



The Road Inventory of Black Canyon of the Gunnison National Park BLCA – 1377



national park service



Road Inventory Program

Prepared By:
Federal Highway Administration
Eastern Federal Lands Highway Division
Cycle 3



Black Canyon of the Gunnison National Park in Colorado





TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1. INTRODUCTION	1 - 1
2. PARK SUMMARY INFORMATION	
National Park Summaries	2 - 1
Cost to Improve Based on Historical and Estimated Data	2 - 2
Paved Route Miles and Percentages by Functional Class and PCR	2 - 3
3. PARK SUMMARY MAPS	
Route Location Key Map	3 - 1
Route Condition Key Map – PCR Mile by Mile	3 - 5
4. PARK ROUTE INVENTORY	
Route Identification Lists (Numeric and Alphabetic)	4 - 1
5. PAVED ROUTE CONDITION RATING SHEETS	5 - 1
6. MANUALLY RATED PAVED ROUTE CONDITION RATING SHEETS	6 - 1
7. PARKING LOT CONDITION RATING SHEETS	7 - 1
Paved parking Areas	
8. PARKWIDE / ROUTE MAINTENANCE FEATURES SUMMARY	8 - 1
9. PARK ROUTE MAINTENANCE FEATURES ROAD LOG	9 - 1
10. APPENDIX	
A. Glossary of Terms and Abbreviations	10 - 1
B. Description of Rating System	10 - 3
C. Digital Image Information	10 - 7
D. Metadata	10 - 8

INTRODUCTION

Background: In July 1976, the National Park Service (NPS) and the Federal Highway Administration (FHWA) entered into a Memorandum of Agreement (MOA), establishing the Road Inventory Program (RIP). In 1980, the NPS and the FHWA terminated the 1976 MOA and entered into a new MOA that provided for the completion of the initial phase of the RIP. The purpose of the RIP, per the 1980 MOA, was to maintain and update RIP data in order to develop long-range and short-range costs and programs to bring National Park Service (NPS) roads up to, or to maintain, designated standards, and to establish a maintenance management program.

The FHWA's Federal Lands Highway (FLH) was assigned the task of identifying condition deficiencies and corrective priorities along with associated corrective costs, inventorying maintenance features (e.g., culverts, signs, guardrail, etc.), summarizing the data and findings in a report, and providing a photographic record of the road system.

The FLH completed the initial phase of the RIP in the early 1980's. As a result of this effort, each park received a RIP book, also known as the "Brown Book," that included the information collected during this initial RIP phase.

In an effort to maintain and update the RIP data, a cyclical data collection and reporting process was re-established in the 1990's. The FLH completed two cycles of RIP data collection between 1994 and 2001. Cycle 1 data was collected in 44 large parks from 1994 to 1995. This data was found to be unusable for comparison to future cycles. Cycle 2 data was collected from March 1997 to January 2001 in 79 large parks and 5 small parks containing 4,874 route miles. Each park received a copy of a Cycle 2 RIP Report, also known as the "Blue Book."

Since 1984, the RIP Program has been funded through the Federal Lands Highway Program's Park Roads and Parkways (PRP) Program. Currently, the NPS Washington Headquarters' Park Facility Management Division is responsible for coordinating the RIP program with the FLH. The FLH Washington office coordinates policy and prepares national reports and needs assessment studies for Congress.

In 1998, the Transportation Equity Act for the 21st Century (TEA-21) amended Title 23 U.S.C., and inserted Section 204(a)(6) which requires the Federal Highway Administration and the National Park Service, to develop, by rule, a Pavement Management System (PMS) for the park roads and parkways serving the National Park System. As a result of the requirements in TEA-21, the NPS and the FHWA are in the process of developing a PMS. The PMS will assist the decision-makers in effectively spending limited PRP Program funds. The PMS will provide information for planning and programming road maintenance, rehabilitation, and reconstruction activities. RIP data will provide the basic information for this system.

Key information included in the RIP is the mileage inventory and condition assessments accomplished by the RIP Program. The mileage and condition data are used in the current allocation formula of PRP Program funds.

RIP Cycle 3: A third RIP cycle was initiated in 2001. Data was collected from March 2001 to July 2004, and is included in the Cycle 3 Reports. Cycle 3 includes 254 large and small parks with a combined total of 5,455 route miles.

In the Cycle 3 Reports, a general condition rating of excellent, good, fair and poor is ascribed to each one-mile section of paved roadway, and to each paved parking area. This condition rating system provides a realistic means of assessing the general funding needs for road improvements. Along with these descriptive condition ratings, a numerical rating between 0 and 100 is ascribed to each mile of road and to each parking area.. This numerical rating is called a Pavement Condition Rating (PCR). The PCR rating system is described in Section 10 of this report.

All of the fieldwork required for obtaining inventory, condition, and maintenance feature information is coordinated with each park and the regional offices to ensure that the information in the RIP reports is accurate.

The FLH is responsible for all of the data presented in this report. Anyone having questions or comments regarding the contents of this report is encouraged to contact the FHWA RIP Coordinator. It is our aim to provide exceptional customer satisfaction in our delivery of the RIP program.

FHWA RIP Coordinator:

James A. Amenta
FHWA/EFLHD
Technical Services, HTS-15
21400 Ridgetop Circle
Sterling, VA 20166
(703) 404-6366

Black Canyon of the Gunnison National Park Summaries

Overall Park Mileage Summary

PARK TOTAL SUMMARY ITEMS	TOTAL	DATE
Paved ARAN Driven Route Miles	8.85	6/15/2003
Unpaved Estimated Route Miles	16.70	6/15/2003
Paved ARAN and Unpaved Route Miles	25.55	
Paved ARAN Driven Lane Miles	16.98	6/15/2003
Paved MRR Lane Miles	0.00	
Parking Lot Lane Miles	1.85	6/15/2003
Total Paved Lane Miles	18.83	

Notes: Total Paved Lane Miles includes the sum of Paved ARAN Driven Lane Miles, Paved MRR Lane Miles, and Parking Lot Lane Miles

Unpaved Route Miles are estimates, they have not been inventoried by the Roadway Inventory Program (RIP)

Black Canyon of the Gunnison National Park Summaries

Cost to Improve to "Excellent" Condition

SOURCE	WORK PERFORMED	COST PER MILE	INITIAL CONDITION
FHWA Awarded Projects	Surface Maintenance	\$30,000	Excellent
FHWA Awarded Projects	3-R (Resurfacing)	\$110,000	Good
FHWA Awarded Projects	3-R (Resurfacing, Restoration, and Rehabilitation) Projects	\$560,000	Fair
FHWA Awarded Projects	4-R (Resurfacing, Restoration, Rehabilitation, and Reconstruction) Projects	\$1,540,000	Poor

Based on the above table, the cost to improve ARAN driven paved road condition miles to "Excellent" PCR are:

Existing Condition	Existing Miles	Estimated Cost to Improve
Excellent	0.02	\$600
Good	0.64	\$70,400
Fair	6.47	\$3,623,200
Poor	1.72	\$2,648,800
Totals	8.85	\$6,343,000

The above numbers include the 35% PE, CE and contingency costs and are national averages. The cost estimates were used in the calculations for the 2004 Reauthorization Bill to determine the level of funding required to bring all the NPS roads into a Pavement Condition Rating (PCR) of Good (85).


These numbers are for preliminary planning purposes only and should not be used for project level proposals. For park planning level analysis, apply your park multiplier for more accurate regional costs.

Black Canyon of the Gunnison National Park Summaries

Paved Route Miles and Percentages by Functional Class and PCR for ARAN Driven Paved Roads

F.C.	Pavement Condition Rating								TOTAL MILES
	Poor (<=60)		Fair (61-84)		Good (85-94)		Excellent (95-100)		
	MILES	%	MILES	%	MILES	%	MILES	%	
1	0.90	10.17%	6.15	69.49%	0.60	6.78%	0.02	0.23%	7.67
2									
3	0.68	7.68%	0.32	3.62%	0.04	0.45%			1.04
4									
5	0.14	1.58%							0.14
6									
7									
8									
Totals	1.72	19.44%	6.47	73.11%	0.64	7.23%	0.02	0.23%	8.85


Black Canyon of the Gunnison National Park Route Location Key Map

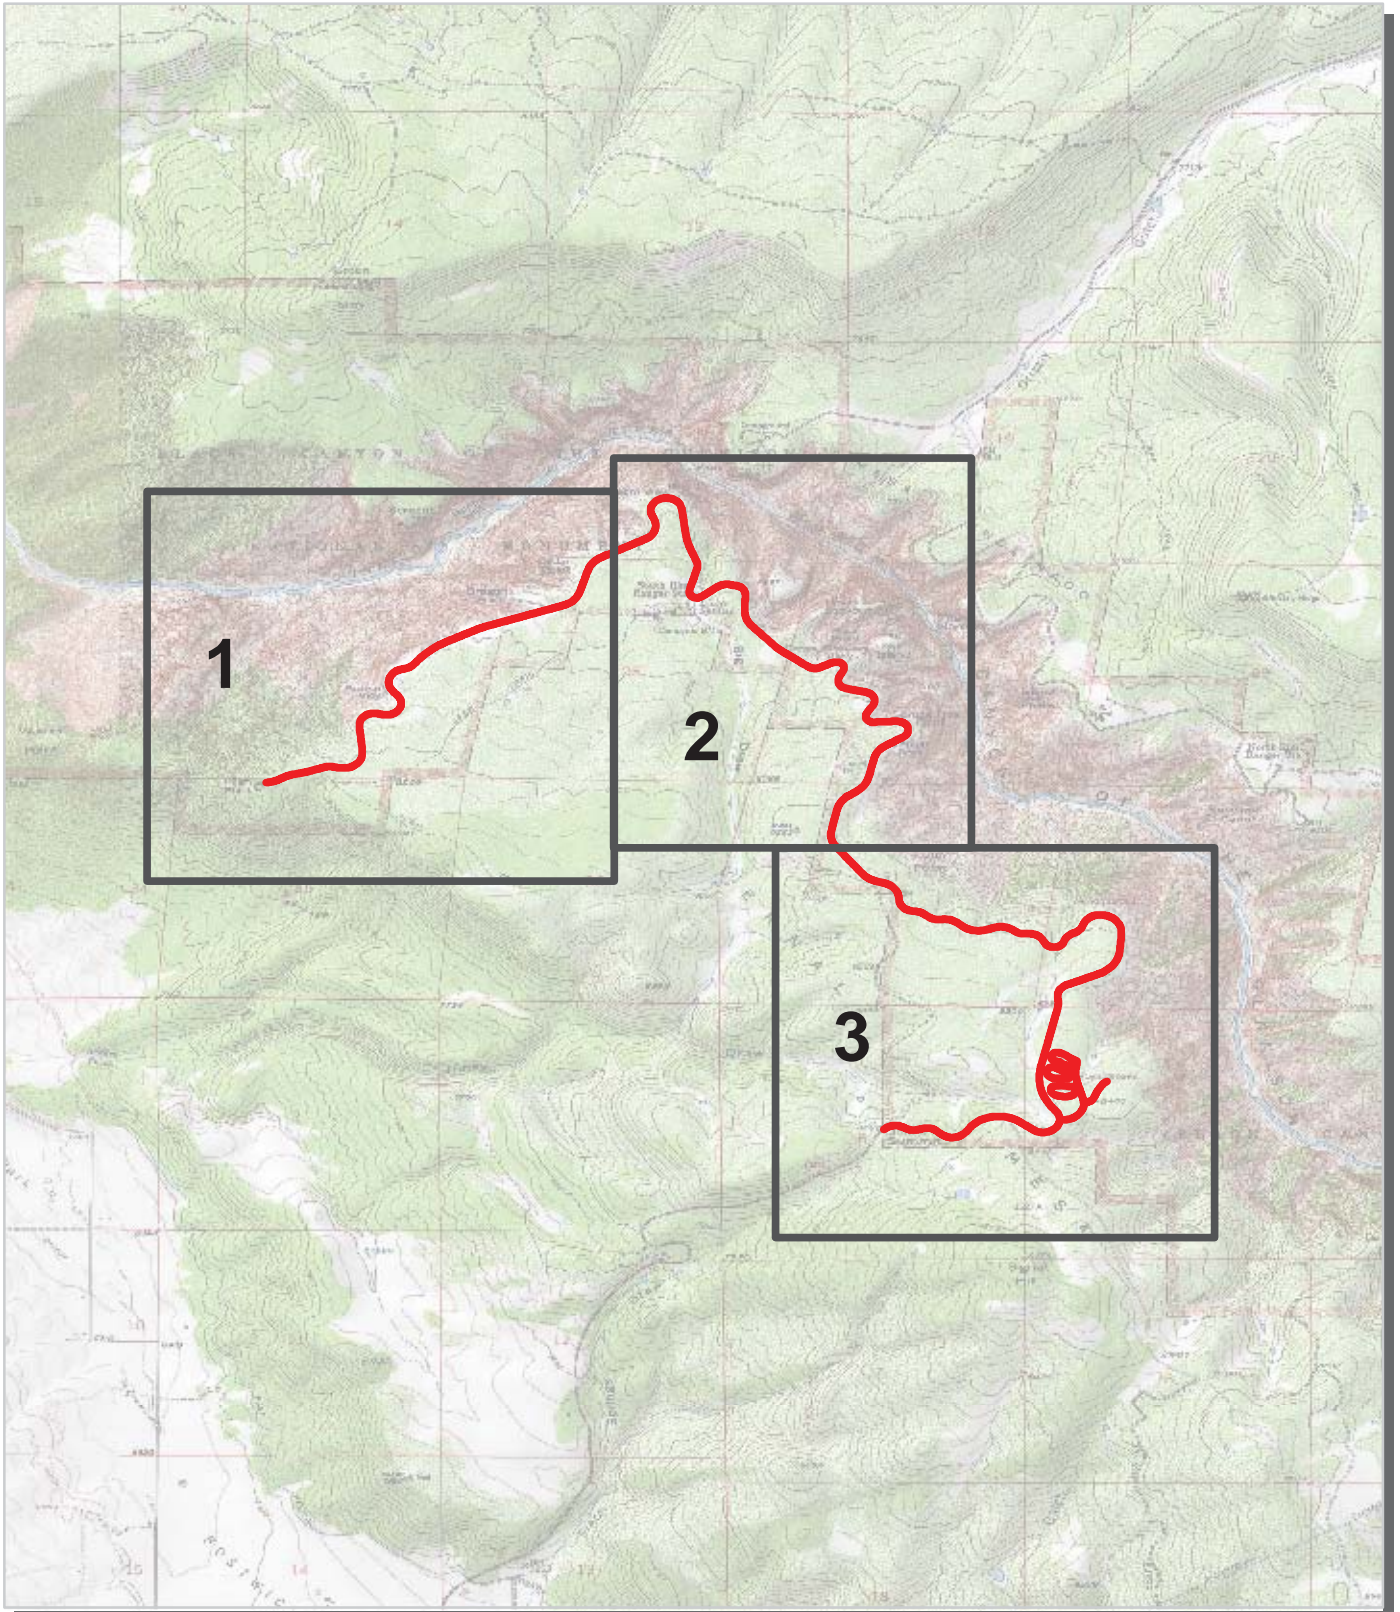

 Park Owned Routes




Black Canyon of the Gunnison National Park Route Location Map Area Map 1

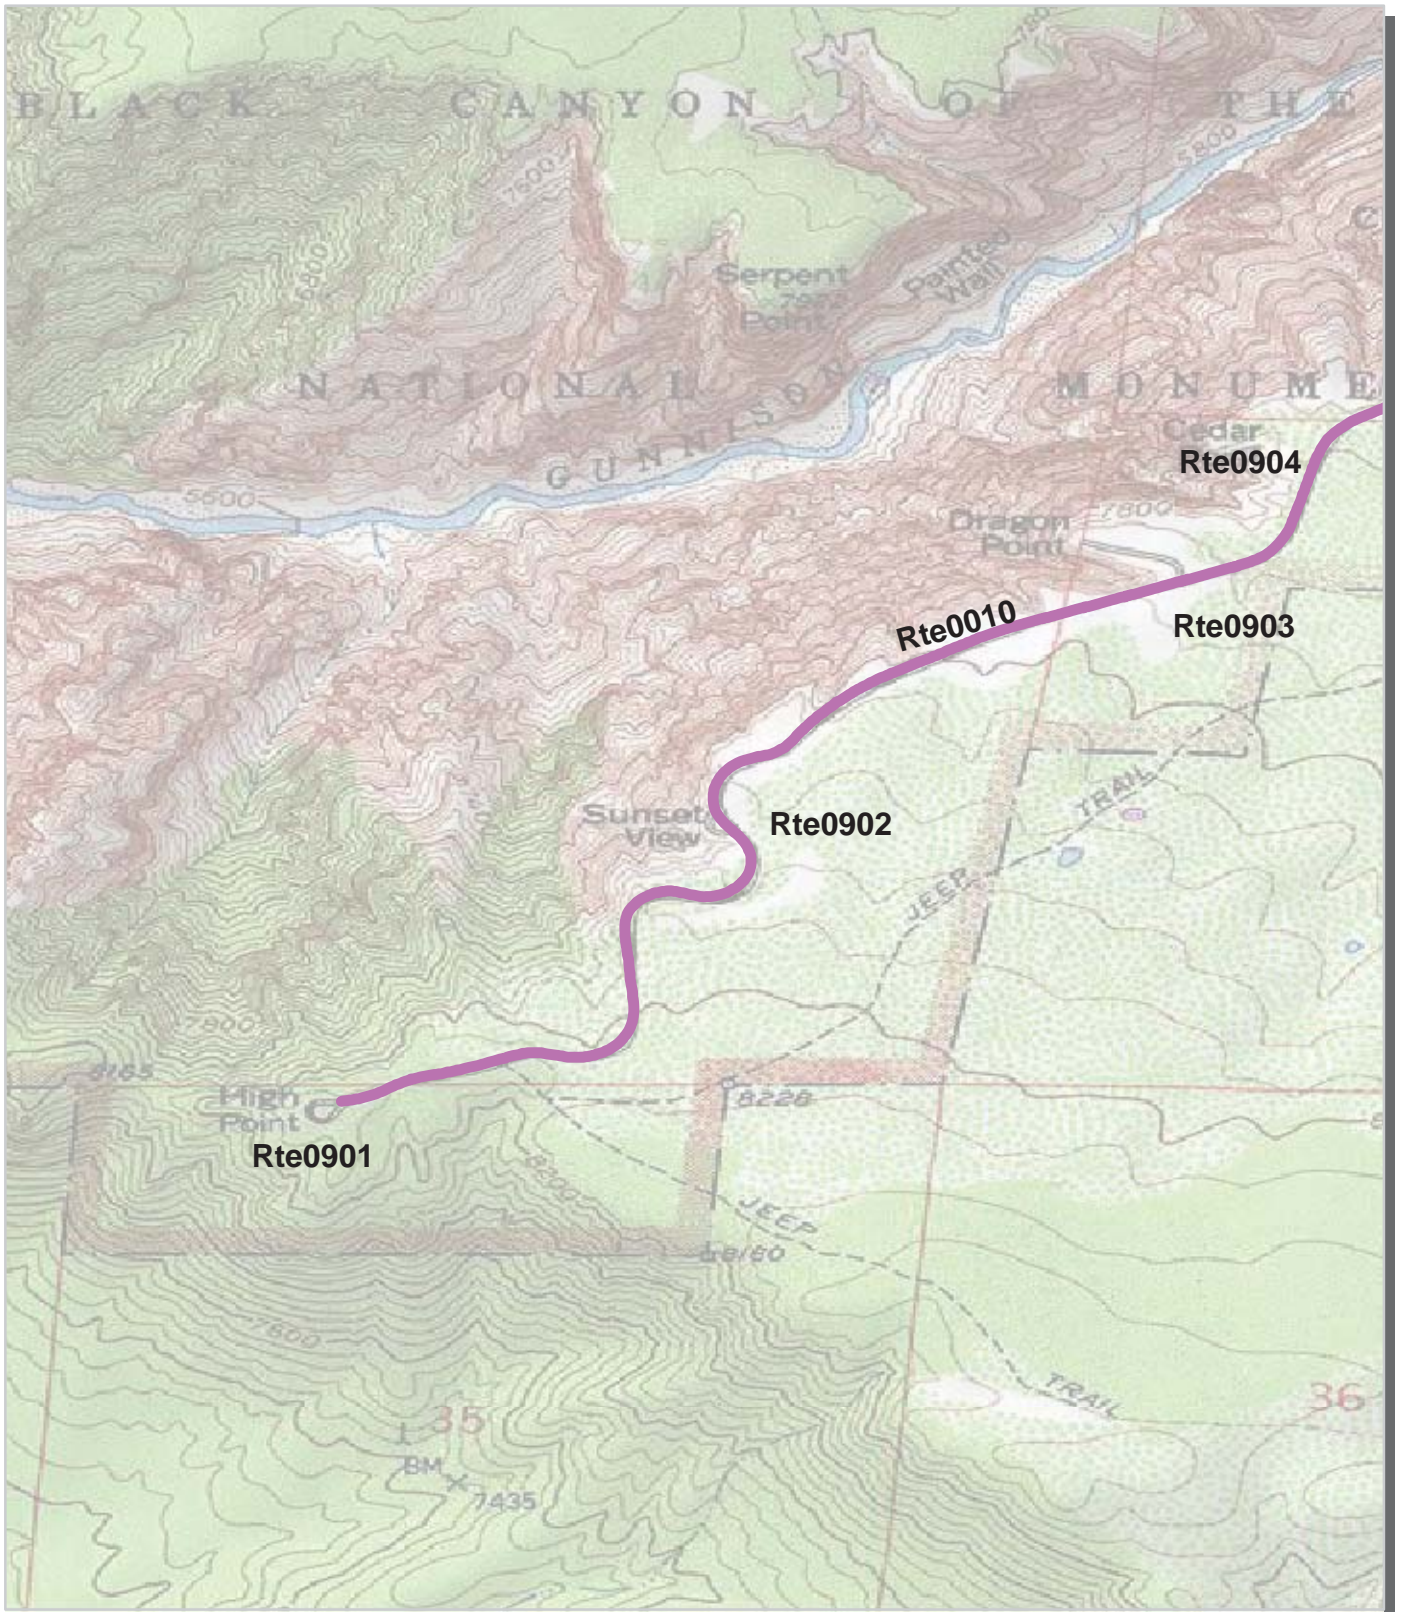

Unique colors used to differentiate routes




Black Canyon of the Gunnison National Park Route Location Map Area Map 2

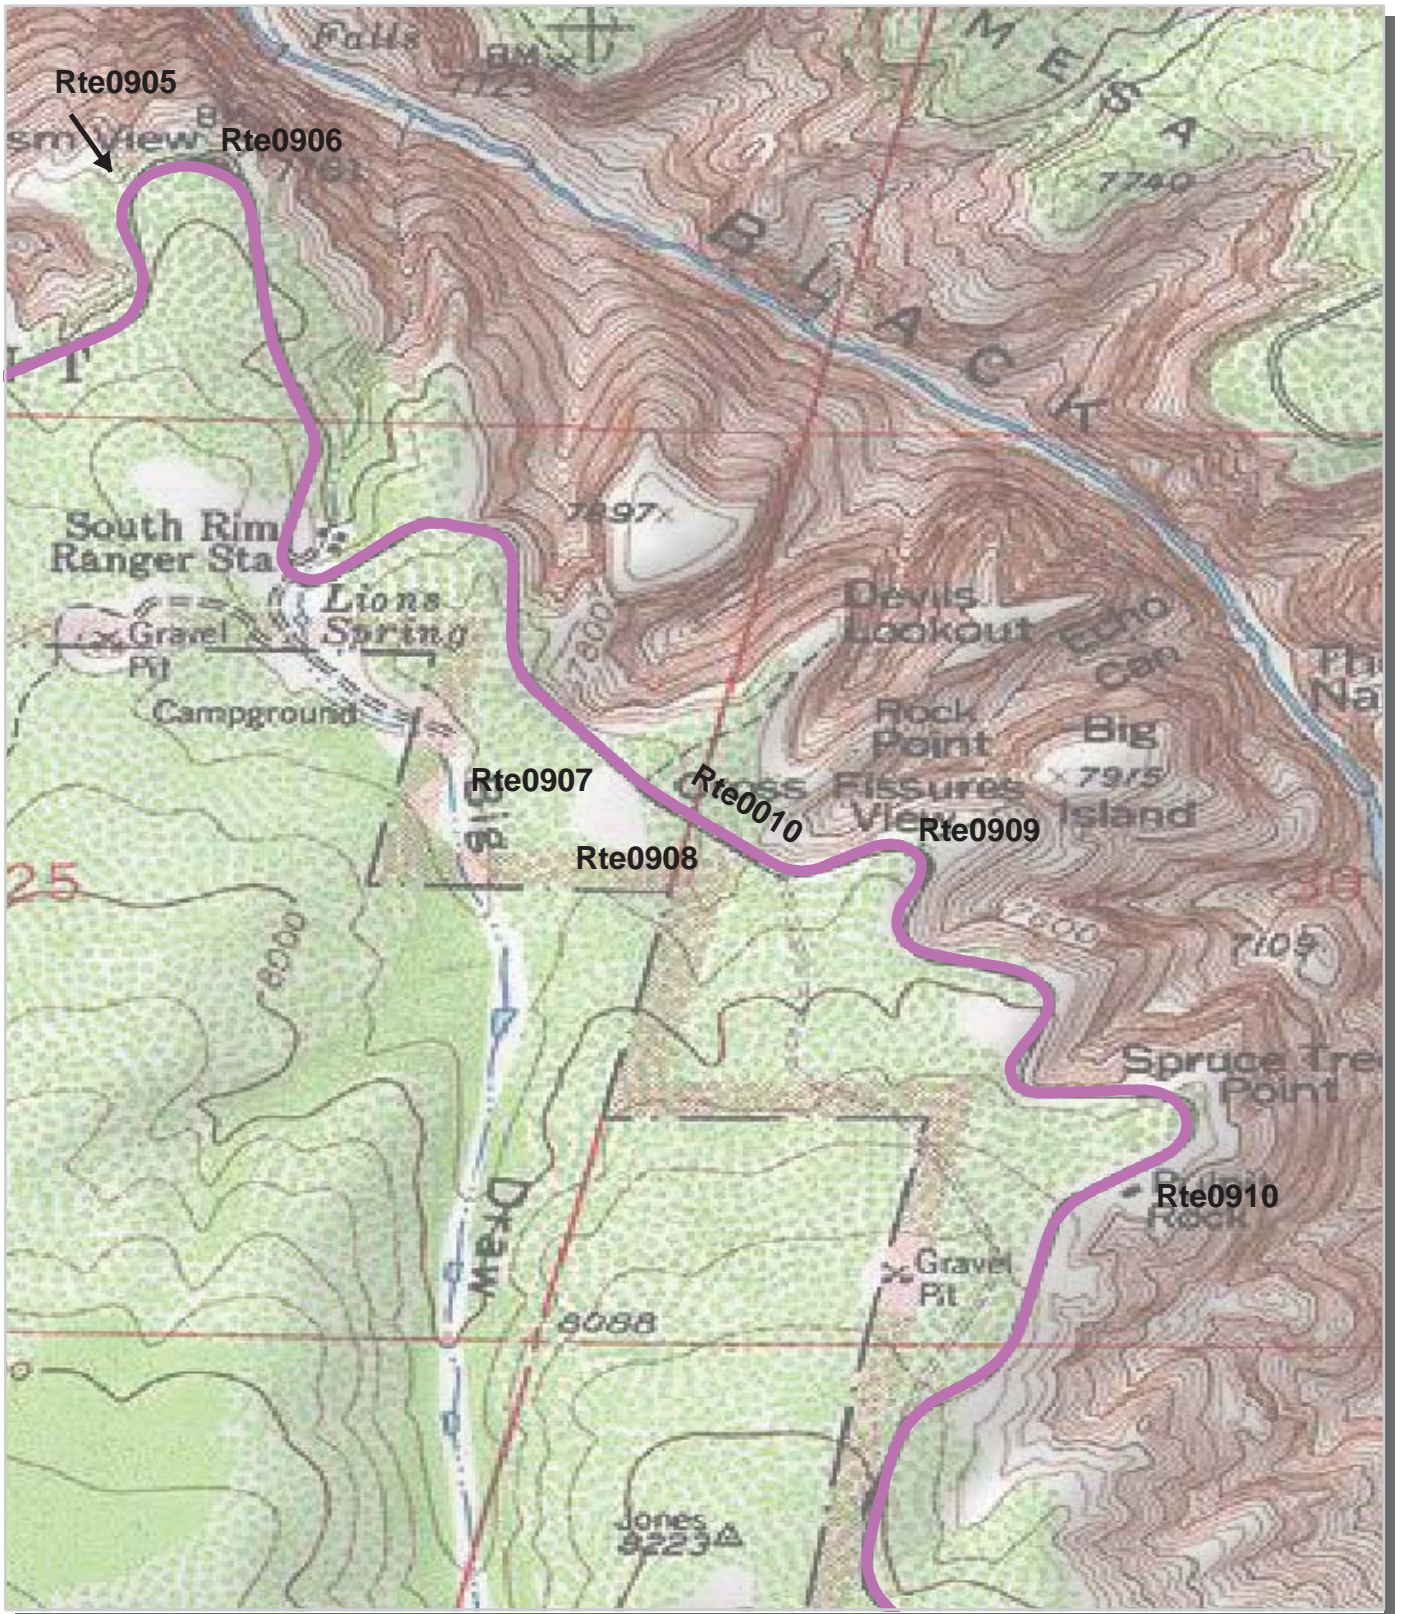

Unique colors used to differentiate routes




Black Canyon of the Gunnison National Park Route Location Map Area Map 3

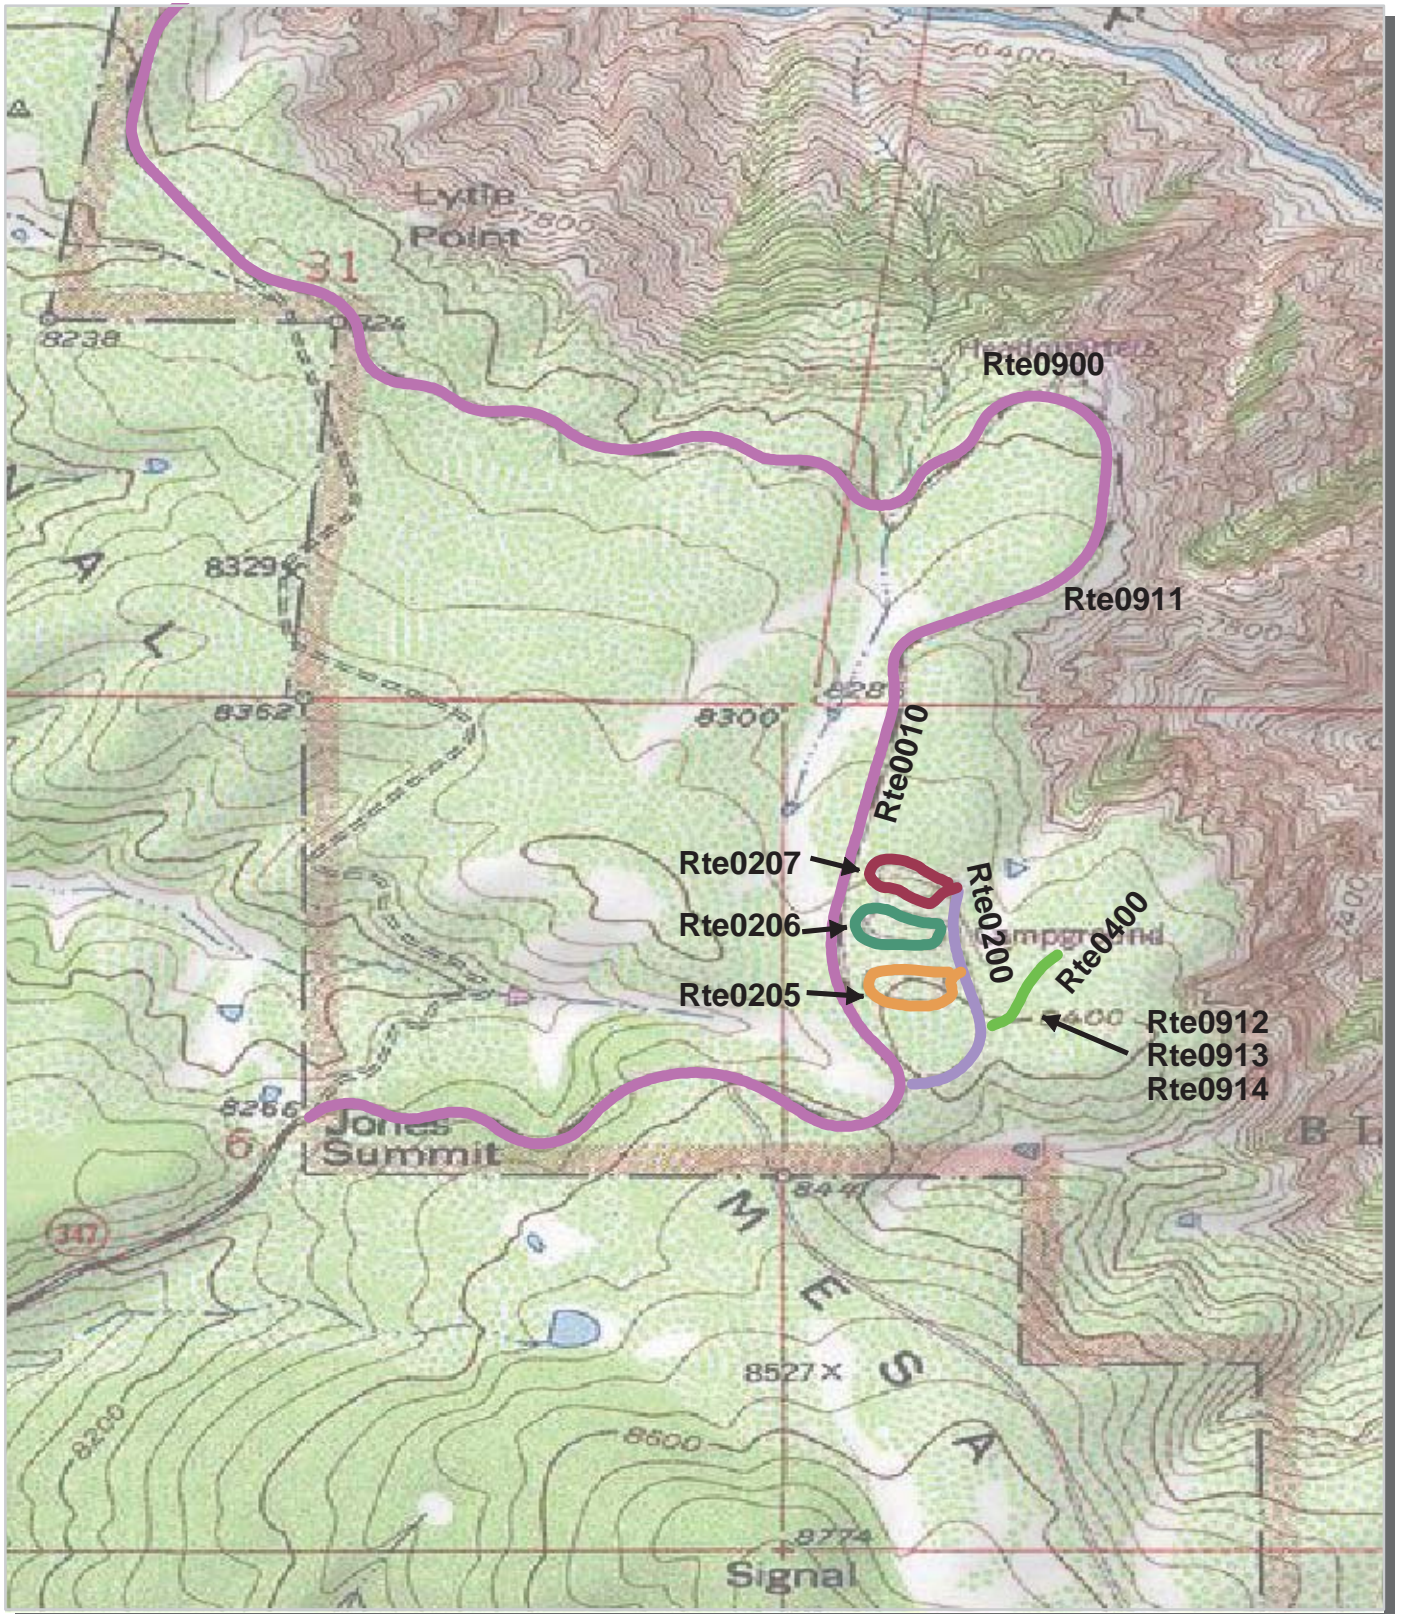

Unique colors used to differentiate routes



Black Canyon of the Gunnison National Park Route Condition Key Map PCR - Mile by Mile

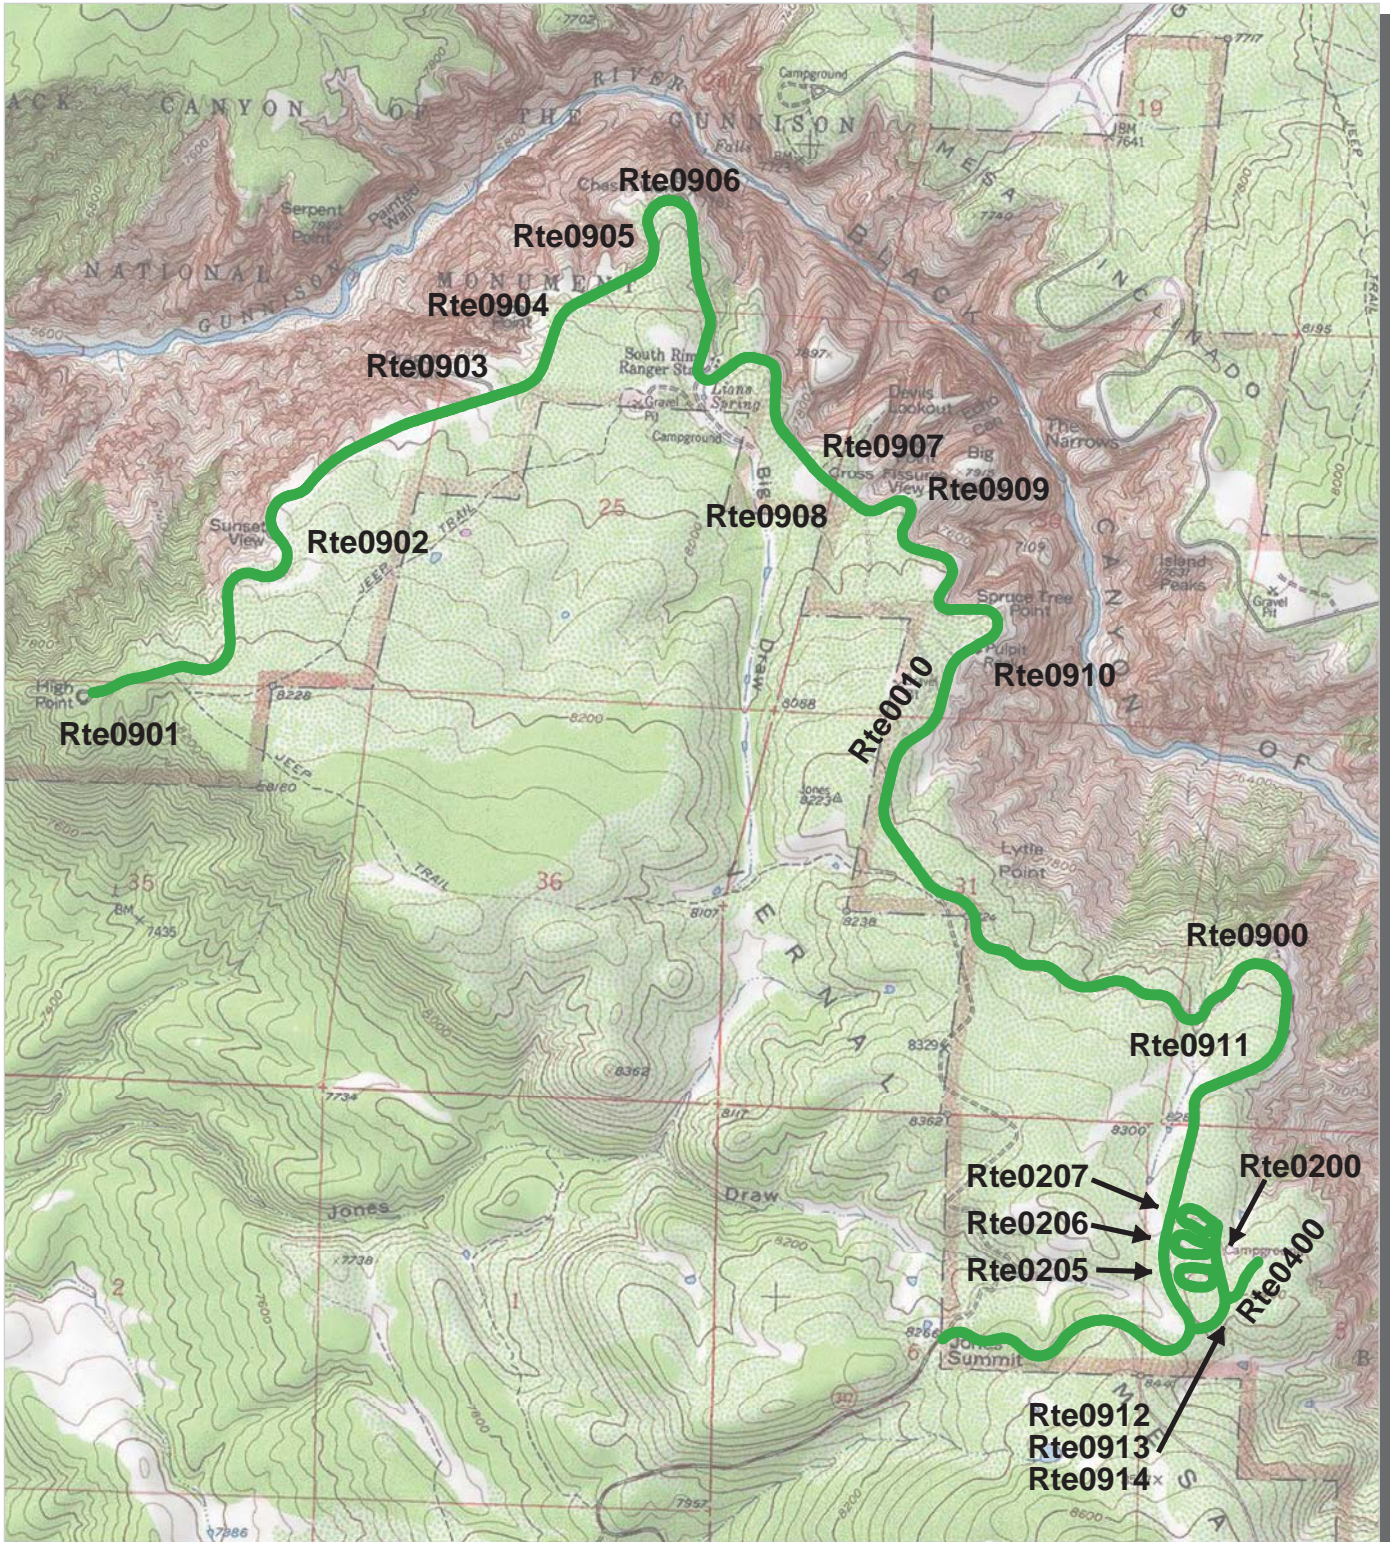

PCR Poor ■ Fair ■ Good ■ Excellent ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.



NPS/RIP Route ID Report

(Numerical By Route #)

Shading Color Key:
Red text denotes approx. mileage

White = Paved Routes, ARAN Driven	Yellow = Unpaved Routes, ARAN not Driven	Blue = All Paved Parking Areas
Grey = Paved Routes, ARAN not Driven	Red =	Green = All Unpaved Parking Areas
Black = Paved State, Local or Private non-NPS Routes, ARAN Driven	Purple =	

BLCA

Black Canyon of the Gunnison National Park

Rte. #	FMSS Asset #	Route Name	Route Description		Paved Miles	Un-Paved Miles	Rte. Lgth	Func. Class	Rte. Lanes	Manual Rated SQ/FT	Surf. Type
			From	To							
0010	84624	SOUTH RIM DRIVE	FROM SOUTH BOUNDARY	TO ROUTE 0901	7.67	0.00	7.67	1	2	0	AS
0011		NORTH RIM MAIN ROAD	FROM NORTH BOUNDARY	TO ROUTE 0203	0.00	5.00	5.00	1	2	0	GR
0012		NORTH RIM - RIM DRIVE	FROM ROUTE 0011	TO END OF LOOP	0.00	4.00	4.00	1	2	0	GR
0200	84650	SOUTH RIM CAMPGROUND ROAD	FROM ROUTE 0010	TO ROUTE 0207	0.32	0.00	0.32	3	2	0	AS
0201	84652	LAST VIEW ROAD	FROM NORTH BOUNDARY	TO END OF LOOP	0.00	6.30	6.30	3	2	0	GR
0202	84653	CHASM VIEW	FROM ROUTE 0201	TO END OF LOOP	0.00	0.94	0.94	3	2	0	GR
0203		CAMPGROUND LOOP ROAD	FROM ROUTE 0011	TO END OF LOOP	0.00	0.20	0.20	3	1	0	GR
0204		CAMPGROUND TURN AROUND	FROM ROUTE 0203	TO ROUTE 0203	0.00	0.10	0.10	3	1	0	GR
0205		CAMPGROUND LOOP A	FROM ROUTE 0200	TO END OF LOOP	0.25	0.00	0.25	3	1	0	AS
0206		CAMPGROUND LOOP B	FROM ROUTE 0200	TO END OF LOOP	0.24	0.00	0.24	3	1	0	AS
0207		CAMPGROUND LOOP C	FROM ROUTE 0200	TO END OF LOOP	0.23	0.00	0.23	3	1	0	AS
0400	84654	SOUTH RIM RESIDENCE ROAD	FROM ROUTE 0200	TO END	0.14	0.00	0.14	5	2	0	AS
0401	84655	SOUTH RIM CAMPGROUND WATER TANK ROAD	FROM ROUTE 0200	TO END	0.00	0.08	0.08	5	1	0	OT
0402	84656	PULPIT ROCK WATER TANK ROAD	FROM ROUTE 0010	TO END	0.00	0.08	0.08	5	1	0	OT
0900	73354	GUNNISON POINT VISITOR CENTER PARKING	FROM ROUTE 0010	TO ROUTE 0010	0.00	0.00	0.00	9		29,138	AS
0901	72382	HIGH POINT PARKING	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		16,364	AS
0902	72377	SUNSET VIEW PARKING	FROM ROUTE 0010	TO ROUTE 0010	0.00	0.00	0.00	9		7,696	AS
0903	72375	DRAGON POINT PARKING	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		2,222	AS
0904	72370	CEDAR POINT OVERLOOK	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		2,985	AS
0905	72367	PAINTED WALL VIEW PARKING	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		2,345	AS
0906	72364	CHASM VIEW OVERLOOK	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		5,997	AS
0907	72363	DEVIL'S OVERLOOK	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		2,803	AS
0908	72344	ROCK POINT PARKING	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		3,088	AS
0909	72320	CROSS FISSURES OVERLOOK	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		3,266	AS
0910	72281	PULPIT ROCK OVERLOOK	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		3,688	AS
0911	72258	TOMICHI POINT PARKING	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		10,473	AS
0912	84657	SOUTH RIM RESIDENCE AREA	FROM ROUTE 0400	TO PARKING	0.00	0.00	0.00	9		5,908	AS
0913	84658	SOUTH RIM MAINTENANCE AREA	FROM ROUTE 0400	TO PARKING	0.00	0.00	0.00	9		5,776	AS
0914	84659	FEE STATION PARKING	FROM ROUTE 0200	TO PARKING	0.00	0.00	0.00	9		5,971	AS
0915	84660	SOUTH RIM GIFT SHOP PARKING	FROM ROUTE 0010	TO PARKING	0.00	0.00	0.00	9		6,000	GR

NPS/RIP Route ID Report

(Numerical By Route #)

Shading Color Key:
Red text denotes approx. mileage

White = Paved Routes, ARAN Driven	Yellow = Unpaved Routes, ARAN not Driven	Blue = All Paved Parking Areas
Grey = Paved Routes, ARAN not Driven	Red =	Green = All Unpaved Parking Areas
Black = Paved State, Local or Private non-NPS Routes, ARAN Driven	Purple =	

BLCA

Black Canyon of the Gunnison National Park

Rte. #	FMSS Asset #	Route Name	Route Description		Paved Miles	Un-Paved Miles	Rte. Lgth	Func. Class	Rte. Lanes	Manual Rated SQ/FT	Surf. Type
			From	To							
0916	84661	SOUTH RIM MAINTENANCE UNPAVED	FROM ROUTE 0913	TO PARKING	0.00	0.00	0.00	9		4,000	GR
0917		RANGER STATION PULLOUTS	FROM ROUTE 0011	TO PARKING	0.00	0.00	0.00	9		3,240	GR
0918		THE NARROWS PULLOUT	FROM ROUTE 0012	TO PARKING	0.00	0.00	0.00	9		1,266	GR
0919		BALANCE ROCK PULLOUT	FROM ROUTE 0012	TO PARKING	0.00	0.00	0.00	9		4,940	GR
0920		BIG ISLAND PULLOUT	FROM ROUTE 0012	TO PARKING	0.00	0.00	0.00	9		9,493	GR
0921		ISLAND PEAKS PULLOUT	FROM ROUTE 0012	TO PARKING	0.00	0.00	0.00	9		1,800	GR
0922		KNEELING CAMEL PULLOUT	FROM ROUTE 0012	TO PARKING	0.00	0.00	0.00	9		18,080	GR
0923		END OF ROAD PARKING	FROM ROUTE 0012	TO PARKING	0.00	0.00	0.00	9		9,396	GR
Totals					8.85	16.70	25.55			165,935	

General Park Road Functional Classification Table

- Class 1 Principal Park Road/Rural Parkway (Public Roads) Roads which constitute the main access route, circulatory tour, or thoroughfare for park visitors. Route Numbers 1 - 99. Note: Rural parkways (e.g. Natchez Trace) are numbered 1 - 9. State Routes Invetoried for Park. Route Numbers 5000-5999
- Class 2 Connector Park Road (Public Roads) - Roads which provide access within a park to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, etc. Route Numbers 100-199.
- Class 3 Special Purpose Park Road (Public Roads) - Roads which provide circulation within public areas, such as campgrounds, picnic areas, visitor center complexes, concessionaire facilities, etc. These roads generally serve low-speed traffic and are often designed for one-way circulation. Route Numbers 200-299.
- Class 4 Primitive Park Roads (Public Roads) - Roads which provide circulation through remote areas and/or access to primitive campgrounds and undeveloped areas. These roads frequently have no minimum design standards and their use may be limited to specially equipped vehicles. Route Numbers 200-299.
Note: Functional Classes 3 and 4 have the same route numbers because, historically, they were numbered similarly.
- Class 5 Administrative Access Road (Administrative Roads) - All public roads intended for access to administrative developments or structures such as park offices, employee quarters, or utility areas. Route Numbers 400-499.
- Class 6 Restricted Road (Administrative Roads) - All roads normally closed to the public, including patrol roads, truck trails, and other similar roads. Route Numbers 400-499.
Note: Functional Classes 5 and 6 have the same route numbers because historically they were numbered similarly and often there is little distinction between these routes. For example, because utility areas and employee housing are often closed to the public, this restriction would result in classification of FC 6 rather than FC 5.
- Class 7 Urban Parkway (Urban Parkways and City Streets) - These facilities serve high volumes of park and non-park related traffic and are restricted, limited-access facilities in an urban area. This category of roads primarily encompasses the major parkways which serve as gateways to our nation's capital. Other major park roads or portions thereof, however, may be included in this category. Route Numbers 1-9.
- Class 8 City Streets (Urban Parkways and City Streets) - City streets are usually extensions of the adjoining street system that are owned and maintained by the National Park Service. The construction and/or reconstruction should conform with accepted local engineering practice and local conditions. Route Numbers 600-699.
- Class 9 Boat Ramp - (Public and Administrative) Route Numbers 800-899.
Parking Area - (Public and Administrative) Route Numbers 900-1999.


Surface Type Abbreviations:

- AS - Asphaltic Concrete Pavement
- CO - Portland Cement Concrete Pavement
- NC - New Chip Seal Pavement (Under 5 Years)
- OC - Old Chip Seal Pavement (5 Years and Greater)
- SS - Slurry Seal Pavement
- GR - Gravel Road Bed
- BR - Brick or Pavers Road Bed
- CB - Cobble Stone Road Bed
- SA - Sand Road Bed
- DT - Dirt or Native Material Road Bed
- OT - Other Materials Road Bed

A park road system contains those roads within or giving access to a park or other unit of the NPS which are administered by the NPS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a park road is not based on traffic volumes or design speed, but on the intended use or function of that road or route.

The historic route numbering system also included a 300 number series for interpretive roads, and a 500 series for one-way roads. There are approximately 250 roads nationwide which are designated by the 300 and 500 series. The numbers for these roads will be maintained for reporting consistency. However, since these interpretive and one-way routes are not as clearly tied to a specific functional class, the 300 and 500 series will be discontinued for future use.

ZZ Functional Class Routes were added from FMSS Database. Final Route Number and Functional Class will be established during Park visit for Cycle 4 data collection.

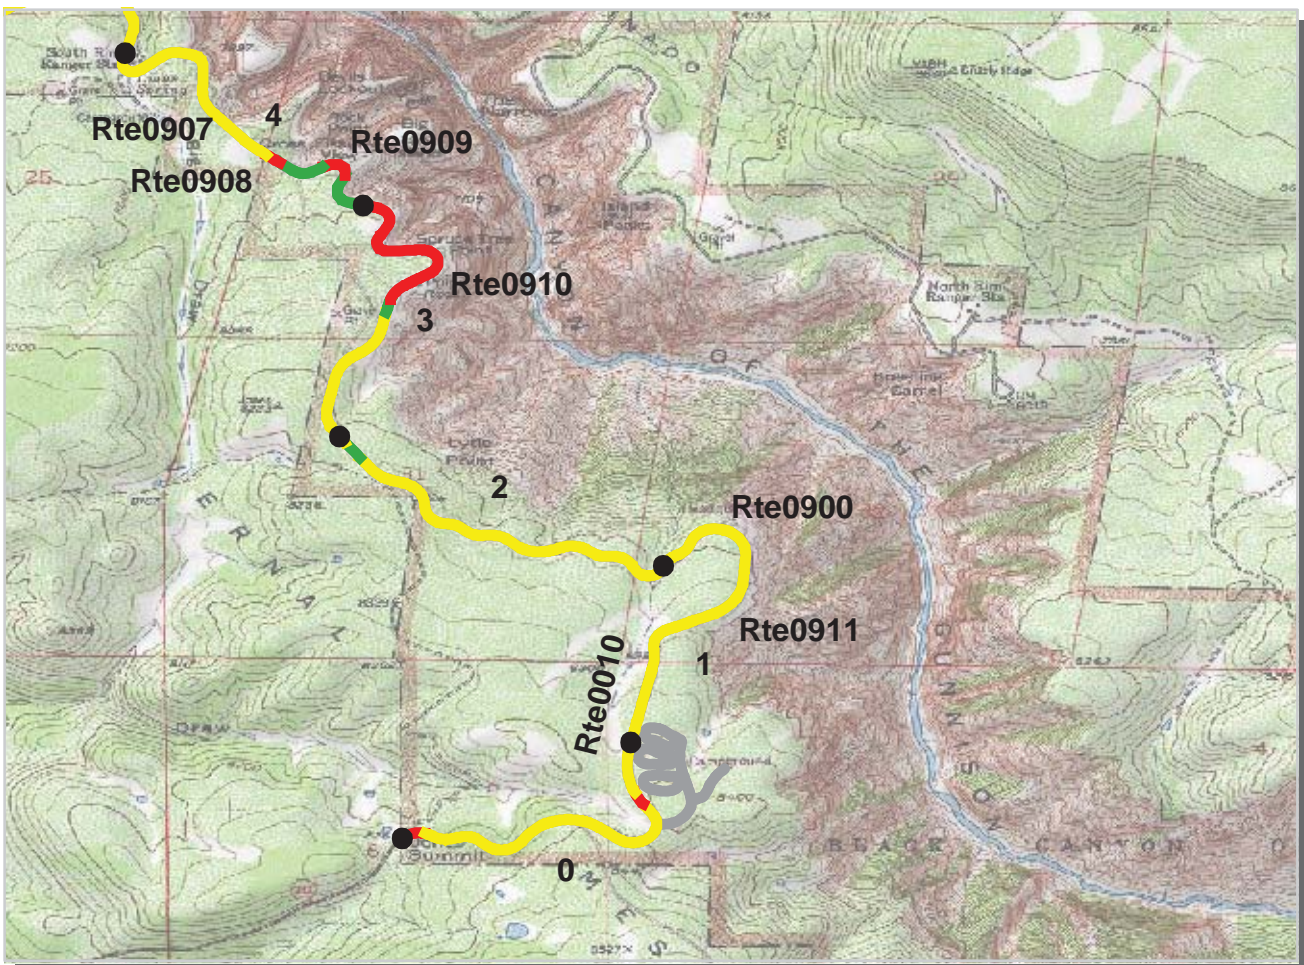

PCR Poor ■ Fair ■ Good ■ Excellent ■
 (≤60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

Intermountain Region

BLCA : Black Canyon of the Gunnison National Park

ROUTE: 0010 South Rim Drive



TOTAL LENGTH: 7.67 Miles

Section Number	0	1	2	3	4
Section Length (mi)	1.00	1.00	1.00	1.00	1.00
AADT	**				
SADT	**				
ADT Date	**				
Cross Section Information					
Number of Lanes	2	2	2	2	2
Paved Width (ft)	24	23	24	24	23
Lane Width (ft)	12	11	12	12	12
Shoulder Width (ft)	0	0	0	4	0
Roadway Condition Information					
PCR (Pavement Condition Rating)	68	76	77	70	69
RCI (Roughness Condition Index)	64	79	67	72	72
SCR (Surface Condition Rating)	71	75	84	69	68
Alligator Cracking Index	99	100	100	100	99
Rutting Index	74	75	84	69	70
Patching Index	100	100	100	100	100
Transverse Cracking Index	99	99	99	99	99
Longitudinal Cracking Index	98	99	99	99	99
Shoulder Condition Rating	N/A	N/A	N/A	GOOD	N/A
Drainage Condition Rating	GOOD	GOOD	GOOD	GOOD	GOOD

ROUTE: 0010 South Rim Drive

* NC designates data not collected NA designates not applicable

** See website for traffic data: <http://www.efl.fhwa.dot.gov/nps/index.htm>

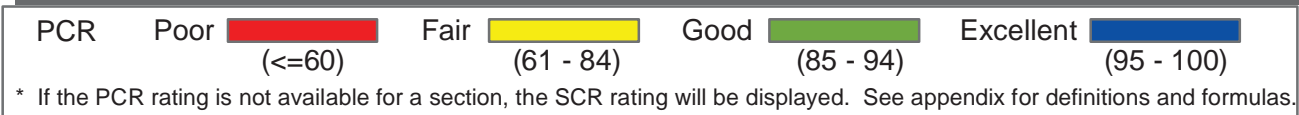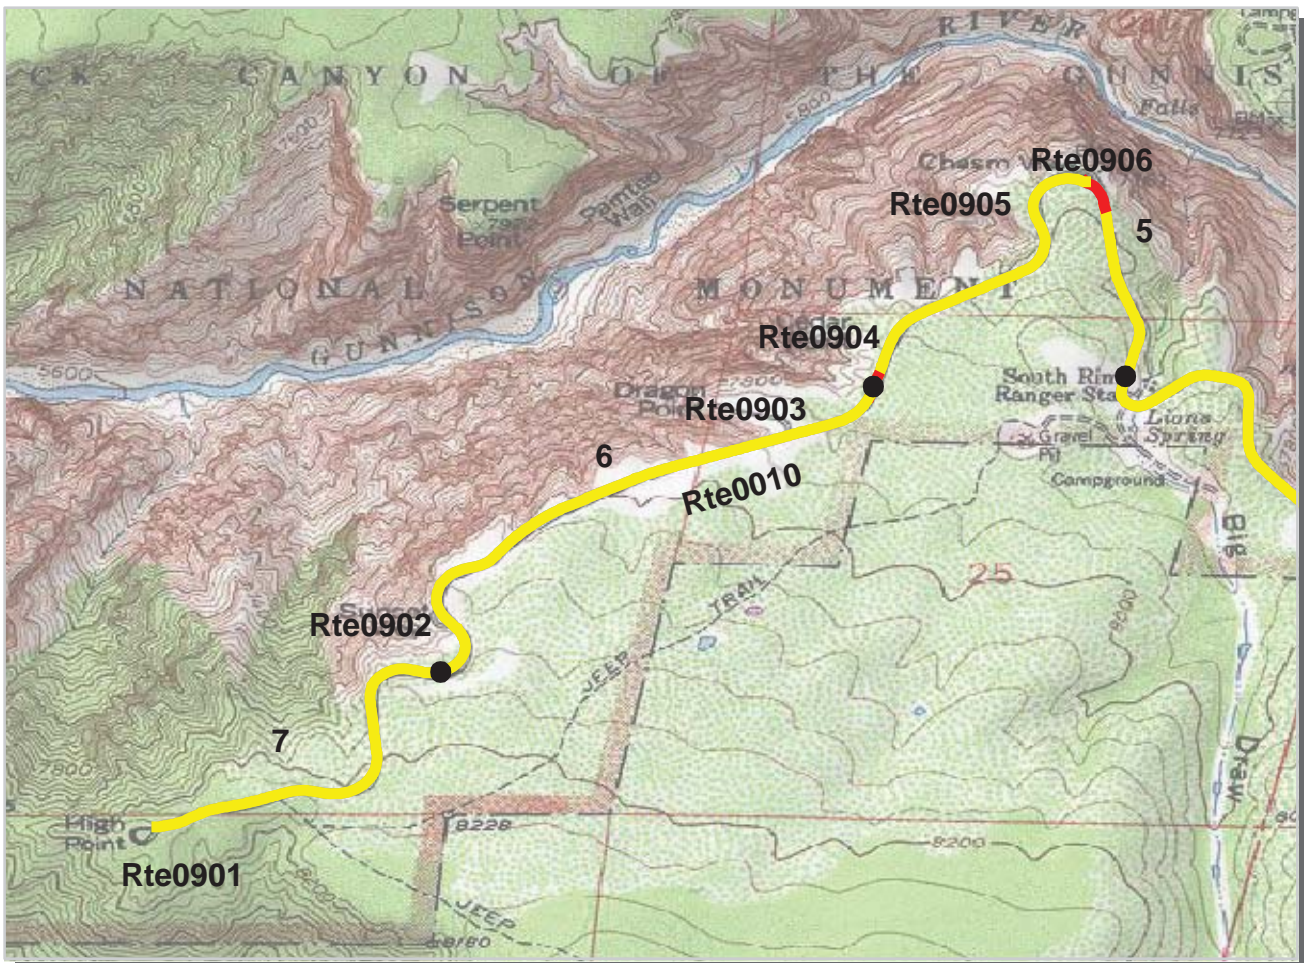



Intermountain Region
BLCA : Black Canyon of the Gunnison National Park

ROUTE: 0010 South Rim Drive **TOTAL LENGTH: 7.67 Miles**

Section Number	5	6	7		
Section Length (mi)	1.00	1.00	0.67		
AADT	**				
SADT	**				
ADT Date	**				
Cross Section Information					
Number of Lanes	2	2	2		
Paved Width (ft)	23	23	24		
Lane Width (ft)	11	11	12		
Shoulder Width (ft)	0	0	0		
Roadway Condition Information					
PCR (Pavement Condition Rating)	69	71	72		
RCI (Roughness Condition Index)	75	84	85		
SCR (Surface Condition Rating)	66	62	64		
Alligator Cracking Index	100	99	100		
Rutting Index	67	65	67		
Patching Index	100	100	100		
Transverse Cracking Index	99	97	97		
Longitudinal Cracking Index	99	98	99		
Shoulder Condition Rating	N/A	N/A	N/A		
Drainage Condition Rating	GOOD	GOOD	GOOD		

ROUTE: 0010 South Rim Drive

* NC designates data not collected NA designates not applicable
 ** See website for traffic data: <http://www.efl.fhwa.dot.gov/nps/index.htm>

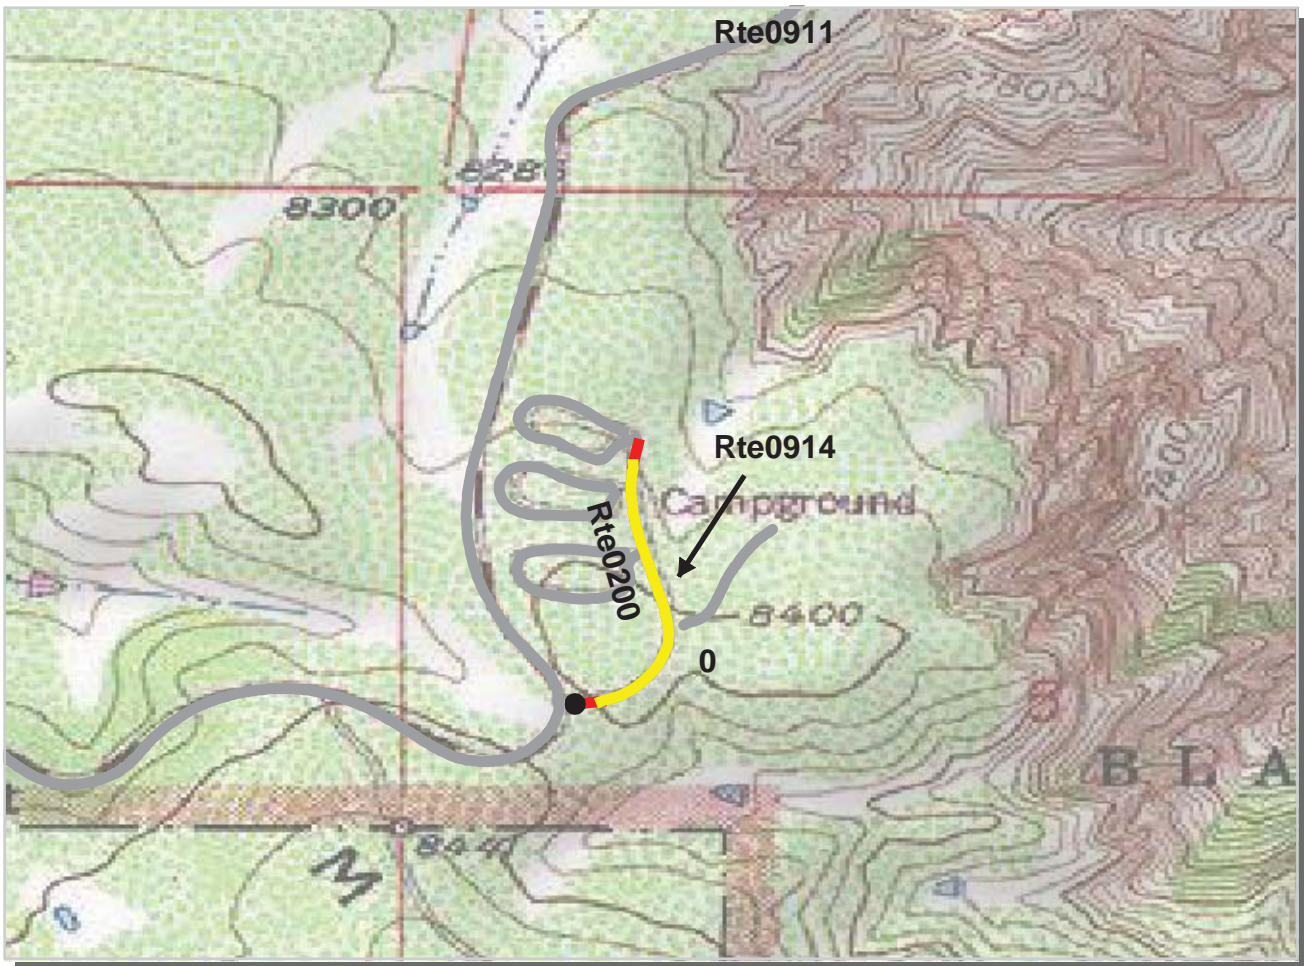

Intermountain Region

BLCA : Black Canyon of the Gunnison National Park



ROUTE: 0200 South Rim Campground Road

TOTAL LENGTH: 0.32 Miles

Section Number	0				
Section Length (mi)	0.32				
AADT	**				
SADT	**				
ADT Date	**				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	23				
Lane Width (ft)	11				
Shoulder Width (ft)	5				
Roadway Condition Information					
PCR (Pavement Condition Rating)	72				
RCI (Roughness Condition Index)	77				
SCR (Surface Condition Rating)	71				
Alligator Cracking Index	100				
Rutting Index	76				
Patching Index	99				
Transverse Cracking Index	96				
Longitudinal Cracking Index	98				
Shoulder Condition Rating	GOOD				
Drainage Condition Rating	GOOD				

ROUTE: 0200 South Rim Campground Road

* NC designates data not collected NA designates not applicable
 ** See website for traffic data: <http://www.efl.fhwa.dot.gov/nps/index.htm>

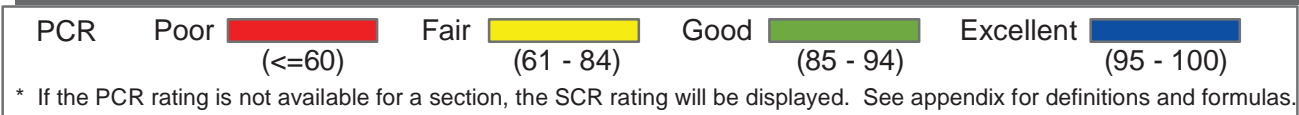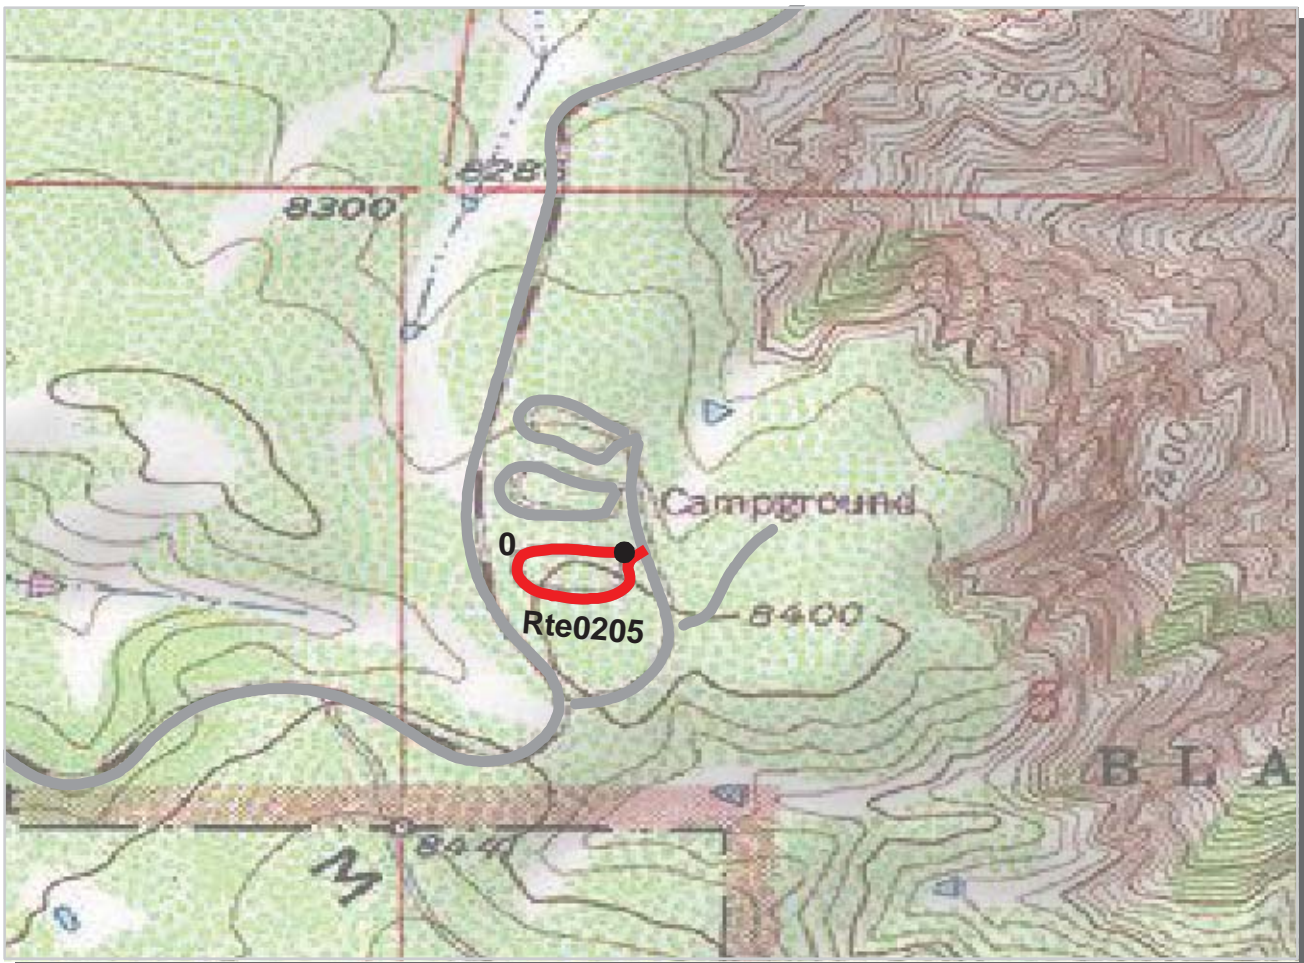



Intermountain Region
BLCA : Black Canyon of the Gunnison National Park

ROUTE: 0205 Campground Loop A **TOTAL LENGTH: 0.25 Miles**

Section Number	0				
Section Length (mi)	0.25				
AADT	**				
SADT	**				
ADT Date	**				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	12				
Lane Width (ft)	12				
Shoulder Width (ft)	0				
Roadway Condition Information					
PCR (Pavement Condition Rating)	45				
RCI (Roughness Condition Index)	58				
SCR (Surface Condition Rating)	43				
Alligator Cracking Index	97				
Rutting Index	58				
Patching Index	100				
Transverse Cracking Index	91				
Longitudinal Cracking Index	96				
Shoulder Condition Rating	N/A				
Drainage Condition Rating	GOOD				

ROUTE: 0205 Campground Loop A

* NC designates data not collected NA designates not applicable
 ** See website for traffic data: <http://www.efl.fhwa.dot.gov/nps/index.htm>

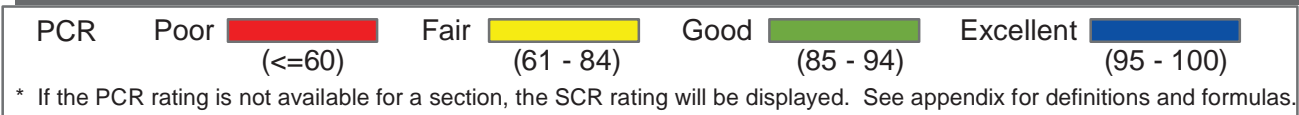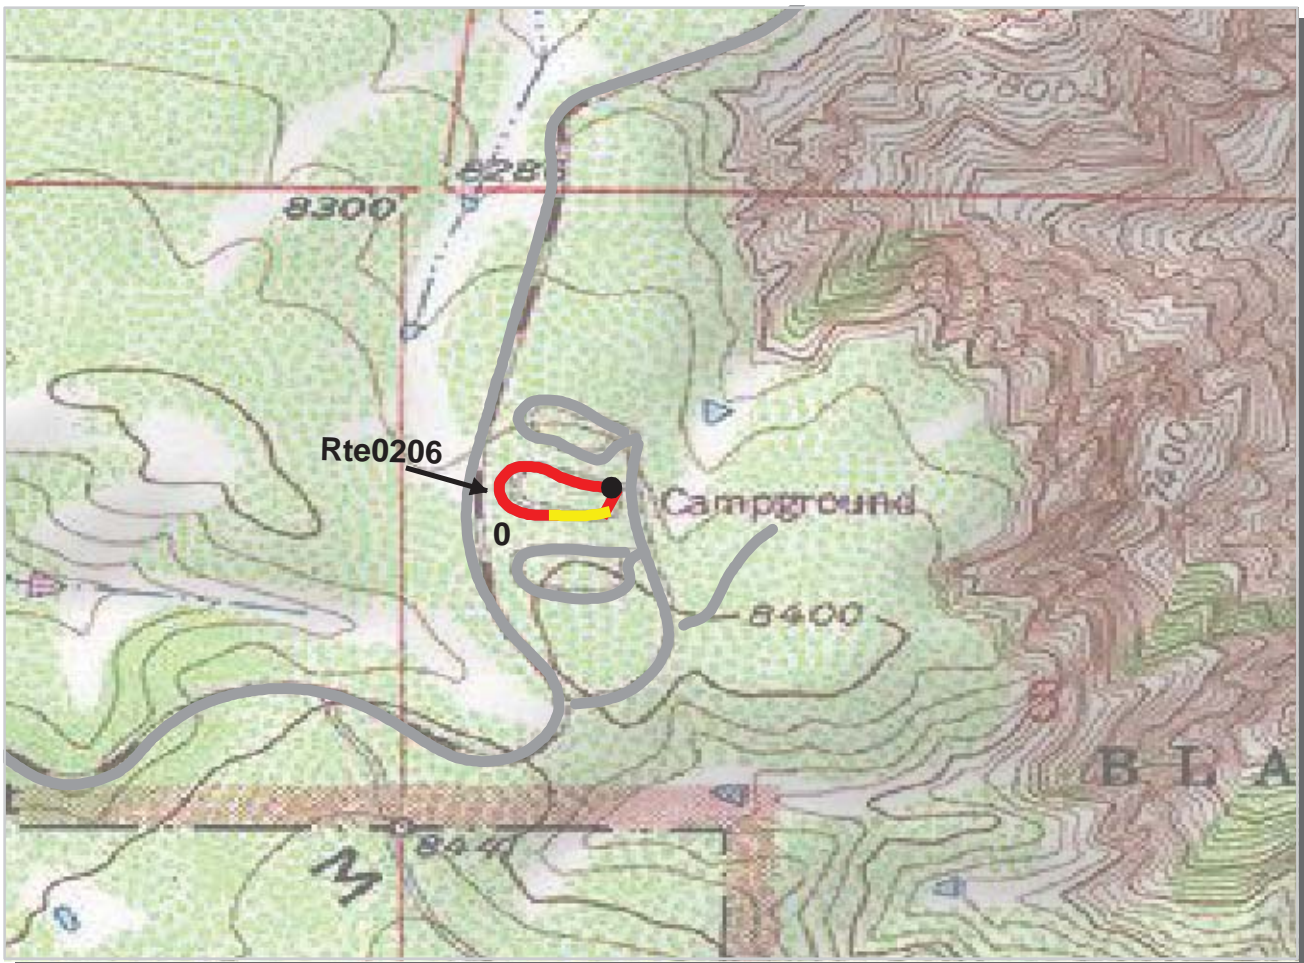

Intermountain Region

BLCA : Black Canyon of the Gunnison National Park


ROUTE: 0206 Campground Loop B

TOTAL LENGTH: 0.24 Miles

Section Number	0				
Section Length (mi)	0.24				
ADT	**				
SADT	**				
ADT Date	**				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	12				
Lane Width (ft)	12				
Shoulder Width (ft)	9				
Roadway Condition Information					
PCR (Pavement Condition Rating)	54				
RCI (Roughness Condition Index)	62				
SCR (Surface Condition Rating)	52				
Alligator Cracking Index	99				
Rutting Index	60				
Patching Index	99				
Transverse Cracking Index	94				
Longitudinal Cracking Index	98				
Shoulder Condition Rating	GOOD				
Drainage Condition Rating	GOOD				

ROUTE: 0206 Campground Loop B

* NC designates data not collected NA designates not applicable
 ** See website for traffic data: <http://www.efl.fhwa.dot.gov/nps/index.htm>

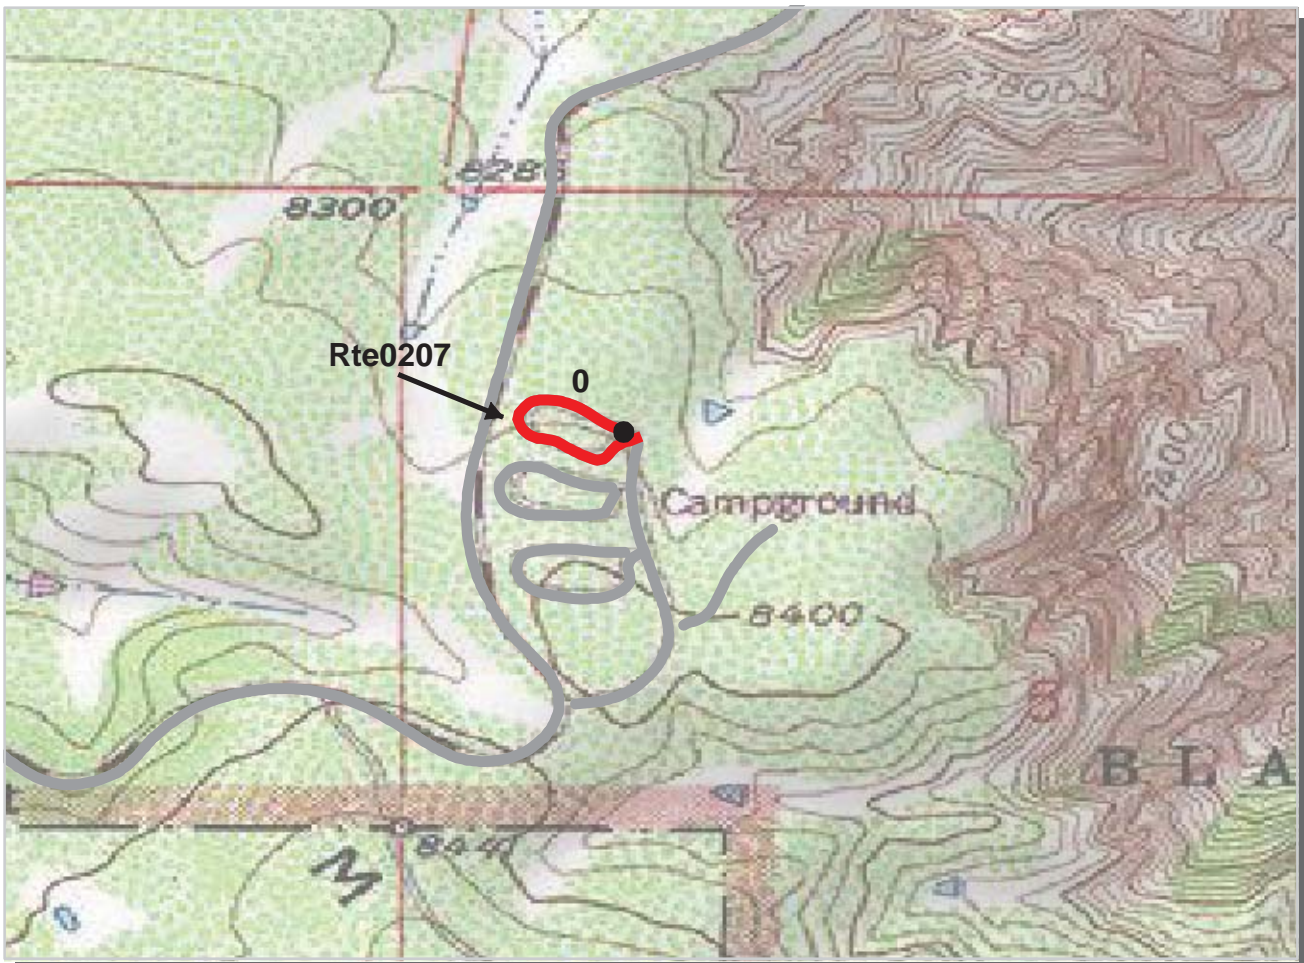

PCR	Poor		Fair		Good		Excellent	
		(<=60)		(61 - 84)		(85 - 94)		(95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.



Intermountain Region
BLCA : Black Canyon of the Gunnison National Park

ROUTE: 0207 Campground Loop C **TOTAL LENGTH: 0.23 Miles**

Section Number	0				
Section Length (mi)	0.23				
AADT	**				
SADT	**				
ADT Date	**				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	11				
Lane Width (ft)	11				
Shoulder Width (ft)	0				
Roadway Condition Information					
PCR (Pavement Condition Rating)	44				
RCI (Roughness Condition Index)	55				
SCR (Surface Condition Rating)	41				
Alligator Cracking Index	99				
Rutting Index	52				
Patching Index	100				
Transverse Cracking Index	91				
Longitudinal Cracking Index	96				
Shoulder Condition Rating	N/A				
Drainage Condition Rating	GOOD				

ROUTE: 0207 Campground Loop C

* NC designates data not collected NA designates not applicable
 ** See website for traffic data: <http://www.efl.fhwa.dot.gov/nps/index.htm>

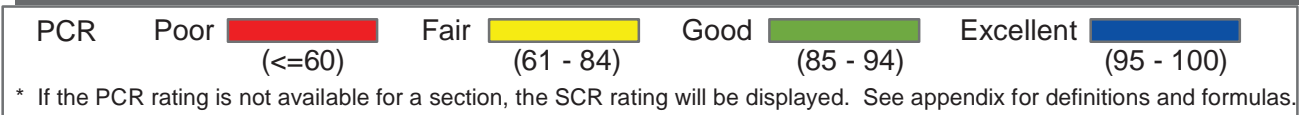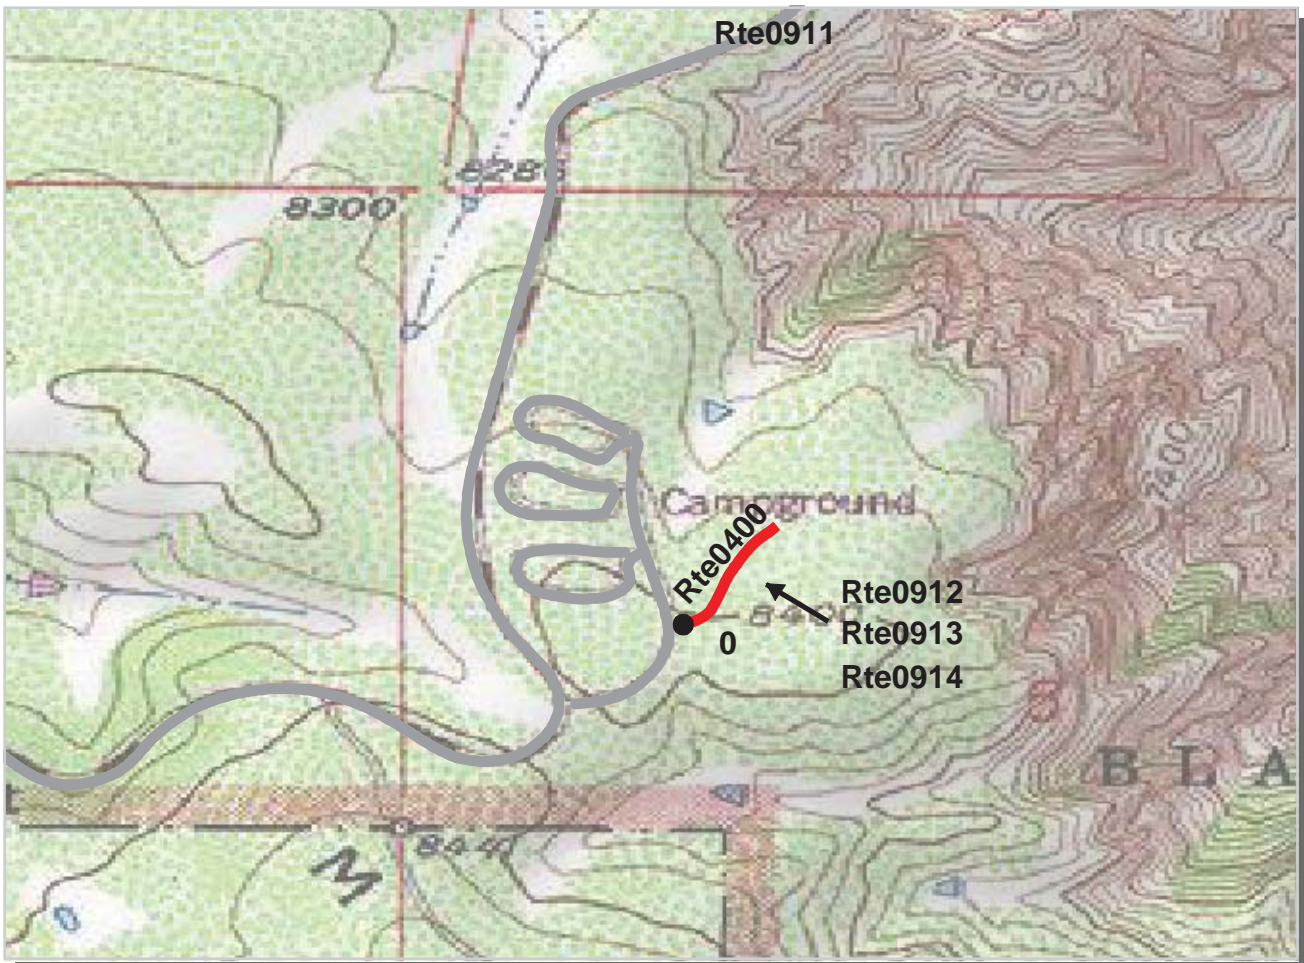

Intermountain Region

BLCA : Black Canyon of the Gunnison National Park

ROUTE: 0400 South Rim Residence Road

TOTAL LENGTH: 0.14 Miles

Section Number	0				
Section Length (mi)	0.14				
AADT	**				
SADT	**				
ADT Date	**				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	21				
Lane Width (ft)	10				
Shoulder Width (ft)	0				
Roadway Condition Information					
PCR (Pavement Condition Rating)	28				
RCI (Roughness Condition Index)	37				
SCR (Surface Condition Rating)	25				
Alligator Cracking Index	84				
Rutting Index	55				
Patching Index	99				
Transverse Cracking Index	92				
Longitudinal Cracking Index	93				
Shoulder Condition Rating	N/A				
Drainage Condition Rating	GOOD				

ROUTE: 0400 South Rim Residence Road

* NC designates data not collected NA designates not applicable
 ** See website for traffic data: <http://www.efl.fhwa.dot.gov/nps/index.htm>

BLCA: Manually Rated Paved Route Condition Rating Sheets

No data available for this section


Black Canyon of the Gunnison National Park

Route 0900

Gunnison Point Visitor Center Parking
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0900	Public	6/15/2003	29138	0.50	AS	FAIR / 73

* Lane miles are based on 11' lane widths

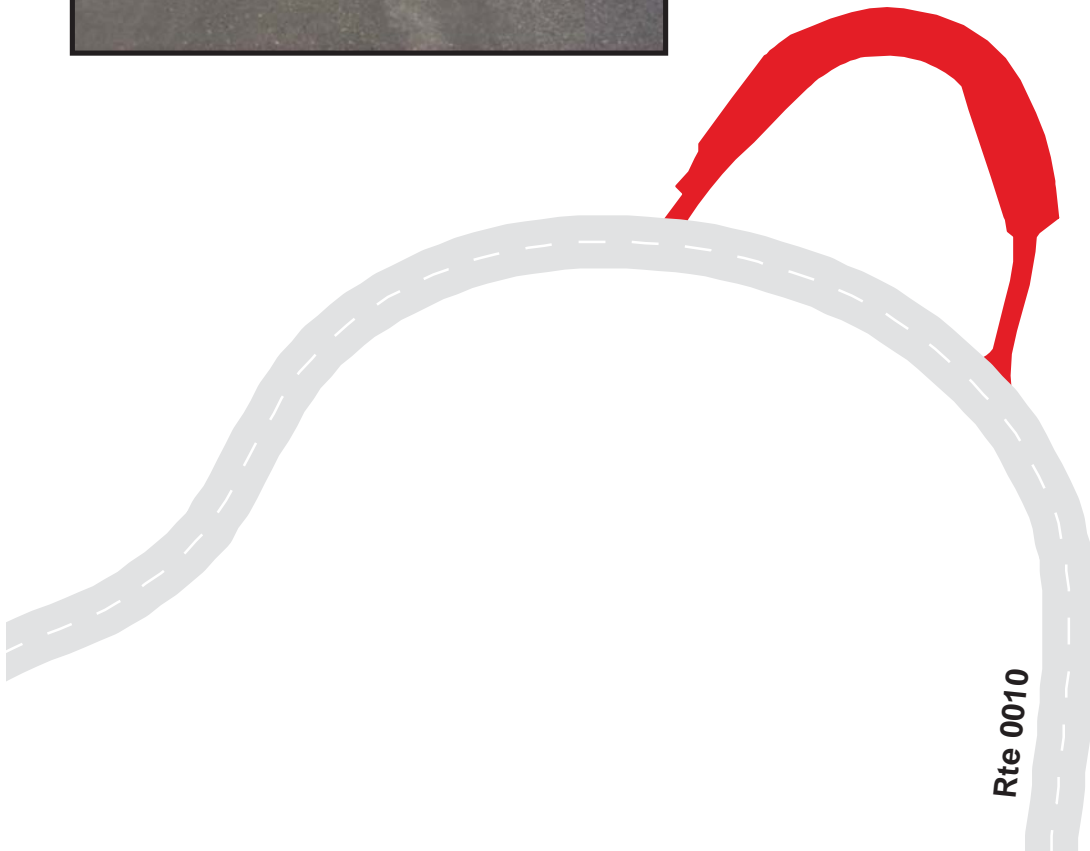


Black Canyon of the Gunnison National Park

Route 0901

High Point Parking
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0901	Public	6/15/2003	16364	0.28	AS	FAIR / 73

* Lane miles are based on 11' lane widths

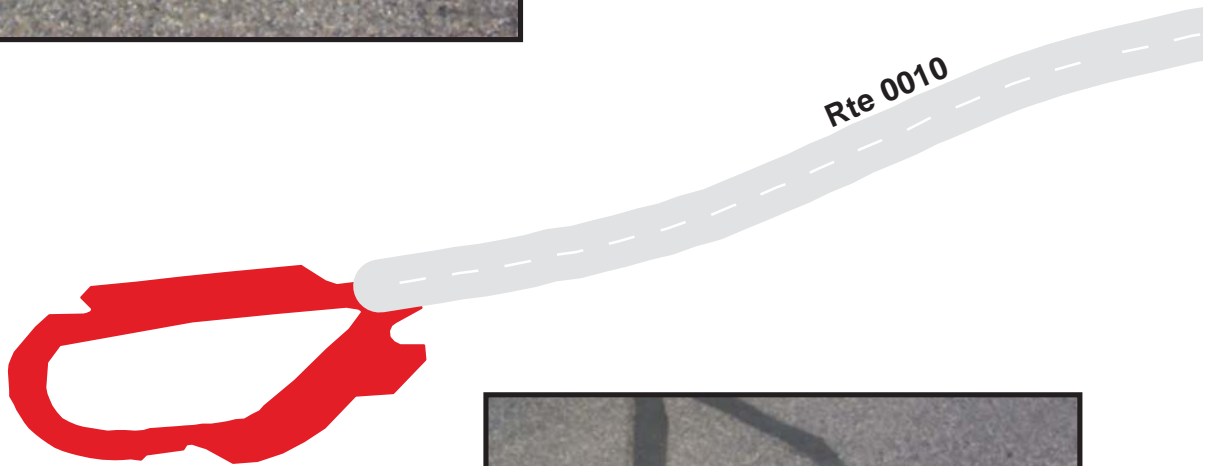


Black Canyon of the Gunnison National Park

Route 0902

Sunset View Parking
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0902	Public	6/15/2003	7696	0.13	AS	FAIR / 73

* Lane miles are based on 11' lane widths

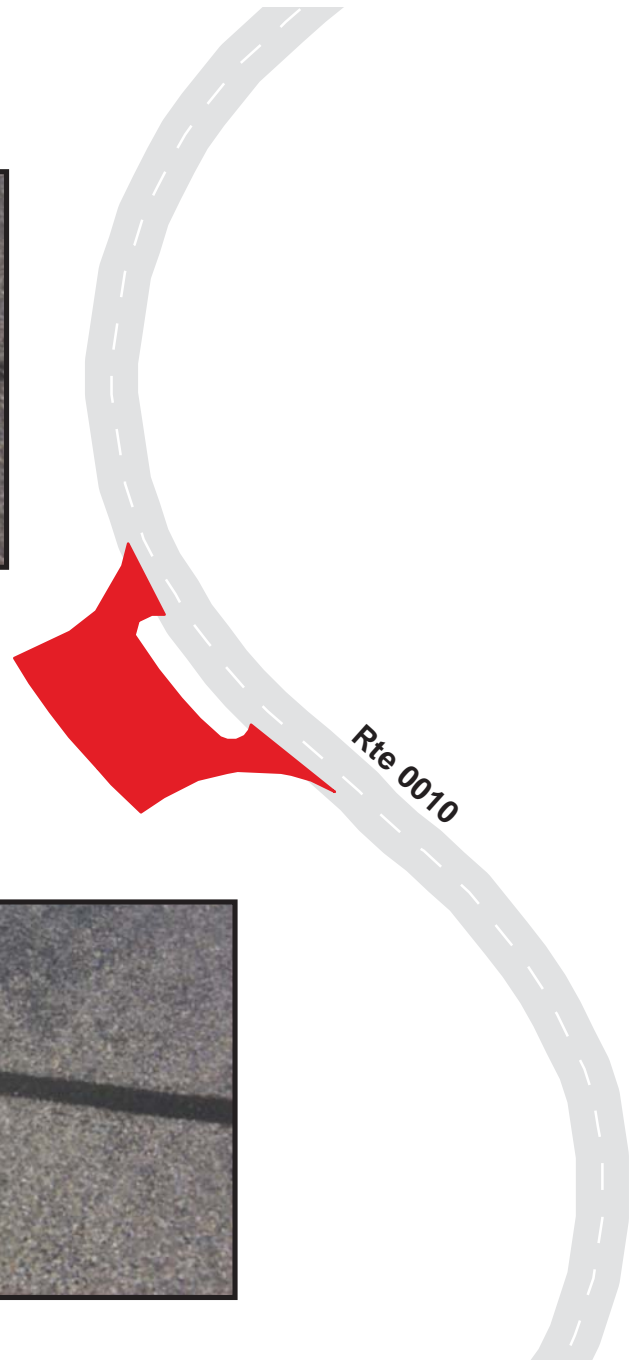

Black Canyon of the Gunnison National Park

Route 0903

Dragon Point Parking
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0903	Public	6/15/2003	2222	0.04	AS	GOOD / 90

* Lane miles are based on 11' lane widths




Black Canyon of the Gunnison National Park

Route 0904

Cedar Point Overlook
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0904	Public	6/15/2003	2985	0.05	AS	GOOD / 90

* Lane miles are based on 11' lane widths

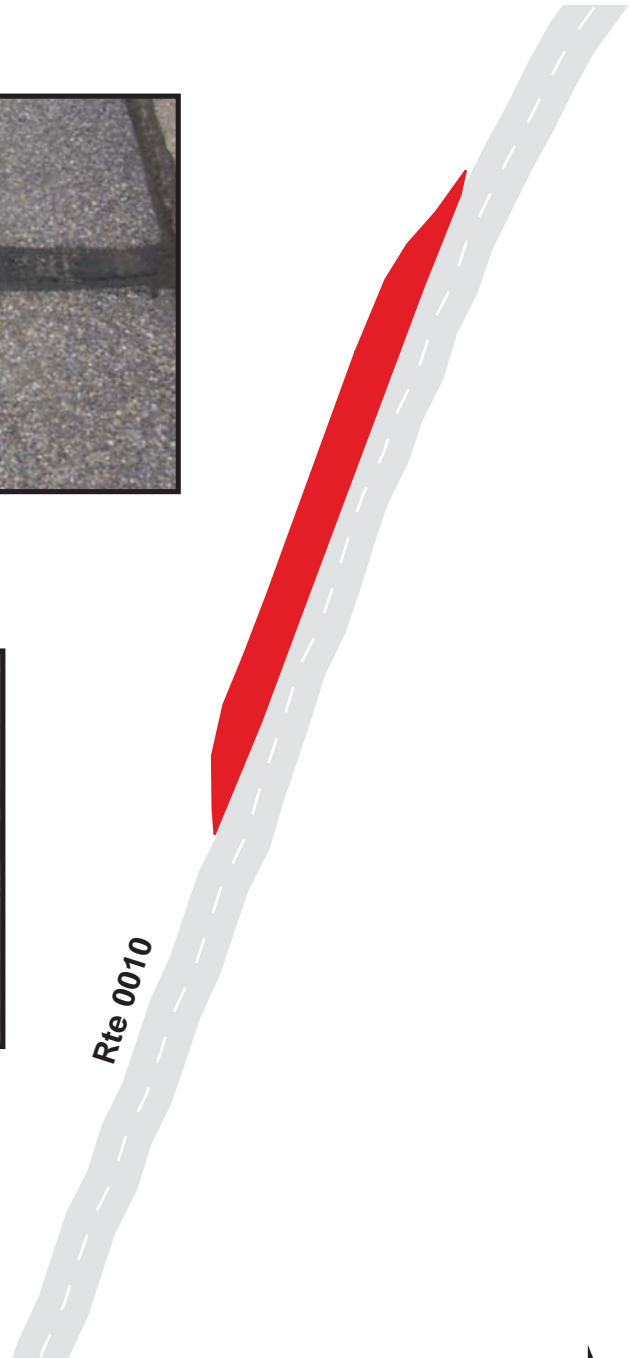


Black Canyon of the Gunnison National Park

Route 0905

Painted Wall View Parking
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0905	Public	6/15/2003	2345	0.04	AS	GOOD / 90

* Lane miles are based on 11' lane widths

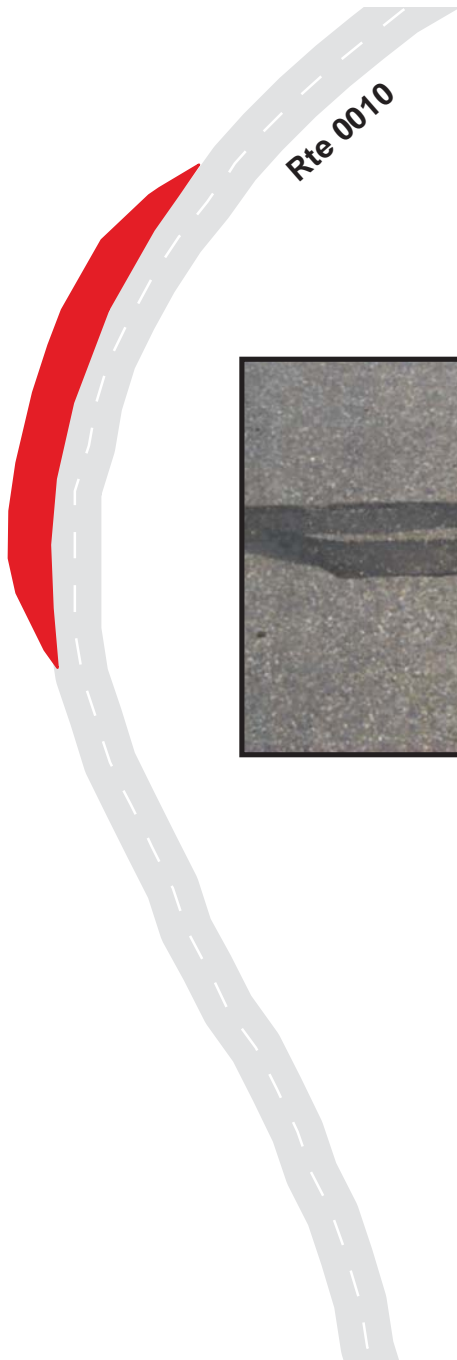


Black Canyon of the Gunnison National Park

Route 0906

Chasm View Overlook
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0906	Public	6/15/2003	5997	0.10	AS	GOOD / 90

* Lane miles are based on 11' lane widths

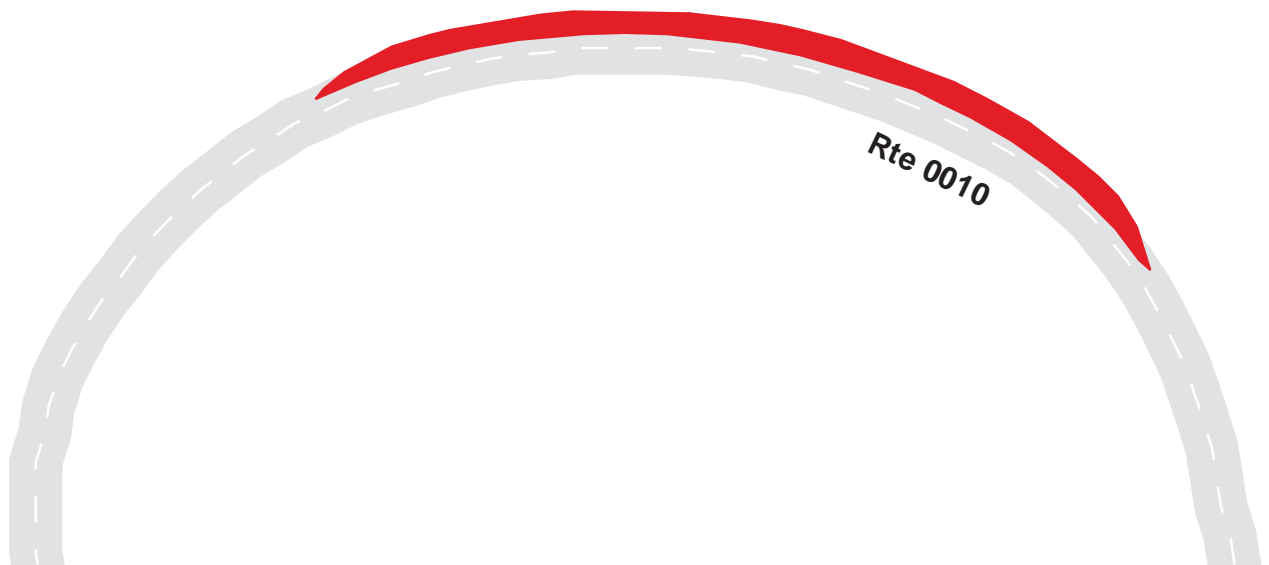


Black Canyon of the Gunnison National Park

Route 0907

Devil's Overlook
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0907	Public	6/15/2003	2803	0.05	AS	GOOD / 90

* Lane miles are based on 11' lane widths

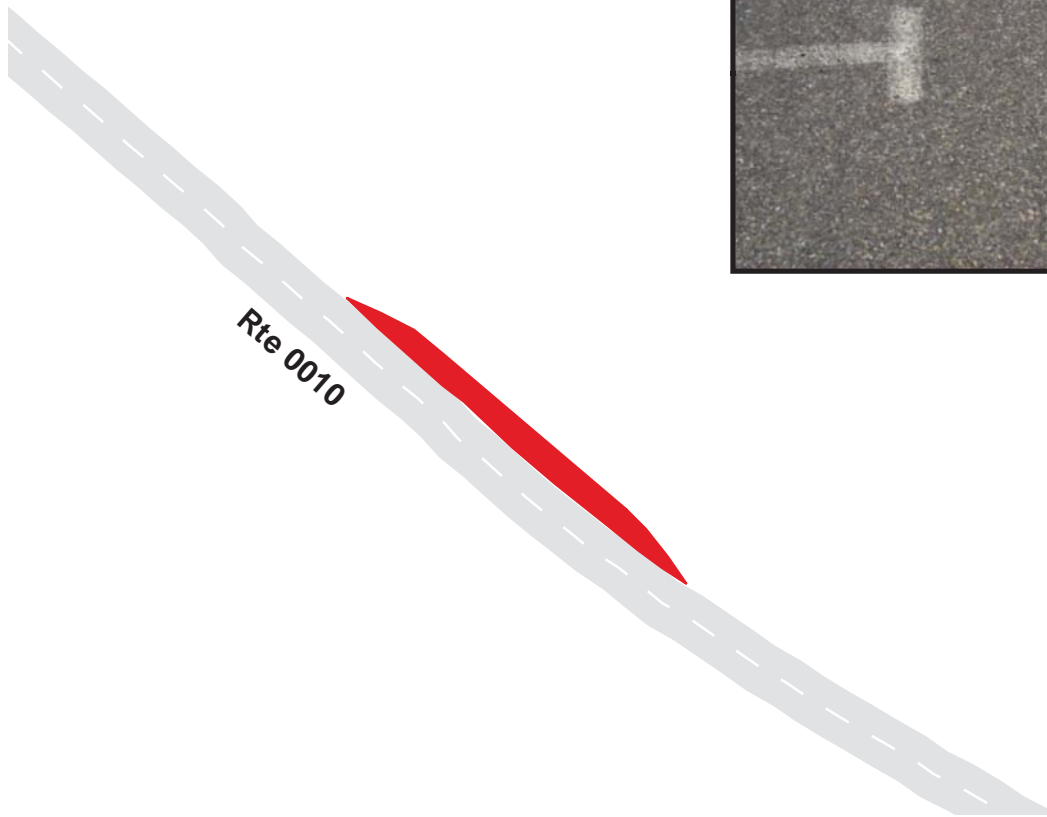



Black Canyon of the Gunnison National Park

Route 0908

Rock Point Parking
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0908	Public	6/15/2003	3088	0.05	AS	FAIR / 73

* Lane miles are based on 11' lane widths

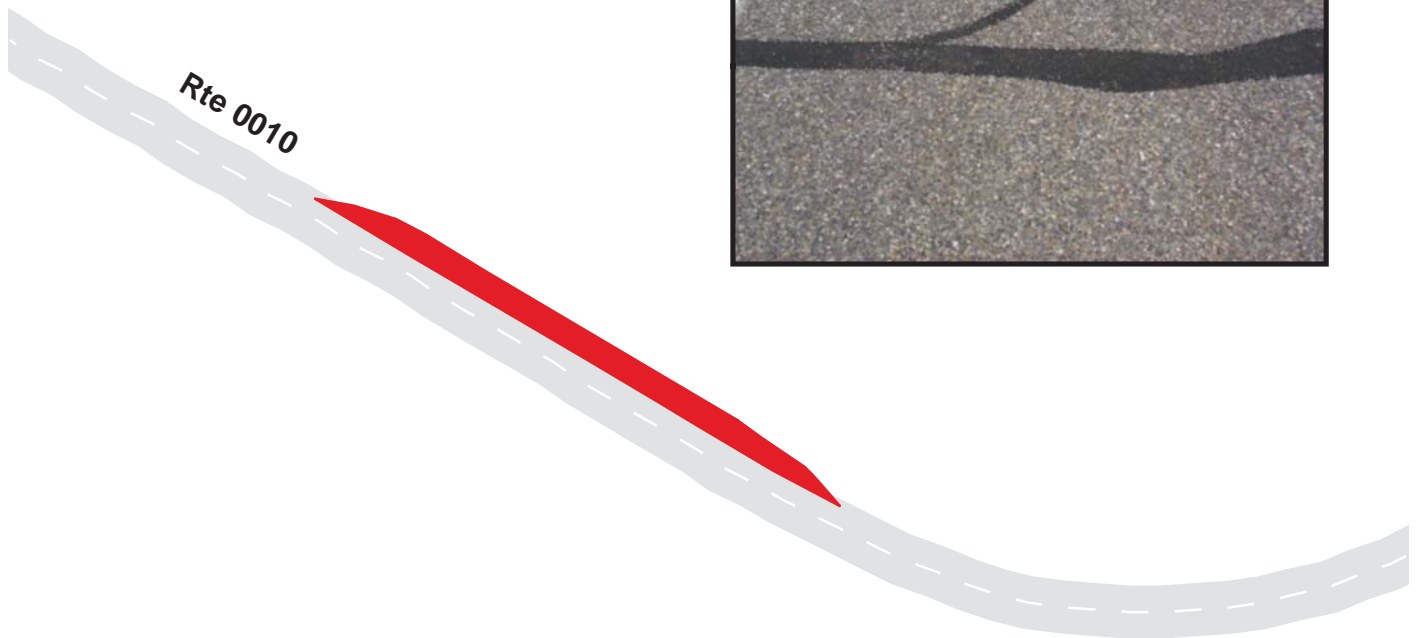

Black Canyon of the Gunnison National Park

Route 0909

Cross Fissures Overlook
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0909	Public	6/15/2003	3266	0.06	AS	GOOD / 90

* Lane miles are based on 11' lane widths





Black Canyon of the Gunnison National Park

Route 0910

Pulpit Rock Overlook
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0910	Public	6/15/2003	3688	0.06	AS	FAIR / 73

* Lane miles are based on 11' lane widths

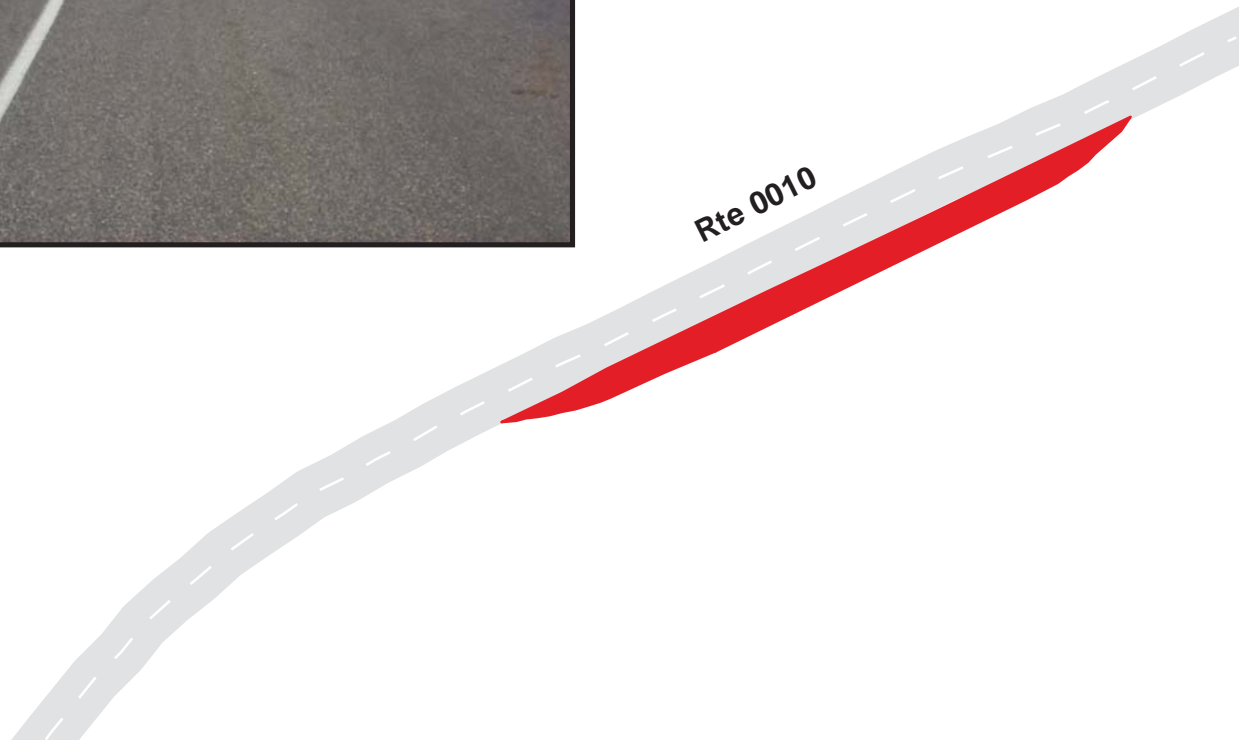




Black Canyon of the Gunnison National Park

Route 0911

Tomichi Point Parking
FROM ROUTE 0010

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0911	Public	6/15/2003	10473	0.18	AS	FAIR / 73

* Lane miles are based on 11' lane widths

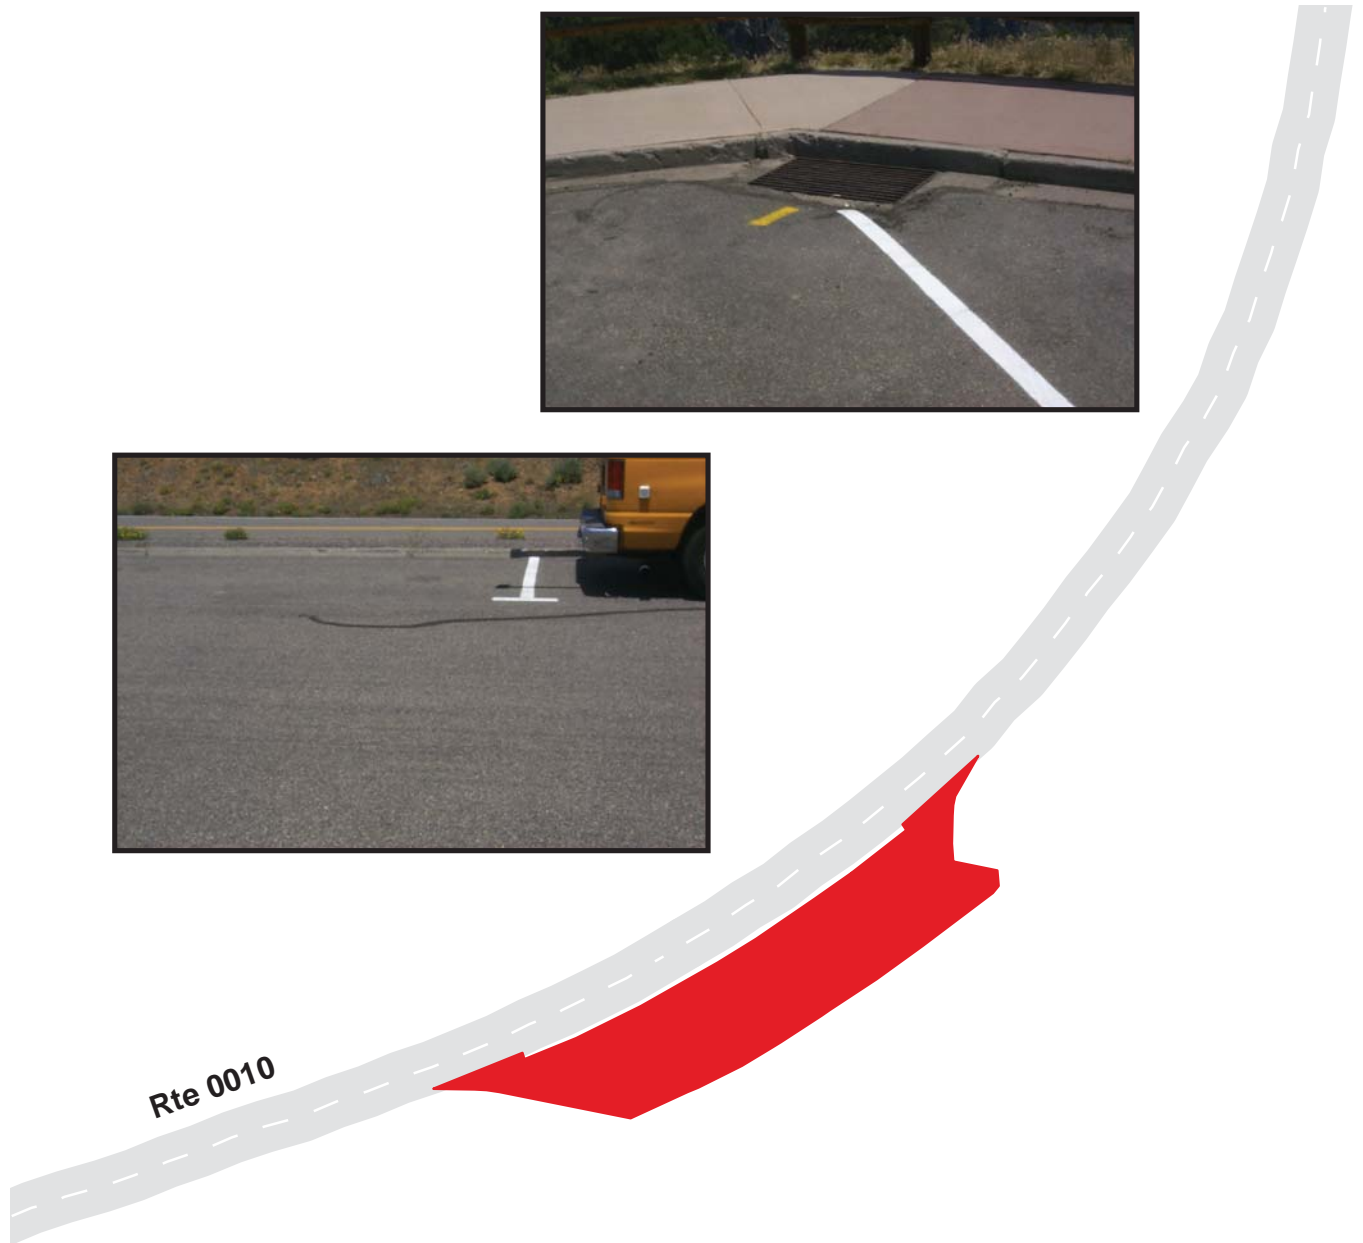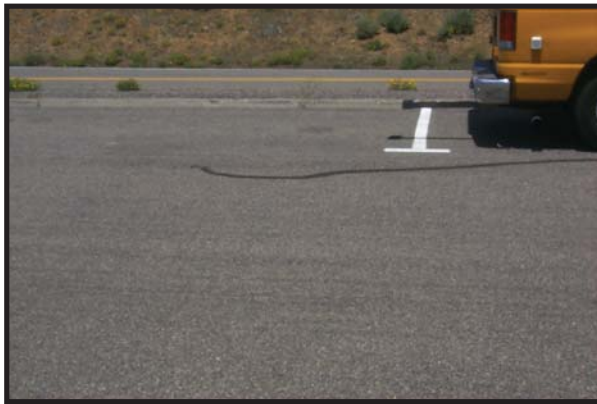

Black Canyon of the Gunnison National Park

Route 0912

South Rim Residence Area

FROM ROUTE 0400

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0912	NonPublic	6/15/2003	5908	0.10	AS	FAIR / 73

* Lane miles are based on 11' lane widths




Black Canyon of the Gunnison National Park

Route 0913

South Rim Maintenance Area
FROM ROUTE 0400

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0913	NonPublic	6/15/2003	5776	0.10	AS	POOR / 45

* Lane miles are based on 11' lane widths

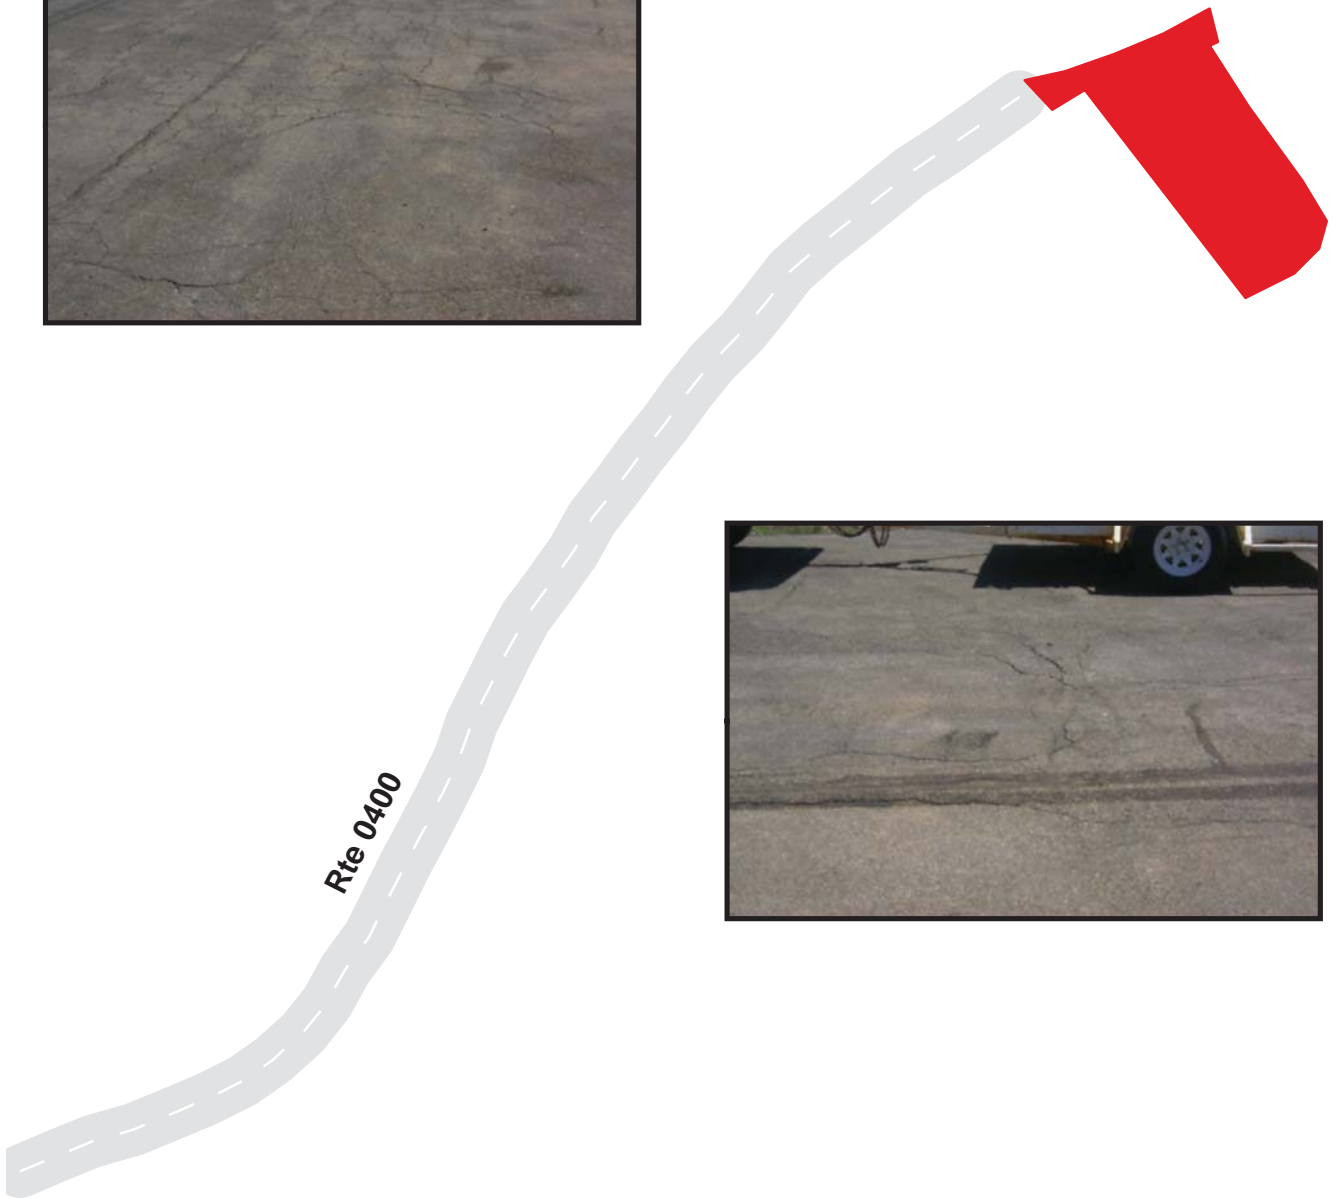


Black Canyon of the Gunnison National Park

Route 0914

Fee Station Parking
FROM ROUTE 0200

Route	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type	Condition / PCR
0914	Public	6/15/2003	5971	0.10	AS	FAIR / 73

* Lane miles are based on 11' lane widths

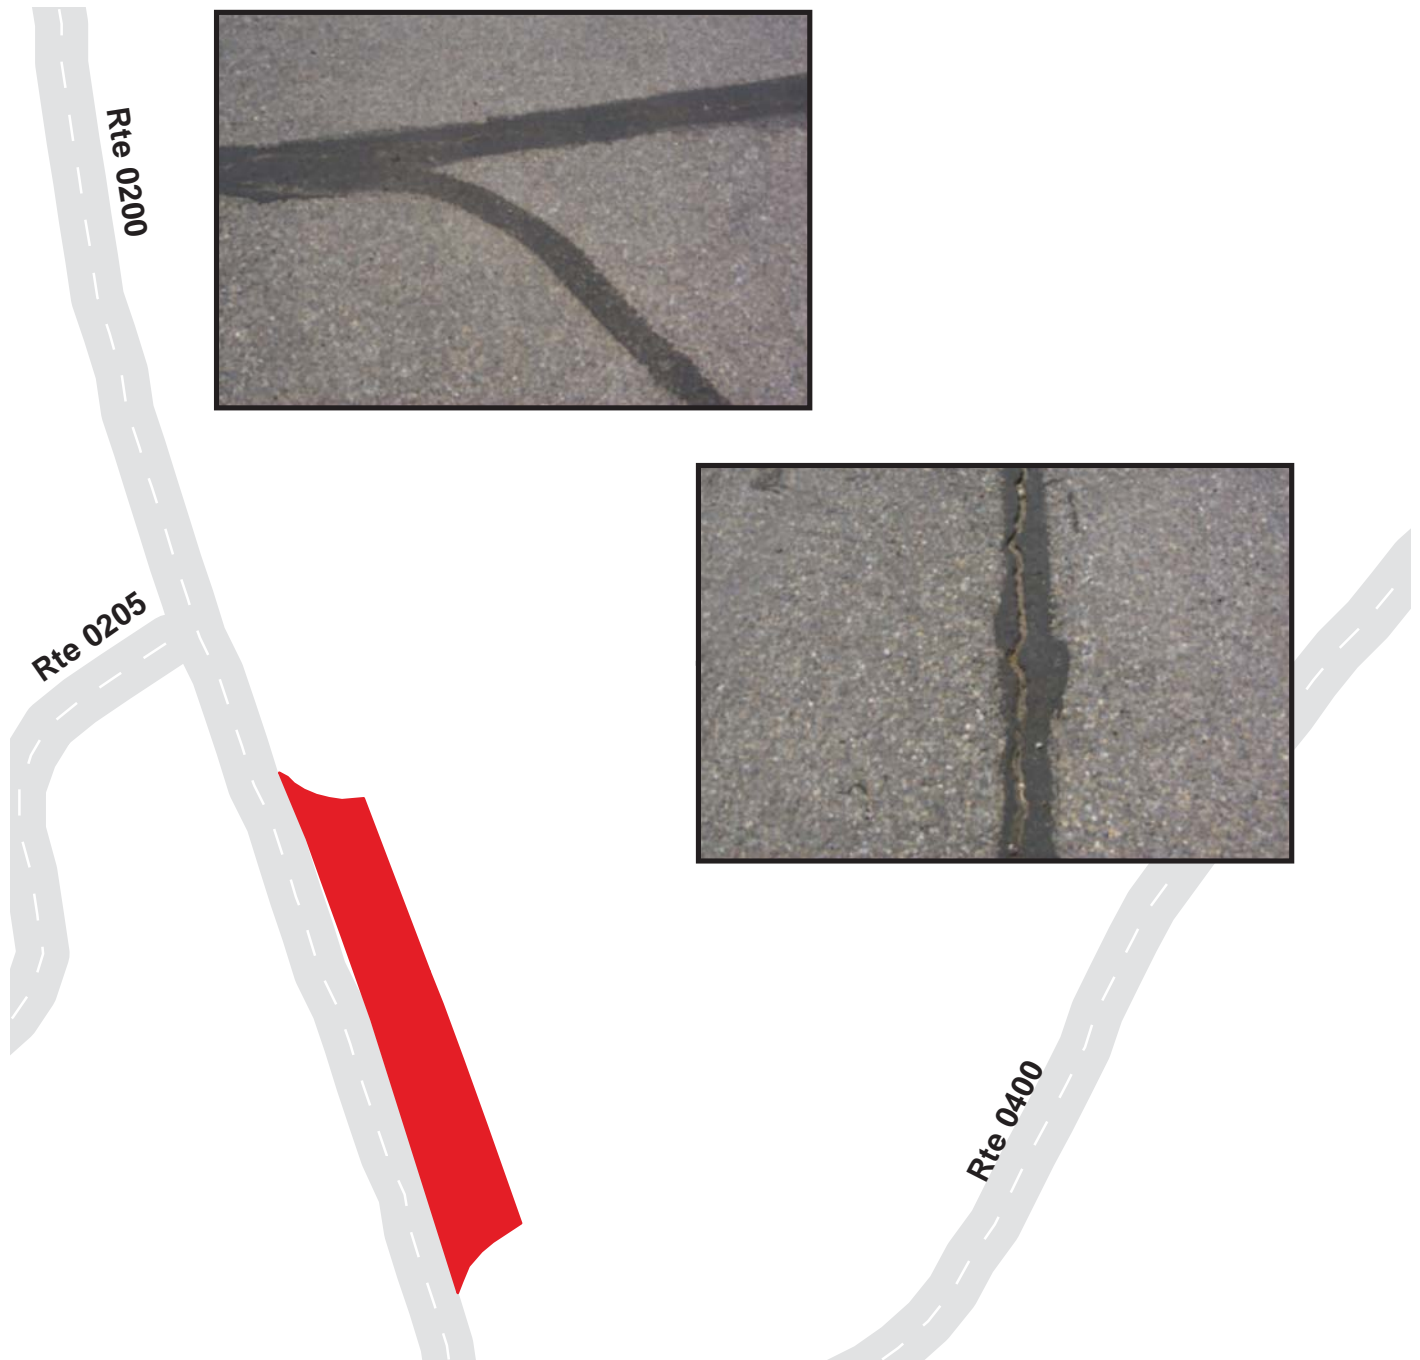

BLCA: PARKWIDE MAINTENANCE FEATURES SUMMARY

<i>FEATURE</i>	<i>PARK TOTAL</i>	<i>UNIT</i>
BRIDGE	0	EACH
CATTLE GUARD	1	EACH
CULVERT	36	EACH
CURB	2,350	LINEAR FEET
DROP INLET	8	EACH
GUARD WALL	0	LINEAR FEET
GUARDRAIL	449	LINEAR FEET
INTERSECTION	71	EACH
LOW WATER CROSSING	0	EACH
OVERHEAD SIGN	0	EACH
PARK BOUNDARY	0	EACH
PAVED DITCH	0	LINEAR FEET
PULLOUT	10	EACH
RAILROAD CROSSING	0	EACH
RETAINING WALL	0	EACH
STATE BOUNDARY	0	EACH
TRAFFIC LIGHT	0	EACH
TUNNEL	0	EACH
TURNOUT	0	LINEAR FEET

BLCA: ROUTE MAINTENANCE FEATURES SUMMARY

<i>FEATURE</i>	<i>ROUTE 0010 SOUTH RIM DRIVE</i>	<i>ROUTE 0200 SOUTH RIM CAMPGROUND ROAD</i>	<i>ROUTE 0205 CAMPGROUND LOOP A</i>	<i>ROUTE 0206 CAMPGROUND LOOP B</i>	<i>ROUTE 0207 CAMPGROUND LOOP C</i>	<i>ROUTE 0400 SOUTH RIM RESIDENCE ROAD</i>	<i>UNIT</i>
BRIDGE	0	0	0	0	0	0	EACH
CATTLE GUARD	1	0	0	0	0	0	EACH
CULVERT	36	0	0	0	0	0	EACH
CURB	2,350	0	0	0	0	0	LINEAR FEET
DROP INLET	8	0	0	0	0	0	EACH
GUARD WALL	0	0	0	0	0	0	LINEAR FEET
GUARDRAIL	449	0	0	0	0	0	LINEAR FEET
INTERSECTION	12	7	23	18	6	5	EACH
LOW WATER CROSSING	0	0	0	0	0	0	EACH
OVERHEAD SIGN	0	0	0	0	0	0	EACH
PARK BOUNDARY	0	0	0	0	0	0	EACH
PAVED DITCH	0	0	0	0	0	0	LINEAR FEET
PULLOUT	10	0	0	0	0	0	EACH
RAILROAD CROSSING	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	EACH
STATE BOUNDARY	0	0	0	0	0	0	EACH
TRAFFIC LIGHT	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	EACH
TURNOUT	0	0	0	0	0	0	LINEAR FEET

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010 : SOUTH RIM DRIVE

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
0.000	0.000			ROUTE BEGINS AT SOUTH BOUNDARY
0.003	0.003	CATTLE GUARD	N/A	
0.070	0.070	CULVERT	N/A	
0.217	0.217	DROP INLET	RIGHT	
0.218	0.244	PULLOUT	LEFT	
0.314	0.314	DROP INLET	RIGHT	
0.341	0.341	DROP INLET	RIGHT	
0.391	0.391	DROP INLET	RIGHT	
0.466	0.466	DROP INLET	RIGHT	
0.487	0.487	DROP INLET	RIGHT	
0.502	0.502	INTERSECTION	RIGHT	NON NPS ROAD (EAST PORTAL ROAD)
0.518	0.518	INTERSECTION	RIGHT	NON NPS ROAD (EAST PORTAL ROAD)
0.523	0.523	DROP INLET	RIGHT	
0.586	0.607	PULLOUT	RIGHT	
0.595	0.595	DROP INLET	RIGHT	
0.711	0.711	CULVERT	N/A	
0.728	0.728	CULVERT	N/A	
0.736	0.736	INTERSECTION	RIGHT	RTE 200
0.838	0.838	CULVERT	N/A	
0.977	0.977	CULVERT	N/A	
1.233	1.233	CULVERT	N/A	
1.386	1.386	CULVERT	N/A	
1.493	1.493	CULVERT	N/A	
1.507	1.507	INTERSECTION	RIGHT	RTE 911
1.511	1.545	CURB	RIGHT	
1.551	1.551	INTERSECTION	RIGHT	RTE 911

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010 : SOUTH RIM DRIVE

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
1.642	1.642	CULVERT	N/A	
1.762	1.762	INTERSECTION	RIGHT	RTE 900
1.823	1.823	INTERSECTION	RIGHT	RTE 900
2.047	2.047	CULVERT	N/A	
2.213	2.213	CULVERT	N/A	
2.348	2.348	CULVERT	N/A	
2.426	2.426	CULVERT	N/A	
2.556	2.556	CULVERT	N/A	
2.669	2.669	CULVERT	N/A	
2.792	2.792	CULVERT	N/A	
2.916	2.916	CULVERT	N/A	
3.172	3.172	CULVERT	N/A	
3.507	3.507	INTERSECTION	LEFT	NPS GRAVEL
3.555	3.609	PULLOUT	RIGHT	
3.562	3.607	CURB	RIGHT	
3.563	3.563	INTERSECTION	RIGHT	RTE 915
3.748	3.748	CULVERT	N/A	
3.980	3.980	CULVERT	N/A	
4.153	4.204	PULLOUT	RIGHT	
4.154	4.203	CURB	RIGHT	
4.275	4.275	CULVERT	N/A	
4.309	4.360	CURB	RIGHT	
4.309	4.360	PULLOUT	RIGHT	
4.363	4.363	CULVERT	N/A	
4.438	4.485	PULLOUT	RIGHT	
4.439	4.481	CURB	RIGHT	
4.763	4.803	GUARDRAIL	RIGHT	

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010 : SOUTH RIM DRIVE

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
4.797	4.797	CULVERT	N/A	
4.944	4.944	CULVERT	N/A	
5.192	5.192	CULVERT	N/A	
5.340	5.357	GUARDRAIL	RIGHT	
5.379	5.465	PULLOUT	RIGHT	
5.380	5.464	CURB	RIGHT	
5.434	5.434	CULVERT	N/A	
5.488	5.528	CURB	RIGHT	
5.491	5.528	PULLOUT	RIGHT	
5.551	5.551	CULVERT	N/A	
5.699	5.699	CULVERT	N/A	
5.824	5.824	CULVERT	N/A	
5.914	5.966	PULLOUT	RIGHT	
5.915	5.962	CURB	RIGHT	
5.995	5.995	CULVERT	N/A	
6.115	6.115	CULVERT	N/A	
6.149	6.188	CURB	RIGHT	
6.149	6.189	PULLOUT	RIGHT	
6.194	6.222	GUARDRAIL	RIGHT	
6.309	6.309	CULVERT	N/A	
6.366	6.366	CULVERT	N/A	
6.408	6.408	CULVERT	N/A	
6.857	6.857	INTERSECTION	RIGHT	RTE 902
6.863	6.877	CURB	RIGHT	
6.882	6.882	INTERSECTION	RIGHT	RTE 902
7.065	7.065	CULVERT	N/A	
7.206	7.206	CULVERT	N/A	

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010 : SOUTH RIM DRIVE

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
7.664	7.664	INTERSECTION	LEFT	RTE 901
7.670	7.670			ROUTE ENDS AT RTE 901

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010 : SOUTH RIM DRIVE

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
0.000	0.000			ROUTE BEGINS AT SOUTH BOUNDARY
0.003	0.003	CATTLE GUARD	N/A	
0.070	0.070	CULVERT	N/A	
0.217	0.217	DROP INLET	RIGHT	
0.218	0.244	PULLOUT	LEFT	
0.314	0.314	DROP INLET	RIGHT	
0.341	0.341	DROP INLET	RIGHT	
0.391	0.391	DROP INLET	RIGHT	
0.466	0.466	DROP INLET	RIGHT	
0.487	0.487	DROP INLET	RIGHT	
0.502	0.502	INTERSECTION	RIGHT	NON NPS ROAD (EAST PORTAL ROAD)
0.518	0.518	INTERSECTION	RIGHT	NON NPS ROAD (EAST PORTAL ROAD)
0.523	0.523	DROP INLET	RIGHT	
0.586	0.607	PULLOUT	RIGHT	
0.595	0.595	DROP INLET	RIGHT	
0.711	0.711	CULVERT	N/A	
0.728	0.728	CULVERT	N/A	
0.736	0.736	INTERSECTION	RIGHT	RTE 200
0.838	0.838	CULVERT	N/A	
0.977	0.977	CULVERT	N/A	
1.233	1.233	CULVERT	N/A	
1.386	1.386	CULVERT	N/A	
1.493	1.493	CULVERT	N/A	
1.507	1.507	INTERSECTION	RIGHT	RTE 911
1.511	1.545	CURB	RIGHT	
1.551	1.551	INTERSECTION	RIGHT	RTE 911

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010 : SOUTH RIM DRIVE

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
1.642	1.642	CULVERT	N/A	
1.762	1.762	INTERSECTION	RIGHT	RTE 900
1.823	1.823	INTERSECTION	RIGHT	RTE 900
2.047	2.047	CULVERT	N/A	
2.213	2.213	CULVERT	N/A	
2.348	2.348	CULVERT	N/A	
2.426	2.426	CULVERT	N/A	
2.556	2.556	CULVERT	N/A	
2.669	2.669	CULVERT	N/A	
2.792	2.792	CULVERT	N/A	
2.916	2.916	CULVERT	N/A	
3.172	3.172	CULVERT	N/A	
3.507	3.507	INTERSECTION	LEFT	NPS GRAVEL
3.555	3.609	PULLOUT	RIGHT	
3.562	3.607	CURB	RIGHT	
3.563	3.563	INTERSECTION	RIGHT	RTE 915
3.748	3.748	CULVERT	N/A	
3.980	3.980	CULVERT	N/A	
4.153	4.204	PULLOUT	RIGHT	
4.154	4.203	CURB	RIGHT	
4.275	4.275	CULVERT	N/A	
4.309	4.360	CURB	RIGHT	
4.309	4.360	PULLOUT	RIGHT	
4.363	4.363	CULVERT	N/A	
4.438	4.485	PULLOUT	RIGHT	
4.439	4.481	CURB	RIGHT	
4.763	4.803	GUARDRAIL	RIGHT	

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010 : SOUTH RIM DRIVE

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
4.797	4.797	CULVERT	N/A	
4.944	4.944	CULVERT	N/A	
5.192	5.192	CULVERT	N/A	
5.340	5.357	GUARDRAIL	RIGHT	
5.379	5.465	PULLOUT	RIGHT	
5.380	5.464	CURB	RIGHT	
5.434	5.434	CULVERT	N/A	
5.488	5.528	CURB	RIGHT	
5.491	5.528	PULLOUT	RIGHT	
5.551	5.551	CULVERT	N/A	
5.699	5.699	CULVERT	N/A	
5.824	5.824	CULVERT	N/A	
5.914	5.966	PULLOUT	RIGHT	
5.915	5.962	CURB	RIGHT	
5.995	5.995	CULVERT	N/A	
6.115	6.115	CULVERT	N/A	
6.149	6.188	CURB	RIGHT	
6.149	6.189	PULLOUT	RIGHT	
6.194	6.222	GUARDRAIL	RIGHT	
6.309	6.309	CULVERT	N/A	
6.366	6.366	CULVERT	N/A	
6.408	6.408	CULVERT	N/A	
6.857	6.857	INTERSECTION	RIGHT	RTE 902
6.863	6.877	CURB	RIGHT	
6.882	6.882	INTERSECTION	RIGHT	RTE 902
7.065	7.065	CULVERT	N/A	
7.206	7.206	CULVERT	N/A	

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010 : SOUTH RIM DRIVE

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
7.664	7.664	INTERSECTION	LEFT	RTE 901
7.670	7.670			ROUTE ENDS AT RTE 901

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0200 : SOUTH RIM CAMPGROUND ROAD

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
0.000	0.000			ROUTE BEGINS AT RTE 010
0.006	0.006	INTERSECTION	RIGHT	ROUTE 010
0.096	0.096	INTERSECTION	LEFT	NPS GRAVEL
0.124	0.124	INTERSECTION	RIGHT	RTE 400
0.165	0.165	INTERSECTION	RIGHT	RTE 914
0.200	0.200	INTERSECTION	LEFT	RTE 205
0.262	0.262	INTERSECTION	LEFT	RTE 206
0.315	0.315	INTERSECTION	LEFT	ROUTE 203
0.320	0.320			ROUTE ENDS AT RTE 914

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0205 : CAMPGROUND LOOP A

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
0.000	0.000			ROUTE BEGINS AT ROUTE 200
0.001	0.001	INTERSECTION	LEFT	RTE 205
0.007	0.007	INTERSECTION	RIGHT	ROUTE 200
0.050	0.050	INTERSECTION	LEFT	
0.051	0.051	INTERSECTION	RIGHT	
0.068	0.068	INTERSECTION	LEFT	
0.080	0.080	INTERSECTION	LEFT	
0.088	0.088	INTERSECTION	RIGHT	
0.090	0.090	INTERSECTION	LEFT	
0.094	0.094	INTERSECTION	RIGHT	
0.101	0.101	INTERSECTION	RIGHT	
0.112	0.112	INTERSECTION	RIGHT	
0.122	0.122	INTERSECTION	RIGHT	
0.136	0.136	INTERSECTION	LEFT	
0.138	0.138	INTERSECTION	RIGHT	
0.151	0.151	INTERSECTION	LEFT	
0.153	0.153	INTERSECTION	RIGHT	
0.166	0.166	INTERSECTION	RIGHT	
0.174	0.174	INTERSECTION	RIGHT	
0.182	0.182	INTERSECTION	RIGHT	
0.193	0.193	INTERSECTION	LEFT	
0.195	0.195	INTERSECTION	RIGHT	
0.237	0.237	INTERSECTION	LEFT	RTE 205
0.242	0.242	INTERSECTION	LEFT	RTE 200
0.250	0.250			ROUTE ENDS AT END OF LOOP

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0206 : CAMPGROUND LOOP B

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
0.000	0.000			ROUTE BEGINS AT ROUTE 200
0.006	0.006	INTERSECTION	RIGHT	ROUTE 200
0.029	0.029	INTERSECTION	LEFT	
0.054	0.054	INTERSECTION	LEFT	
0.063	0.063	INTERSECTION	RIGHT	
0.087	0.087	INTERSECTION	RIGHT	
0.105	0.105	INTERSECTION	RIGHT	
0.128	0.128	INTERSECTION	RIGHT	
0.137	0.137	INTERSECTION	RIGHT	
0.153	0.153	INTERSECTION	LEFT	
0.157	0.157	INTERSECTION	RIGHT	
0.175	0.175	INTERSECTION	LEFT	
0.195	0.195	INTERSECTION	RIGHT	
0.196	0.196	INTERSECTION	LEFT	
0.207	0.207	INTERSECTION	RIGHT	
0.215	0.215	INTERSECTION	RIGHT	
0.233	0.233	INTERSECTION	LEFT	RTE 206
0.233	0.233	INTERSECTION	RIGHT	
0.240	0.240			ROUTE ENDS AT END OF LOOP
0.245	0.245	INTERSECTION	LEFT	RTE 200

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0207 : CAMPGROUND LOOP C

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
0.000	0.000			ROUTE BEGINS AT ROUTE 200
0.008	0.008	INTERSECTION	LEFT	ROUTE 200
0.027	0.027	INTERSECTION	RIGHT	
0.045	0.045	INTERSECTION	LEFT	
0.190	0.190	INTERSECTION	RIGHT	
0.218	0.218	INTERSECTION	LEFT	RTE 207
0.219	0.219	INTERSECTION	RIGHT	RTE 207
0.230	0.230			ROUTE ENDS AT END OF LOOP

BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0400 : SOUTH RIM RESIDENCE ROAD

<i>FROM MILEPOST</i>	<i>TO MILEPOST</i>	<i>FEATURE</i>	<i>SIDE</i>	<i>COMMENT</i>
0.000	0.000			ROUTE BEGINS AT RTE 200
0.002	0.002	INTERSECTION	RIGHT	RTE 200
0.074	0.074	INTERSECTION	RIGHT	RTE 912
0.089	0.089	INTERSECTION	LEFT	
0.093	0.093	INTERSECTION	RIGHT	
0.136	0.136	INTERSECTION	RIGHT	RTE 913
0.140	0.140			ROUTE ENDS AT END

APPENDIX A: GLOSSARY OF TERMS AND ABBREVIATIONS

TERM OR ABBREVIATION	DESCRIPTION OR DEFINITION
1377	Numeric Code for Black Canyon of the Gunnison National
AADT	Annually Adjusted Daily Traffic. Average daily traffic adjusted for the term period comprising 80% of annual visitation
BLCA	Alpha Code for Black Canyon of the Gunnison National
CRS	Condition Rating Sheets. (Section 5)
Drainage Condition Rating	A visual rating (Good, Poor) of the drainage condition. (see Section 10)
Excellent	Excellent rating with an index value of 95 or greater
Fair	Fair rating with an index value between 61 and 84
Func. Class	Functional Classification (see Route ID, Section 4)
Good	Good rating with an index value between 85 and 94
IRI	International Roughness Index
Lane Width	Distance from road centerline to fogline, or from centerline to edge-of-pavement when no fogline exists
MRR	Manually Rated Route
NA	Not Applicable
NC	Not Collected
Paved Width	Distance from edge-of-pavement to edge-of-pavement
PCR	Pavement Condition Rating (see Section 10)

Poor	Poor Rating with an index value of 60 or less
RCI	Roughness Condition Index
SADT	Seasonal Annual Daily Traffic. Average daily traffic for the total defined "season"
SCR	Surface Condition Rating (see Section 10)
Shoulder Condition Rating	Visual rating (Good, Poor) of the condition of shoulder. (see Section 10)
Shoulder Width	Distance from fogline to hinge point, or if no fogline, from edge-of-pavement to hinge point

APPENDIX B: DESCRIPTION OF RATING SYSTEM

A numerical roadway rating system is used to describe the overall condition of the paved roadways and paved parking areas. In this system, a numerical rating between 1 and 100 is ascribed to each 0.02 miles of road. This numerical rating is called a Pavement Condition Rating (PCR). A “perfect” road, newly constructed with no surface distresses and a smooth surface, would be assigned a PCR rating of 100. Based on the type, severity, and extent of surface distresses points are deducted from 100 to arrive at the final PCR.

Data is collected on the following distresses and conditions:

- **Alligator Cracking** - a series of interconnecting cracks resembling alligator skin or chicken wire, which can occur anywhere in the lane.
- **Longitudinal Cracking** - cracks which are parallel to the pavement centerline or asphalt lay-down direction.
- **Transverse Cracking** - cracks perpendicular to the pavement centerline.
- **Pothole (patch)** - a bowl-shaped hole in the pavement surface. May be patched or not.
- **Rutting** - surface depressions in the wheel paths.

Roughness is collected as International Roughness Index (IRI) and is used in the PCR formula. Roughness is measured in inches of vertical displacement of the vehicle per mile traveled.

A Distress Rating Index value is calculated for each of the individual distresses at the 0.02 mile, or every 105.6 feet.

Rating Index Formulas

Alligator Cracking Index = $100 - [40 * (\%low/70 + \%medium/30 + \%high/10)]$

Longitudinal Cracking Index = $100 - [40 * (\%low/350 + \%medium/200 + \%high/75)]$

Transverse Cracking Index = $100 - [(20 * (low/15.1 + medium/7.5)) + (40 * (high/1.9))]$

Patching Index = $100 - [40 * (\%patching / 80)]$

Rutting Index: $100 - [40 * ((low/160) + (med/80) + (high/40))]$

Roughness Condition Index: (RCI) = $32 * [5 * e^{(-0.0041 * \text{average IRI})}]$

These 0.02 Distress Rating Index values are then averaged over one mile sections for the mile-by-mile Distress Rating Indexes, Surface Condition Rating (SCR) and Pavement Condition Rating (PCR).

Surface Condition Rating (SCR) = $100 - [(100 - AC_INDEX) + (100 - LC_INDEX) + (100 - TC_INDEX) + (100 - PATCH_INDEX) + (100 - RUT_INDEX)]$

Pavement Condition Rating (PCR) = $(SCR * 0.60) + (RCI * 0.40)$

NOTE: Collection of roughness data is dependant on the data collection vehicle traveling at a minimum speed of 12 mph. In the event that a route cannot be safely traveled at this minimum speed, and results in no roughness data, the SCR only will be calculated.

Parking Lot and Manually Rated Road Condition Rating

Surface Condition Distresses- Chip Seal:

Raveling – loss of surface rock chips revealing previous surface

Bleeding – asphalt or tar is bleeding through to the surface where surface looks slick with asphalt

Rutting

Potholes/Patching

Ratings - Chip Seal:

Excellent – None of the surface affected by the above (recently constructed)

Good – Less than 10% of surface affected by the above

Fair – Between 10% and 40% of surface affected by the above

Poor – More than 40% of surface affected by the above

Surface Condition - Asphalt:

Cracking of any type

Rutting

Potholes/Patching

Ratings - Asphalt:

Excellent – None of the surface affected by the above (recently constructed)

Good – Less than 10% of surface affected by the above

Fair – Between 10% and 40% of surface affected by the above

Poor – More than 40% of surface affected by the above

Index Values of Visual Ratings on Parking Lots and Manually Rated Roads

Excellent 97

Good 90

Fair 73

Poor 45

Drainage Condition Rating Definitions

- Good:** Minimal overall drainage problems. If funding were available for pavement maintenance, 25% or less is estimated to correct drainage deficiencies.
- Poor:** Problems exist that jeopardizes the integrity of the road in this section. If funding were available for pavement maintenance, 50% to 100% is estimated to correct drainage deficiencies.

Drainage Condition Rating Criteria

The following are examples of basic criteria to help the rater to identify the different drainage ratings. While in the field, many other flaws will be discovered, but these criteria should give a feel for where the flaws would apply in the ratings.

Good Drainage

Most water clears the road prism adequately with little concern of base saturation.

- X Pavement has minor deficiencies that interrupt water flow.
- X Shoulders are mostly adequate as they relate to surrounding terrain. Shoulder design generally coincides with the drainage design.
- X Curbs have deficiencies, but still function without erosion.
- X Down drains are placed properly, but show signs of some deterioration.
- X Culverts are adequate in numbers and size however, minor deficiencies are evident.
- X Ditches are not paved, but solid and have enough area to maintain and carry required volume of water.

Poor Drainage

This section has areas of inadequate drainage ability that is causing base saturation that could cause a road failure.

- X Pavement grade is irregular and holds dangerous amounts of water (hydroplaning is a concern), or shows massive alligator cracking.
- X Shoulder design induces ponding that encroaches on the pavement (drivers try to avoid ponds).
- X Portions of curbs are missing, allowing water to escape causing erosion.
- X Drop inlets, due to various reasons, are only able to drain 50% or less efficiently.
- X Down drains show signs of water exiting in areas by the down drain causing erosion.
- X Culverts are functionally deficient including size, installation, location, or grade giving water opportunity to saturate the road base.
- X Ditches allow water opportunity to saturate the road base through various reasons such as low places in ditch where design has not allowed for water to drain, little or no room in the road prism for a needed ditch, or water is disappearing within the ditch.

Shoulder Condition Rating Definitions

- Good:** The shoulder is generally in good functional condition.. If curbs are present, they are functional.
- Poor:** There is no shoulder because erosion has removed it. If curbs are present, they need to be replaced.

Shoulder Rating Criteria

The following are examples of basic criteria to help the rater to identify the different shoulder ratings. While in the field, many other flaws will be discovered, but these criteria should give a feel for where the flaws would apply in the ratings.

Good Shoulders

- X If shoulder is unpaved drop-offs are less than 1", but grading is required.
- X If shoulder is paved rut depth is less than 1/2", sealed cracks are present, and grading is required.
- X If curbs are present they are functional.

Poor Shoulder

- X If shoulder is unpaved drop-offs are greater than 4" and erosion has removed the shoulder.
- X If shoulder is paved rut depth is greater than 1". Open cracks are greater than 1/4" deep, and erosion has removed the shoulder.
- X If curbs are present they need replacement.
- X If curbs are present they need repairs, and there is erosion behind the curb.

APPENDIX C: DIGITAL IMAGE INFORMATION

All images collected in Cycle 3 are digital images. These images provide the best resolution for identifying sign inventories and pavement evaluations. The images can be viewed with an interactive software program called **Visi-Data**. Each park will have a copy of the Visi-Data program installed in the park for park personnel to access and use.

Only Cycle 3 data can be queried and reviewed using the Visi-Data software program. This program is a multimedia data presentation and analysis tool that can be accessed either at the individual park, park region or at NPS headquarters. The data is organized in a hierarchical manner and presented in tabular and graphical formats. The user is able to perform queries and drill down through the data to find the particular information they are trying to query. Associated digital right-of-way images from either the LAN, USB port, individual DVD, or from the Visi-web application, can be presented along with the GPS locations.

APPENDIX D: METADATA

ARAN ROUTE GPS DATA

Background information of route spatial data.

GPS Records: GPS data for NPS routes is stored in the MS Access database for the park. The coordinates of the road traces are stored in the 'PMS_20' table in the 'GPS_LAT' and 'GPS_LON' fields.

Data Collection Device:

Vehicle Information: Ford Van
Type of GPS Unit: NovAtel MiLLennium, 12 channel, dual frequency L1/L2, DGPS ready receiver w/MiLLennium 502 GPS antenna and OmniSTAR System 3000 LR
Inertial System: Applanix POS LV

Accuracy: Expected ground accuracy is 1 meter *

*The above accuracy assumes good GPS mission planning resulting in maximum GPS satellite observation and ideal environmental conditions. Due to less than ideal satellite and environmental conditions, some routes may lack the expected ground accuracy.

Geographic Datum: WGS 1984

Post Collection GPS Correction: Due to unanticipated GPS collection inaccuracies, some route locations have been digitized using DOQQ's and other data sources.

FHWA – NPS Road Inventory Program Cycle 3 Metadata for the Park Database

The purpose of these sheets is to provide users of the Road Inventory Program's data with data accuracies and tolerances to help users define ways in which the RIP data can and cannot be used. For further information on specifics of data collection equipment, data collection procedures, equipment calibrations, or quality control/quality assurance procedures, please contact Jim Kennedy, Project Manager, Data Quality Assurance, at 720-963-3560 or jim.kennedy@fhwa.dot.gov.

All Road Inventory Program data undergoes quality control and quality assurance testing. This document represents the known data accuracies and tolerances for the data collection equipment, data collection procedures, and data processing procedures currently in use. Many additional tests conducted on the park databases during the quality assurance phase to ensure data integrity are not listed as a part of this document. Before it is delivered, a park database undergoes a large set of table design consistency, field data format consistency, data completeness, uniqueness of key fields, data reasonableness, acceptable data range, within-field data consistency, between-field data consistency, and between-table data consistency tests. Additional data sampling checks are conducted to ensure proper data upload from raw files into the park database and to quality check the pavement crack analysis. Further information is detailed in the FHWA – NPS RIP Quality Assurance Manual, available upon request.

This description of metadata includes only the known accuracies with which a data field matches its expected value. The tables that follow this page show each database field's:

- Field – field name
- Format – data type and number of characters of field
- Expected Value – meaning of value assigned to field
- Source – when in process field value obtained
- Validation – how field value obtained
- Expected Accuracy – accuracy with which contents of field match Expected Value

Verifying and continually improving the accuracy of Road Inventory Program data is an ongoing goal of the Federal Highway Administration and the National Park Service. Field testing and post-collection analysis of ARAN (Automatic Road Analyzer) -collected data will continue in Cycle 4. Data quality is expected to improve as the FHWA – NPS Road Inventory Program continues to operate, due to the fact that future data collection cycles will consist in large part of data updates. Also, technological improvements are expected to render the data increasingly consistent with actual roadway conditions as data collection cycles progress.

Specific Caveats

- Three canned reports are titled “Features in Good Condition”, “Features in Fair Condition,” and “Features in Poor Condition.” These titles could be misleading. In Cycle 3, condition assessments have been conducted on **signs only**. Condition assessments have not been conducted on non-sign features, such as culverts, guardrails, pullouts, etc. Although the database and canned reports might report a default value of “good” for un-assessed features, these condition values are not valid for import into FMSS.
- Database records that show a concrete surface type sometimes include index values that seem to show a perfect roadway (e.g., a Pavement Condition Rating (PCR) of 100). The Road Inventory Program does not actually conduct condition assessments of concrete surfaces. The perfect values are just default values assigned to unassessed sections of pavement and do not represent an assessment of the roadway surface's quality.
- On the USB drive, in the Database folder, parks are provided with intersection lists and exceptions lists. These documents should be treated as raw files and are **not accurate**. Refer to the final database for accurately post-processed intersection data.
- Most roadway data is collected in the primary direction lane of a roadway. To save data storage

space and to reduce data analysis efforts, the assumption was made that the paved surface condition of a route's primary lane adequately represents the surface condition of the full roadway. Therefore, in the database, opposite-direction records in the PMS_Visidata table do not include assessed values for roadway surface distresses. Values such as 0, N/A, -1, or a repeat of the primary-direction assessed value indicate that no assessment was performed. The PMS_20 and PMS_Mile tables simply exclude all opposite routes.

- Most roadway features are collected relative to the primary direction lane of a roadway, using the primary-direction video. Signs are the only features collected using the opposite-direction video.

Key to Notes in Tables

(1): Note that only one value fits in field, so even if this value varies throughout the route, only one value is recorded here.

(2): Note that some MP values listed here are estimates recorded during the Route ID process for use by the data collection crew (e.g. "FROM ROUTE 0010 AT MILEPOST 30.3"). They are estimates only and are not expected to match the more accurate milepost values included elsewhere in the database in the BEG_MP, END_MP, and MP fields.

(3): Mileage is measured by the ARAN (Automatic Road ANalyzer) data collection vehicle out to the 0.001 decimal place. The DMI (distance measuring instrument) is very accurate, with extremely slight variations in measurement due to air temperature, tire inflation, curves, hills, and equipment calibration.

(4): Features are measured differently depending on whether they are visible in the forward-facing video of the roadway, but every feature milepost measurement depends on the baseline measurement of the data collection vehicle's mileage. The ARAN (Automatic Road ANalyzer) data collection vehicle's mileage is measured by the DMI (distance measuring instrument) out to the 0.001 decimal place. The DMI is very accurate, with extremely slight variations in measurement due to air temperature, tire inflation, curves, hills, and equipment calibration. If a feature will not be visible in the forward-facing video, its milepost is determined by the data collectors' key press tagging the milepost when the ARAN passes the feature. Key presses are entered into the ARAN software when the vehicle travels typically between 15 and 45 miles/hour, so a delay of a single second as the vehicle passes a feature would result in an inaccuracy of 0.004 miles (22 feet) to 0.012 miles (66 feet). If a feature is visible in the video, its milepost is determined during post-processing using a video measurement software called Surveyor. Features along the side of a roadway that are measured using the Surveyor software might not be located very accurately. Surveyor is known to be most accurate when measuring quantities near the center of the video frame, as opposed to in the edges of the video image.

(5): Only signs are evaluated for condition. No other features' conditions are assessed, so "N/A" was originally intended to be the default value for unassessed features. However, some non-sign features do have condition ratings in the database. These are not accurate, because no assessment was ever done on non-sign features.

(6): Condition assessments are not conducted on concrete (CO) surface types. Perfect values for concrete road sections are default values and do not represent a condition assessment of the concrete surfaces.

(7): Roadway cracking presence, type, severity, and extent are determined by filming the roadway in the primary lane continuously with two overlapping analog cameras of 640 x 480 resolution. The images from both cameras are stitched together in real time to create a continuous strip image of the roadway pavement in the primary lane. Cracks 3 mm or greater in width are visible in this video. A semi-automatic process running the WiseCrax software with additional input by human operators provides the cracking quantities recorded in these database fields. Quality checks have determined that a consistent 80% or better of the visible cracks are recorded.

Access Database Metadata

Master Table Metadata:

FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
RIP_CYCLE	X	3, for data collection cycle 3	Route ID Meeting	FHWA Determination	100%
STATE	XX	State where route is located	Route ID Meeting	Park Input/FHWA Determination	Untested. (1)
PARK_ALPHA	XXXX	Park alpha code	Route ID Meeting	NPS References	Untested
PARK_NO	XXXX	Park numeric code	Route ID Meeting	NPS References	Untested
RTE_NO	XXXXXX	Route number	Route ID Meeting	Park Input/FHWA Classification	Untested
RTE_NAME	(Text)	Route name	Route ID Meeting	Park Input	Untested. 50 characters fit in field
FUNCT_CLAS	X	Route functional classification	Route ID Meeting	Park Input/FHWA Classification	Untested
DIRECTION	XXX	Survey lane: PRI (primary) or OPP (opposite)	Route ID Meeting	Park Input/FHWA Determination	Untested
BEG_MP_EST	999.999 (miles)	Estimated starting MP	Route ID Meeting	Park Input/FHWA Determination	Estimated before data collected
END_MP_EST	999.999 (miles)	Estimated ending MP	Route ID Meeting	Park Input/FHWA Determination	Estimated before data collected
RTE_LENGTH	999.999 (miles)	Collected route length	ARAN Data Collection	Automatic Output	100%
FROM_DESC	(Text)	Beginning terminus of route	Route ID Meeting	Park Input/FHWA Determination	Estimated before data collected. (2)
TO_DESC	(Text)	Ending terminus of route	Route ID Meeting	Park Input/FHWA Determination	Estimated before data collected. (2)
NO_LANES	X	Number of lanes in route	ARAN Data Collection	Survey Crew Input	Untested. (1)
SURF_TYPE	XX	Surface type of route	ARAN Data Collection	Survey Crew Input	Untested. (1)
COMP_DIR	XX	Compass direction of route's primary lane (nearest cardinal direction)	Route ID Meeting	Park Input/FHWA Determination	Untested
COMMENTS	(Text)	Special information, if any	Contractor Post-processing	Contractor Input	Untested
FILENAME	XXXXXXXXXX	Filename of raw data files	ARAN Data Collection	Automatic Output	100%
SECTION	XXXXXX	Route section ID	Route ID Meeting/ARAN Data Collection	Survey Crew Input/Automatic Output	100%
FKEY	9999999	Unique record ID	Contractor Post-processing	Database Processing	100%
DATE	DD/MM/YY	Data collection date	ARAN Data Collection	Automatic Output	100%
BEG_MP	999.999 (miles)	Beginning MP collected	ARAN Data Collection	Automatic Output	100% (3)
END_MP	999.999 (miles)	Ending MP collected	ARAN Data Collection	Automatic Output	100% (3)

PMS_Feature Table Metadata:

FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
RIP_CYCLE	X	3, for data collection cycle 3	Route ID Meeting	FHWA Determination	100%
STATE	XX	State where route is located	Route ID Meeting	Park Input/FHWA Determination	Untested. (1)
PARK_ALPHA	XXXX	Park alpha code	Route ID Meeting	NPS References	Untested
PARK_NO	XXXX	Park numeric code	Route ID Meeting	NPS References	Untested
RTE_NO	XXXXXXXX	Route number	Route ID Meeting	Park Input/FHWA Classification	Untested
FUNCT_CLAS	X	Route functional class	Route ID Meeting	Park Input/FHWA Classification	Untested
DIRECTION	XXX	Survey lane: PRI (primary) or OPP (opposite)	Route ID Meeting	Park Input/FHWA Determination	Untested
MP	999.999 (miles)	Feature location along route	ARAN Data Collection/Contractor Post-processing	Survey Crew Input/Video Processing	Untested (4)
EVENT	XXXX	Event category of feature	Contractor Post-processing	Video Processing	Untested
EVENT_CODE	XXXX	Event sub-category of feature	Contractor Post-processing	Video Processing	Untested
EVENT_DESC	(Text)	Description of feature/contents of sign	Contractor Post-processing	Video Processing	Untested
MUTCD	"N/A"	N/A. Intended to be sign MUTCD code	Contractor Post-processing	Database Processing	Values inaccurate, defaulted to N/A
CONDITION	XXX	Sign condition (G-D, F-R, P-R, N/A)	Contractor Post-processing	Video Processing	Untested (5)
COMMENT	(Text)	Sign label, intersecting route, etc.	Contractor Post-processing	Database Processing	Untested
OFFSET	"N/A"	N/A. Intended to be offset from pavement edge	Contractor Post-processing	Database Processing	Values inaccurate, defaulted to N/A
SIDE	XXX	Side of route; "N/A" if not on one side	Contractor Post-processing	Video Processing	Untested
STR_NUMBER	XXXXXXXXXXXX	FHWA bridge structure number	FHWA Post-processing	Database Processing	Untested
GPS_LAT	"N/A"	N/A. Intended to be latitude coordinate	Contractor Post-processing	Database Processing	Values inaccurate, defaulted to N/A
GPS_LON	"N/A"	N/A. Intended to be longitude coordinate	Contractor Post-processing	Database Processing	Values inaccurate, defaulted to N/A
GPS_ELEV	"N/A"	N/A. Intended to be elevation	Contractor Post-processing	Database Processing	Values inaccurate, defaulted to N/A
GPS_MODE	"N/A"	N/A. Intended to be GPS mode	Contractor Post-processing	Database Processing	Values inaccurate, defaulted to N/A
VIDEO	<Park-C03VID-#>	Removable USB video hard drive number	Contractor Post-processing	Database Processing	Untested
IMAGE	(Text)	Filename of .jpg image showing feature	Contractor Post-processing	Automatic Output	Untested
DATE	DD/MM/YY	Data collection date	ARAN Data Collection	Automatic Output	100%
FILENAME	XXXXXXXXXX	Filename of raw data files	ARAN Data Collection	Automatic Output	100%
SECTION	XXXXXX	Route section ID	Route ID Meeting/ARAN Data Collection	Survey Crew Input/Automatic Output	100%
FKEY	9999999	Unique record ID	Contractor Post-processing	Database Processing	100%
VISL_FROM	999999 (millimiles)	Raw MP of first video frame showing feature	Contractor Post-processing	Database Processing	Untested
VISL_TO	999999 (millimiles)	Raw MP of last video frame showing feature	Contractor Post-processing	Database Processing	Untested

FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
IDKEY	(Text)	Unique record ID used by VisiData	Contractor Post-processing	Database Processing	Untested
MP_REF	(Text)	Range of mileage to play in VisiData	Contractor Post-processing	Database Processing	Untested

PMS 20, PMS Mile & PMS Visidata Tables Metadata:

FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
RIP_CYCLE	X	3, for data collection cycle 3	Route ID Meeting	FHWA Determination	100%
STATE	XX	State where route is located	Route ID Meeting	Park Input/FHWA Determination	Untested. (1)
PARK_ALPHA	XXXX	Park alpha code	Route ID Meeting	NPS References	Untested
PARK_NO	XXXX	Park numeric code	Route ID Meeting	NPS References	Untested
RTE_NO	XXXXXX	Route number	Route ID Meeting	Park Input/FHWA Classification	Untested
FUNCT_CLASS	X	Route functional class	Route ID Meeting	Park Input/FHWA Classification	Untested
DIRECTION	XXX	Survey lane: PRI (primary) or OPP (opposite)	Route ID Meeting	Park Input/FHWA Determination	Untested
BEG_MP	999.999 (miles)	MP at start of road interval described by database record	Contractor Post-processing	Database Processing	100% (3)
END_MP	999.999 (miles)	MP at end of road interval described by database record	Contractor Post-processing	Database Processing	100% (3)
INT_LENGTH	999.9 (ft)	Length of road interval as aggregated for data table	Contractor Post-processing	Database Processing	100%
RTE_LENGTH	999.999 (miles)	Collected route length	ARAN Data Collection	Automatic Output	100%
NO_LANES	X	Number of lanes in route	ARAN Data Collection	Survey Crew Input	Untested. (1)
LANE_NO	X	Data collection lane	Contractor Post-processing	Database Processing	Untested
WX_LANE_WIDTH	99.999 (ft)	WiseCrax (crack detection software) analysis width	Contractor Post-processing	Automatic Output	Untested
LANE_WIDTH	99.999 (ft)	Width of lane	Contractor Post-processing	Video Processing	Untested
PAVE_WIDTH	99.999 (ft)	Full pavement width	Contractor Post-processing	Video Processing	Untested
SHLD_WIDTH_L	99.999 (ft)	Left shoulder width	Contractor Post-processing	Video Processing	Untested
SHLD_WIDTH_R	99.999 (ft)	Right shoulder width	Contractor Post-processing	Video Processing	Untested
SHLD_COND_L	XXXX	Left shoulder condition	ARAN Data Collection	Survey Crew Input	Untested
SHLD_COND_R	XXXX	Right shoulder condition	ARAN Data Collection	Survey Crew Input	Untested
DRAIN_COND_L	XXXX	Left drainage condition	ARAN Data Collection	Survey Crew Input	Untested
DRAIN_COND_R	XXXX	Right drainage condition	ARAN Data Collection	Survey Crew Input	Untested
SURF_TYPE	XX	Surface type of route	ARAN Data Collection	Survey Crew Input	Untested. (1)
PCR	999	Pavement Condition Rating	Contractor Post-processing	Database Processing	100% for calculation (6)
RCI	999	Roughness Condition Index; -1 if invalid IRI	Contractor Post-processing	Database Processing	100% for calculation

FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
SCR	999	Surface Condition Rating	Contractor Post-processing	Database Processing	100% for calculation (6)
IRI_AVG	999.9 (inches/mile)	Average IRI	Contractor Post-processing	Database Processing	Untested
IRI_SD	999.9 (inches/mile)	IRI standard deviation	Contractor Post-processing	Database Processing	Untested
IRI_L	999.9 (inches/mile)	Left wheel path IRI	ARAN Data Collection	Automatic Output	Untested
IRI_R	999.9 (inches/mile)	Right wheel path IRI	ARAN Data Collection	Automatic Output	Untested
IRI_FLAG	0 or -1	-1 if invalid IRI data	Contractor Post-processing	Database Processing	Untested
RUT_INDEX	999	Rut index	Contractor Post-processing	Database Processing	100% for calculation (6)
RUT_AVG	99.99 (inches)	Average rut depth of both wheelpaths	Contractor Post-processing	Database Processing	Untested (6)
RUT_MAX	99.99 (inches)	Maximum rut depth of both wheelpaths	Contractor Post-processing	Database Processing	Untested (6)
RUT_SD	9.9	Rut depth standard deviation	Contractor Post-processing	Database Processing	Untested (6)
RUT_LOW	999 (%)	Percent of low severity ruts (on a 0-200% scale) in both wheelpaths	Contractor Post-processing	Database Processing	Untested (6)
RUT_MED	999 (%)	Percent of medium severity ruts (on a 0-200% scale) in both wheelpaths	Contractor Post-processing	Database Processing	Untested (6)
RUT_HI	999 (%)	Percent of high severity ruts (on a 0-200% scale) in both wheelpaths	Contractor Post-processing	Database Processing	Untested (6)
XFALL	999.9 (% slope)	Cross fall at start of road interval	ARAN Data Collection	Automatic Output	Precise but inaccurate. Not reported in Cycle 4
GRADE	999.9 (% slope)	Grade at start of road interval	ARAN Data Collection	Automatic Output	Precise but inaccurate. Not reported in Cycle 4
AC_INDEX	999	Alligator cracking index	Contractor Post-processing	Database Processing	100% for calculation (6)
AC_LOW	999.9999 (%)	Percent of WiseCrax measured lane area with low-severity alligator cracking	Contractor Post-processing	Automatic Output	(6) (7)
AC_MED	999.9999 (%)	Percent of WiseCrax measured lane area with medium-severity alligator cracking	Contractor Post-processing	Automatic Output	(6) (7)
AC_HI	999.9999 (%)	Percent of WiseCrax measured lane area with high-severity alligator cracking	Contractor Post-processing	Automatic Output	(6) (7)
LC_INDEX	999	Longitudinal cracking index	Contractor Post-processing	Database Processing	100% for calculation (6)
LC_LOW	999.99 (%)	Low-severity longitudinal cracking in lane as a percentage of road interval length	Contractor Post-processing	Automatic Output	(6) (7)
LC_MED	999.99 (%)	Medium-severity longitudinal cracking in lane as a percentage of road interval length	Contractor Post-processing	Automatic Output	(6) (7)
LC_HI	999.99 (%)	High-severity longitudinal cracking in lane as a percentage of road interval length	Contractor Post-processing	Automatic Output	(6) (7)
TC_INDEX	999	Transverse cracking index	Contractor Post-processing	Database Processing	100% for calculation (6)
TC_LOW	999.99 (cracks)	Count of low-severity transverse cracks, where one crack unit equals the WiseCrax measured lane width	Contractor Post-processing	Automatic Output	(6) (7)
TC_MED	999.99 (cracks)	Count of medium-severity transverse cracks, where one crack unit equals the WiseCrax measured lane width	Contractor Post-processing	Automatic Output	(6) (7)
TC_HI	999.99 (cracks)	Count of high-severity transverse cracks, where one crack unit equals the WiseCrax measured lane width	Contractor Post-processing	Automatic Output	(6) (7)
PATCH_INDEX	999	Patching index	Contractor Post-processing	Database Processing	100% for calculation (6)

FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
PATCHING	999.9999 (%)	Percent of WiseCrax measured lane area affected by patching	Contractor Post-processing	Manual Pavement Video Processing	Untested (6)
GPS_LAT	999.9999999	Latitude coordinate	ARAN Data Collection	Automatic Output	See GPS Metadata sheet distributed with data
GPS_LON	-999.9999999	Longitude coordinate	ARAN Data Collection	Automatic Output	See GPS Metadata sheet distributed with data
GPS_ELEV	999999.9	Elevation	ARAN Data Collection	Automatic Output	See GPS Metadata sheet distributed with data
GPS_MODE	XXX	GPS mode during collection	ARAN Data Collection	Automatic Output	See GPS Metadata sheet distributed with data
VIDEO	<Par/>-C03VID<#>	Removable USB video hard drive number	Contractor Post-processing	Database Processing	Untested
IMAGE	(Text)	Filename of .jpg image showing road interval	Contractor Post-processing	Automatic Output	Untested
SPEED	999 (miles/hour)	Average ARAN speed during data collection	ARAN Data Collection	Automatic Output	Untested
BRIDGE_FLAG	0 or 1	Flag indicating presence of bridge in interval	ARAN Data Collection	Survey Crew Input	Untested
CONSTR_FLAG	0 or 1	Flag indicating construction in interval	ARAN Data Collection	Survey Crew Input	Untested
LANEDEV_FLG	0 or 1	Flag indicating lane deviation in interval	ARAN Data Collection	Survey Crew Input	Untested
DATE	DD/MM/YY	Data collection date	ARAN Data Collection	Automatic Output	100%
NODISTRESS	0 OR 1	Flag indicating absence of pavement distress	Contractor Post-processing	Database Processing	100%
FILENAME	XXXXXXXXXX	Filename of raw data files	ARAN Data Collection	Automatic Output	100%
SECTION	XXXXXX	Route section ID	Route ID Meeting/ARAN Data Collection	Survey Crew Input/Automatic Output	100%
FKEY	9999999	Unique record ID	Contractor Post-processing	Database Processing	100%
VISL_FROM	999999 (millimiles)	Raw MP of first video frame in section	Contractor Post-processing	Database Processing	Untested
VISL_TO	999999 (millimiles)	Raw MP of last video frame in section	Contractor Post-processing	Database Processing	Untested
IDKEY	(Text)	Unique record ID used by VisiData	Contractor Post-processing	Database Processing	Untested
MP_REF	(Text)	Range of mileage to play in VisiData	Contractor Post-processing	Database Processing	Untested

Cycle Shapefile Metadata

Metadata is provided for all shapefiles used for the creation of RIP report documents. The metadata for each shapefile associated with the park can be found in Section 10 of the PDF report provided on your park CD.

All shapefiles have the following spatial characteristics:

Geographic_Coordinate_Units: Decimal degrees
Spheroid: WGS 1984

blca_seg

Metadata:

- [Identification Information](#)
 - [Data Quality Information](#)
 - [Spatial Data Organization Information](#)
 - [Spatial Reference Information](#)
 - [Entity and Attribute Information](#)
 - [Distribution Information](#)
 - [Metadata Reference Information](#)
-

Identification_Information:

Citation:

Citation_Information:

Originator: The TSR Group

Publication_Date: 2005

Title:

blca_seg

Geospatial_Data_Presentation_Form: vector digital data

Online_Linkage: [Not Available](#)

Description:

Abstract:

Routes

Purpose:

Road Inventory Program

Supplemental_Information:

Data created by The TSR Group from GPS coordinates provided in the PMS_20 table. The shapefile is processed to aggregate adjacent segments with the same PCR rating.

Time_Period_of_Content:

Time_Period_Information:

Single_Date/Time:

Calendar_Date: 2005

Currentness_Reference:

ground condition

Status:

Progress: Complete

Maintenance_and_Update_Frequency: As per RIP cycle

Spatial_Domain:

Bounding_Coordinates:

West_Bounding_Coordinate: -107.741196

East_Bounding_Coordinate: -107.685837

North_Bounding_Coordinate: 38.581184

South_Bounding_Coordinate: 38.539803

Keywords:

Theme:

Theme_Keyword_Thesaurus: BLCA

Theme_Keyword: BLCA

Access_Constraints: None

Use_Constraints:

Redistribution needs permission from EFLHD/NPS

Point_of_Contact:

*Contact_Information:**Contact_Person_Primary:**Contact_Person:* Dan VanGilder*Contact_Organization:* EFLHD*Contact_Position:* GIS Coordinator*Contact_Address:**Address_Type:* mailing and physical address*Address:*

21400 Ridgetop Circle

City: Sterling*State_or_Province:* Virginia*Postal_Code:* 20166*Country:* United States*Contact_Voice_Telephone:* 703-404-6361*Contact_Electronic_Mail_Address:* dvangilder@fhwa.dot.gov*Native_Data_Set_Environment:*

Microsoft Windows 2000 Version 5.0 (Build 2195) Service Pack 4; ESRI ArcCatalog 8.3.0.800

[Back to Top](#)

*Data_Quality_Information:**Attribute_Accuracy:**Attribute_Accuracy_Report:*

Good

Completeness_Report:

Complete for routes

*Lineage:**Source_Information:**Type_of_Source_Media:* GPS*Process_Step:**Process_Description:*

Metadata imported.

[Back to Top](#)

*Spatial_Data_Organization_Information:**Direct_Spatial_Reference_Method:* Vector*Point_and_Vector_Object_Information:**SDTS_Terms_Description:**SDTS_Point_and_Vector_Object_Type:* String*Point_and_Vector_Object_Count:* 29[Back to Top](#)

*Spatial_Reference_Information:**Horizontal_Coordinate_System_Definition:**Geographic:**Latitude_Resolution:* 0.000000*Longitude_Resolution:* 0.000000*Geographic_Coordinate_Units:* Decimal degrees*Geodetic_Model:**Horizontal_Datum_Name:* North American Datum of 1927*Ellipsoid_Name:* Clarke 1866

Semi-major_Axis: 6378206.400000
Denominator_of_Flattening_Ratio: 294.978698

[Back to Top](#)

Entity_and_Attribute_Information:

Detailed_Description:

Entity_Type:

Entity_Type_Label: blca_seg

Attribute:

Attribute_Label: FID

Attribute_Definition:

Internal feature number.

Attribute_Definition_Source:

ESRI

Attribute_Domain_Values:

Unrepresentable_Domain:

Sequential unique whole numbers that are automatically generated.

Attribute:

Attribute_Label: Shape

Attribute_Definition:

Feature geometry.

Attribute_Definition_Source:

ESRI

Attribute_Domain_Values:

Unrepresentable_Domain:

Coordinates defining the features.

Attribute:

Attribute_Label: LENGTH

Attribute_Definition:

Length of feature

Attribute_Definition_Source:

ESRI

Attribute:

Attribute_Label: ID

Attribute:

Attribute_Label: RTE_NO

Attribute_Definition:

Route number

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: RT_LENGTH

Attribute_Definition:

Collected route length

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: PCR_RATEAV

Attribute_Definition:

Numeric PCR definition. Average PCR value based on programatic averaging of adjacent segments.

Attribute_Domain_Values:

Range_Domain:

Range_Domain_Minimum: 0

Range_Domain_Maximum: 100

Attribute:

Attribute_Label: PCRAV

Attribute_Definition:

Verbal PCR definition based on value in PCRAV field

Attribute_Domain_Values:

Enumerated_Domain:

Enumerated_Domain_Value: POOR

Enumerated_Domain_Value_Definition:

PCR value <= 60

Enumerated_Domain:

Enumerated_Domain_Value: FAIR

Enumerated_Domain_Value_Definition:

PCR value 61-84

Enumerated_Domain:

Enumerated_Domain_Value: GOOD

Enumerated_Domain_Value_Definition:

PCR value 85-94

Enumerated_Domain:

Enumerated_Domain_Value: EXCELLENT

Enumerated_Domain_Value_Definition:

PCR value 95-100

Attribute:

Attribute_Label: TSR_EDIT

Attribute_Definition:

Indicates whether feature has been edited for graphic purposes.

Attribute_Domain_Values:

Enumerated_Domain:

Enumerated_Domain_Value: 1

Enumerated_Domain_Value_Definition:

Edit has been made to feature for graphic purposes

Enumerated_Domain:

Enumerated_Domain_Value: 0

Enumerated_Domain_Value_Definition:

No edit made to feature.

[Back to Top](#)

Distribution_Information:

Resource_Description: Downloadable Data

Standard_Order_Process:

Digital_Form:

Digital_Transfer_Information:

Transfer_Size: 0.016

[Back to Top](#)

Metadata_Reference_Information:

Metadata_Date: 20050420

Metadata_Contact:

Contact_Information:

Contact_Organization_Primary:

Contact_Organization: EFLHD Sterling

Contact_Person: Dan VanGilder

Contact_Position: GIS Coordinator

Contact_Address:

Address_Type: mailing and physical address

City: Sterling

State_or_Province: Virginia

Postal_Code: 20166

Country: United States

Contact_Voice_Telephone: 703-404-6361

Contact_Electronic_Mail_Address: dvangilder@fhwa.dot.gov

Metadata_Standard_Name: FGDC Content Standards for Digital Geospatial Metadata

Metadata_Standard_Version: FGDC-STD-001-1998

Metadata_Time_Convention: local time

Metadata_Extensions:

Online_Linkage: <http://www.esri.com/metadata/esriprof80.html>

Profile_Name: ESRI Metadata Profile

[Back to Top](#)

blca_pkg_03

Metadata also available as

Metadata:

- [Identification Information](#)
 - [Data Quality Information](#)
 - [Spatial Data Organization Information](#)
 - [Spatial Reference Information](#)
 - [Entity and Attribute Information](#)
 - [Distribution Information](#)
 - [Metadata Reference Information](#)
-

Identification_Information:

Citation:

Citation_Information:

Originator: Eastern Federal Lands Highway Division

Publication_Date: Unknown

Title: blca_pkg_03

Geospatial_Data_Presentation_Form: vector digital data

Online_Linkage: Not Available

Description:

Abstract:

Black Canyon of the Gunnison National Park National Park Parking Areas

Purpose: Road Inventory Program

Time_Period_of_Content:

Time_Period_Information:

Single_Date/Time:

Calendar_Date: 06/15/2003

Currentness_Reference: ground condition

Status:

Progress: Complete

Maintenance_and_Update_Frequency: As per RIP cycle

Spatial_Domain:

Bounding_Coordinates:

West_Bounding_Coordinate: -68.366816

East_Bounding_Coordinate: -68.044042

North_Bounding_Coordinate: 44.427870

South_Bounding_Coordinate: 44.222537

Keywords:

Theme:

Theme_Keyword_Thesaurus: BLCA

Theme_Keyword: BLCA

Access_Constraints: None

Use_Constraints: Redistribution needs permission from EFLHD/NPS

Point_of_Contact:

*Contact_Information:**Contact_Person_Primary:**Contact_Person:* Dan VanGilder*Contact_Organization:* EFLHD*Contact_Position:* GIS Coordinator*Contact_Address:**Address_Type:* mailing and physical address*Address:* 21400 Ridgetop Circle*City:* Sterling*State_or_Province:* Virginia*Postal_Code:* 20166*Country:* United State*Contact_Voice_Telephone:* 703-404-6361*Contact_Electronic_Mail_Address:* dvangilder@fhwa.dot.gov*Native_Data_Set_Environment:*Microsoft Windows 2000 Version 5.0 (Build 2195) Service Pack 4; ESRI ArcCatalog
8.3.0.800

*Data_Quality_Information:**Attribute_Accuracy:**Attribute_Accuracy_Report:* Good*Completeness_Report:* Complete for parking areas*Lineage:**Source_Information:**Type_of_Source_Media:* GPS*Process_Step:**Process_Description:* Metadata imported.*Source_Used_Citation_Abbreviation:* C:\DOCUME~1\LMaharas\LOCALS~1
\Temp\xml9A.tmp

*Spatial_Data_Organization_Information:**Direct_Spatial_Reference_Method:* Vector*Point_and_Vector_Object_Information:**SDTS_Terms_Description:**SDTS_Point_and_Vector_Object_Type:* G-polygon*Point_and_Vector_Object_Count:* 76

*Spatial_Reference_Information:**Horizontal_Coordinate_System_Definition:**Geographic:**Latitude_Resolution:* 0.000000*Longitude_Resolution:* 0.000000*Geographic_Coordinate_Units:* Decimal degrees*Geodetic_Model:**Horizontal_Datum_Name:* North American Datum of 1927

Ellipsoid_Name: Clarke 1866
Semi-major_Axis: 6378206.400000
Denominator_of_Flattening_Ratio: 294.978698

Entity_and_Attribute_Information:

Detailed_Description:

Entity_Type:

Entity_Type_Label: acad_pkg_03

Attribute:

Attribute_Label: FID

Attribute_Definition: Internal feature number.

Attribute_Definition_Source: ESRI

Attribute_Domain_Values:

Unrepresentable_Domain:

Sequential unique whole numbers that are automatically generated.

Attribute:

Attribute_Label: Shape

Attribute_Definition: Feature geometry.

Attribute_Definition_Source: ESRI

Attribute_Domain_Values:

Unrepresentable_Domain: Coordinates defining the features.

Attribute:

Attribute_Label: PARK_ALPHA

Attribute:

Attribute_Label: RTE_NO

Attribute:

Attribute_Label: RTE_NAME

Attribute:

Attribute_Label: FEATURE

Attribute:

Attribute_Label: SURF_TYPE

Attribute_Domain_Values:

Attribute:

Attribute_Label: CONDITION

Attribute:

Attribute_Label: PHOTOS

Attribute:

Attribute_Label: COMMENT

Attribute:

Attribute_Label: GPS_DATE

Attribute:

Attribute_Label: DATAFILE

Attribute:

Attribute_Label: SQ_FT

Distribution_Information:

Resource_Description: Downloadable Data

*Standard_Order_Process:**Digital_Form:**Digital_Transfer_Information:**Transfer_Size:* 0.129

*Metadata_Reference_Information:**Metadata_Date:* 20050222*Metadata_Contact:**Contact_Information:**Contact_Organization_Primary:**Contact_Organization:* EFLHD Sterling*Contact_Person:* Dan VanGilder*Contact_Position:* GIS Coordinator*Contact_Address:**Address_Type:* mailing and physical address*Address:* 21400 Ridgetop Circle*City:* Sterling*State_or_Province:* Virginia*Postal_Code:* 20166*Country:* United States*Contact_Voice_Telephone:* 703-404-6361*Contact_Electronic_Mail_Address:* dvangilder@fhwa.dot.gov*Metadata_Standard_Name:* FGDC Content Standards for Digital Geospatial Metadata*Metadata_Standard_Version:* FGDC-STD-001-1998*Metadata_Time_Convention:* local time*Metadata_Extensions:**Online_Linkage:* <<http://www.esri.com/metadata/esriprof80.html>>*Profile_Name:* ESRI Metadata Profile

Generated by [mp](#) version 2.7.33 on Tue Feb 22 09:41:19 2005

blca_pkg_03_map

Metadata:

- [Identification Information](#)
 - [Data Quality Information](#)
 - [Spatial Data Organization Information](#)
 - [Spatial Reference Information](#)
 - [Entity and Attribute Information](#)
 - [Distribution Information](#)
 - [Metadata Reference Information](#)
-

Identification_Information:

Citation:

Citation_Information:

Originator: Eastern Federal Lands Highway Division

Publication_Date: Unknown

Title:

blca_pkg_03_map

Geospatial_Data_Presentation_Form: vector digital data

Online_Linkage: [Not Available](#)

Description:

Abstract:

Copy of Parking Areas

Purpose:

Road Inventory Program

Supplemental_Information:

This shapefile is a copy of the source parking shapefile. The features are edited as needed for graphic purposes.

Time_Period_of_Content:

Time_Period_Information:

Single_Date/Time:

Calendar_Date: 2003

Currentness_Reference:

ground condition

Status:

Progress: Complete

Maintenance_and_Update_Frequency: As per RIP cycle

Spatial_Domain:

Bounding_Coordinates:

West_Bounding_Coordinate: -107.741986

East_Bounding_Coordinate: -107.685870

North_Bounding_Coordinate: 38.581246

South_Bounding_Coordinate: 38.542295

Keywords:

Theme:

Theme_Keyword_Thesaurus: BLCA

Theme_Keyword: BLCA

Access_Constraints: None

Use_Constraints:

Redistribution needs permission from EFLHD/NPS

Point_of_Contact:

*Contact_Information:**Contact_Person_Primary:**Contact_Person:* Dan VanGilder*Contact_Organization:* EFLHD*Contact_Position:* GIS Coordinator*Contact_Address:**Address_Type:* mailing and physical address*Address:*

21400 Ridgetop Circle

City: Sterling*State_or_Province:* Virginia*Postal_Code:* 20166*Country:* United States*Contact_Voice_Telephone:* 703-404-6361*Contact_Electronic_Mail_Address:* dvangilder@fhwa.dot.gov*Native_Data_Set_Environment:*

Microsoft Windows 2000 Version 5.0 (Build 2195) Service Pack 4; ESRI ArcCatalog 8.3.0.800

[Back to Top](#)

*Data_Quality_Information:**Attribute_Accuracy:**Attribute_Accuracy_Report:*

Good

Completeness_Report:

Complete for parking areas

*Lineage:**Source_Information:**Type_of_Source_Media:* GPS*Process_Step:**Process_Description:*

Metadata imported.

[Back to Top](#)

*Spatial_Data_Organization_Information:**Direct_Spatial_Reference_Method:* Vector*Point_and_Vector_Object_Information:**SDTS_Terms_Description:**SDTS_Point_and_Vector_Object_Type:* G-polygon*Point_and_Vector_Object_Count:* 15[Back to Top](#)

*Spatial_Reference_Information:**Horizontal_Coordinate_System_Definition:**Geographic:**Latitude_Resolution:* 0.000000*Longitude_Resolution:* 0.000000*Geographic_Coordinate_Units:* Decimal degrees*Geodetic_Model:**Horizontal_Datum_Name:* North American Datum of 1927*Ellipsoid_Name:* Clarke 1866

Semi-major_Axis: 6378206.400000
Denominator_of_Flattening_Ratio: 294.978698

[Back to Top](#)

Entity_and_Attribute_Information:

Detailed_Description:

Entity_Type:

Entity_Type_Label: blca_pkg_03_map

Attribute:

Attribute_Label: FID

Attribute_Definition:

Internal feature number.

Attribute_Definition_Source:

ESRI

Attribute_Domain_Values:

Unrepresentable_Domain:

Sequential unique whole numbers that are automatically generated.

Attribute:

Attribute_Label: Shape

Attribute_Definition:

Feature geometry.

Attribute_Definition_Source:

ESRI

Attribute_Domain_Values:

Unrepresentable_Domain:

Coordinates defining the features.

Attribute:

Attribute_Label: PARK_ALPHA

Attribute_Definition:

Park alpha code

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: RTE_NO

Attribute_Definition:

Route number

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: RTE_NAME

Attribute_Definition:

Route name

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: FEATURE

Attribute:

Attribute_Label: SURF_TYPE

Attribute_Definition:

Surface type of route

Attribute_Domain_Values:

Attribute:

Attribute_Label: CONDITION

Attribute_Definition:

Condition rating for route

Attribute:

Attribute_Label: PHOTOS

Attribute_Definition:

Photo filename associated with feature

Attribute:

Attribute_Label: COMMENT

Attribute_Definition:

Field comment

Attribute:

Attribute_Label: GPS_DATE

Attribute_Definition:

Date of GPS collection

Attribute:

Attribute_Label: DATAFILE

Attribute:

Attribute_Label: SQ_FT

Attribute_Definition:

Feature area in square feet

[Back to Top](#)

Distribution_Information:

Resource_Description: Downloadable Data

Standard_Order_Process:

Digital_Form:

Digital_Transfer_Information:

Transfer_Size: 0.018

[Back to Top](#)

Metadata_Reference_Information:

Metadata_Date: 20050420

Metadata_Contact:

Contact_Information:

Contact_Organization_Primary:

Contact_Organization: EFLHD Sterling

Contact_Person: Dan VanGilder

Contact_Position: GIS Coordinator

Contact_Address:

Address_Type: mailing and physical address

Address:

21400 Ridgetop Circle

City: Sterling

State_or_Province: Virginia

Postal_Code: 20166

Country: United States

Contact_Voice_Telephone: 703-404-6361

Contact_Electronic_Mail_Address: dvangilder@fhwa.dot.gov

Metadata_Standard_Name: FGDC Content Standards for Digital Geospatial Metadata

Metadata_Standard_Version: FGDC-STD-001-1998

Metadata_Time_Convention: local time

Metadata_Extensions:

Online_Linkage: <http://www.esri.com/metadata/esriprof80.html>

Profile_Name: ESRI Metadata Profile

[Back to Top](#)

blca_mi_pt

Metadata:

- [Identification Information](#)
 - [Data Quality Information](#)
 - [Spatial Data Organization Information](#)
 - [Spatial Reference Information](#)
 - [Entity and Attribute Information](#)
 - [Distribution Information](#)
 - [Metadata Reference Information](#)
-

Identification_Information:

Citation:

Citation_Information:

Originator: The TSR Group

Publication_Date: 2005

Title:

blca_mi_pt

Geospatial_Data_Presentation_Form: vector digital data

Online_Linkage: [Not Available](#)

Description:

Abstract:

Mile Points

Purpose:

Road Inventory Program

Supplemental_Information:

Data created by The TSR Group from GPS coordinates provided in the PMS_20 table. All attributes found in the PMS_20 table are found on the miles points.

Time_Period_of_Content:

Time_Period_Information:

Single_Date/Time:

Calendar_Date: 2005

Currentness_Reference:

ground condition

Status:

Progress: Complete

Maintenance_and_Update_Frequency: Not Available

Spatial_Domain:

Bounding_Coordinates:

West_Bounding_Coordinate: -107.733131

East_Bounding_Coordinate: -107.688049

North_Bounding_Coordinate: 38.575577

South_Bounding_Coordinate: 38.540314

Keywords:

Theme:

Theme_Keyword_Thesaurus: BLCA

Theme_Keyword: BLCA

Access_Constraints: None

Use_Constraints:

Redistribution needs permission from EFLHD/NPS

Point_of_Contact:

*Contact_Information:**Contact_Person_Primary:**Contact_Person:* Dan VanGilder*Contact_Organization:* EFLHD Sterling*Contact_Position:* GIS Coordinator*Contact_Address:**Address_Type:* mailing and physical address*Address:*

21400 Ridgetop Circle

City: Sterling*State_or_Province:* Virginia*Postal_Code:* 20166*Country:* United States*Contact_Voice_Telephone:* 703-404-6361*Contact_Electronic_Mail_Address:* dvangilder@fhwa.dot.gov*Native_Data_Set_Environment:*

Microsoft Windows 2000 Version 5.0 (Build 2195) Service Pack 4; ESRI ArcCatalog 8.3.0.800

[Back to Top](#)

*Data_Quality_Information:**Attribute_Accuracy:**Attribute_Accuracy_Report:*

Good

Completeness_Report:

Complete for mile points

*Lineage:**Source_Information:**Type_of_Source_Media:* GPS*Process_Step:**Process_Description:*

Metadata imported.

[Back to Top](#)

*Spatial_Data_Organization_Information:**Direct_Spatial_Reference_Method:* Vector*Point_and_Vector_Object_Information:**SDTS_Terms_Description:**SDTS_Point_and_Vector_Object_Type:* Entity point*Point_and_Vector_Object_Count:* 13[Back to Top](#)

*Spatial_Reference_Information:**Horizontal_Coordinate_System_Definition:**Geographic:**Latitude_Resolution:* 0.000000*Longitude_Resolution:* 0.000000*Geographic_Coordinate_Units:* Decimal degrees*Geodetic_Model:**Horizontal_Datum_Name:* North American Datum of 1927*Ellipsoid_Name:* Clarke 1866

Semi-major_Axis: 6378206.400000
Denominator_of_Flattening_Ratio: 294.978698

[Back to Top](#)

Entity_and_Attribute_Information:

Detailed_Description:

Entity_Type:

Entity_Type_Label: blca_mi_pt

Attribute:

Attribute_Label: FID

Attribute_Definition:

Internal feature number.

Attribute_Definition_Source:

ESRI

Attribute_Domain_Values:

Unrepresentable_Domain:

Sequential unique whole numbers that are automatically generated.

Attribute:

Attribute_Label: Shape

Attribute_Definition:

Feature geometry.

Attribute_Definition_Source:

ESRI

Attribute_Domain_Values:

Unrepresentable_Domain:

Coordinates defining the features.

Attribute:

Attribute_Label: RIP_CYCLE

Attribute_Definition:

3, for data collection cycle 3

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: STATE

Attribute_Definition:

State where route is located

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: PARK_ALPHA

Attribute_Definition:

Park alpha code

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: PARK_NO

Attribute_Definition:

Park numeric code

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: RTE_NO

Attribute_Definition:

Route number

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: FUNCT_CLAS

Attribute_Definition:

Route functional class

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: DIRECTION

Attribute_Definition:

Survey lane: PRI (primary) or OPP (opposite)

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: BEG_MP

Attribute_Definition:

MP at end of road interval described by database record

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: END_MP

Attribute_Definition:

MP at end of road interval described by database record

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: INT_LENGTH

Attribute_Definition:

Length of road interval as aggregated from data table

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: RTE_LENGTH

Attribute_Definition:

Collected route length

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: NO_LANES

Attribute_Definition:

Number of lanes in route

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: LANE_NO

Attribute_Definition:

Data collection lane

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: WX_LANE_WI

Attribute_Definition:

WiseCrax (crack detection software) analysis width

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* LANE_WIDTH*Attribute_Definition:*

Width of lane

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* PAVE_WIDTH*Attribute_Definition:*

Full pavement width

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* SHLD_WIDTH*Attribute_Definition:*

Left shouler width

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* SHLD_WID_1*Attribute_Definition:*

Right shoulder width

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* SHLD_COND_*Attribute_Definition:*

Left shoulder condition

Attribute_Definition_Source:

ARAN Data Collection

*Attribute:**Attribute_Label:* SHLD_COND1*Attribute_Definition:*

Right shoulder condition

Attribute_Definition_Source:

ARAN Data Collection

*Attribute:**Attribute_Label:* DRAIN_COND*Attribute_Definition:*

Left drainage condition

Attribute_Definition_Source:

ARAN Data Collection

*Attribute:**Attribute_Label:* DRAIN_CO_1*Attribute_Definition:*

Right drainage condition

Attribute_Definition_Source:

ARAN Data Collection

*Attribute:**Attribute_Label:* SURF_TYPE*Attribute_Definition:*

Surface type of route

Attribute_Definition_Source:

ARAN Data Collection

*Attribute:**Attribute_Label:* PCR

Attribute_Definition:

Pavement Condition Rating

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: RCI

Attribute_Definition:

Roughness Condition Index; -1 if invalid IRI

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: SCR

Attribute_Definition:

Surface Condition Rating

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: IRI_AVG

Attribute_Definition:

Average IRI

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: IRI_SD

Attribute_Definition:

IRI Standard Deviation

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: IRI_L

Attribute_Definition:

Left wheel path IRI

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: IRI_R

Attribute_Definition:

Righth wheel path IRI

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: IRI_FLAG

Attribute_Definition:

-1 if invalid IRI data

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: RUT_INDEX

Attribute_Definition:

Rut index

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: RUT_AVG

Attribute_Definition:

Average rut depth of both wheelpaths

Attribute_Definition_Source:
Contractor Post-processing

Attribute:

Attribute_Label: RUT_MAX

Attribute_Definition:

Maximum rut depth of both wheelpaths

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: RUT_SD

Attribute_Definition:

Rut depth standard deviation

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: RUT_LOW

Attribute_Definition:

Percent of low severity ruts (on a 0-200% scale) in both wheelpaths

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: RUT_MED

Attribute_Definition:

Percent of medium severity ruts (on a 0-200% scale) in both wheelpaths

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: RUT_HI

Attribute_Definition:

Percent of high severity ruts (on a 0-200% scale) in both wheelpaths

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: XFALL

Attribute_Definition:

Cross fall at start of road interval

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: GRADE

Attribute_Definition:

Grade at start of road interval

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: AC_INDEX

Attribute_Definition:

Alligator cracking index

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: AC_LOW

Attribute_Definition:

Percent of WiseCrax measured lane area with low-severity alligator cracking

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* AC_MED*Attribute_Definition:*

Percent of WiseCrax measured lane area with medium-severity alligator cracking

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* AC_HI*Attribute_Definition:*

Percent of WiseCrax measured lane area with high-severity alligator cracking

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* LC_INDEX*Attribute_Definition:*

Longitudinal cracking index

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* LC_LOW*Attribute_Definition:*

Low-severity longitudinal cracking in lane as a percentage of road interval length

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* LC_MED*Attribute_Definition:*

Medium-severity longitudinal cracking in lane as a percentage of road interval length

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* LC_HI*Attribute_Definition:*

High-severity longitudinal cracking in lane as a percentage of road interval length

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* TC_INDEX*Attribute_Definition:*

Transverse cracking index

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* TC_LOW*Attribute_Definition:*

Count of low-severity transverse cracks, where one crack unit equals the WiseCrax measured land width

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* TC_MED*Attribute_Definition:*

Count of medium-severity transverse cracks, where one crack unit equals the WiseCrax measured land width

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* TC_HI*Attribute_Definition:*

Count of high-severity transverse cracks, where one crack unit equals the WiseCrax measured land width

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* PATCH_INDE*Attribute_Definition:*

Patching index

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* PATCHING*Attribute_Definition:*

Percent of WiseCrax measured lane area affected by patching

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* GPS_LAT*Attribute_Definition:*

Latitude coordinate

Attribute_Definition_Source:

ARAN Data Collection

*Attribute:**Attribute_Label:* GPS_LON*Attribute_Definition:*

Longitude coordinate

Attribute_Definition_Source:

ARAN Data Collection

*Attribute:**Attribute_Label:* GPS_ELEV*Attribute_Definition:*

Elevation

Attribute_Definition_Source:

ARAN Data Collection

*Attribute:**Attribute_Label:* GPS_MODE*Attribute_Definition:*

GPS mode during collection

Attribute_Definition_Source:

ARAN Data Collection

*Attribute:**Attribute_Label:* VIDEO*Attribute_Definition:*

Removable USB video hard drive number

Attribute_Definition_Source:

Contractor Post-processing

*Attribute:**Attribute_Label:* IMAGE*Attribute_Definition:*

Filename of .jpg image showing road interval

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: SPEED

Attribute_Definition:

Average ARAN speed during data collection

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: BRIDGE_FLA

Attribute_Definition:

Flag indicating presence of bridge in interval

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: CONSTR_FL A

Attribute_Definition:

Flag indicating construction in interval

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: LANEDEV_FL

Attribute_Definition:

Flag indicating lane deviation in interval

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: DATE

Attribute_Definition:

Data collection date

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: NODISTRESS

Attribute_Definition:

Flag indicating absence of pavement distress

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: FILENAME

Attribute_Definition:

Filename of raw data files

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: SECTION

Attribute_Definition:

route section ID

Attribute_Definition_Source:

Route ID Meeting / ARAN Data Collection

Attribute:

Attribute_Label: FKEY

Attribute_Definition:

Unique record ID

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: VISI_FROM

Attribute_Definition:

Raw MP of first video frame in section

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: VISI_TO

Attribute_Definition:

Raw MP of last video frame in section

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: IDKEY

Attribute_Definition:

Unique record ID used by VisiData

Attribute_Definition_Source:

Contractor Post-processing

Attribute:

Attribute_Label: MP_REF

Attribute_Definition:

Range of mileage to play in VisiData

Attribute_Definition_Source:

Contractor Post-processing

[Back to Top](#)

Distribution_Information:

Resource_Description: Downloadable Data

Standard_Order_Process:

Digital_Form:

Digital_Transfer_Information:

Transfer_Size: 0.030

[Back to Top](#)

Metadata_Reference_Information:

Metadata_Date: 20050420

Metadata_Contact:

Contact_Information:

Contact_Organization_Primary:

Contact_Organization: EFLHD Sterling

Contact_Person: Dan VanGilder

Contact_Position: GIS Coordinator

Contact_Address:

Address_Type: mailing and physical address

Address:

21400 Ridgetop Circle

City: Sterling

State_or_Province: Virginia

Postal_Code: 20166

Country: United States

Contact_Voice_Telephone: 703-404-6361

Contact_Electronic_Mail_Address: dvangilder@fhwa.dot.gov

Metadata_Standard_Name: FGDC Content Standards for Digital Geospatial Metadata

Metadata_Standard_Version: FGDC-STD-001-1998

Metadata_Time_Convention: local time

Metadata_Extensions:

Online_Linkage: <http://www.esri.com/metadata/esriprof80.html>

Profile_Name: ESRI Metadata Profile

[Back to Top](#)

blca_mi

Metadata:

- [Identification Information](#)
 - [Data Quality Information](#)
 - [Spatial Data Organization Information](#)
 - [Spatial Reference Information](#)
 - [Entity and Attribute Information](#)
 - [Distribution Information](#)
 - [Metadata Reference Information](#)
-

Identification_Information:

Citation:

Citation_Information:

Originator: The TSR Group

Publication_Date: 2005

Title:

blca_mi

Geospatial_Data_Presentation_Form: vector digital data

Online_Linkage: [Not Available](#)

Description:

Abstract:

Routes

Purpose:

Road Inventory Program

Supplemental_Information:

Data created by The TSR Group from GPS coordinates provided in the PMS_20 table. The shapefile is processed to aggregate adjacent segments with the same PCR rating provided in the PMS_mile table.

Time_Period_of_Content:

Time_Period_Information:

Single_Date/Time:

Calendar_Date: 2005

Currentness_Reference:

ground condition

Status:

Progress: Complete

Maintenance_and_Update_Frequency: As per RIP cycle

Spatial_Domain:

Bounding_Coordinates:

West_Bounding_Coordinate: -107.741196

East_Bounding_Coordinate: -107.685837

North_Bounding_Coordinate: 38.581184

South_Bounding_Coordinate: 38.539806

Keywords:

Theme:

Theme_Keyword_Thesaurus: BLCA

Theme_Keyword: BLCA

Access_Constraints: None

Use_Constraints:

Redistribution needs permission from EFLHD/NPS

*Point_of_Contact:**Contact_Information:**Contact_Person_Primary:**Contact_Person:* Dan VanGilder*Contact_Organization:* EFLHD*Contact_Position:* GIS Coordinator*Contact_Address:**Address_Type:* mailing and physical address*Address:*

21400 Ridgetop Circle

City: Sterling*State_or_Province:* Virginia*Postal_Code:* 20166*Country:* United States*Contact_Voice_Telephone:* 703-404-6361*Contact_Electronic_Mail_Address:* dvangilder@fhwa.dot.gov*Native_Data_Set_Environment:*

Microsoft Windows 2000 Version 5.0 (Build 2195) Service Pack 4; ESRI ArcCatalog 8.3.0.800

[Back to Top](#)

*Data_Quality_Information:**Attribute_Accuracy:**Attribute_Accuracy_Report:*

Good

Completeness_Report:

Complete for routes

*Lineage:**Source_Information:**Type_of_Source_Media:* GPS*Process_Step:**Process_Description:*

Metadata imported.

[Back to Top](#)

*Spatial_Data_Organization_Information:**Direct_Spatial_Reference_Method:* Vector*Point_and_Vector_Object_Information:**SDTS_Terms_Description:**SDTS_Point_and_Vector_Object_Type:* String*Point_and_Vector_Object_Count:* 11[Back to Top](#)

*Spatial_Reference_Information:**Horizontal_Coordinate_System_Definition:**Geographic:**Latitude_Resolution:* 0.000000*Longitude_Resolution:* 0.000000*Geographic_Coordinate_Units:* Decimal degrees*Geodetic_Model:**Horizontal_Datum_Name:* North American Datum of 1927

Ellipsoid_Name: Clarke 1866
Semi-major_Axis: 6378206.400000
Denominator_of_Flattening_Ratio: 294.978698

[Back to Top](#)

Entity_and_Attribute_Information:

Detailed_Description:

Entity_Type:

Entity_Type_Label: blca_mi

Attribute:

Attribute_Label: FID

Attribute_Definition:

Internal feature number.

Attribute_Definition_Source:

ESRI

Attribute_Domain_Values:

Unrepresentable_Domain:

Sequential unique whole numbers that are automatically generated.

Attribute:

Attribute_Label: Shape

Attribute_Definition:

Feature geometry.

Attribute_Definition_Source:

ESRI

Attribute_Domain_Values:

Unrepresentable_Domain:

Coordinates defining the features.

Attribute:

Attribute_Label: LENGTH

Attribute_Definition:

Length of feature

Attribute_Definition_Source:

ESRI

Attribute:

Attribute_Label: ID

Attribute:

Attribute_Label: RTE_NO

Attribute_Definition:

Route number

Attribute_Definition_Source:

Route ID Meeting

Attribute:

Attribute_Label: RT_LENGTH

Attribute_Definition:

Collected route length

Attribute_Definition_Source:

ARAN Data Collection

Attribute:

Attribute_Label: PCRMI

Attribute_Definition:

Numeric PCR definition

Attribute_Domain_Values:

Range_Domain:

Range_Domain_Minimum: 0

Range_Domain_Maximum: 100

Attribute:

Attribute_Label: PCR_RATEMI

Attribute_Definition:

Verbal PCR definition

Attribute_Domain_Values:

Enumerated_Domain:

Enumerated_Domain_Value: POOR

Enumerated_Domain_Value_Definition:

PCR value <= 60

Enumerated_Domain:

Enumerated_Domain_Value: FAIR

Enumerated_Domain_Value_Definition:

PCR value 61-84

Enumerated_Domain:

Enumerated_Domain_Value: GOOD

Enumerated_Domain_Value_Definition:

PCR value 85-94

Enumerated_Domain:

Enumerated_Domain_Value: EXCELLENT

Enumerated_Domain_Value_Definition:

PCR value 95-100

Attribute:

Attribute_Label: TSR_EDIT

Attribute_Definition:

Indicates whether feature has been edited for graphic purposes.

Attribute_Domain_Values:

Enumerated_Domain:

Enumerated_Domain_Value: 1

Enumerated_Domain_Value_Definition:

Edit has been made to feature for graphic purposes

Enumerated_Domain:

Enumerated_Domain_Value: 0

Enumerated_Domain_Value_Definition:

No edit made to feature.

[Back to Top](#)

Distribution_Information:

Resource_Description: Downloadable Data

Standard_Order_Process:

Digital_Form:

Digital_Transfer_Information:

Transfer_Size: 0.016

[Back to Top](#)

Metadata_Reference_Information:

Metadata_Date: 20050420

Metadata_Contact:

Contact_Information:

Contact_Organization_Primary:

Contact_Organization: EFLHD Sterling

Contact_Person: Dan VanGilder

Contact_Position: GIS Coordinator

Contact_Address:

Address_Type: mailing and physical address

City: Sterling

State_or_Province: Virginia

Postal_Code: 20166

Country: United States

Contact_Voice_Telephone: 703-404-6361

Contact_Electronic_Mail_Address: dvangilder@fhwa.dot.gov

Metadata_Standard_Name: FGDC Content Standards for Digital Geospatial Metadata

Metadata_Standard_Version: FGDC-STD-001-1998

Metadata_Time_Convention: local time

Metadata_Extensions:

Online_Linkage: <http://www.esri.com/metadata/esriprof80.html>

Profile_Name: ESRI Metadata Profile

[Back to Top](#)