



national park service

**The Road Inventory
of
Organ Pipe Cactus National Monument
ORPI – 8660
Cycle 4**



**Prepared By:
Federal Highway Administration
Road Inventory Program
Cycle 4**



Organ Pipe Cactus National Monument in Arizona





TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1. INTRODUCTION	1 - 1
2. PARK SUMMARY INFORMATION	
Paved Route Miles and Percentages by Functional Class and PCR	2 - 1
ARAN Road Condition Summary	2 - 2
Parkwide Condition Summary	2 - 7
Cycle 2 vs Cycle 3 vs Cycle 4 Condition Comparisons	2 - 8
3. PARK ROUTE LOCATION / CONDITION MAPS	
Route Location Key Map	3 - 1
Route Location Area Map	3 - 2
Route Condition Key Map – PCR Mile by Mile	3 - 5
Route Condition Area Map – PCR Mile by Mile	3 - 6
4. PARK ROUTE INVENTORY	
Route Identification Report	4 - 1
5. PAVED ROUTE CONDITION RATING SHEETS (CRS)	
CRS Pages	5 - 1
6. MANUALLY RATED PAVED ROUTE CONDITION RATING SHEETS (MRR)	
MRR Pages	6 - 1
7. PARKING AREA CONDITION RATING SHEETS	
Paved Parking Area Pages	7 - 1
8. PARKWIDE / ROUTE MAINTENANCE FEATURES SUMMARIES	
Parkwide Maintenance Features Summary	8 - 1
Route Maintenance Features Summary	8 - 2
Structure List	8 - 6
9. PARK ROUTE MAINTENANCE FEATURES ROAD LOGS	
Route Maintenance Features Road Logs	9 - 1
10. APPENDIX	
A. Glossary of Terms and Abbreviations	10 - 1
B. Description of Rating System	10 - 2
C. General Information on RIP Systems	10 - 8
D. Metadata	10 - 11

Organ Pipe Cactus National Monument



Section 1 **Introduction**

INTRODUCTION

Background: In 1976, the National Park Service (NPS) and the Federal Highway Administration (FHWA) entered into a Memorandum of Agreement (MOA), establishing the Road Inventory Program (RIP). In 1980, the NPS and the FHWA terminated the 1976 MOA and entered into a new MOA that provided for the completion of the initial phase of the RIP. The purpose of the RIP, per the 1980 MOA was to maintain and update RIP data in order to develop long-range costs and programs to bring National Park Service (NPS) roads up to, or to maintain, designated standards, and establish a maintenance management program.

The FHWA's Federal Lands Highway (FLH) was assigned the task of identifying condition deficiencies and corrective priorities along with associated corrective costs, inventorying maintenance features (e.g., culverts, signs, guardrail, etc.), summarizing the data and findings in a report and providing a photographic record of the road system.

The FLH completed the initial phase of the RIP in the early 1980's. As a result of this effort, each park received a RIP book, also known as the "Brown Book," that included the information collected during this initial RIP phase.

In an effort to maintain and update the RIP data, a cyclical data collection and reporting process was reestablished in the 1990's. The FLH completed two cycles of RIP data collection between 1994 and 2001. Cycle 1 was collected in 44 large parks from 1994 to 1996. This data was found to be unusable for comparison to future cycles. Cycle 2 data was collected from March 1997 to January 2001 in 79 large parks and 5 small parks containing 4,874 route miles. Each park received a copy of a Cycle 2 RIP Report, also known as the "Blue Book". Cycle 3 was completed from 2001 through 2004, and included data collection in all parks that contain pavement.

Since 1984, the RIP Program has been funded through the Federal Lands Highway Program's Park Roads and Parkways (PRP) Program. Currently, the NPS Washington Headquarters' Park Facility Management Division is responsible for coordinating the RIP program with the FLH. The FLH Washington office coordinates policy and prepares national reports and needs assessment studies for congress.

In 1998, the Transportation Equity Act for the 21st Century (TEA-21) amended Title 23 U.S.C., and inserted Section 204(a)(6) which requires the Federal Highway Administration and the National Park Service, to develop, by rule, a Pavement Management System (PMS) for the park roads and parkways serving the National Park System. As a result of the requirements in TEA-21, the NPS and FHWA are in the process of developing a PMS. The PMS will assist the decision-makers in effectively spending limited PRP Program funds. The PMS

will provide information for planning and programming road maintenance, rehabilitation, and reconstruction activities. RIP data will provide the basic information for this system.

Key information included in the RIP is the mileage inventory and condition assessments accomplished by the RIP Program. The mileage and condition data are used in the current allocation formula of PRP Program funds.

RIP Cycle 4: Cycle 4 data collection was initiated in spring 2006, where 86 large parks, consisting of 5,553 route miles and 6,232 paved parking areas, were selected as a representative sample of the entire NPS paved road network. Cycle 4 is scheduled for completion in spring 2009 and will serve the PMS in further development of its pavement preservation techniques.

In the Cycle 4 Reports, a general condition rating of excellent, good, fair and poor is ascribed to each one-mile section of paved roadway, and to each paved parking area. This condition rating system provides a realistic means of assessing the general funding needs for road improvements. Along with these descriptive condition ratings, a numerical rating between 0 and 100 is ascribed to each mile of road and to each parking area. This numerical rating is called a Pavement Condition Rating (PCR). The PCR rating system is described in Section 10 of this report.

All of the fieldwork required for obtaining inventory, condition, and maintenance feature information is coordinated with each park and the regional offices to ensure that the information in the RIP reports is accurate.

The FLH is responsible for all the data presented in this report. Anyone having questions or comments regarding the contents of this report is encouraged to contact the FHWA RIP Coordinator. It is our aim to provide exceptional customer satisfaction in our delivery of the RIP program.

The FHWA RIP Team

FHWA/EFLHD
21400 Ridgetop Circle
Sterling, VA 20166
(703) 404-6371

FHWA/CFLHD
12300 West Dakota Ave.
Lakewood, CO 80228
(720) 963-3560

Organ Pipe Cactus National Monument




Section 2 **Park Summary Information**

ORPI: PAVED ROUTE MILES AND PERCENTAGES BY FUNCTIONAL CLASS AND PCR

F.C.	Pavement Condition Rating (PCR)								TOTAL MILES
	Poor (<=60)		Fair (61-84)		Good (85-94)		Excellent (95-100)		
	MILES	%	MILES	%	MILES	%	MILES	%	
1	0.20	2.92%	1.02	14.87%	0.18	2.62%	0.26	3.79%	1.66
2									
3	3.82	55.69%	0.04	0.58%					3.86
4									
5	1.20	17.49%	0.10	1.46%	0.02	0.29%	0.02	0.29%	1.34
6									
7									
8									
Totals	5.22	76.09%	1.16	16.91%	0.20	2.91%	0.28	4.08%	6.86


ORPI: ARAN ROAD CONDITION SUMMARY

ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	ROUTE LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0010	VISITOR CENTER DRIVE	1	0.34	ASPHALT	92	83
0100	RESIDENCE ACCESS ROAD	5	1.14	ASPHALT	16	30
0101	TWIN PEAKS ACCESS ROAD	1	1.32	ASPHALT	68	73
0200	CAMPGROUND LOOP ROAD	3	0.81	ASPHALT	0	10
0205	MAINTENANCE YARD ACCESS ROAD	5	0.08	ASPHALT	0	0

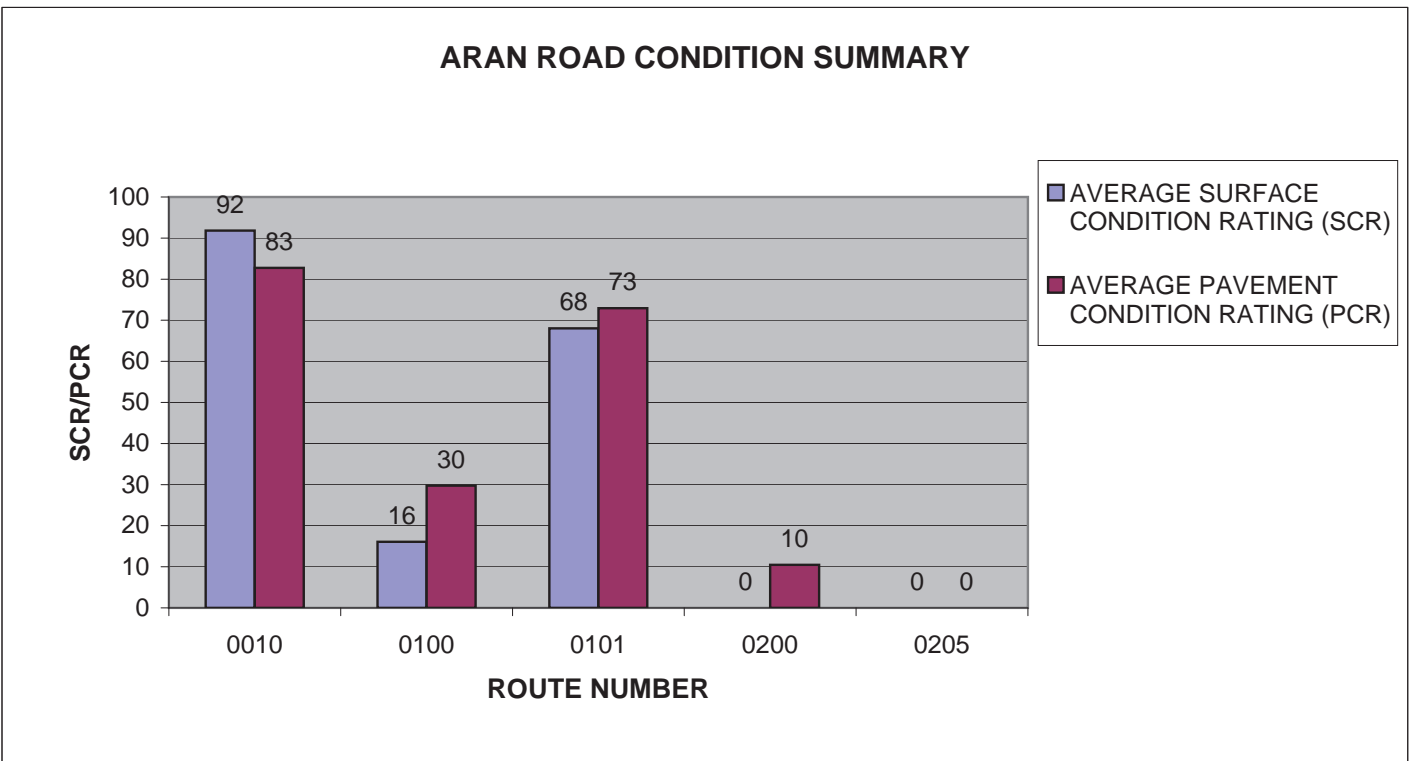


ORPI: ARAN ROAD CONDITION SUMMARY

ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	ROUTE LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0206	CAMPGROUND SITES 1-6 ACCESS	3	0.09	ASPHALT	0	0
0207	CAMPGROUND SITES 7-15 ACCESS	3	0.11	ASPHALT	0	6
0208	CAMPGROUND SITES 16-23 ACCESS	3	0.13	ASPHALT	0	2
0209	CAMPGROUND SITES 24-34 ACCESS	3	0.14	ASPHALT	0	5
0210	CAMPGROUND SITES 35-45 ACCESS	3	0.16	ASPHALT	0	2

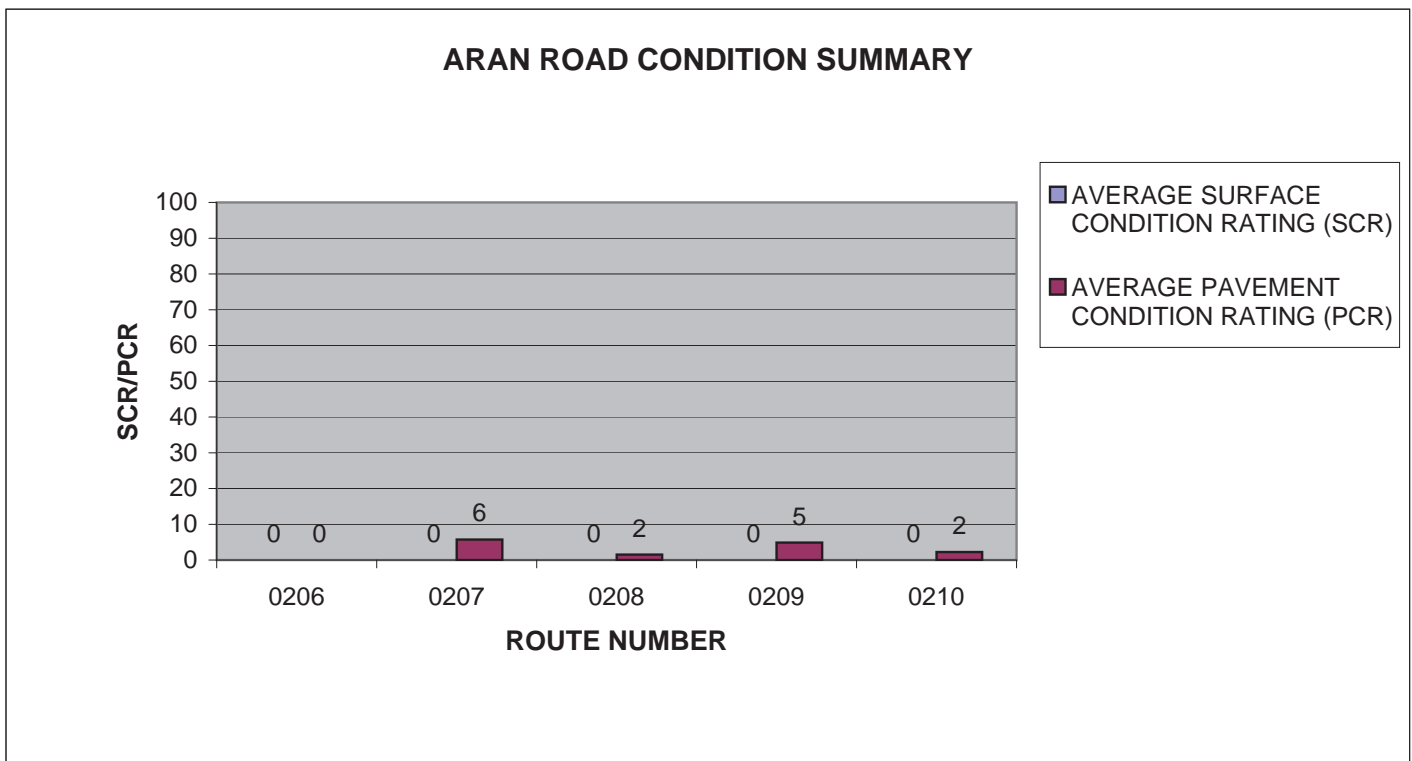


ORPI: ARAN ROAD CONDITION SUMMARY

ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	ROUTE LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0211	CAMPGROUND SITES 46-57 ACCESS	3	0.17	ASPHALT	0	2
0212	CAMPGROUND SITES 58-70 ACCESS	3	0.17	ASPHALT	0	5
0213	CAMPGROUND SITES 71-85 ACCESS	3	0.19	ASPHALT	0	4
0214	CAMPGROUND SITES 86-95 ACCESS	3	0.19	ASPHALT	0	8
0215	CAMPGROUND SITES 96-112 ACCESS	3	0.2	ASPHALT	0	3

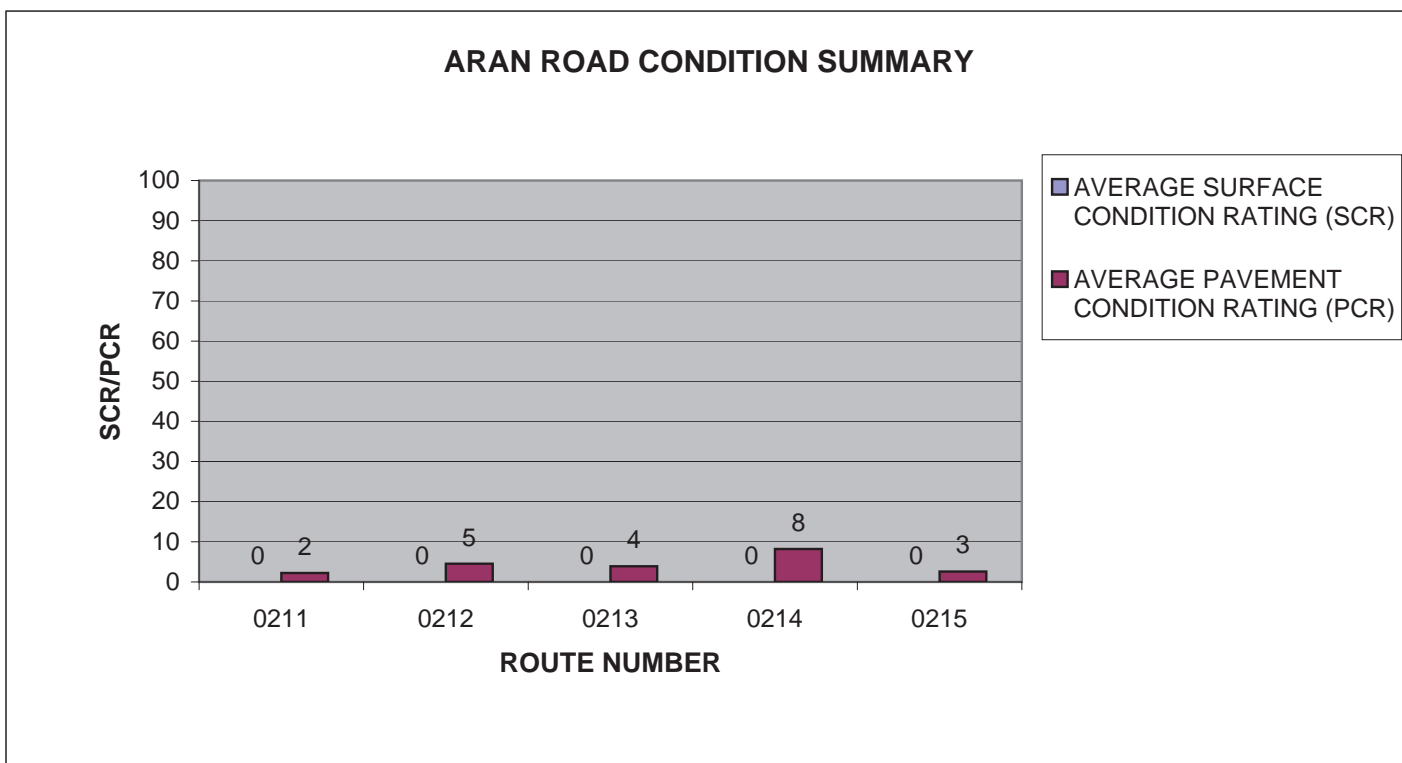


ORPI: ARAN ROAD CONDITION SUMMARY

ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	ROUTE LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0216	CAMPGROUND SITES 113-128 ACCESS	3	0.21	ASPHALT	0	4
0217	CAMPGROUND SITES 129-145 ACCESS	3	0.21	ASPHALT	0	3
0218	CAMPGROUND SITES 146-158 ACCESS	3	0.22	ASPHALT	3	4
0219	CAMPGROUND SITES 159-174 ACCESS	3	0.23	ASPHALT	0	6
0220	CAMPGROUND SITES 175-191 ACCESS	3	0.24	ASPHALT	0	6

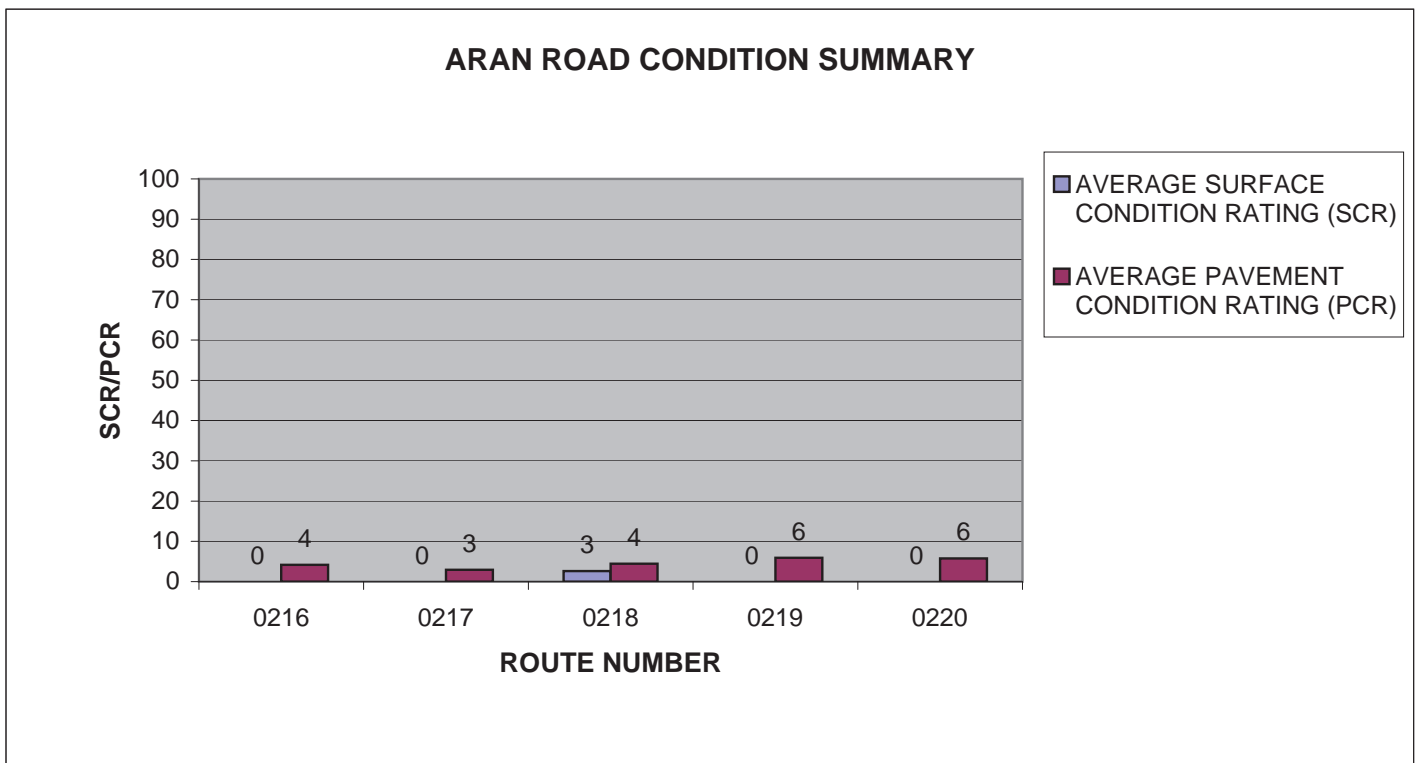

ORPI: ARAN ROAD CONDITION SUMMARY

ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	ROUTE LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0221	CAMPGROUND SITES 192-208 ACCESS	3	0.25	ASPHALT	4	11
0402	SPUR RESIDENCE ROAD EAST	5	0.12	ASPHALT	0	0
0409	GROUP CAMPGROUND ACCESS ROAD	3	0.22	ASPHALT	53	53

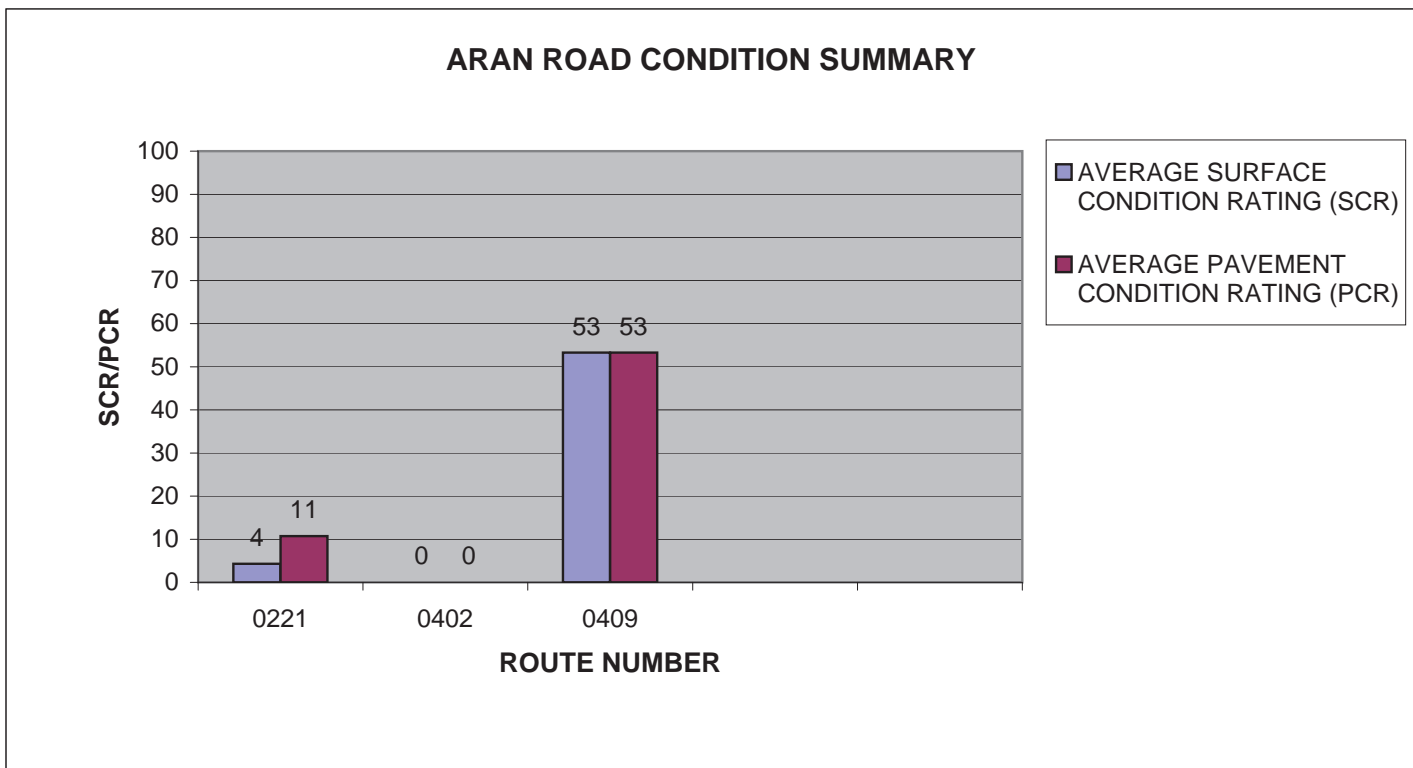


ORPI: PARKWIDE CONDITION SUMMARY

**AVERAGE PAVEMENT CONDITION RATING (PCR)	*AVERAGE ROUGHNESS CONDITION INDEX (RCI)	*AVERAGE SURFACE CONDITION RATING (SCR)	*AVERAGE RUT INDEX	*AVERAGE ALLIGATOR CRACKING INDEX	*AVERAGE LONGITUDINAL CRACKING INDEX	*AVERAGE TRANSVERSE CRACKING INDEX	*AVERAGE PATCHING INDEX
49	65	42	67	61	98	99	100




** PCR Index is based on all ARAN-driven roads, parking areas, and manually rated routes.

* Index values are based on ARAN-driven roads only.

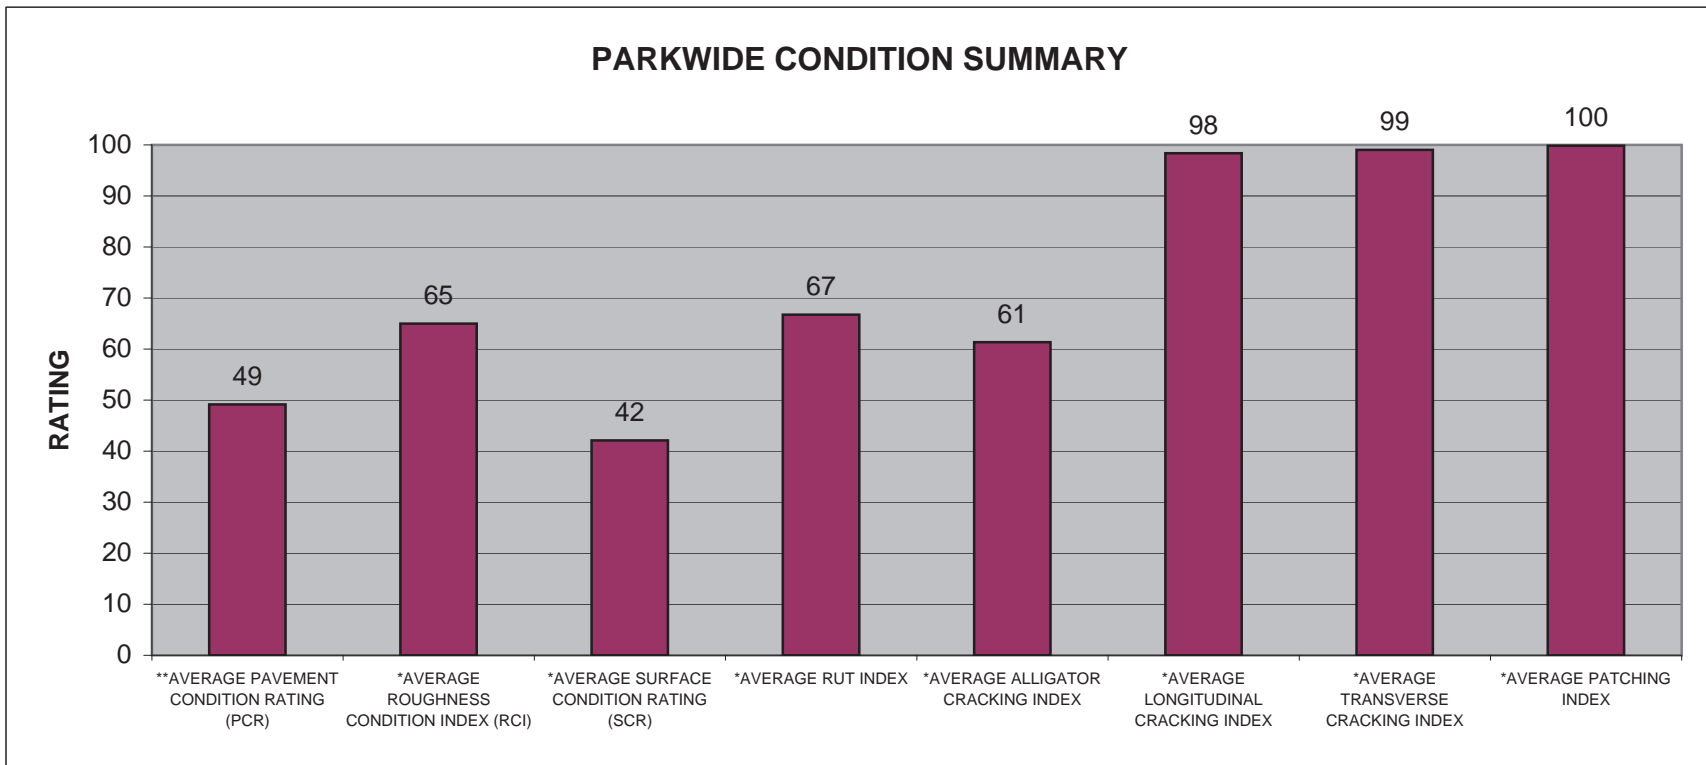




ORPI : CYCLE 2 vs CYCLE 3 vs CYCLE 4 CONDITION COMPARISONS

ROUTE NUMBER	PAVED MILES	FROM MILLEPOST	TO MILLEPOST	PAVEMENT CONDITION RATING (PCR)				SURFACE CONDITION RATING (SCR)				ROUGHNESS CONDITION INDEX (RCI)				COMMENT
				CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	
0010	0.34	0.00	0.34	N/A	3	83	+2667%	25	0	92	N/A	N/A	67	56	-16%	
0100	1.14	0.00	1.14	N/A	13	30	+131%	82	0	16	N/A	N/A	56	51	-9%	
0101	1.32	0.00	1.32	N/A	23	73	+217%	53	0	68	N/A	N/A	64	80	+25%	
0200	0.82	0.00	0.82	N/A	12	10	-17%	20	0	0	N/A	N/A	38	34	-11%	
0205	0.10	0.00	0.10	N/A	6	0	N/A	8	0	0	N/A	N/A	39	N/A	N/A	No RCI collected in Cycle 4.
0206	0.09	0.00	0.09	N/A	6	0	N/A	N/A	0	0	N/A	N/A	38	N/A	N/A	No RCI collected in Cycle 4.
0207	0.11	0.00	0.11	N/A	0	6	N/A	N/A	0	0	N/A	N/A	N/A	32	N/A	No RCI collected in Cycle 3.

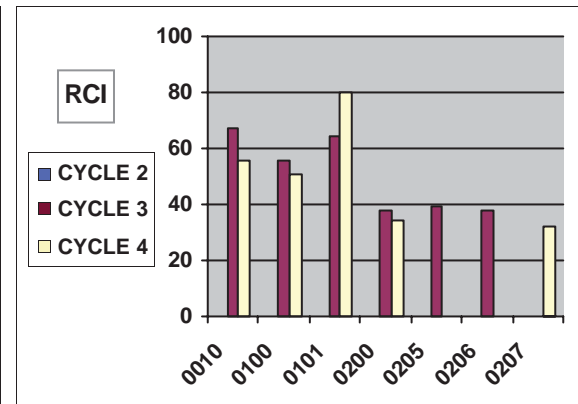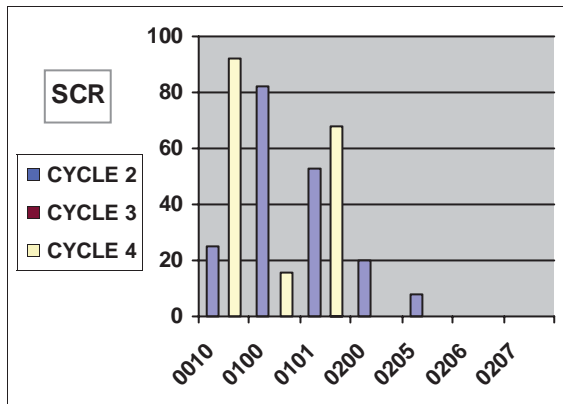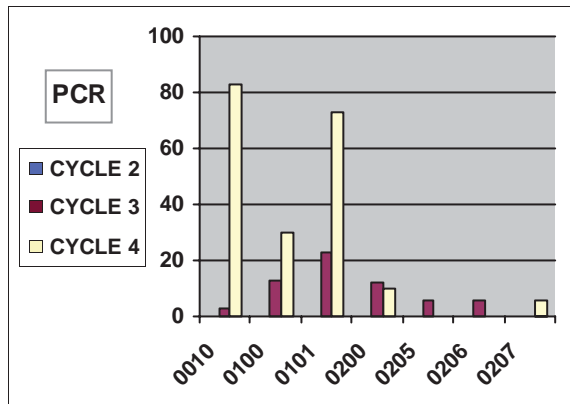




ORPI : CYCLE 2 vs CYCLE 3 vs CYCLE 4 CONDITION COMPARISONS

ROUTE NUMBER	PAVED MILES	FROM MILEPOST	TO MILEPOST	PAVEMENT CONDITION RATING (PCR)				SURFACE CONDITION RATING (SCR)				ROUGHNESS CONDITION INDEX (RCI)				COMMENT
				CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	
0208	0.13	0.00	0.13	N/A	2	2	0%	N/A	0	0	N/A	N/A	29	24	-17%	
0209	0.15	0.00	0.15	N/A	2	5	+150%	N/A	0	0	N/A	N/A	34	29	-15%	
0210	0.16	0.00	0.16	N/A	6	2	-67%	N/A	0	0	N/A	N/A	36	22	-39%	
0211	0.17	0.00	0.17	N/A	4	2	-50%	N/A	0	0	N/A	N/A	21	16	-24%	
0212	0.18	0.00	0.18	N/A	4	5	+25%	N/A	0	0	N/A	N/A	21	21	0%	
0213	0.19	0.00	0.19	N/A	5	4	-20%	N/A	0	0	N/A	N/A	27	31	+15%	

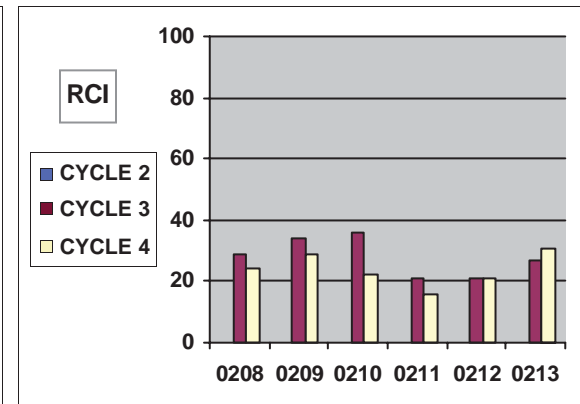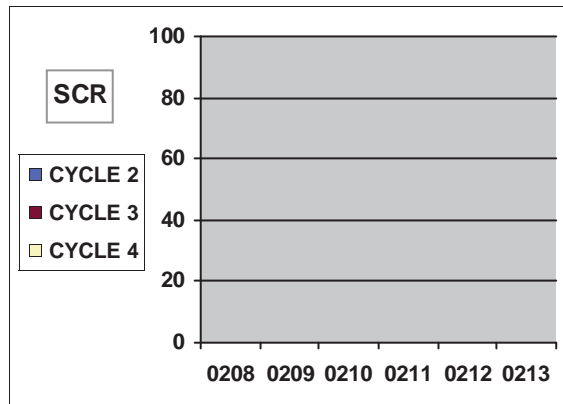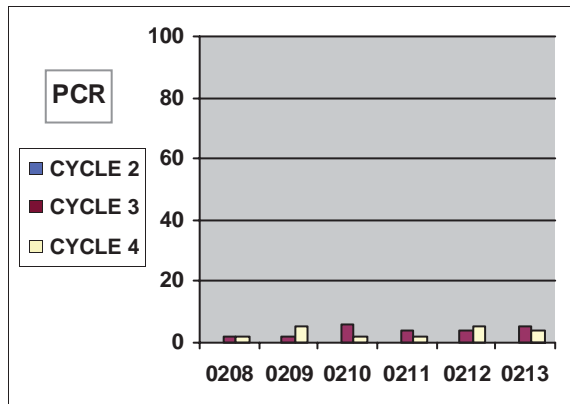




ORPI : CYCLE 2 vs CYCLE 3 vs CYCLE 4 CONDITION COMPARISONS

ROUTE NUMBER	PAVED MILES	FROM MILEPOST	TO MILEPOST	PAVEMENT CONDITION RATING (PCR)				SURFACE CONDITION RATING (SCR)				ROUGHNESS CONDITION INDEX (RCI)				COMMENT
				CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	
0214	0.20	0.00	0.20	N/A	5	8	+60%	N/A	0	0	N/A	N/A	31	30	-3%	
0215	0.20	0.00	0.20	N/A	5	3	-40%	N/A	0	0	N/A	N/A	23	22	-4%	
0216	0.21	0.00	0.21	N/A	5	4	-20%	N/A	0	0	N/A	N/A	27	27	0%	
0217	0.22	0.00	0.22	N/A	3	3	0%	N/A	0	0	N/A	N/A	23	25	+9%	
0218	0.23	0.00	0.23	N/A	5	4	-20%	N/A	0	3	N/A	N/A	23	16	-30%	
0219	0.23	0.00	0.23	N/A	5	6	+20%	N/A	0	0	N/A	N/A	38	34	-11%	

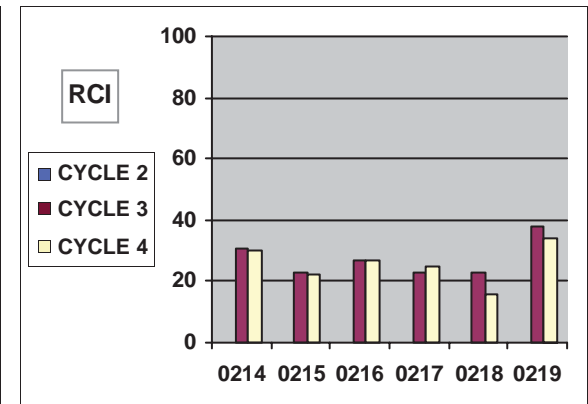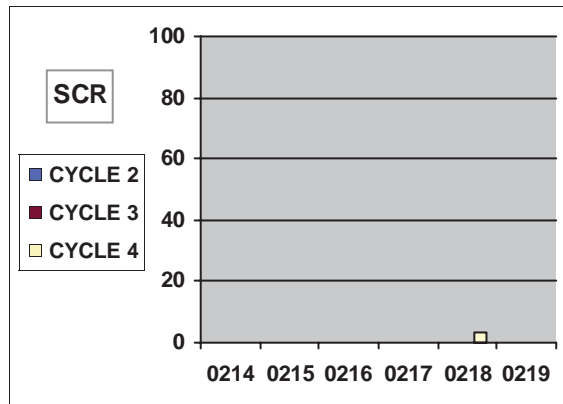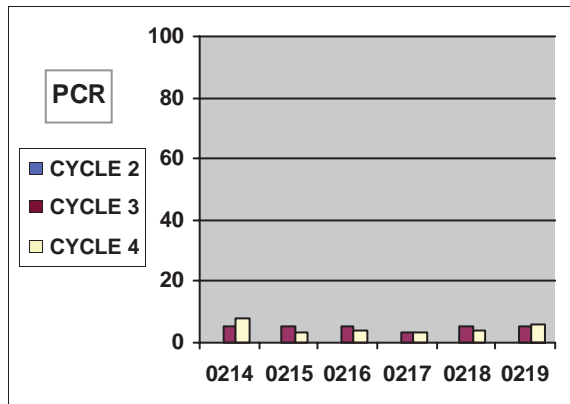

ORPI : CYCLE 2 vs CYCLE 3 vs CYCLE 4 CONDITION COMPARISONS

ROUTE NUMBER	PAVED MILES	FROM MILEPOST	TO MILEPOST	PAVEMENT CONDITION RATING (PCR)				SURFACE CONDITION RATING (SCR)				ROUGHNESS CONDITION INDEX (RCI)				COMMENT
				CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	CYCLE 2	CYCLE 3	CYCLE 4	PERCENT CHANGE	
0220	0.25	0.00	0.25	N/A	7	6	-14%	N/A	0	0	N/A	N/A	32	34	+6%	
0221	0.26	0.00	0.26	N/A	7	11	+57%	N/A	0	4	N/A	N/A	35	29	-17%	
0402	0.12	0.00	0.12	N/A	0	0	N/A	64	0	0	N/A	N/A	N/A	N/A	N/A	No RCI collected in Cycle 3 or 4.
0409	0.14	0.00	0.14	N/A	12	53	+342%	5	0	53	N/A	N/A	41	53	+29%	

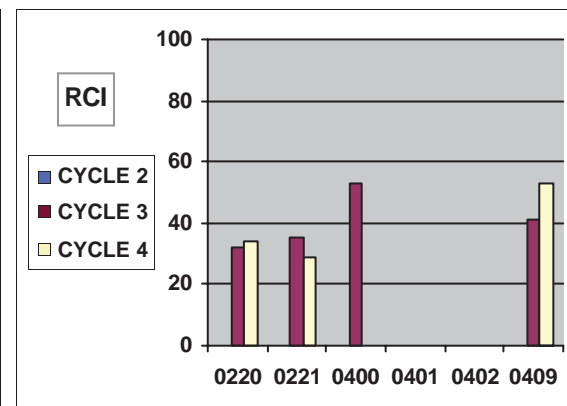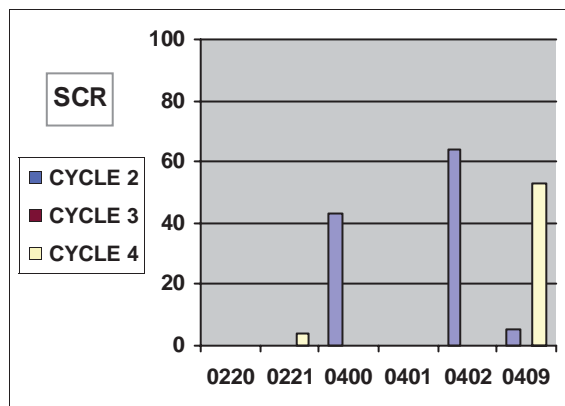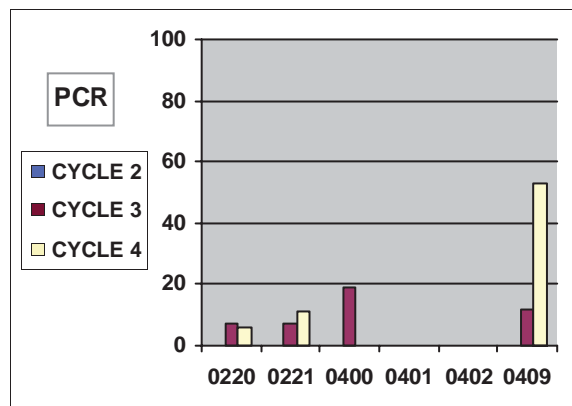


Organ Pipe Cactus National Monument



Section 3 **Park Route Location / Condition** **Maps**


Organ Pipe Cactus National Monument Route Location Map Key Map

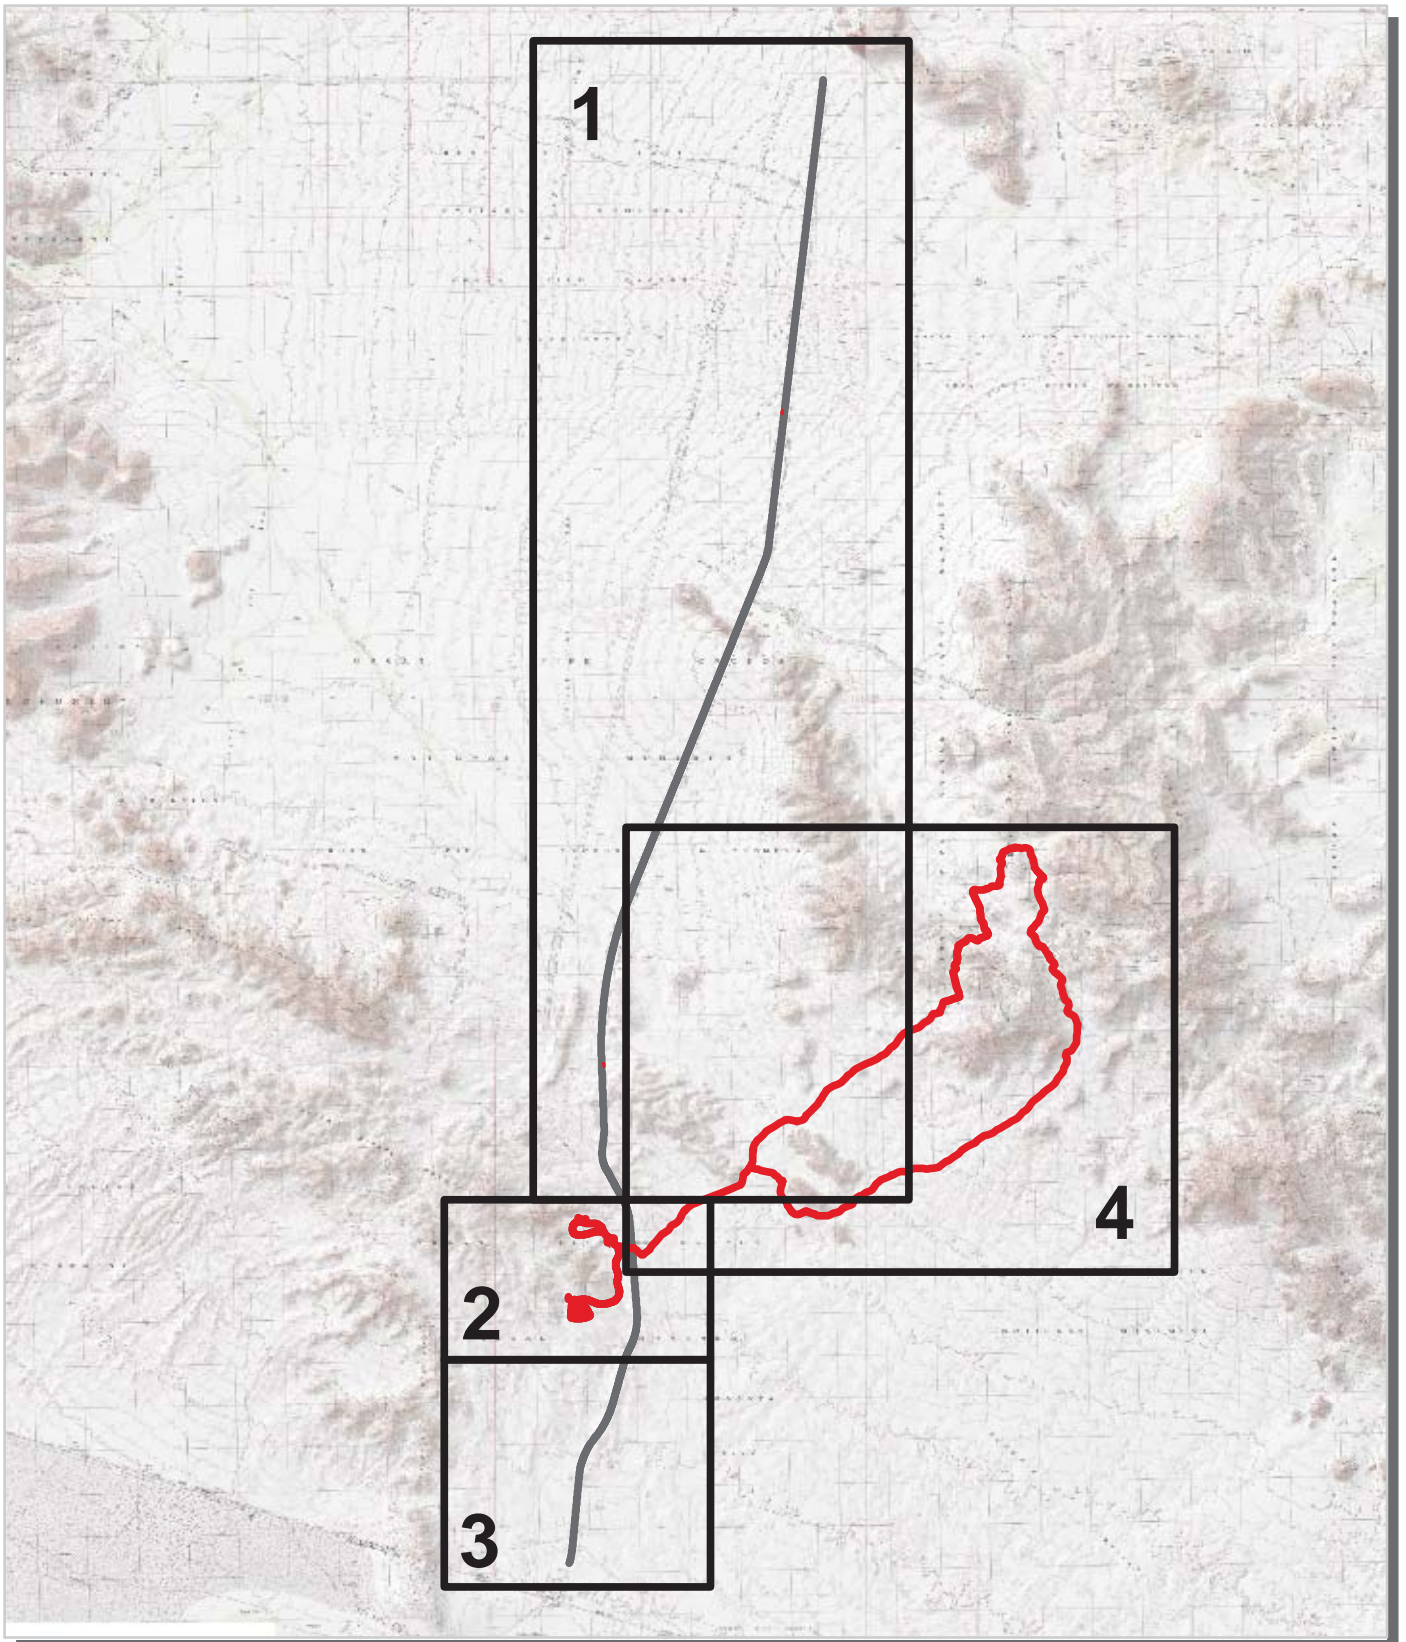

 Park Owned Routes



Organ Pipe Cactus National Monument Route Location Map Area 1

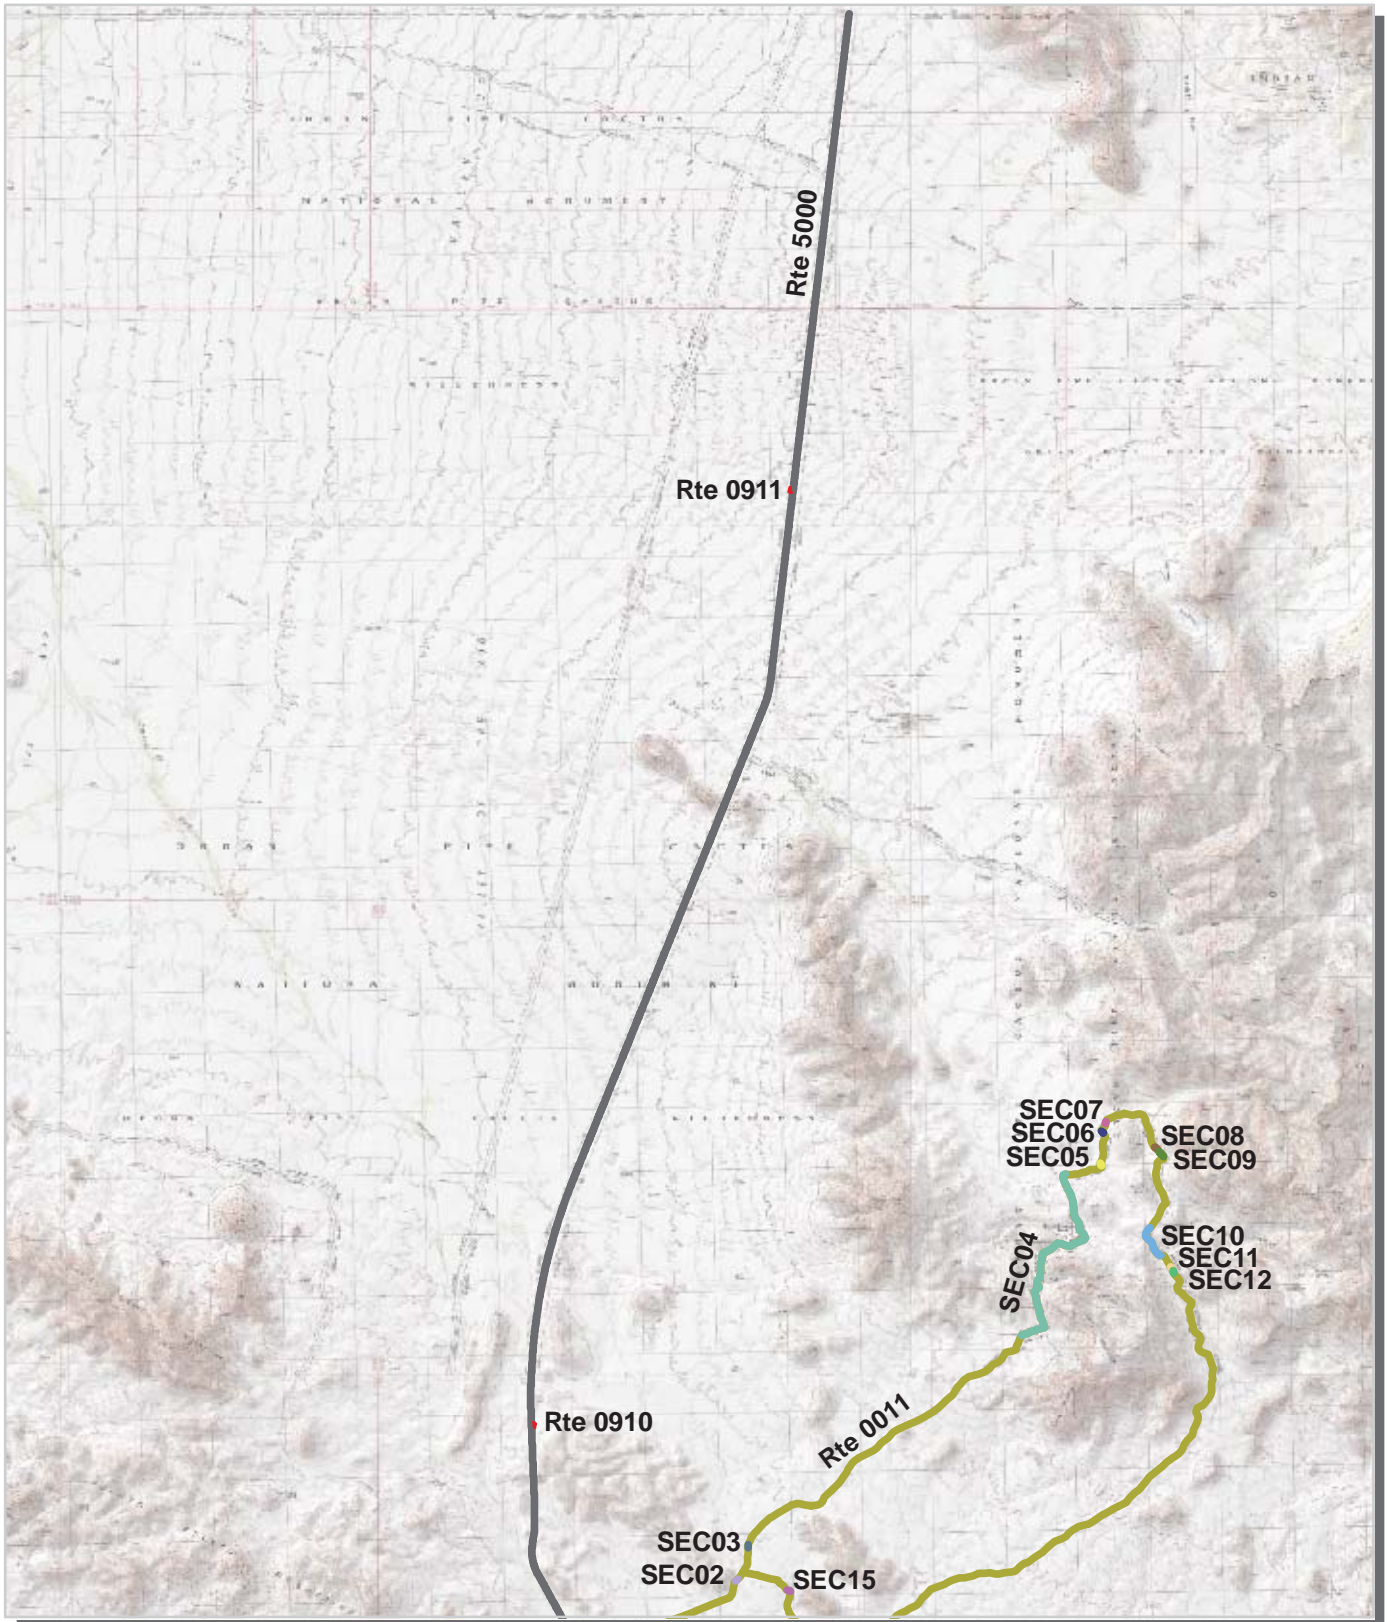


Unique colors used to differentiate routes




Organ Pipe Cactus National Monument

Route Location Map


Area 2

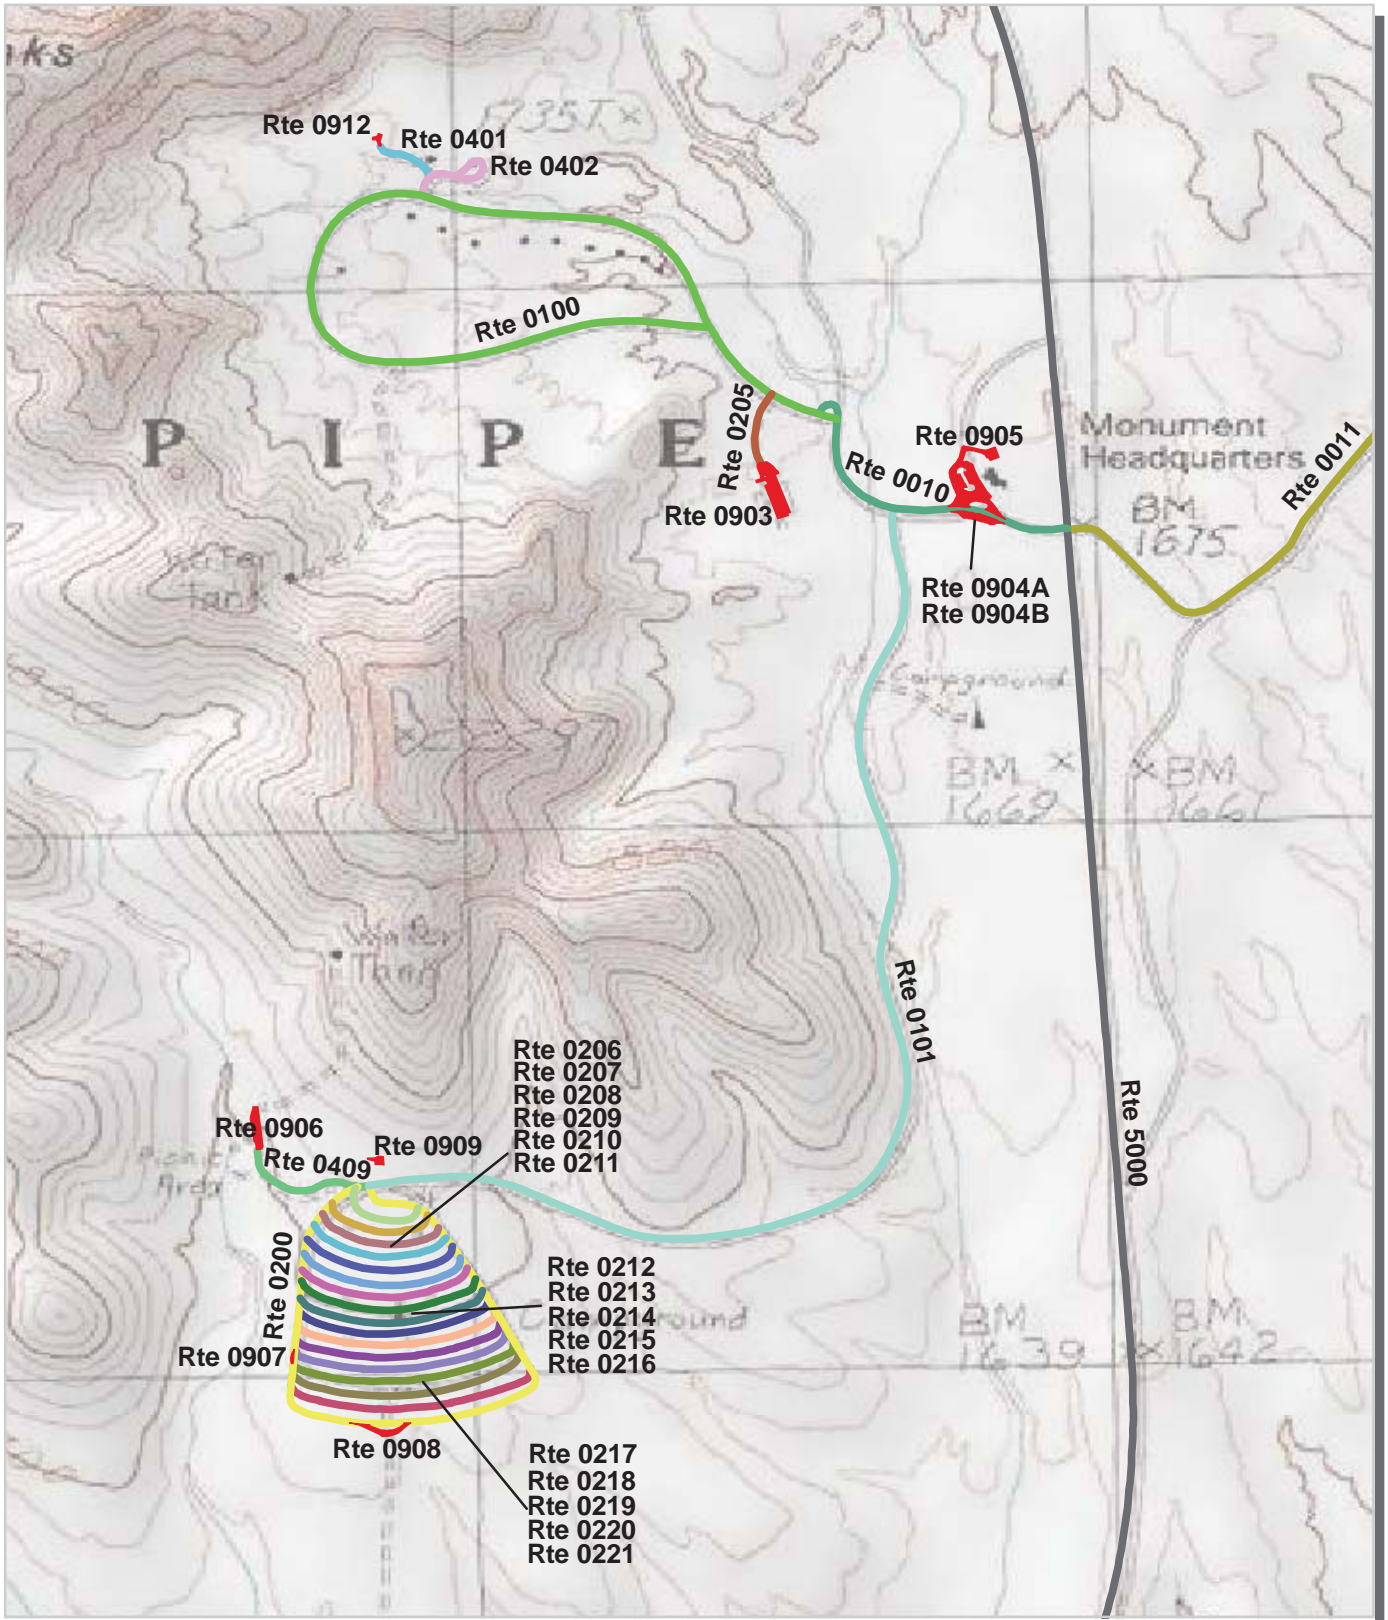

Unique colors used to differentiate routes



Organ Pipe Cactus National Monument Route Location Map Area 4

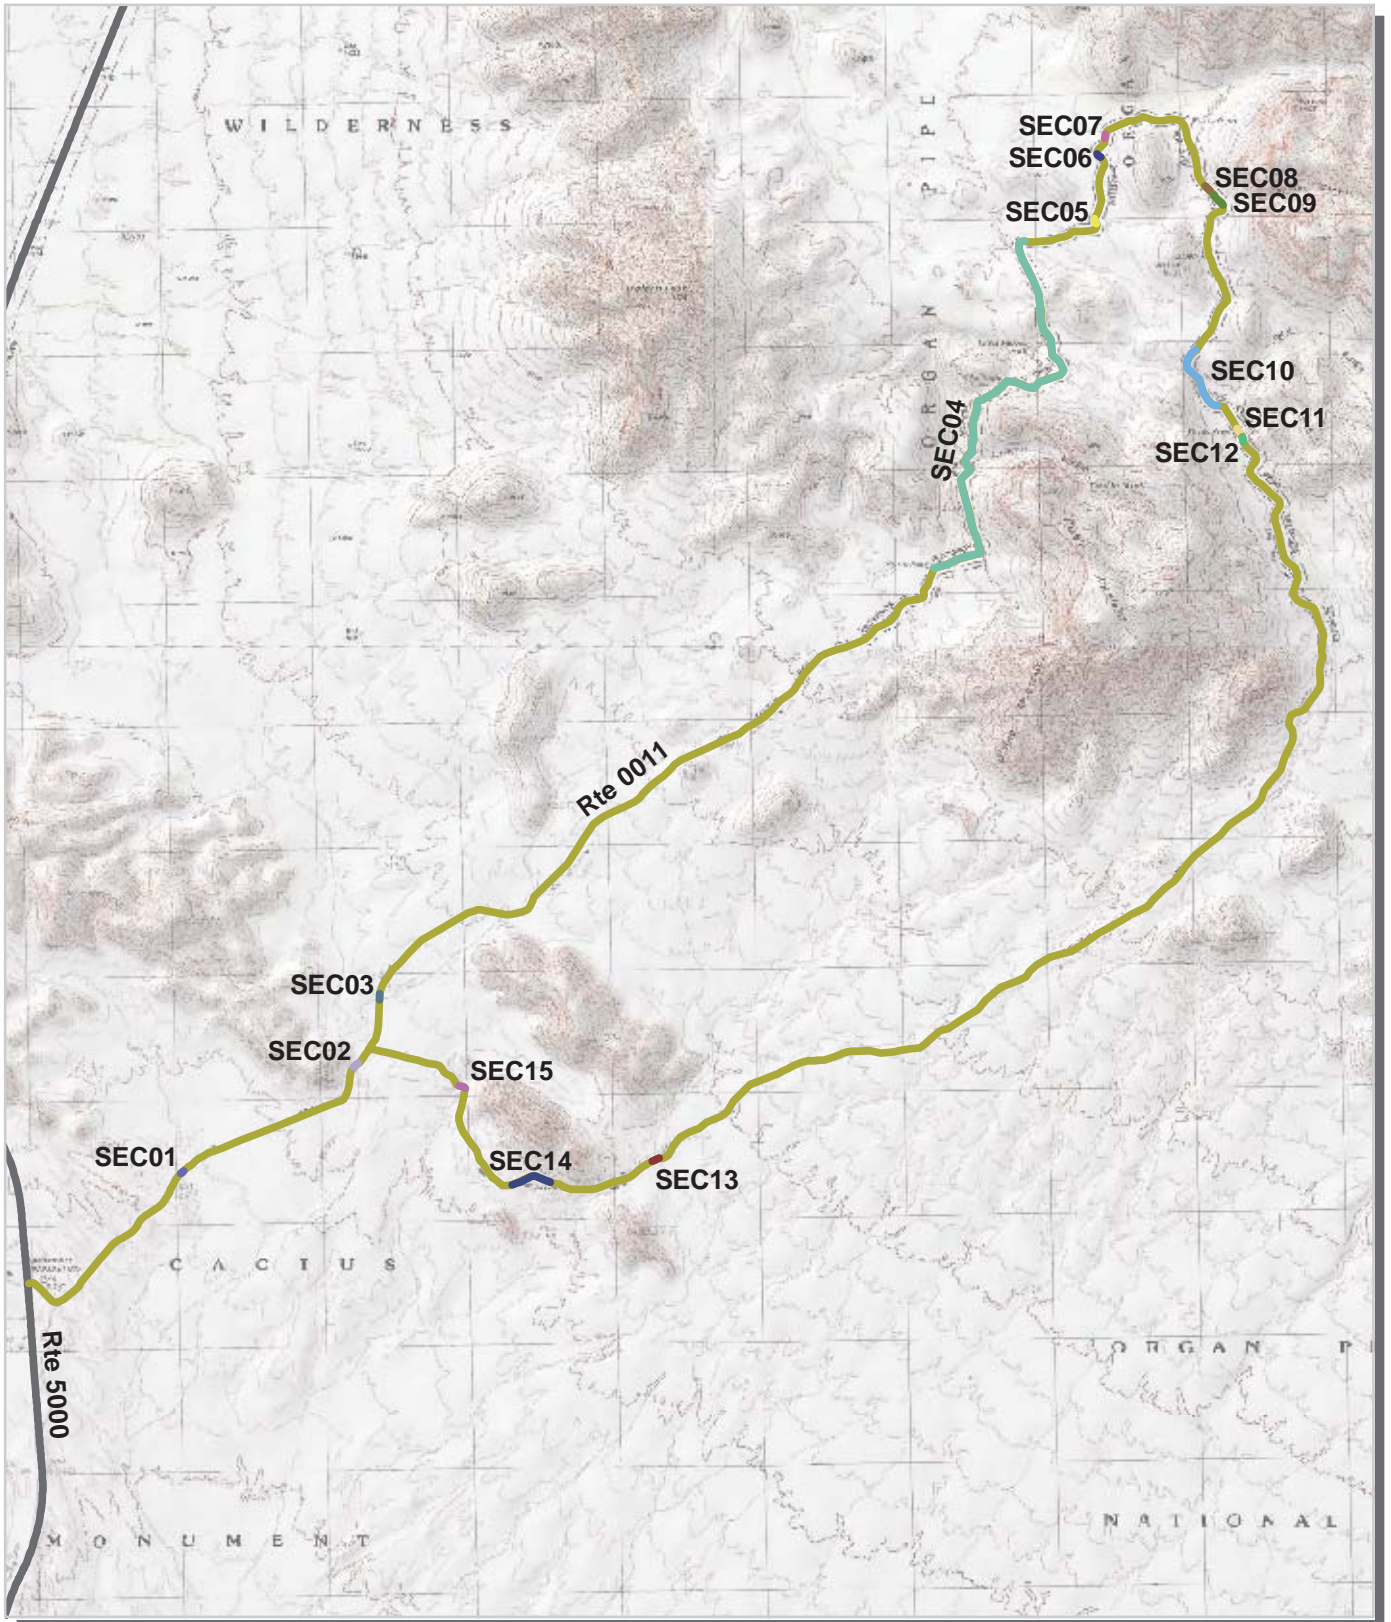

Unique colors used to differentiate routes




Organ Pipe Cactus National Monument

Route Condition Map

PCR - Mile by Mile

Key Map

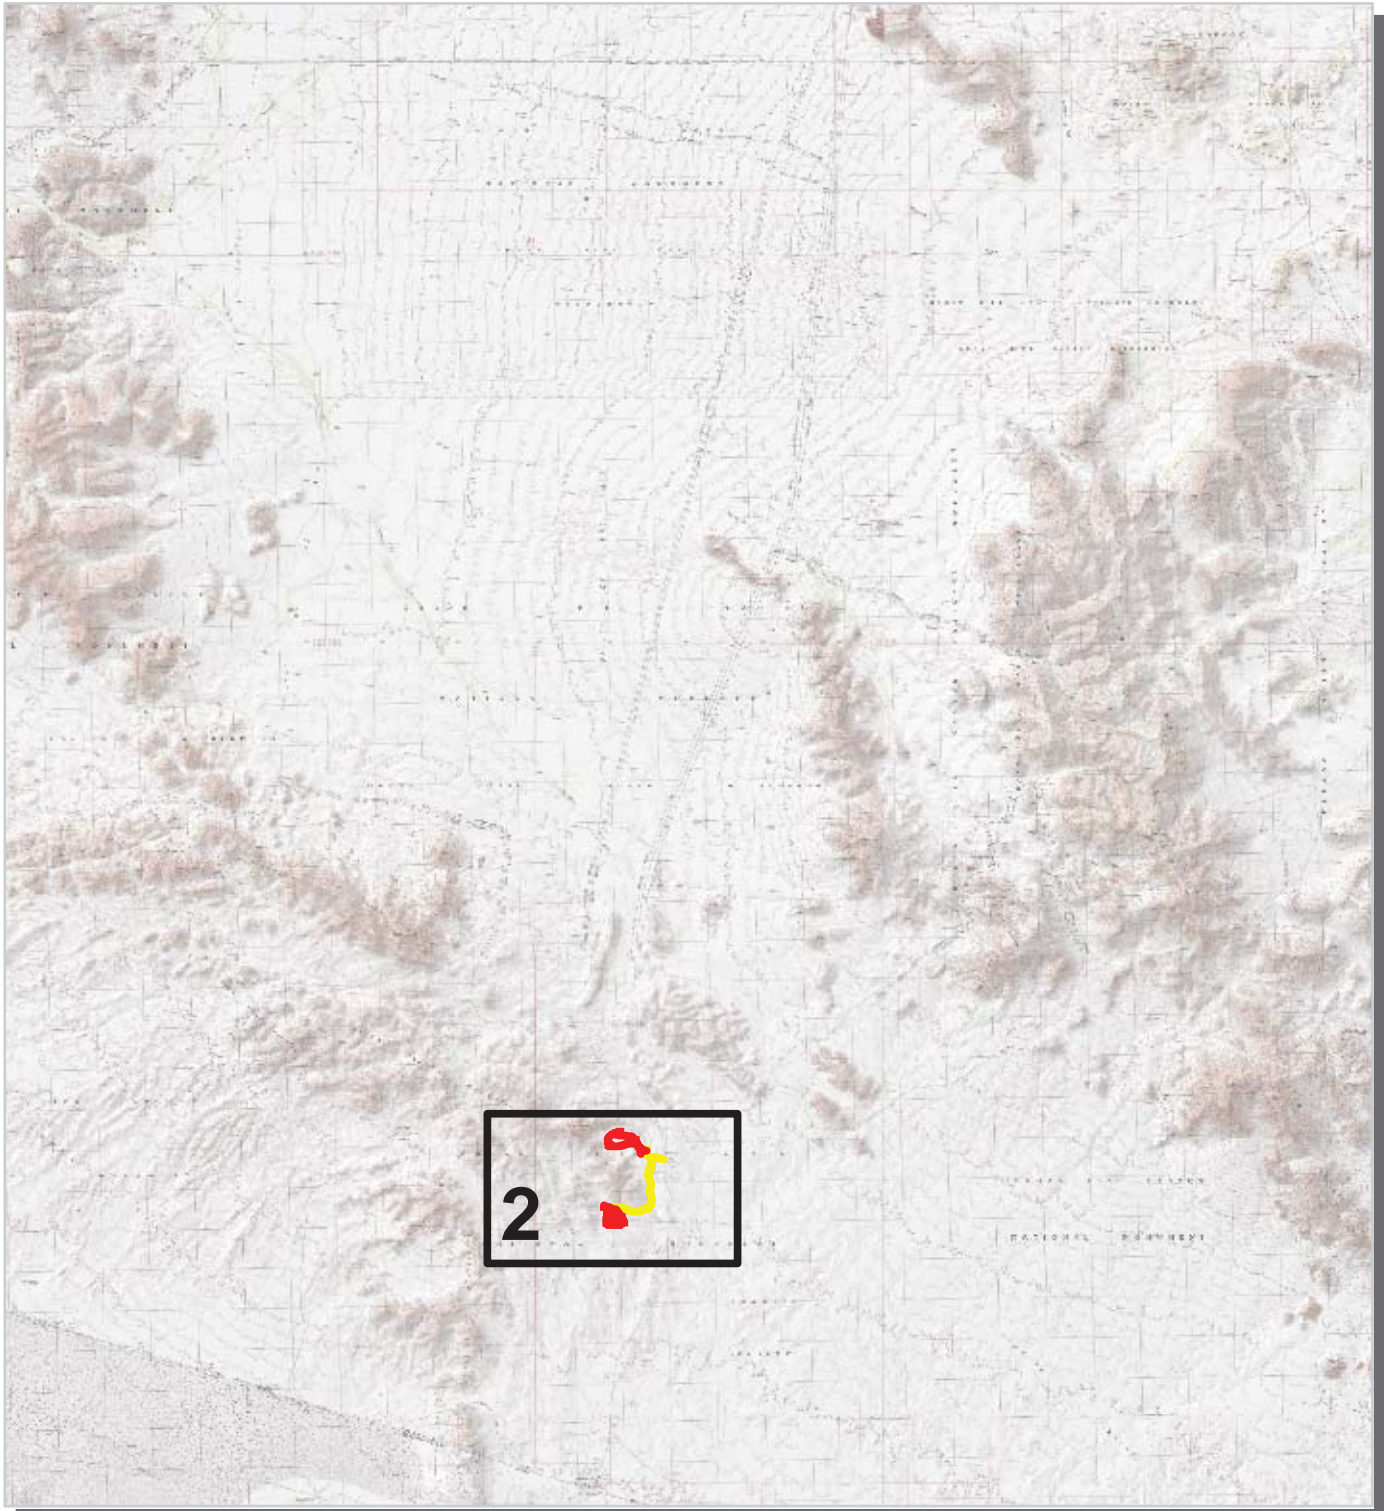

PCR	Poor		Fair		Good		Excellent		No Data	
		(<=60)		(61 - 84)	(85 - 94)		(95 - 100)			

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.




Organ Pipe Cactus National Monument

Route Condition Map

PCR - Mile by Mile

Area 2

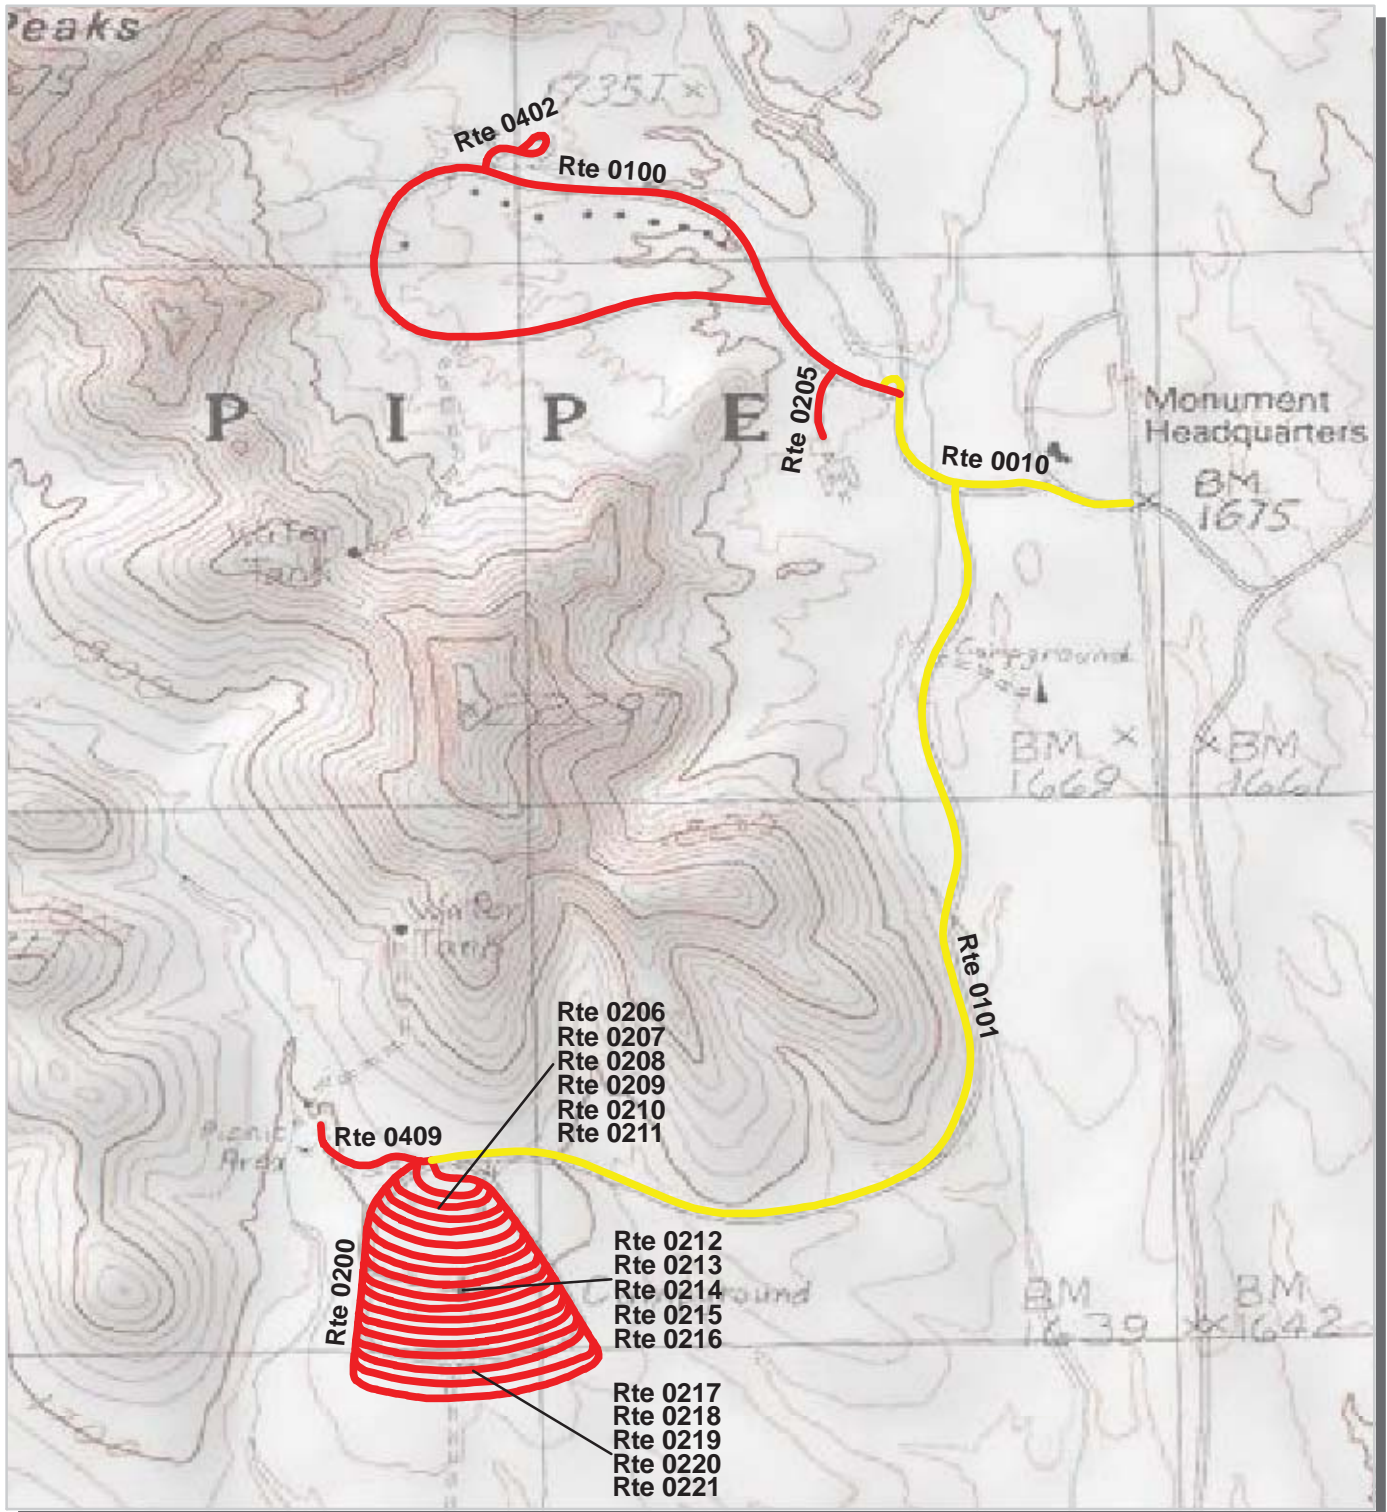

PCR	Poor		Fair		Good		Excellent		No Data	
	(<=60)		(61 - 84)	(85 - 94)	(95 - 100)					

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.



Organ Pipe Cactus National Monument



Section 4 **Park Route Inventory**

NPS/RIP Route ID Report

Road Inventory Program 01/09/2009

(Numerical By Route #)

Page 1 of 6

Shading Color Key:
Red text denotes approx. mileage

White = Paved Routes, ARAN Driven

Yellow = Unpaved Routes, ARAN not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Grey = Paved Routes, ARAN not Driven

Black = Paved State, Local or Private non-NPS Routes, ARAN Driven

 = Concession Route Flag ON

** Unpaved Routes displayed on report were obtained from FMSS database and not inventoried by Road Inventory Program (RIP)

ORPI

ORGAN PIPE CACTUS NATIONAL MONUMENT

Rte. No.	FMSS No.	Concess Route	Route Name	Route Description		Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Rte. Lanes	Manual Rated SQ/FT	Surf. Type	Area Maps
				From	To									
0010	72387		VISITOR CENTER DRIVE	FROM ROUTE 5000 (STATE ROUTE 85) AT MP 17.53 (ON RIGHT)	TO ROUTE 0100 (RESIDENCE ACCESS ROAD) AT MP 0.12 (ON RIGHT)	N/A	0.340	0.000	0.340	1		0	AS	2,4
0011	74168		AJO MOUNTAIN DRIVE	FROM ROUTE 5000 (STATE ROUTE 85) AT MP 17.53 (ON LEFT)	TO END OF LOOP	N/A	3.110	14.200	17.310	1		288,266	AS	1,2,4
0012	74253		PUERTO BLANCO DRIVE	FROM ROUTE 0010 (VISITOR CENTER DRIVE) AT MP 0.32 (ON RIGHT)	TO ROUTE 5000 (STATE ROUTE 85) AT MP 21.83 (ON RIGHT)	N/A	0.000	37.900	37.900	1		0	OT	
0100	72452		RESIDENCE ACCESS ROAD	FROM ROUTE 0010 (VISITOR CENTER DRIVE) AT MP 0.30 (ON LEFT)	TO ROUTE 0100 (RESIDENCE ACCESS ROAD) AT MP 0.17 (ON LEFT)	N/A	1.140	0.000	1.140	5		0	AS	2
0101	72864		TWIN PEAKS ACCESS ROAD	FROM ROUTE 0010 (VISITOR CENTER DRIVE) AT MP 0.17 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.81 (ON RIGHT)	N/A	1.320	0.000	1.320	1		0	AS	2
0200	72866		CAMPGROUND LOOP ROAD	FROM ROUTE 0409 (GROUP CAMPGROUND ACCESS ROAD) AT MP 0.02 (ON LEFT)	TO END OF ROUTE 0101 / START OF ROUTE 0409	N/A	0.810	0.000	0.810	3		0	AS	2
0201	74164		CAMINO DE DOS REPUBLICAS	FROM ROUTE 5000 (STATE ROUTE 85) AT MP 21.91 (ON LEFT)	TO DOS LOMITAS RANCH	N/A	0.000	4.900	4.900	2		0	OT	
0202	74266		SENITA BASIN ROAD	FROM ROUTE 0012 (PUERTO BLANCO DRIVE)	TO ROUTE 0901 (SENITA BASIN PARKING)	N/A	0.000	4.500	4.500	2		0	OT	
0203	74269		QUITOBAQUITO ROAD	FROM ROUTE 0012 (PUERTO BLANCO DRIVE)	TO ROUTE 0900 (QUITOBAQUITO PARKING)	N/A	0.000	0.400	0.400	2		0	OT	
0204	74171		ALAMO CANYON ROAD	FROM ROUTE 5000 (STATE ROUTE 85) AT MP 7.63 (ON LEFT)	TO ALAMO CANYON TRAILHEAD	N/A	0.000	3.300	3.300	2		0	OT	
0205	72685		MAINTENANCE YARD ACCESS ROAD	FROM ROUTE 0100 (RESIDENCE ACCESS ROAD) AT MP 0.07 (ON LEFT)	TO ROUTE 0903 (MAINTENANCE YARD)	N/A	0.080	0.000	0.080	5		0	AS	2
0206	102406		CAMPGROUND SITES 1-6 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.01 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.76 (ON LEFT)	N/A	0.090	0.000	0.090	3		0	AS	2
0207	102418		CAMPGROUND SITES 7-15 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.03 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.74 (ON LEFT)	N/A	0.110	0.000	0.110	3		0	AS	2
0208	102419		CAMPGROUND SITES 16-23 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.05 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.72 (ON LEFT)	N/A	0.130	0.000	0.130	3		0	AS	2

NPS/RIP Route ID Report

Road Inventory Program 01/09/2009

(Numerical By Route #)

Page 2 of 6

Shading Color Key:

Red text denotes approx. mileage

White = Paved Routes, ARAN Driven

Yellow = Unpaved Routes, ARAN not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Grey = Paved Routes, ARAN not Driven

Black = Paved State, Local or Private non-NPS Routes, ARAN Driven

■ = Concession Route Flag ON

** Unpaved Routes displayed on report were obtained from FMSS database and not inventoried by Road Inventory Program (RIP)

ORPI

ORGAN PIPE CACTUS NATIONAL MONUMENT

Rte. No.	FMSS No.	Concess Route	Route Name	Route Description		Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Rte. Lanes	Manual Rated SQ/FT	Surf. Type	Area Maps
				From	To									
0209	102421		CAMPGROUND SITES 24-34 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.06 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.71 (ON LEFT)	N/A	0.140	0.000	0.140	3		0	AS	2
0210	102422		CAMPGROUND SITES 35-45 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.08 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.70 (ON LEFT)	N/A	0.160	0.000	0.160	3		0	AS	2
0211	102424		CAMPGROUND SITES 46-57 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.09 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.68 (ON LEFT)	N/A	0.170	0.000	0.170	3		0	AS	2
0212	102425		CAMPGROUND SITES 58-70 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.11 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.67 (ON LEFT)	N/A	0.170	0.000	0.170	3		0	AS	2
0213	102426		CAMPGROUND SITES 71-85 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.12 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.65 (ON LEFT)	N/A	0.190	0.000	0.190	3		0	AS	2
0214	102427		CAMPGROUND SITES 86-95 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.14 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.64 (ON LEFT)	N/A	0.190	0.000	0.190	3		0	AS	2
0215	102428		CAMPGROUND SITES 96-112 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.16 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.63 (ON LEFT)	N/A	0.200	0.000	0.200	3		0	AS	2
0216	102429		CAMPGROUND SITES 113-128 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.17 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.61 (ON LEFT)	N/A	0.210	0.000	0.210	3		0	AS	2
0217	102430		CAMPGROUND SITES 129-145 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.19 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.60 (ON LEFT)	N/A	0.210	0.000	0.210	3		0	AS	2
0218	102431		CAMPGROUND SITES 146-158 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.20 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.59 (ON LEFT)	N/A	0.220	0.000	0.220	3		0	AS	2
0219	102432		CAMPGROUND SITES 159-174 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.22 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.57 (ON LEFT)	N/A	0.230	0.000	0.230	3		0	AS	2
0220	102435		CAMPGROUND SITES 175-191 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.23 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.56 (ON LEFT)	N/A	0.240	0.000	0.240	3		0	AS	2
0221	102434		CAMPGROUND SITES 192-208 ACCESS	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.24 (ON LEFT)	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.54 (ON LEFT)	N/A	0.250	0.000	0.250	3		0	AS	2
0222	72867		50 K WATER TANK ROAD	FROM	TO WATER TANK	N/A	0.000	0.190	0.190	3		0	GR	

NPS/RIP Route ID Report

Shading Color Key:

Red text denotes approx. mileage

White = Paved Routes, ARAN Driven

Yellow = Unpaved Routes, ARAN not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Grey = Paved Routes, ARAN not Driven

Black = Paved State, Local or Private non-NPS Routes, ARAN Driven

■ = Concession Route Flag ON

** Unpaved Routes displayed on report were obtained from FMSS database and not inventoried by Road Inventory Program (RIP)

ORPI

ORGAN PIPE CACTUS NATIONAL MONUMENT

Rte. No.	FMSS No.	Concess Route	Route Name	Route Description From To	Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Rte. Lanes	Manual Rated SQ/FT	Surf. Type	Area Maps
0401	72473		SPUR RESIDENCE ROAD WEST	FROM ROUTE 0402 (SPUR RESIDENCE ROAD EAST) AT MP 0.02 (ON LEFT) TO ROUTE 0912 (HOUSING AREA DUPLEX PARKING)	N/A	0.000	0.080	0.080	5		0	GR	
0402	72455		SPUR RESIDENCE ROAD EAST	FROM ROUTE 0100 (RESIDENCE ACCESS ROAD) AT MP 0.52 (ON RIGHT) TO END OF LOOP	N/A	0.120	0.000	0.120	5		0	AS	2
0403	102994		CAMPGROUND HOUSING ROAD	FROM ROUTE 0409 (GROUP CAMPGROUND ACCESS ROAD) TO ROUTE 0909 (CAMPGROUND HOUSING PARKING)	N/A	0.000	0.100	0.100	6		0	OT	
0404	74274		POZO NUEVO ROAD	FROM ROUTE 0012 (PUERTO BLANCO DRIVE) TO ROUTE 0405 (BATES WELL ROAD)	N/A	0.000	13.950	13.950	4		0	OT	
0405	74277		BATES WELL ROAD	FROM WEST PARK BOUNDARY TO NORTH PARK BOUNDARY	N/A	0.000	13.250	13.250	2		0	OT	
0406	74280		ARMENTA ROAD	FROM ROUTE 0405 (BATES WELL ROAD) TO ROUTE 5000 (STATE ROUTE 85)	N/A	0.000	9.350	9.350	1		0	OT	
0407	72874		SEWAGE LAGOON ROAD	FROM ROUTE 0908 (DUMP STATION LOOP) TO SEWAGE LAGOON	N/A	0.000	0.250	0.250	6		0	OT	
0408	72482		100 K WATER TANK ROAD	FROM ROUTE 0100 (RESIDENCE ACCESS ROAD) TO WATER TANK	N/A	0.000	0.310	0.310	6		0	OT	
0409	72870		GROUP CAMPGROUND ACCESS ROAD	FROM ROUTE 0101 (TWIN PEAKS ACCESS ROAD) AT MP 1.32 (SIDE N/A) TO ROUTE 0906 (GROUP CAMPGROUND PARKING)	N/A	0.140	0.080	0.220	3		0	AS	2
0410	72862		DOMESTIC WATER WELLS ROAD	FROM ROUTE 0101 (TWIN PEAKS ACCESS ROAD) AT MP 0.22 (ON LEFT) TO WATER WELLS	N/A	0.000	0.230	0.230	6		0	OT	
0412	74286		TIGER CAGE ROAD	FROM ROUTE 5000 (STATE ROUTE 85) TO BORROW PIT	N/A	0.000	0.500	0.500	6		0	OT	
0416	72485		VIP ROAD	FROM ROUTE 0100 (RESIDENCE ACCESS ROAD) AT MP 1.08 (ON LEFT) TO END	N/A	0.000	0.100	0.100	5		0	OT	
0417	92462		MAINTENANCE BONEYARD ROAD	FROM ROUTE 0205 (MAINTENANCE YARD ACCESS ROAD) TO END	N/A	0.000	0.100	0.100	6		0	OT	
0900	102998		QUITOBAQUITO PARKING	FROM ROUTE 0203 (QUITOBAQUITO ROAD) TO PARKING	N/A	0.000	0.000	0.000			7,200	OT	
0901	103000		SENITA BASIN PARKING	FROM ROUTE 0202 (SENITA BASIN ROAD) TO PARKING	N/A	0.000	0.000	0.000			5,700	OT	
0902	102992		GOLDEN BELL MINE PARKING	FROM ROUTE 0012 (PUERTO BLANCO DRIVE) TO PARKING	N/A	0.000	0.000	0.000			5,100	OT	

NPS/RIP Route ID Report

Shading Color Key:

Red text denotes approx. mileage

White = Paved Routes, ARAN Driven	Yellow = Unpaved Routes, ARAN not Driven	Blue = All Paved Parking Areas	Green = All Unpaved Parking Areas
Grey = Paved Routes, ARAN not Driven	Black = Paved State, Local or Private non-NPS Routes, ARAN Driven	■ = Concession Route Flag ON	

** Unpaved Routes displayed on report were obtained from FMSS database and not inventoried by Road Inventory Program (RIP)

General Park Road Functional Classification Table

- Class 1** Principal Park Road/Rural Parkway (Public Roads) Roads which constitute the main access route, circulatory tour, or thoroughfare for park visitors. Route Numbers 1 - 99. Note: Rural parkways (e.g. Natchez Trace) are numbered 1 - 9. State Routes Inventoried for Park. Route Numbers 5000-5999
- Class 2** Connector Park Road (Public Roads) - Roads which provide access within a park to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, etc. Route Numbers 100-199.
- Class 3** Special Purpose Park Road (Public Roads) - Roads which provide circulation within public areas, such as campgrounds, picnic areas, visitor center complexes, concessionaire facilities, etc. These roads generally serve low-speed traffic and are often designed for one-way circulation. Route Numbers 200-299.
- Class 4** Primitive Park Roads (Public Roads) - Roads which provide circulation through remote areas and/or access to primitive campgrounds and undeveloped areas. These roads frequently have no minimum design standards and their use may be limited to specially equipped vehicles. Route Numbers 200-299.
Note: Functional Classes 3 and 4 have the same route numbers because, historically, they were numbered similarly.
- Class 5** Administrative Access Road (Administrative Roads) - All public roads intended for access to administrative developments or structures such as park offices, employee quarters, or utility areas. Route Numbers 400-499.
- Class 6** Restricted Road (Administrative Roads) - All roads normally closed to the public, including patrol roads, truck trails, and other similar roads. Route Numbers 400-499.
Note: Functional Classes 5 and 6 have the same route numbers because historically they were numbered similarly and often there is little distinction between these routes. For example, because utility areas and employee housing are often closed to the public, this restriction would result in classification of FC 6 rather than FC 5.
- Class 7** Urban Parkway (Urban Parkways and City Streets) - These facilities serve high volumes of park and non-park related traffic and are restricted, limited-access facilities in an urban area. This category of roads primarily encompasses the major parkways which serve as gateways to our nation's capital. Other major park roads or portions thereof, however, may be included in this category. Route Numbers 1-9.
- Class 8** City Streets (Urban Parkways and City Streets) - City streets are usually extensions of the adjoining street system that are owned and maintained by the National Park Service. The construction and/or reconstruction should conform with accepted local engineering practice and local conditions. Route Numbers 600-699.

A park road system contains those roads within or giving access to a park or other unit of the NPS which are administered by the NPS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a park road is not based on traffic volumes or design speed, but on the intended use or function of that road or route.

The historic route numbering system also included a 300 number series for interpretive roads, and a 500 series for one-way roads. There are approximately 250 roads nationwide which are designated by the 300 and 500 series. The numbers for these roads will be maintained for reporting consistency. However, since these interpretive and one-way routes are not as clearly tied to a specific functional class, the 300 and 500 series will be discontinued for future use.

5000 route numbers are assigned to Non-NPS Routes that are State, County or City owned which border, traverse, or provide access to Park Facilities or Assets. 5000 Routes are driven for GPS, Video Log and Road Features only.


Surface Type Abbreviations:

- AS - Asphaltic Concrete Pavement**
- CO - Portland Cement Concrete Pavement**
- BR - Brick or Pavers Road Bed**
- CB - Cobble Stone Road Bed**
- GR - Gravel Road Bed**
- SA - Sand Road Bed**
- NV - Native or Dirt Material Road Bed**
- OT - Other Materials Road Bed**

Organ Pipe Cactus National Monument



Section 5 **Paved Route Condition Rating Sheets** **(CRS)**

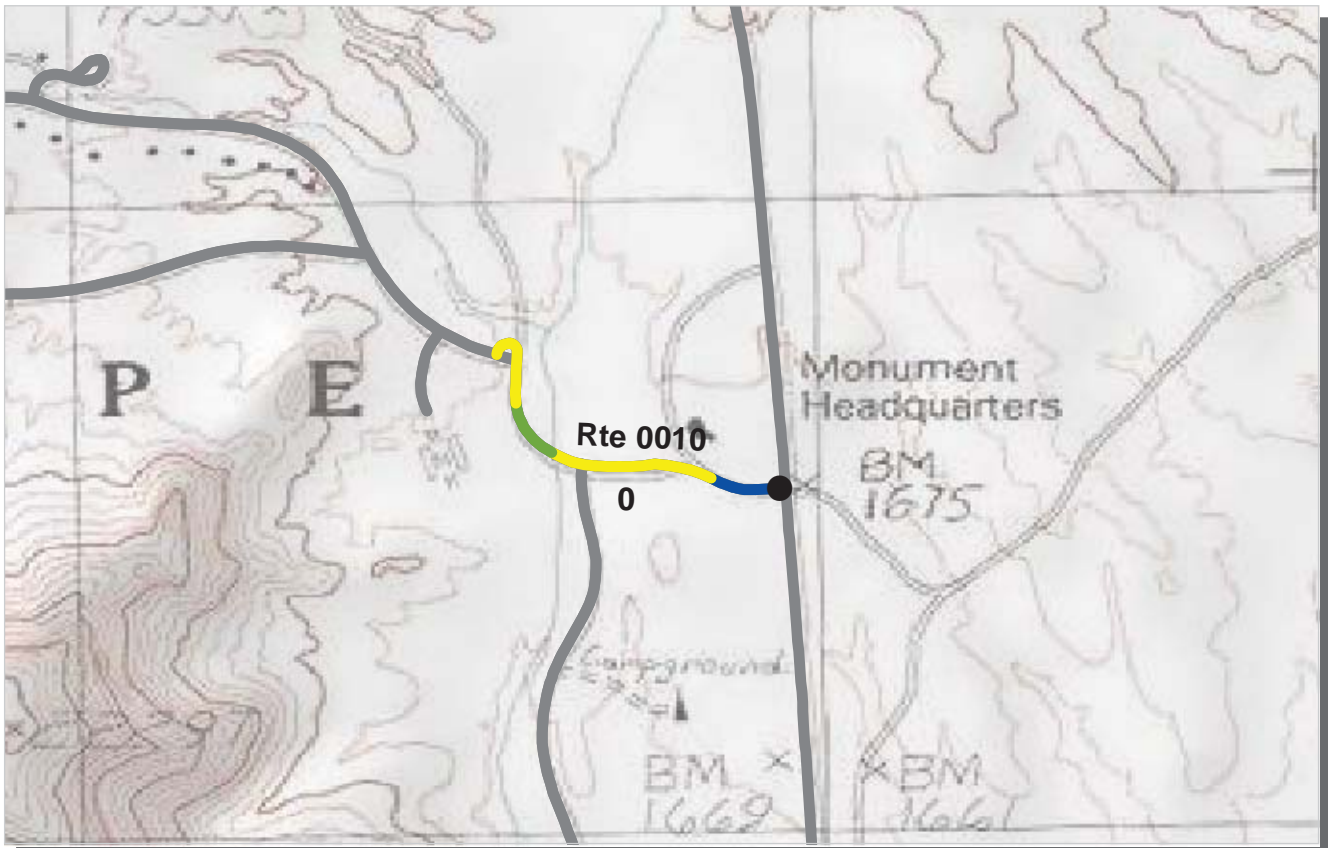

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT


COLLECTED: 11/3/2007
TOTAL LENGTH: 0.34 Miles

ROUTE: 0010 VISITOR CENTER DRIVE

<i>Section Number</i>	0				
<i>Section Length (mi)</i>	0.34				
<i>Traffic</i>	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
<i>Cross Section Information</i>					
Number of Lanes	2				
Paved Width (ft)	35				
Lane Width (ft)	12				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
<i>Roadway Condition Information</i>					
SCR (Surface Condition Rating)	92				
PCR (Pavement Condition Rating)	83				
<i>Distress Index Values</i>					
Alligator Cracking Index	100				
Longitudinal Cracking Index	99				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	93				
Roughness Condition Index (RCI)	56				

ROUTE: 0010 VISITOR CENTER DRIVE

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

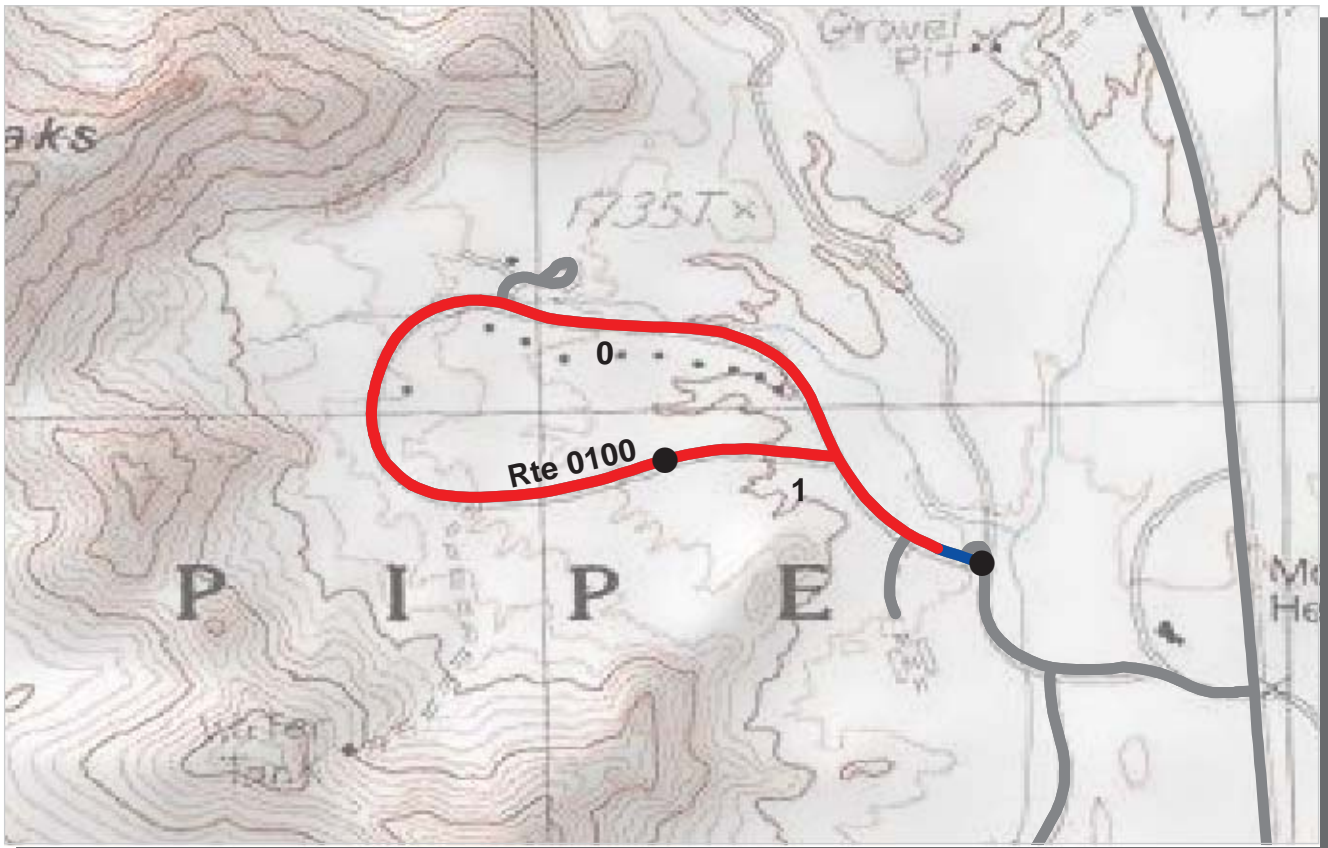

PCR	Poor	Fair	Good	Excellent	No Data
	(≤60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT


COLLECTED: 11/3/2007
TOTAL LENGTH: 1.14 Miles

ROUTE: 0100 RESIDENCE ACCESS ROAD

Section Number	0	1			
Section Length (mi)	1.00	0.14			
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	2	2			
Paved Width (ft)	25	19			
Lane Width (ft)	12	9			
Shoulder Width Right (ft)**	0	0			
Shoulder Width Left (ft)**	0	0			
Roadway Condition Information					
SCR (Surface Condition Rating)	11	53			
PCR (Pavement Condition Rating)	26	55			
Distress Index Values					
Alligator Cracking Index	16	87			
Longitudinal Cracking Index	97	100			
Transverse Cracking Index	98	100			
Patching Index	100	100			
Rutting Index	65	66			
Roughness Condition Index (RCI)	50	58			

ROUTE: 0100 RESIDENCE ACCESS ROAD

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

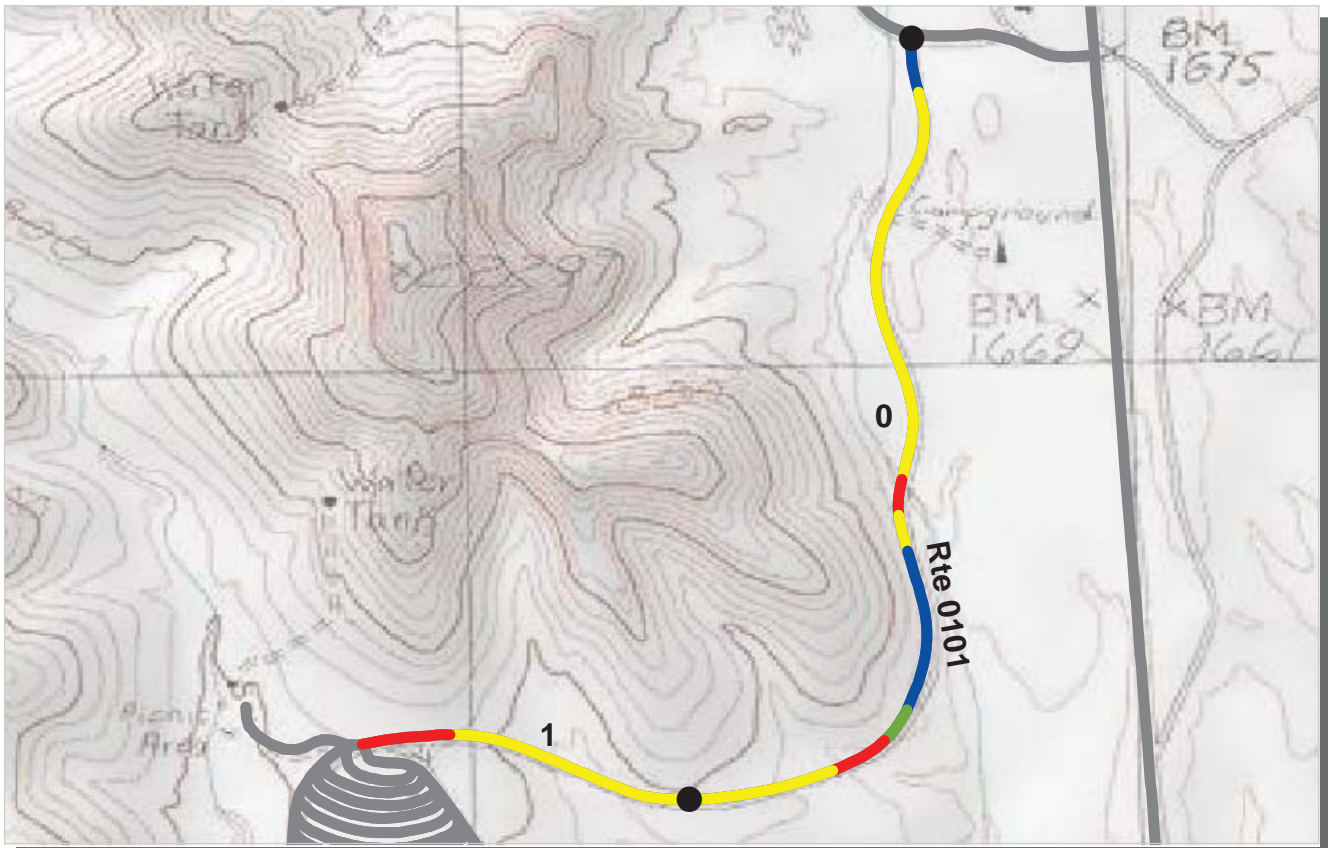

PCR	Poor	Fair	Good	Excellent	No Data
	(≤60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION

ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0101 TWIN PEAKS ACCESS ROAD

TOTAL LENGTH: 1.32 Miles

Section Number	0	1			
Section Length (mi)	1.00	0.32			
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	2	2			
Paved Width (ft)	24	24			
Lane Width (ft)	11	12			
Shoulder Width Right (ft)**	0	0			
Shoulder Width Left (ft)**	0	0			
Roadway Condition Information					
SCR (Surface Condition Rating)	71	59			
PCR (Pavement Condition Rating)	76	64			
Distress Index Values					
Alligator Cracking Index	100	100			
Longitudinal Cracking Index	99	99			
Transverse Cracking Index	100	100			
Patching Index	100	100			
Rutting Index	72	60			
Roughness Condition Index (RCI)	84	70			

ROUTE: 0101 TWIN PEAKS ACCESS ROAD

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

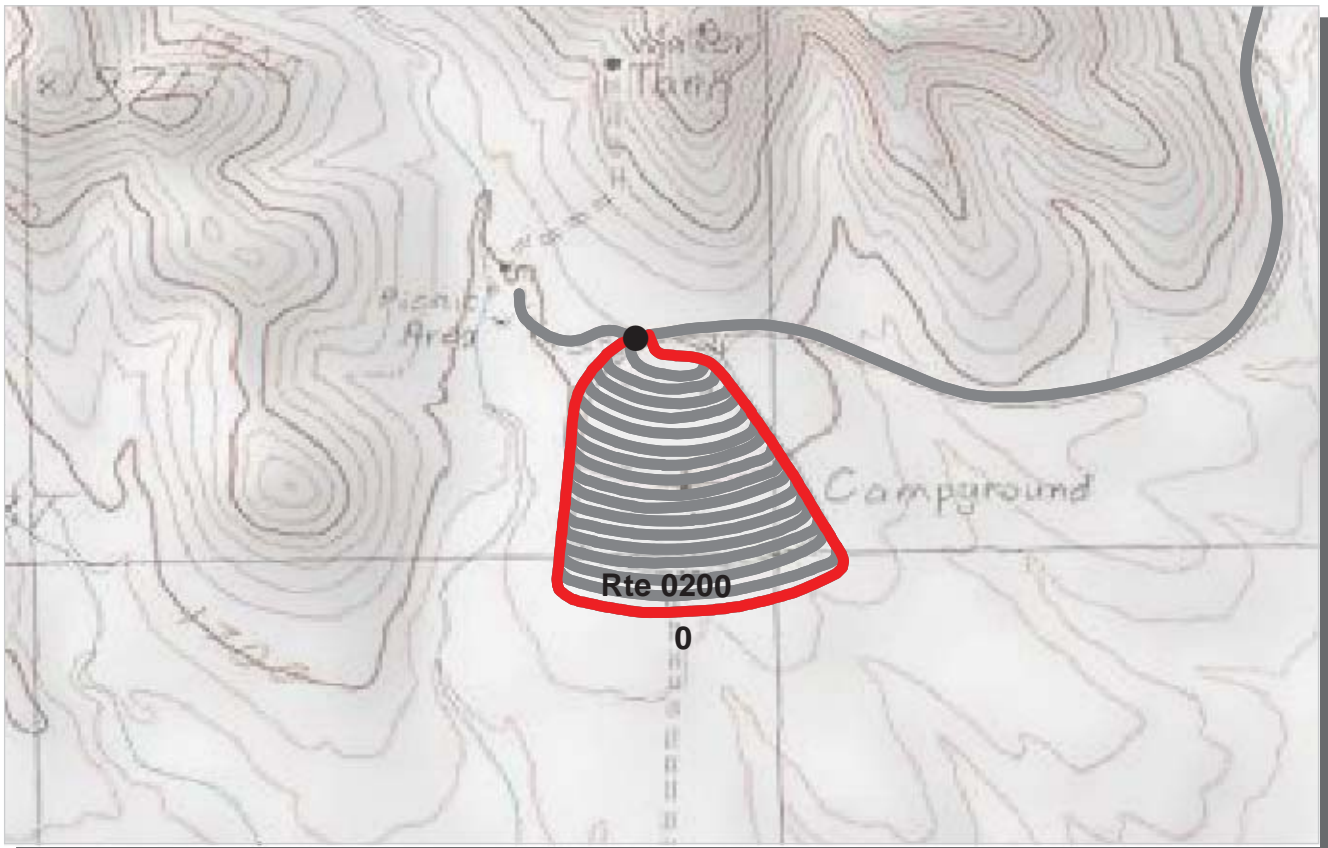

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT


COLLECTED: 11/3/2007
TOTAL LENGTH: 0.81 Miles

ROUTE: 0200 CAMPGROUND LOOP ROAD

<i>Section Number</i>	0				
<i>Section Length (mi)</i>	0.81				
<i>Traffic</i>	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
<i>Cross Section Information</i>					
Number of Lanes	1				
Paved Width (ft)	12				
Lane Width (ft)	12				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
<i>Roadway Condition Information</i>					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	10				
<i>Distress Index Values</i>					
Alligator Cracking Index	2				
Longitudinal Cracking Index	98				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	58				
Roughness Condition Index (RCI)	34				

ROUTE: 0200 CAMPGROUND LOOP ROAD

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

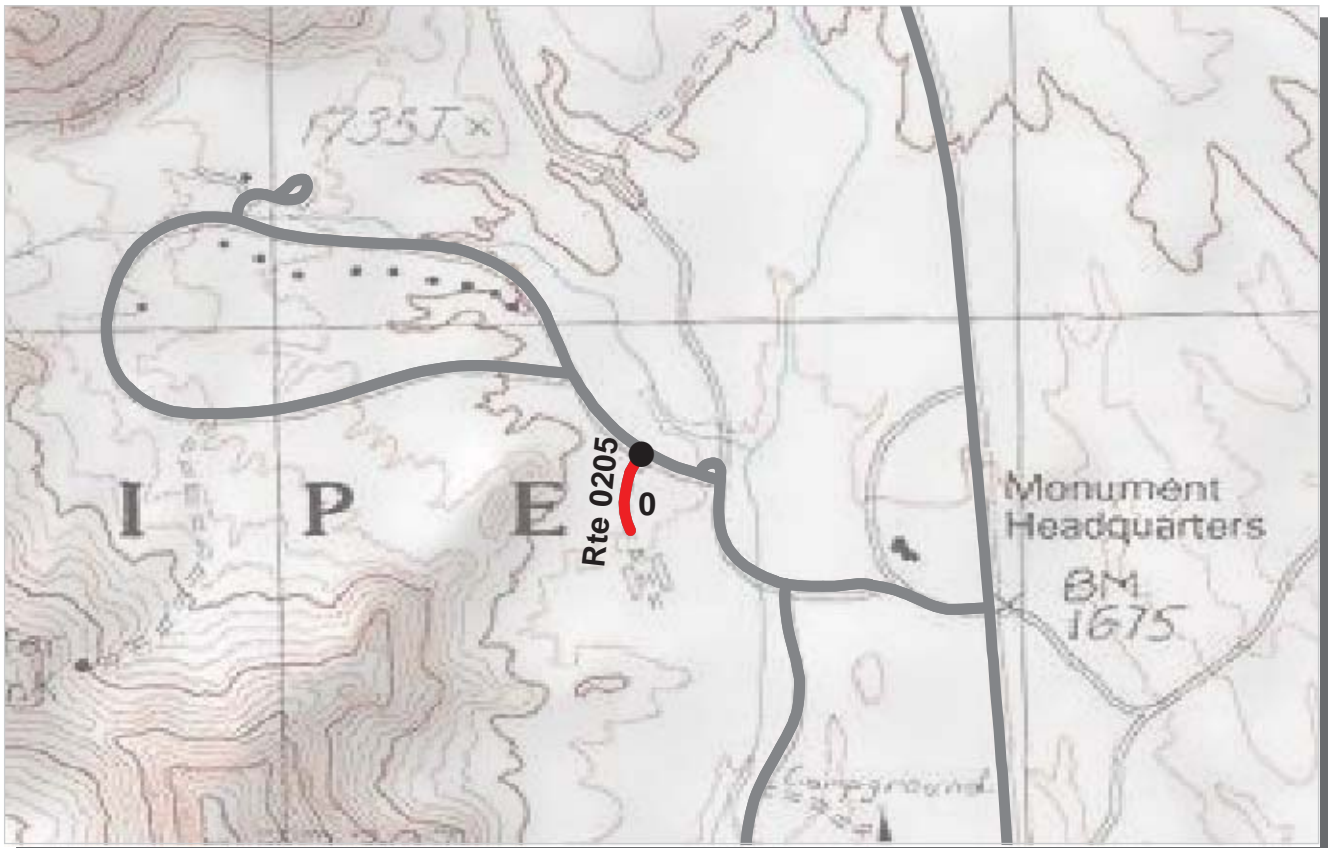

PCR	Poor	Fair	Good	Excellent	No Data
	(≤60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION

ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0205 MAINTENANCE YARD ACCESS ROAD

TOTAL LENGTH: 0.08 Miles

Section Number	0				
Section Length (mi)	0.08				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	18				
Lane Width (ft)	8				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	0				
Distress Index Values					
Alligator Cracking Index	6				
Longitudinal Cracking Index	99				
Transverse Cracking Index	97				
Patching Index	100				
Rutting Index	62				
Roughness Condition Index (RCI)	NC				

ROUTE: 0205 MAINTENANCE YARD ACCESS ROAD

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

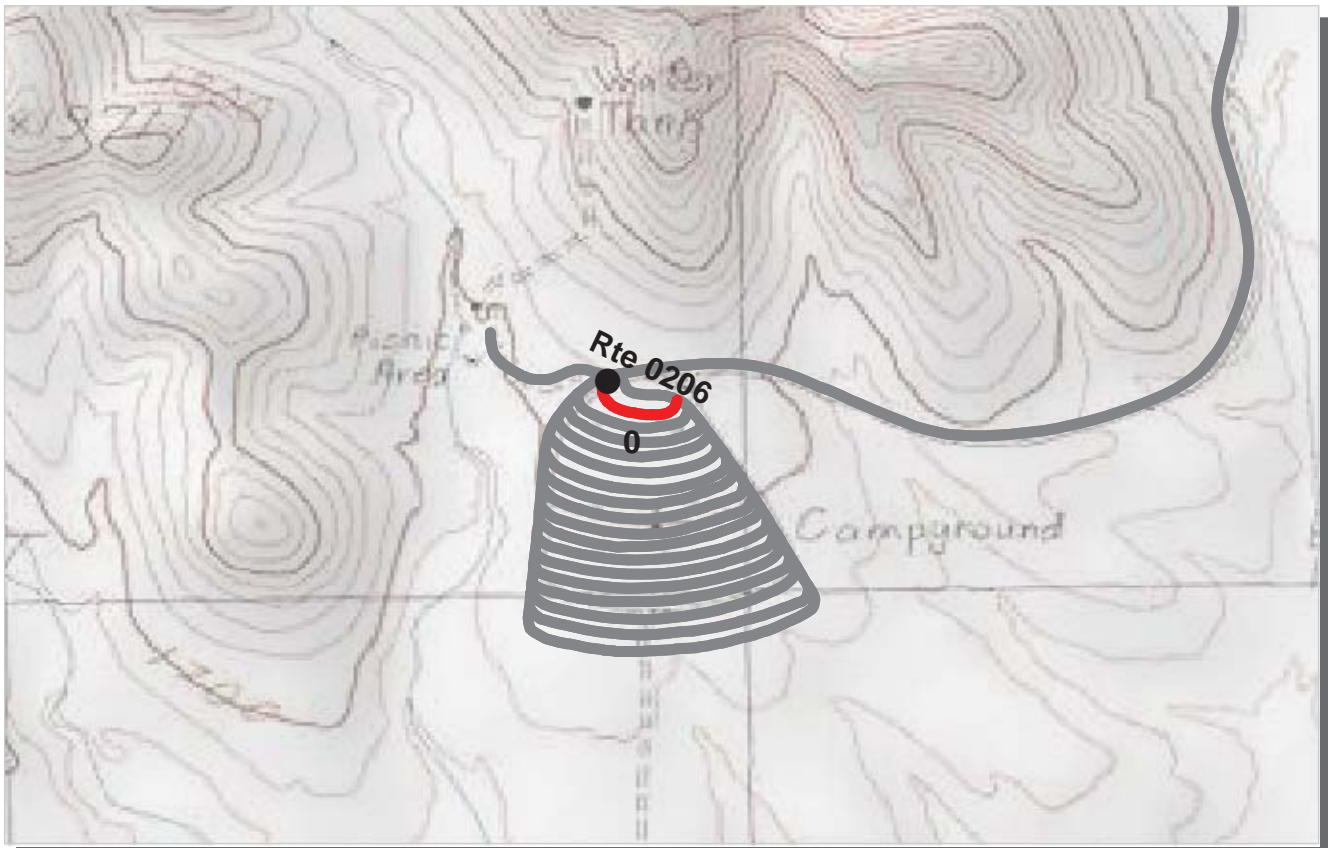

PCR	Poor	Fair	Good	Excellent	No Data
	(≤60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0206 CAMPGROUND SITES 1-6 ACCESS

TOTAL LENGTH: 0.09 Miles

Section Number	0				
Section Length (mi)	0.09				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	11				
Lane Width (ft)	11				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	0				
Distress Index Values					
Alligator Cracking Index	12				
Longitudinal Cracking Index	87				
Transverse Cracking Index	91				
Patching Index	100				
Rutting Index	61				
Roughness Condition Index (RCI)	NC				

ROUTE: 0206 CAMPGROUND SITES 1-6 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

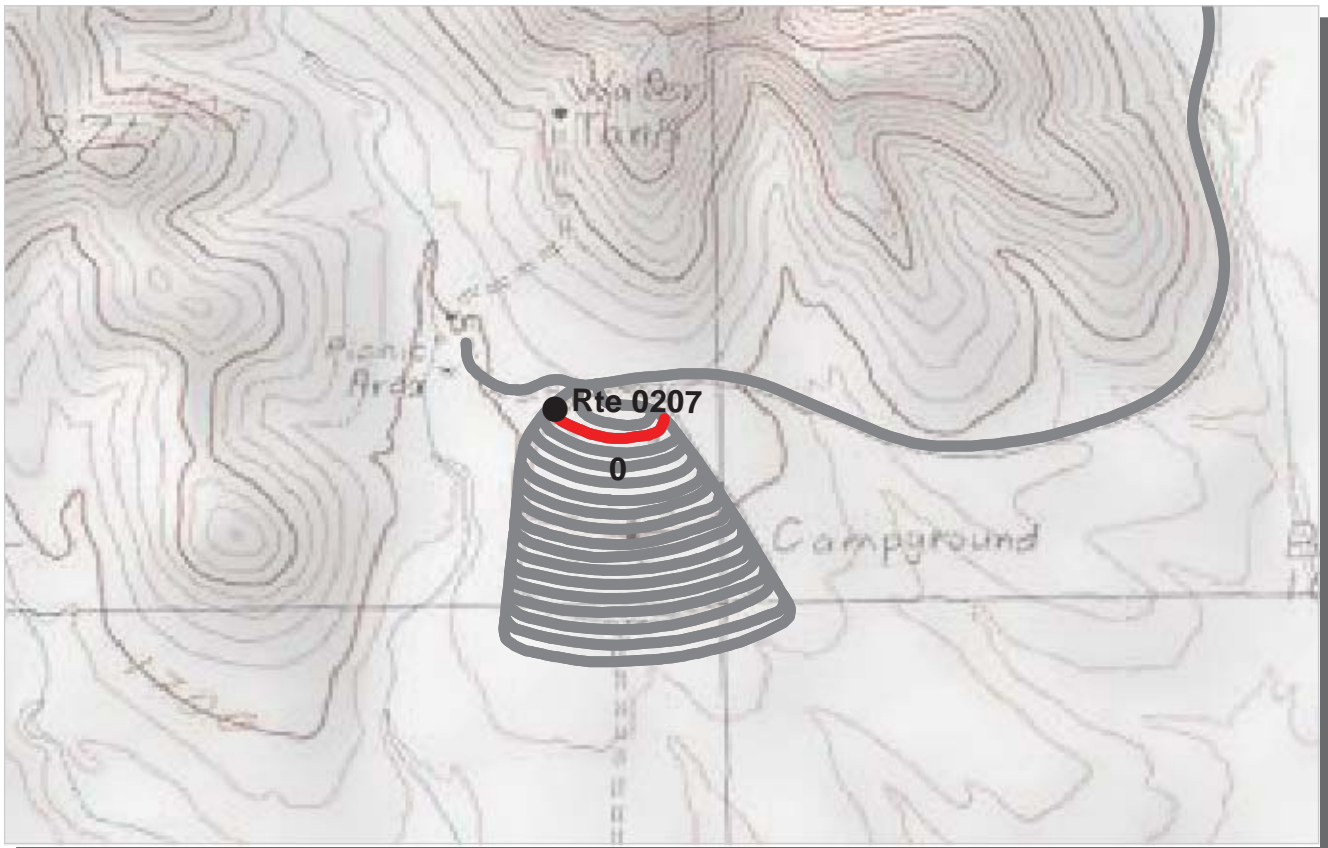

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION

ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0207 CAMPGROUND SITES 7-15 ACCESS

TOTAL LENGTH: 0.11 Miles

Section Number	0				
Section Length (mi)	0.11				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	11				
Lane Width (ft)	11				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	6				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	93				
Transverse Cracking Index	95				
Patching Index	99				
Rutting Index	60				
Roughness Condition Index (RCI)	30				

ROUTE: 0207 CAMPGROUND SITES 7-15 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

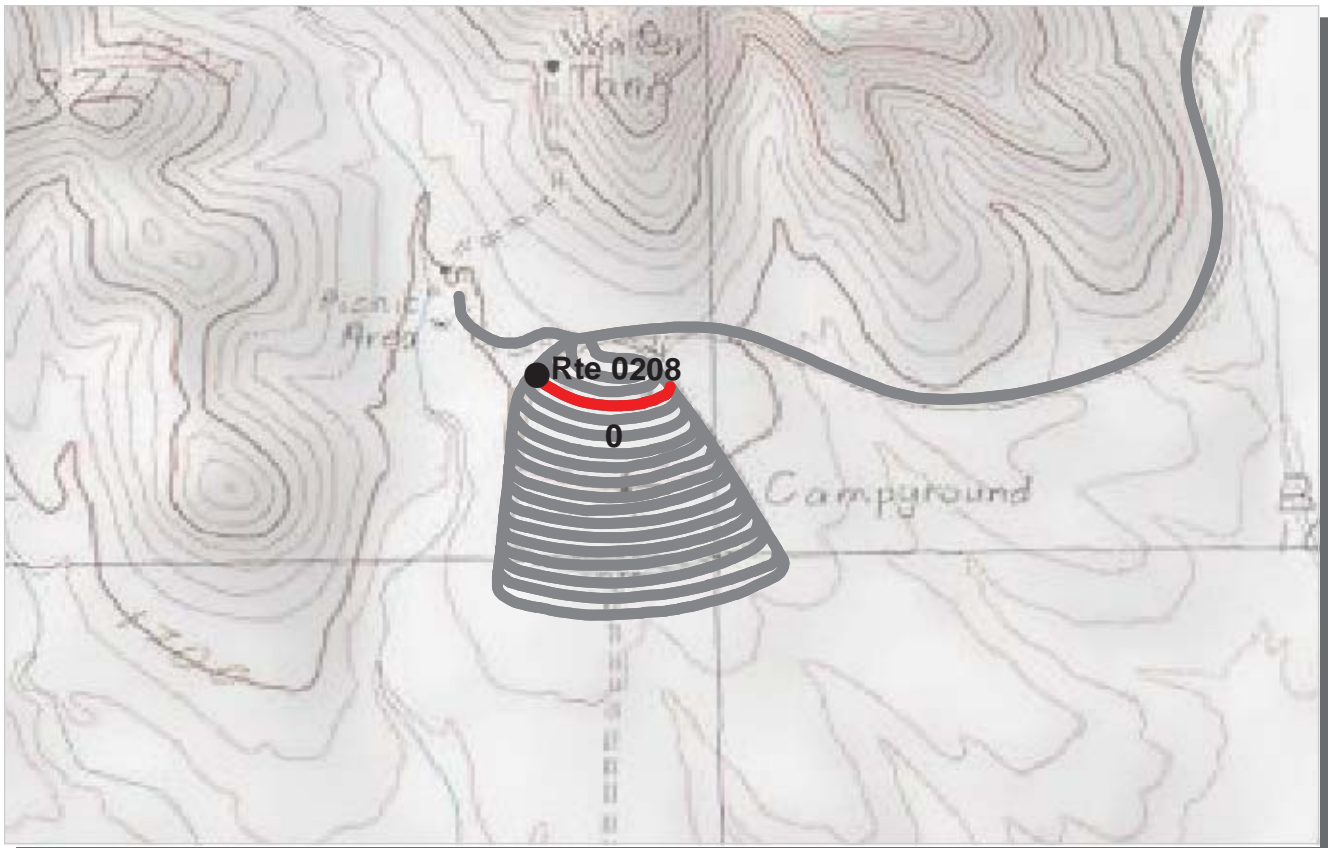

PCR	Poor	Fair	Good	Excellent	No Data
	(≤60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION

ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0208 CAMPGROUND SITES 16-23 ACCESS

TOTAL LENGTH: 0.13 Miles

Section Number	0				
Section Length (mi)	0.13				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	11				
Lane Width (ft)	11				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	1				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	92				
Transverse Cracking Index	91				
Patching Index	99				
Rutting Index	55				
Roughness Condition Index (RCI)	24				

ROUTE: 0208 CAMPGROUND SITES 16-23 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

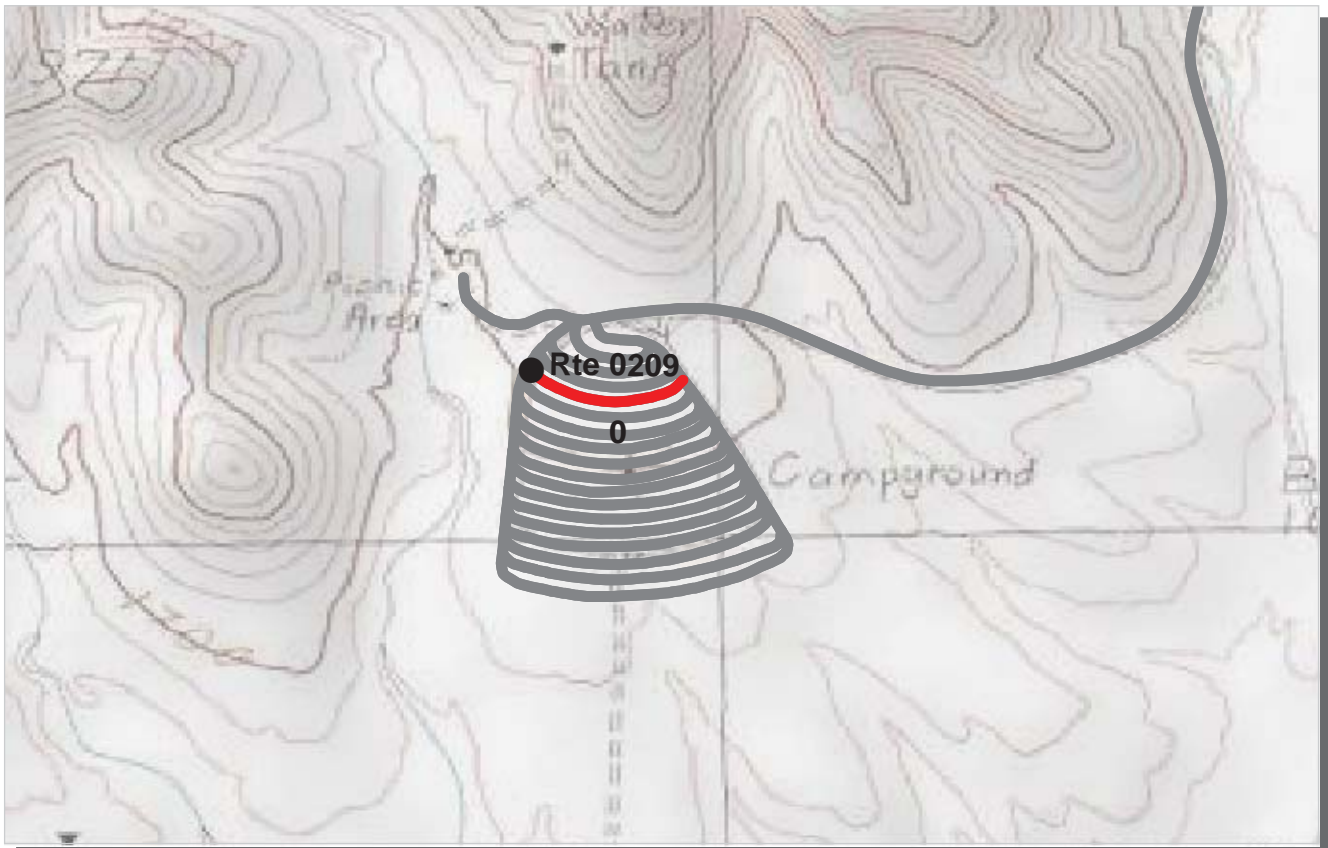

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION

ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0209 CAMPGROUND SITES 24-34 ACCESS

TOTAL LENGTH: 0.14 Miles

Section Number	0				
Section Length (mi)	0.14				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	10				
Lane Width (ft)	10				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	5				
Distress Index Values					
Alligator Cracking Index	7				
Longitudinal Cracking Index	90				
Transverse Cracking Index	91				
Patching Index	100				
Rutting Index	50				
Roughness Condition Index (RCI)	29				

ROUTE: 0209 CAMPGROUND SITES 24-34 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

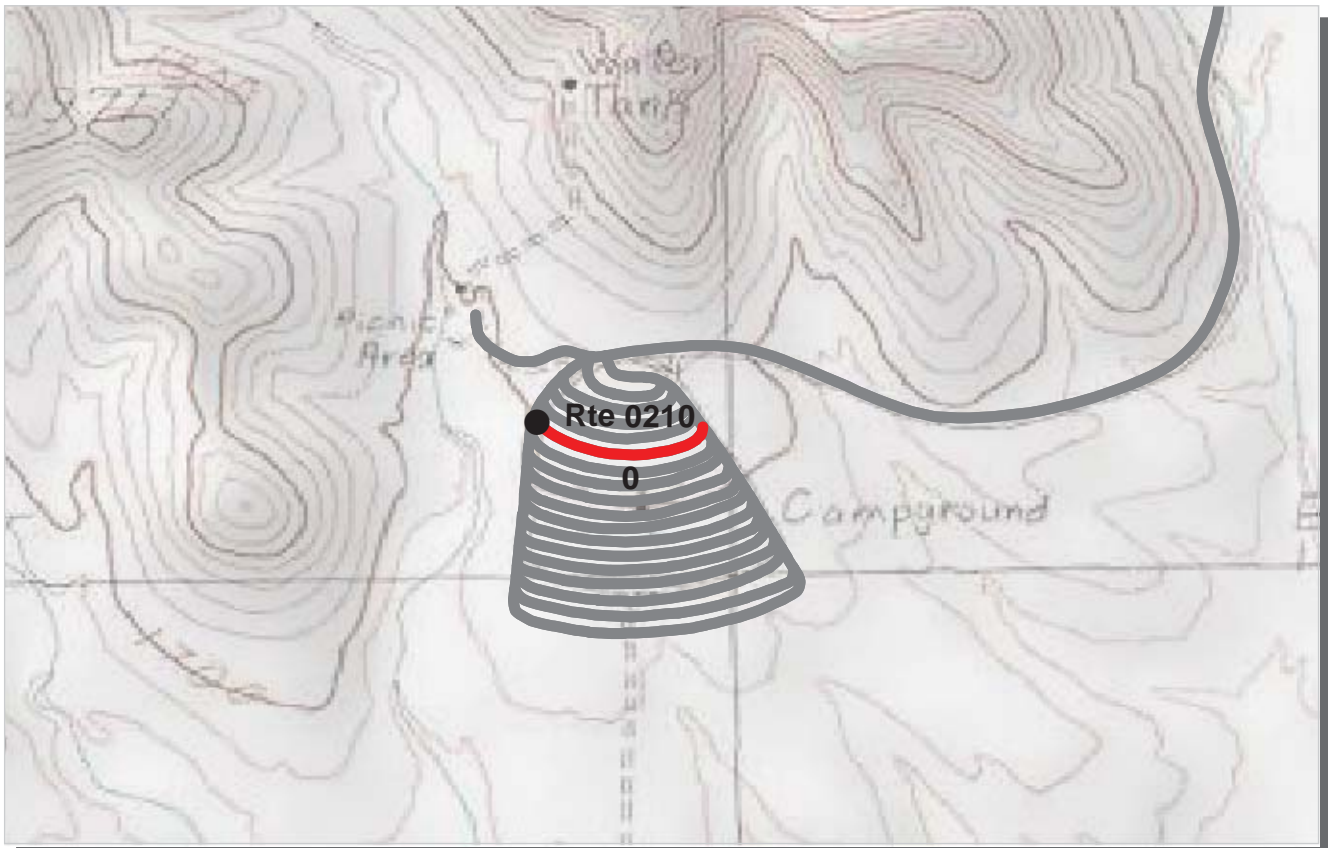

PCR	Poor	Fair	Good	Excellent	No Data
	(≤60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0210 CAMPGROUND SITES 35-45 ACCESS

TOTAL LENGTH: 0.16 Miles

Section Number	0				
Section Length (mi)	0.16				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	10				
Lane Width (ft)	10				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	2				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	93				
Transverse Cracking Index	90				
Patching Index	100				
Rutting Index	52				
Roughness Condition Index (RCI)	22				

ROUTE: 0210 CAMPGROUND SITES 35-45 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

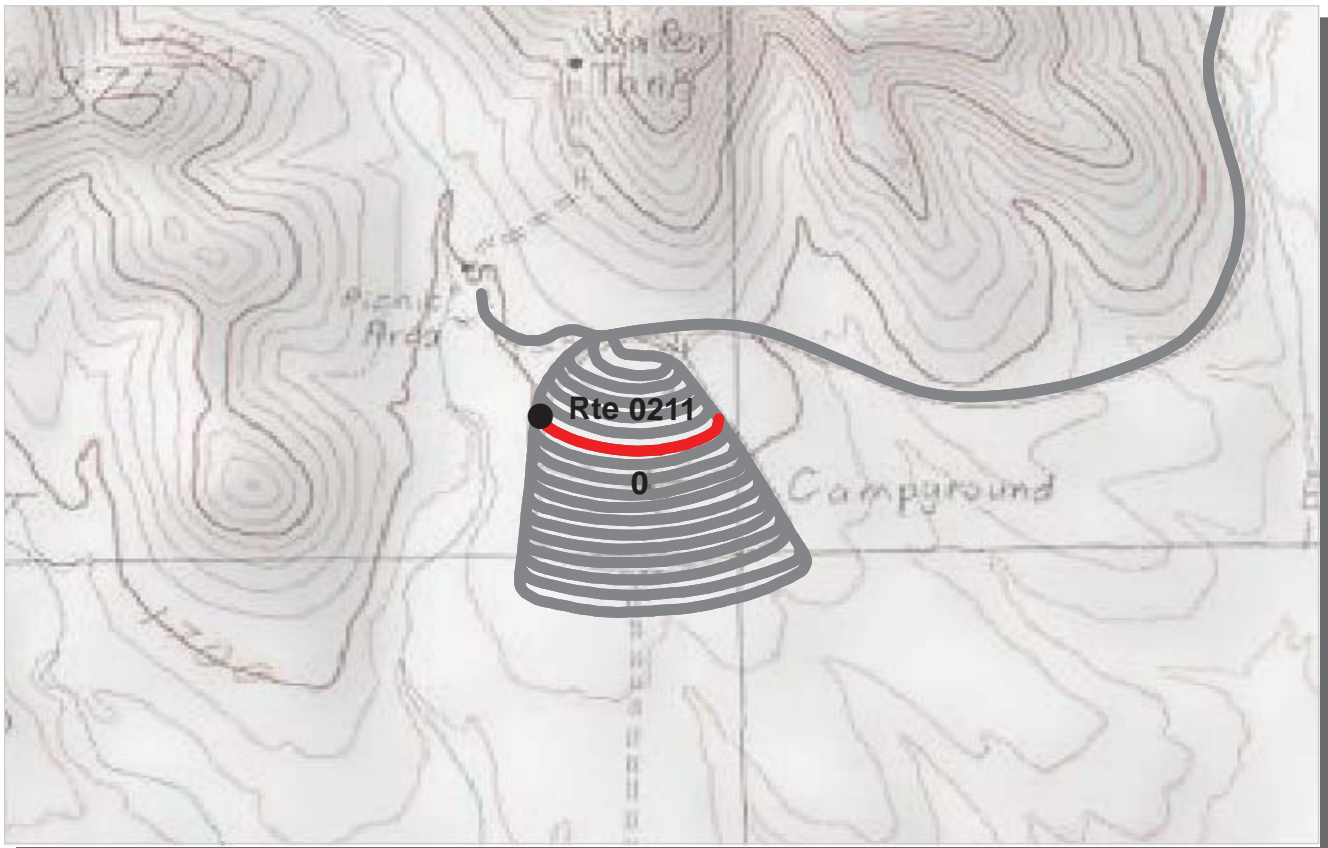

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0211 CAMPGROUND SITES 46-57 ACCESS

TOTAL LENGTH: 0.17 Miles

Section Number	0				
Section Length (mi)	0.17				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	11				
Lane Width (ft)	11				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	2				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	95				
Transverse Cracking Index	97				
Patching Index	100				
Rutting Index	55				
Roughness Condition Index (RCI)	16				

ROUTE: 0211 CAMPGROUND SITES 46-57 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

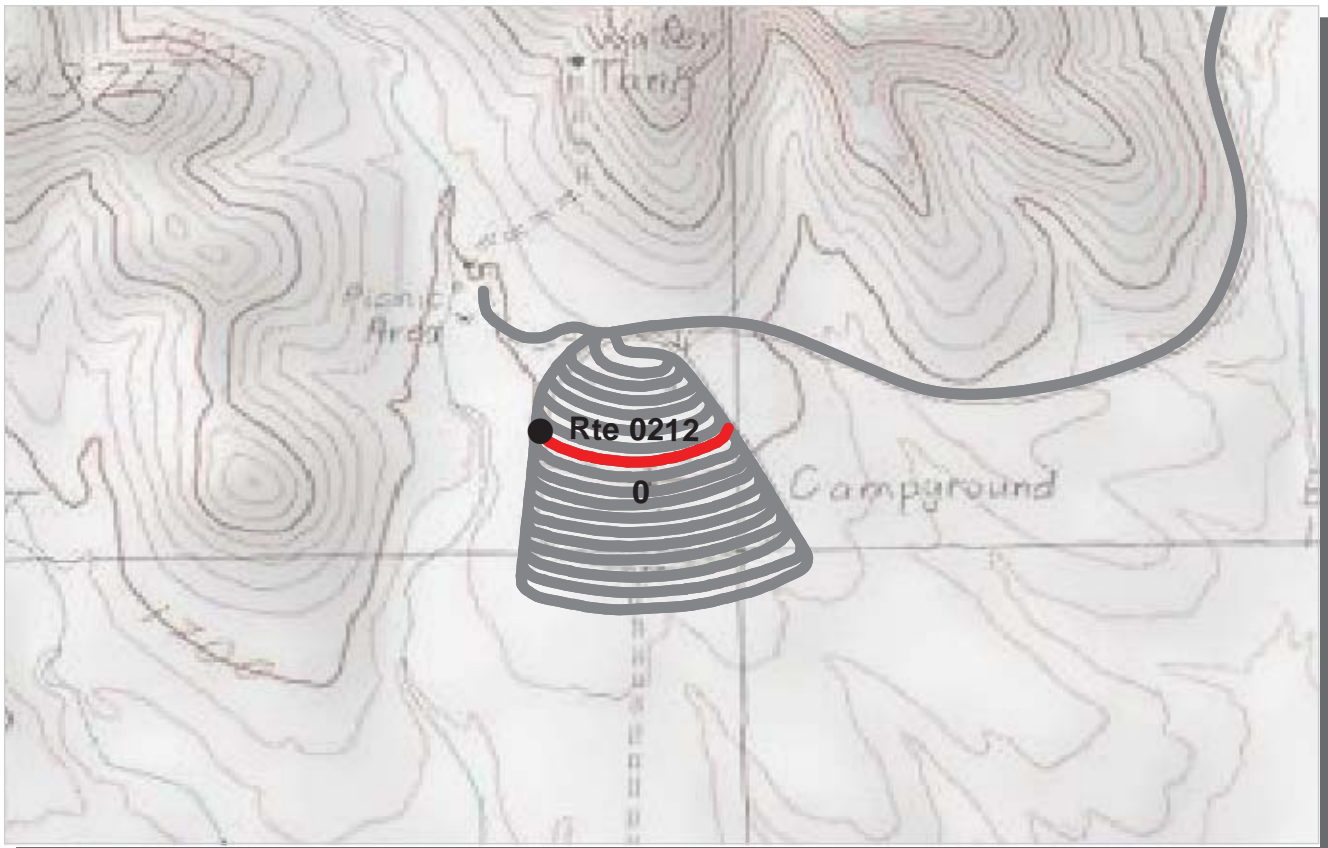

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0212 CAMPGROUND SITES 58-70 ACCESS

TOTAL LENGTH: 0.17 Miles

Section Number	0				
Section Length (mi)	0.17				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	10				
Lane Width (ft)	10				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	5				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	98				
Transverse Cracking Index	98				
Patching Index	100				
Rutting Index	55				
Roughness Condition Index (RCI)	21				

ROUTE: 0212 CAMPGROUND SITES 58-70 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

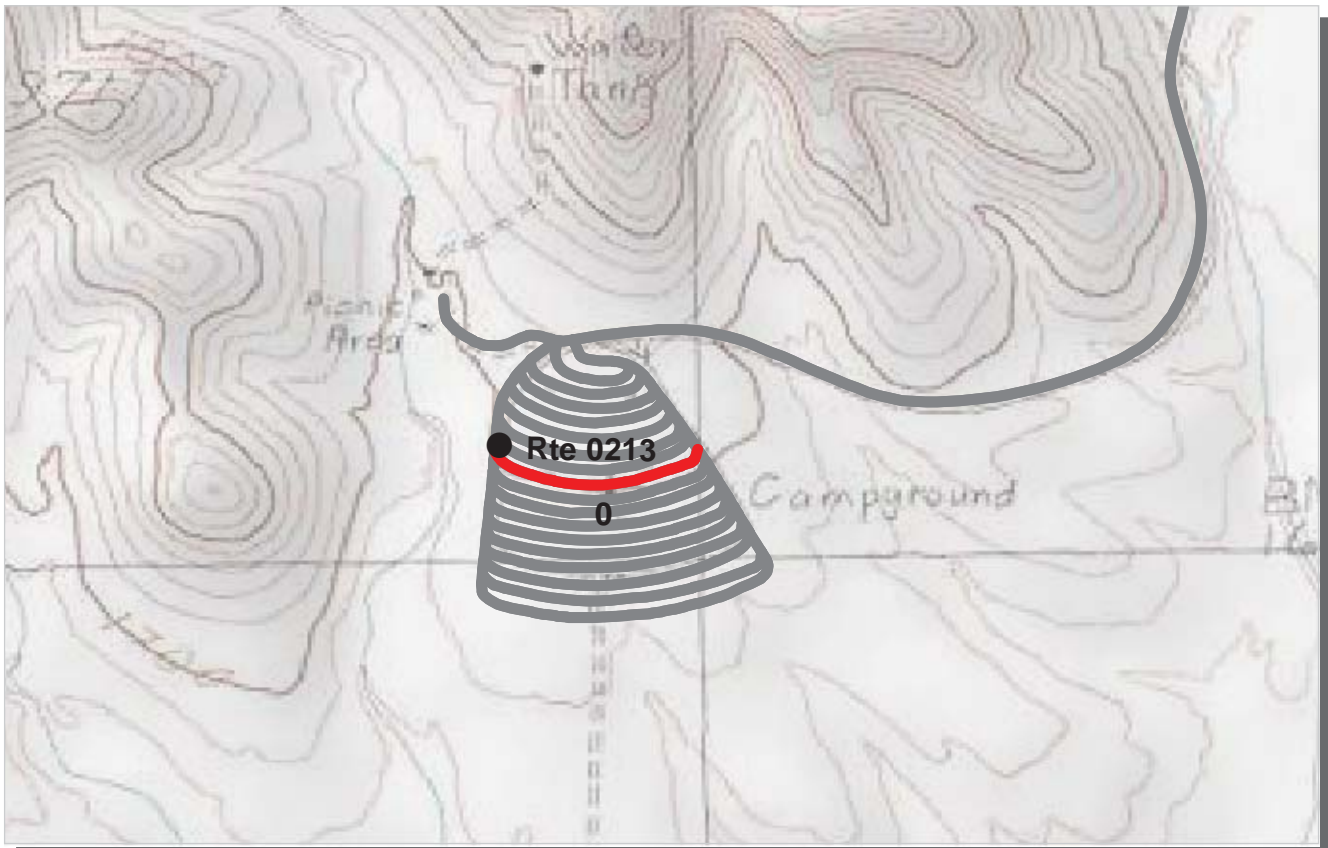

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION

ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0213 CAMPGROUND SITES 71-85 ACCESS

TOTAL LENGTH: 0.19 Miles

Section Number	0				
Section Length (mi)	0.19				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	12				
Lane Width (ft)	12				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	4				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	99				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	59				
Roughness Condition Index (RCI)	31				

ROUTE: 0213 CAMPGROUND SITES 71-85 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

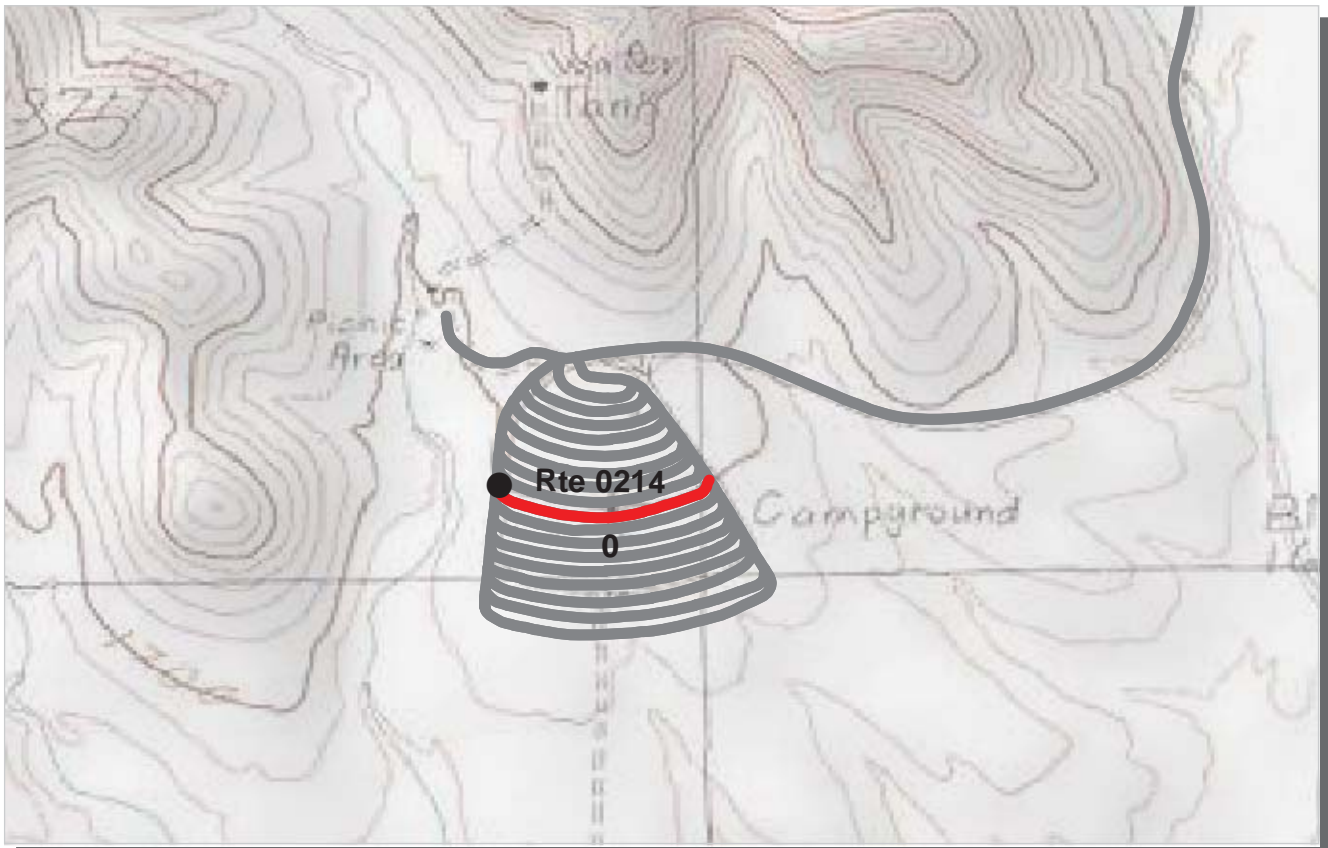

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0214 CAMPGROUND SITES 86-95 ACCESS

TOTAL LENGTH: 0.19 Miles

Section Number	0				
Section Length (mi)	0.19				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	11				
Lane Width (ft)	11				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	8				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	99				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	63				
Roughness Condition Index (RCI)	30				

ROUTE: 0214 CAMPGROUND SITES 86-95 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

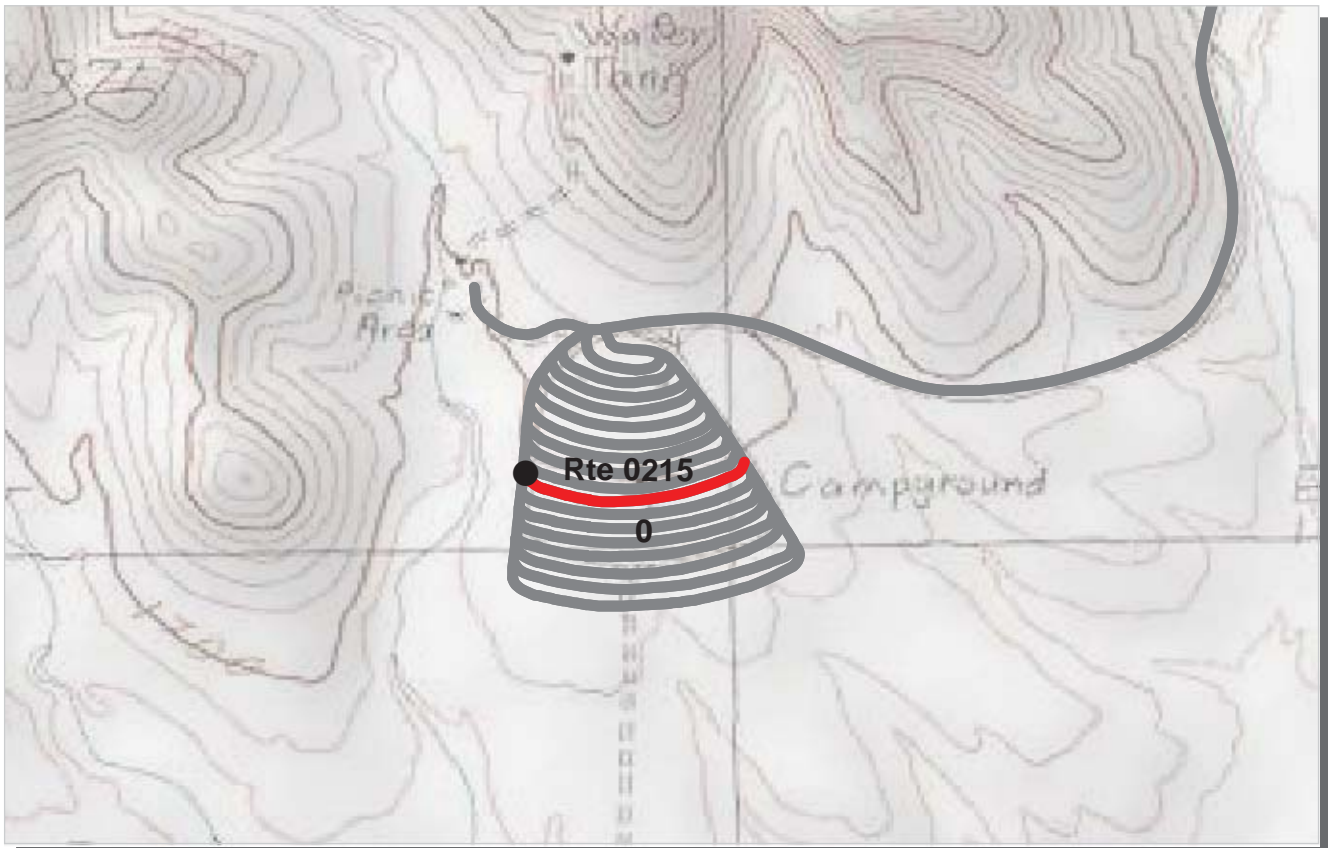

PCR	Poor		Fair		Good		Excellent		No Data	
		(≤60)		(61 - 84)		(85 - 94)		(95 - 100)		

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION

ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0215 CAMPGROUND SITES 96-112 ACCESS

TOTAL LENGTH: 0.20 Miles

Section Number	0				
Section Length (mi)	0.20				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	11				
Lane Width (ft)	11				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	3				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	97				
Transverse Cracking Index	98				
Patching Index	100				
Rutting Index	57				
Roughness Condition Index (RCI)	22				

ROUTE: 0215 CAMPGROUND SITES 96-112 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

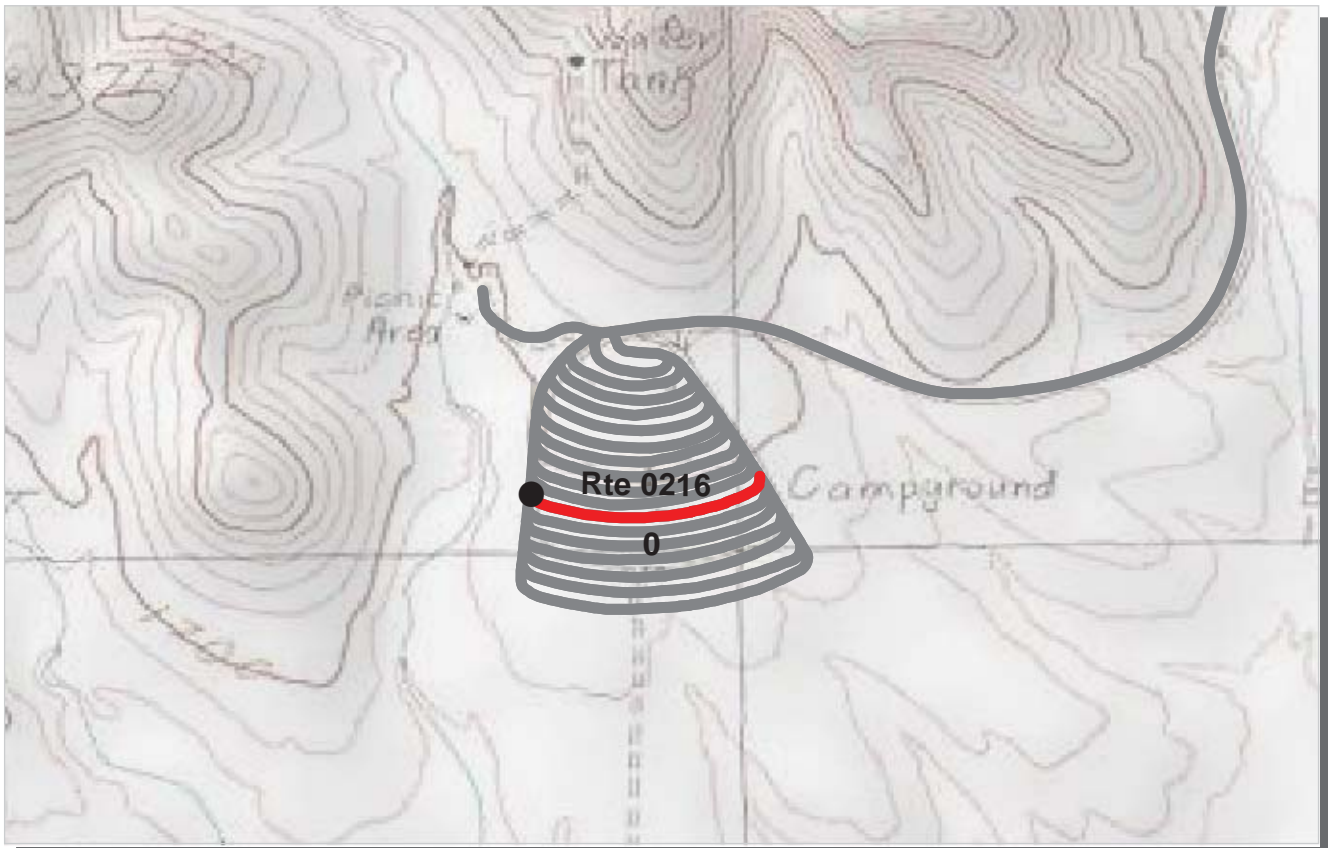

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION

ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0216 CAMPGROUND SITES 113-128 ACCESS

TOTAL LENGTH: 0.21 Miles

Section Number	0				
Section Length (mi)	0.21				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	10				
Lane Width (ft)	10				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	4				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	98				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	54				
Roughness Condition Index (RCI)	27				

ROUTE: 0216 CAMPGROUND SITES 113-128 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

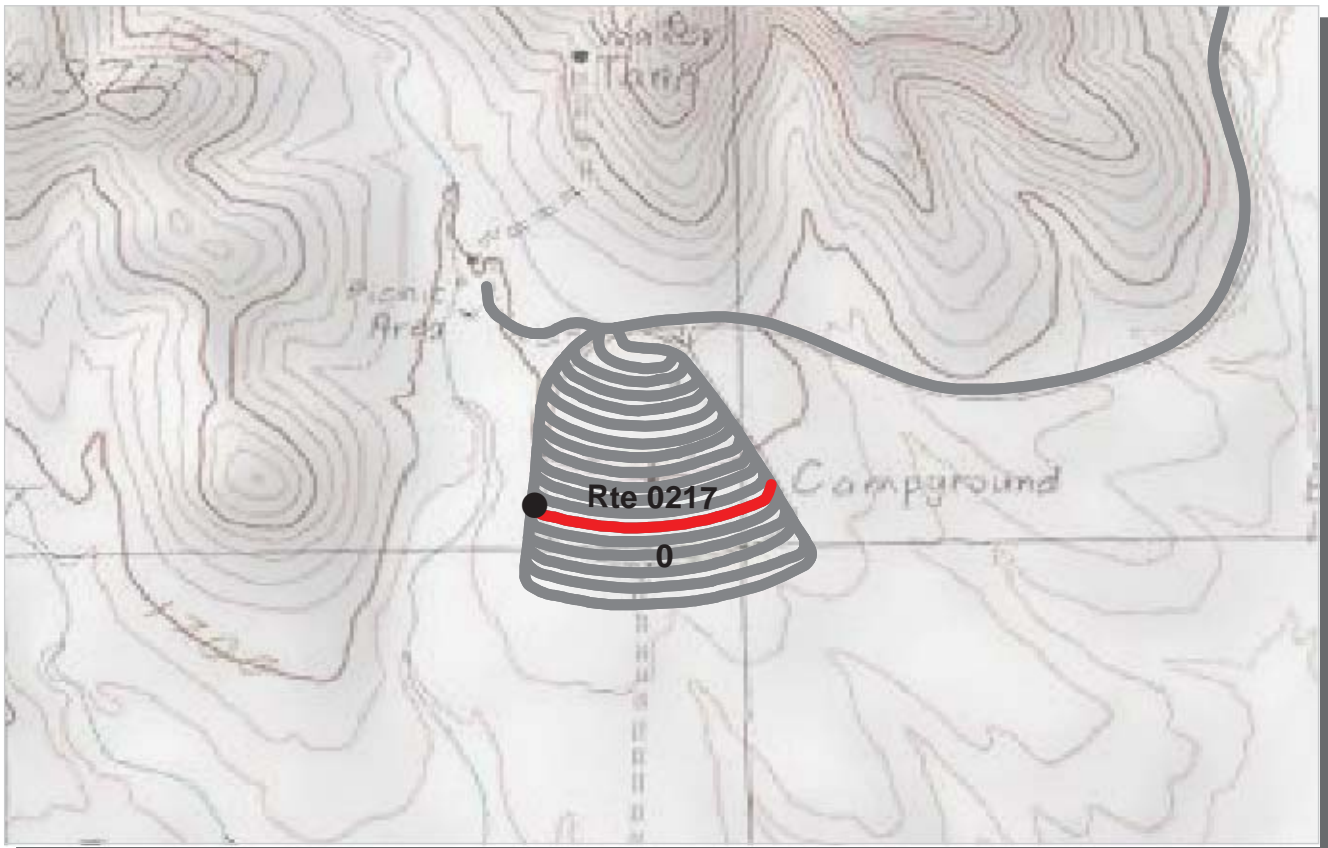

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT


COLLECTED: 11/3/2007

ROUTE: 0217 CAMPGROUND SITES 129-145 ACCESS TOTAL LENGTH: 0.21 Miles

Section Number	0				
Section Length (mi)	0.21				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	11				
Lane Width (ft)	11				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	3				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	99				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	58				
Roughness Condition Index (RCI)	25				

ROUTE: 0217 CAMPGROUND SITES 129-145 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

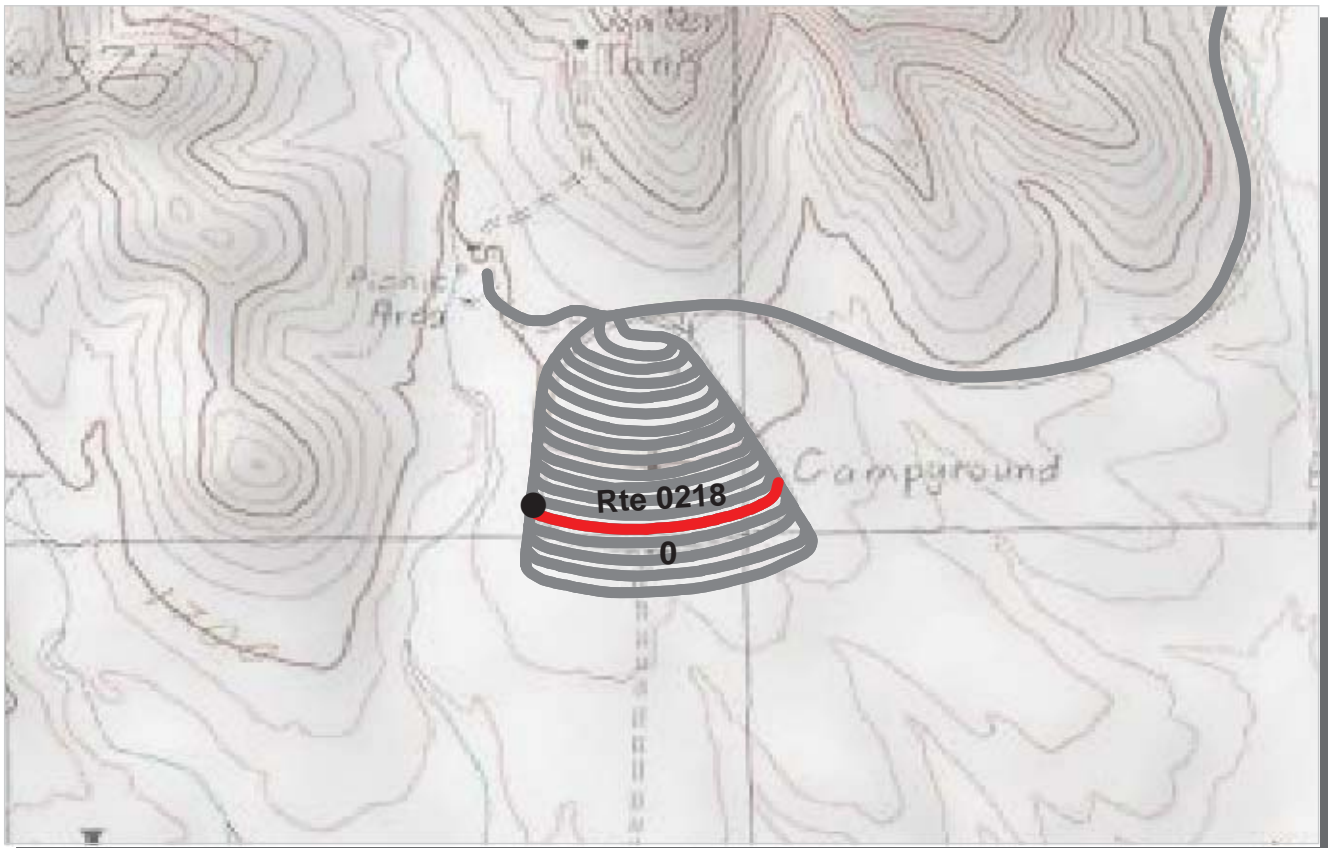

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT


COLLECTED: 11/3/2007

ROUTE: 0218 CAMPGROUND SITES 146-158 ACCESS TOTAL LENGTH: 0.22 Miles

Section Number	0				
Section Length (mi)	0.22				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	11				
Lane Width (ft)	11				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	3				
PCR (Pavement Condition Rating)	4				
Distress Index Values					
Alligator Cracking Index	8				
Longitudinal Cracking Index	98				
Transverse Cracking Index	98				
Patching Index	100				
Rutting Index	54				
Roughness Condition Index (RCI)	16				

ROUTE: 0218 CAMPGROUND SITES 146-158 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

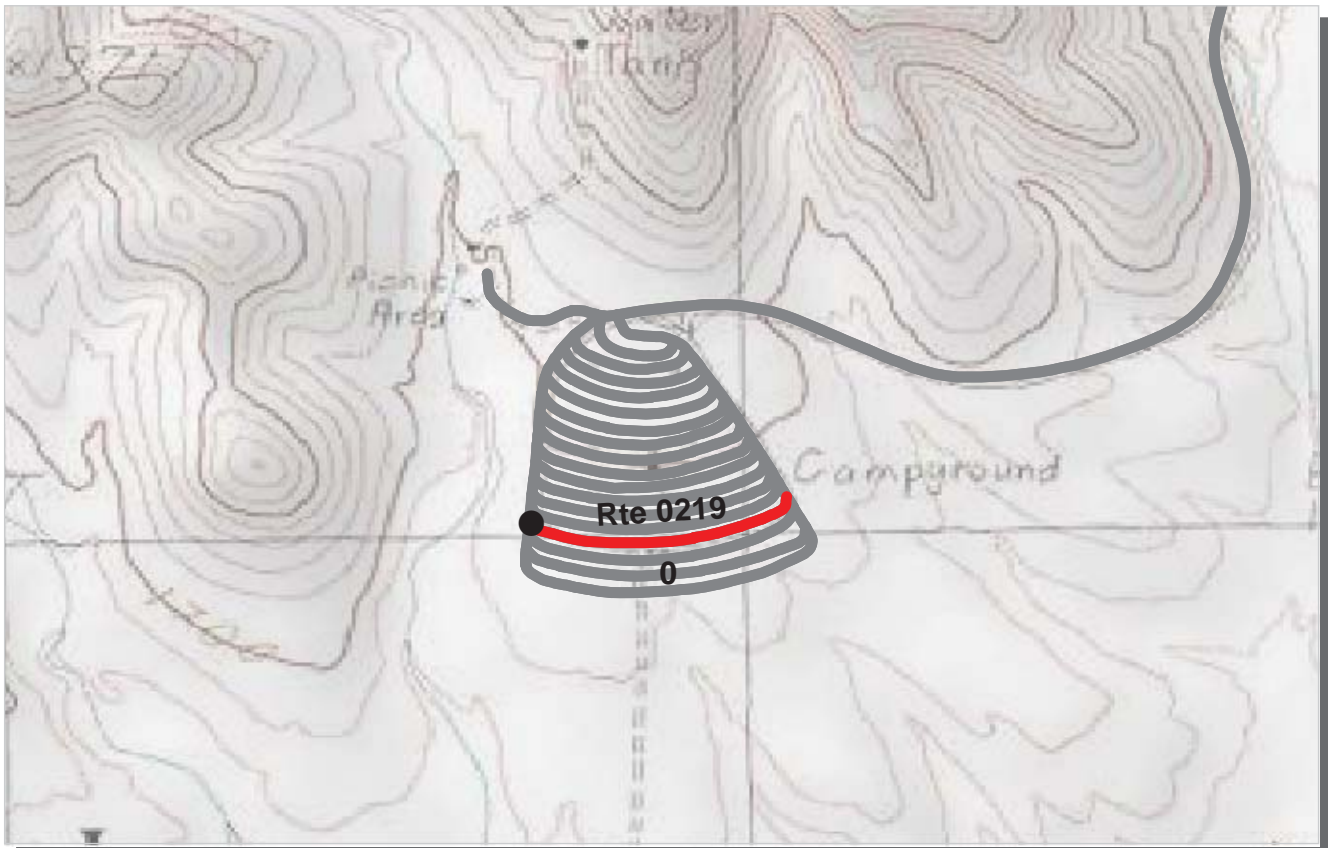

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/4/2007


ROUTE: 0219 CAMPGROUND SITES 159-174 ACCESS

TOTAL LENGTH: 0.23 Miles

Section Number	0				
Section Length (mi)	0.23				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	10				
Lane Width (ft)	10				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	6				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	100				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	60				
Roughness Condition Index (RCI)	34				

ROUTE: 0219 CAMPGROUND SITES 159-174 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

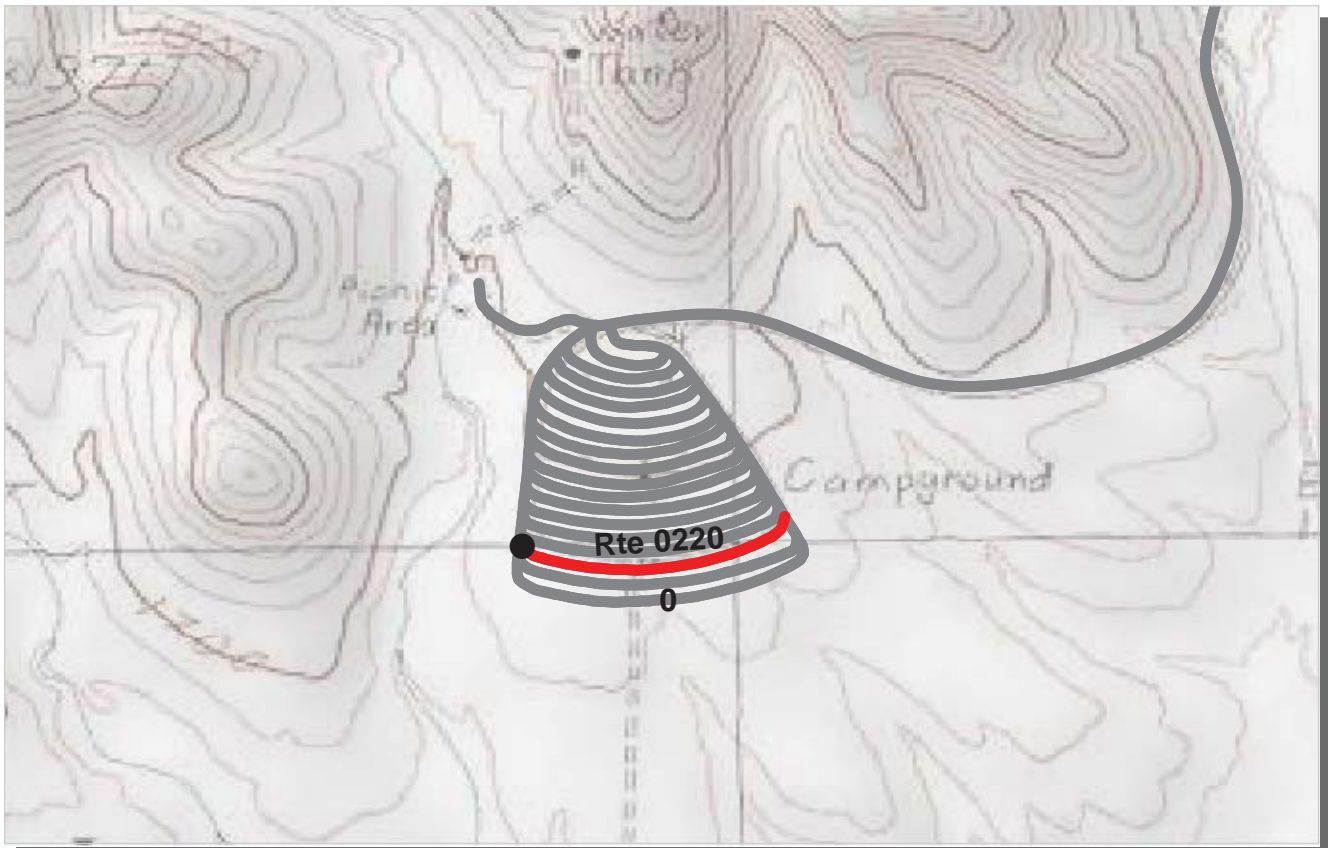

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT


COLLECTED: 11/4/2007

ROUTE: 0220 CAMPGROUND SITES 175-191 ACCESS TOTAL LENGTH: 0.24 Miles

Section Number	0				
Section Length (mi)	0.24				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	10				
Lane Width (ft)	10				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	6				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	54				
Roughness Condition Index (RCI)	34				

ROUTE: 0220 CAMPGROUND SITES 175-191 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

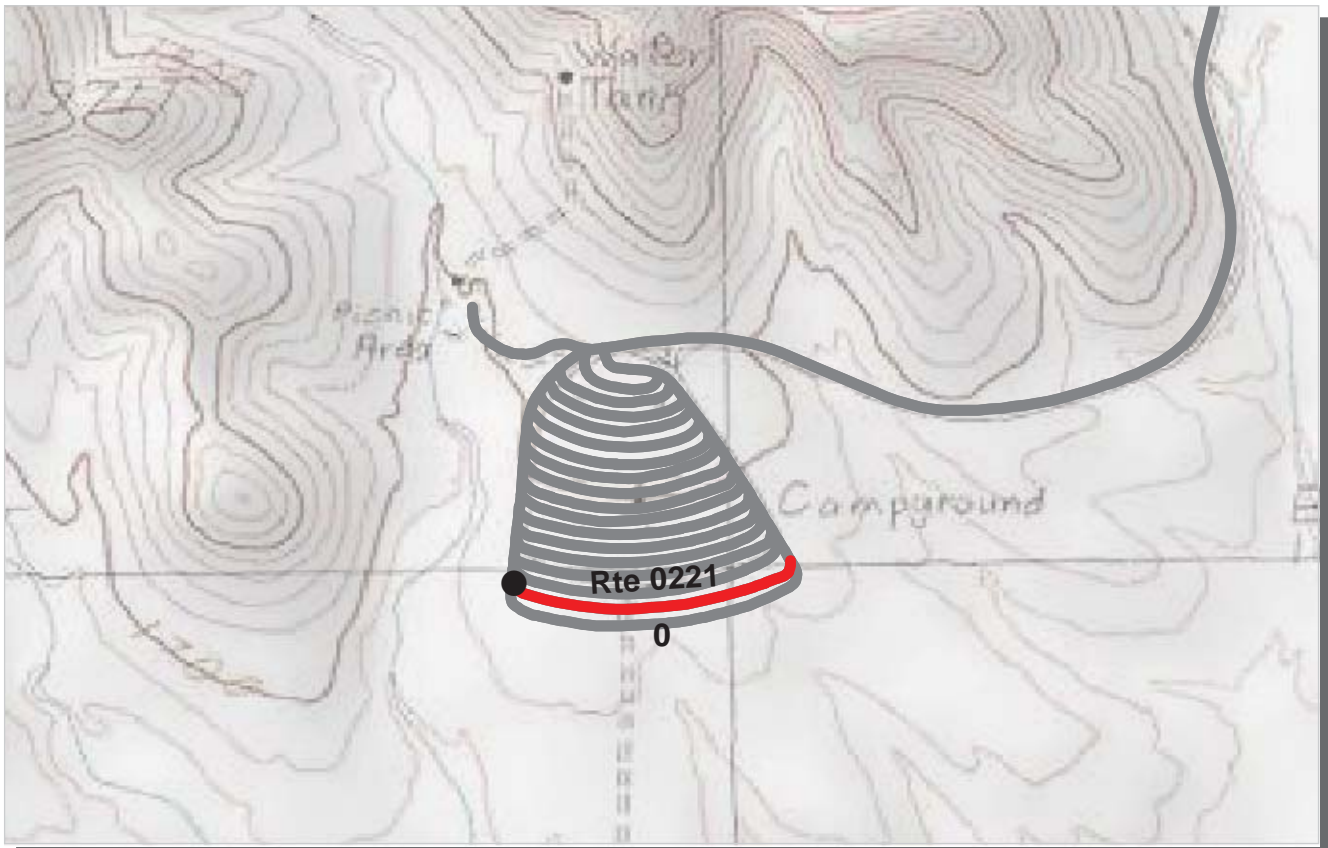

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (<=60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT


COLLECTED: 11/4/2007

ROUTE: 0221 CAMPGROUND SITES 192-208 ACCESS TOTAL LENGTH: 0.25 Miles

Section Number	0				
Section Length (mi)	0.25				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	12				
Lane Width (ft)	12				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	4				
PCR (Pavement Condition Rating)	10				
Distress Index Values					
Alligator Cracking Index	7				
Longitudinal Cracking Index	100				
Transverse Cracking Index	100				
Patching Index	99				
Rutting Index	54				
Roughness Condition Index (RCI)	29				

ROUTE: 0221 CAMPGROUND SITES 192-208 ACCESS

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

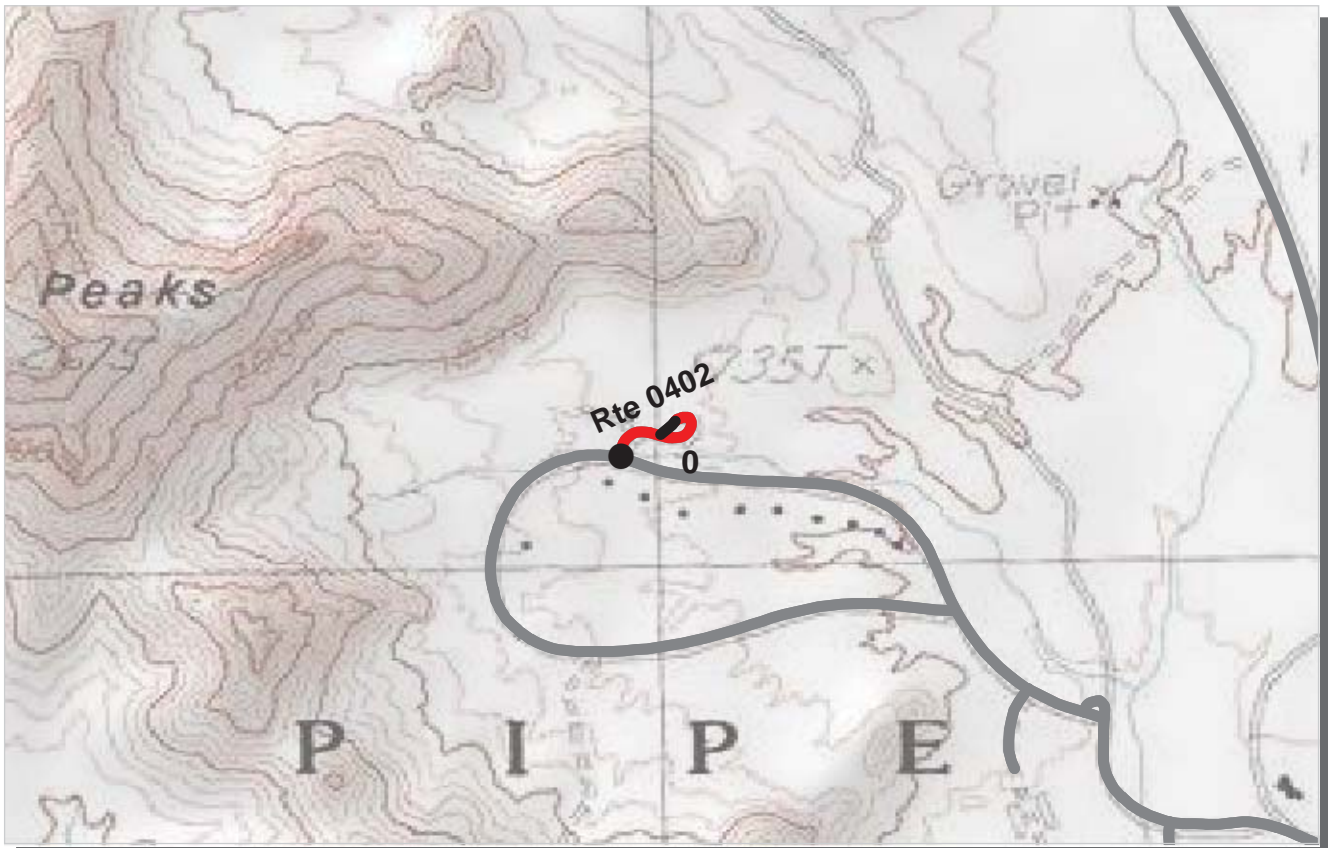

PCR	Poor		Fair		Good		Excellent		No Data	
		(≤60)		(61 - 84)		(85 - 94)		(95 - 100)		

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION
ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007


ROUTE: 0402 SPUR RESIDENCE ROAD EAST

TOTAL LENGTH: 0.12 Miles

Section Number	0				
Section Length (mi)	0.12				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	10				
Lane Width (ft)	10				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	0				
Distress Index Values					
Alligator Cracking Index	0				
Longitudinal Cracking Index	98				
Transverse Cracking Index	93				
Patching Index	100				
Rutting Index	60				
Roughness Condition Index (RCI)	NC				

ROUTE: 0402 SPUR RESIDENCE ROAD EAST

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

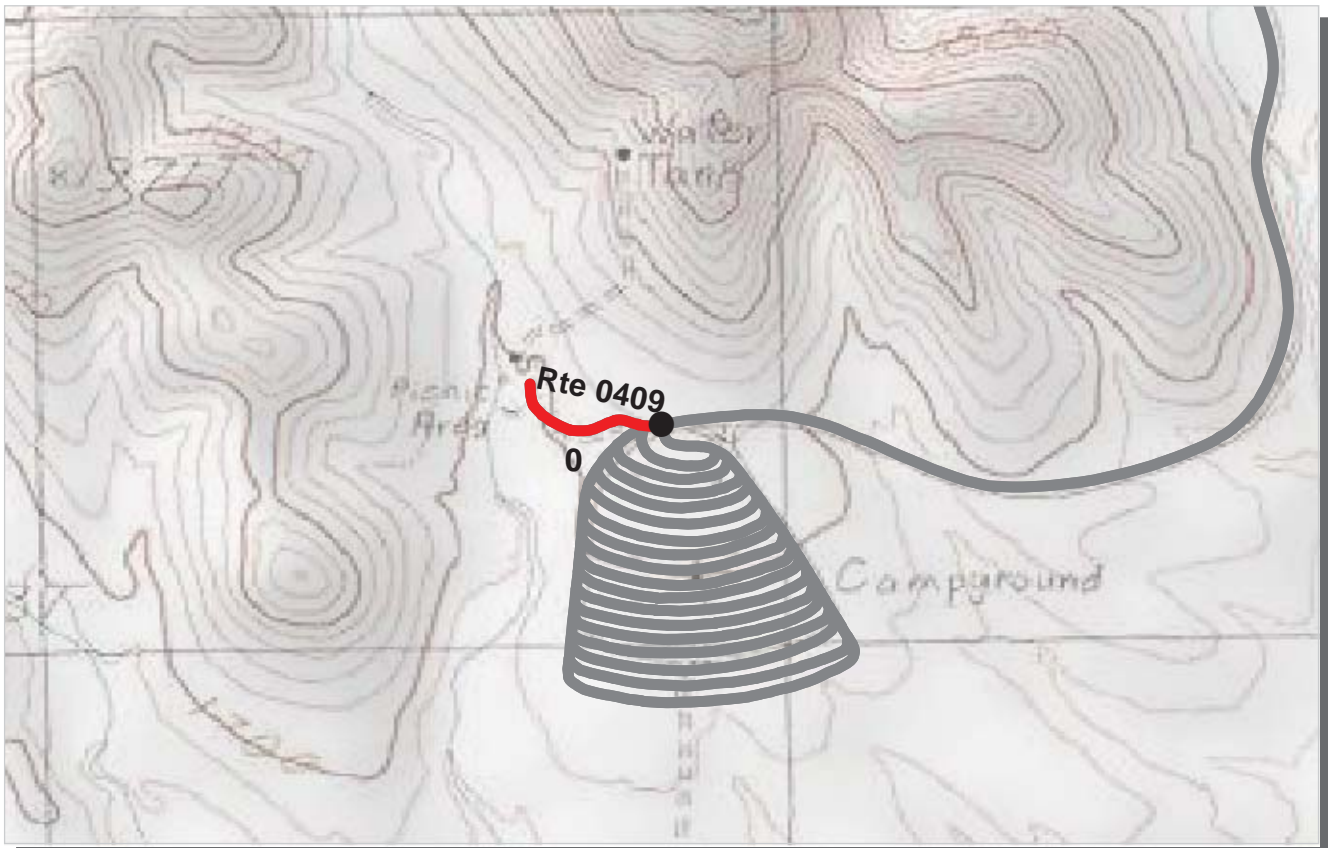

PCR	Poor	Fair	Good	Excellent	No Data
	(≤60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

INTERMOUNTAIN REGION

ORPI : ORGAN PIPE CACTUS NATIONAL MONUMENT

COLLECTED: 11/3/2007

ROUTE: 0409 GROUP CAMPGROUND ACCESS ROAD

TOTAL LENGTH: 0.14 Miles

Section Number	0				
Section Length (mi)	0.14				
Traffic	Traffic data may be found at www.efl.fhwa.dot.gov Click on PROGRAMS / NPS Traffic Data (Note: Not all parks have traffic data)				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	27				
Lane Width (ft)	13				
Shoulder Width Right (ft)**	0				
Shoulder Width Left (ft)**	0				
Roadway Condition Information					
SCR (Surface Condition Rating)	53				
PCR (Pavement Condition Rating)	53				
Distress Index Values					
Alligator Cracking Index	100				
Longitudinal Cracking Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	53				
Roughness Condition Index (RCI)	53				

ROUTE: 0409 GROUP CAMPGROUND ACCESS ROAD

** Shoulder widths are measured from video at 0.50 mile intervals along route tangents. Visibility of actual shoulders in video images may affect accuracy of measured shoulder widths.

Organ Pipe Cactus National Monument



Section 6

Manually Rated Paved Route Condition Rating Sheets (MRR)

ORGAN PIPE CACTUS NATIONAL MONUMENT


Route 0011

AJO MOUNTAIN DRIVE

FROM ROUTE 5000 (STATE ROUTE 85) AT MP 17.53 (ON LEFT)
TO END OF LOOP

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		288,266	4.96	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	CONCRETE CURB	GOOD/90

The above Area (sq ft), Lane Miles, Surface Type, and PCR values apply only to the fifteen numbered dark grey paved sections. The above PCR value (GOOD/90) is being factored into the Park-Total-PCR value.

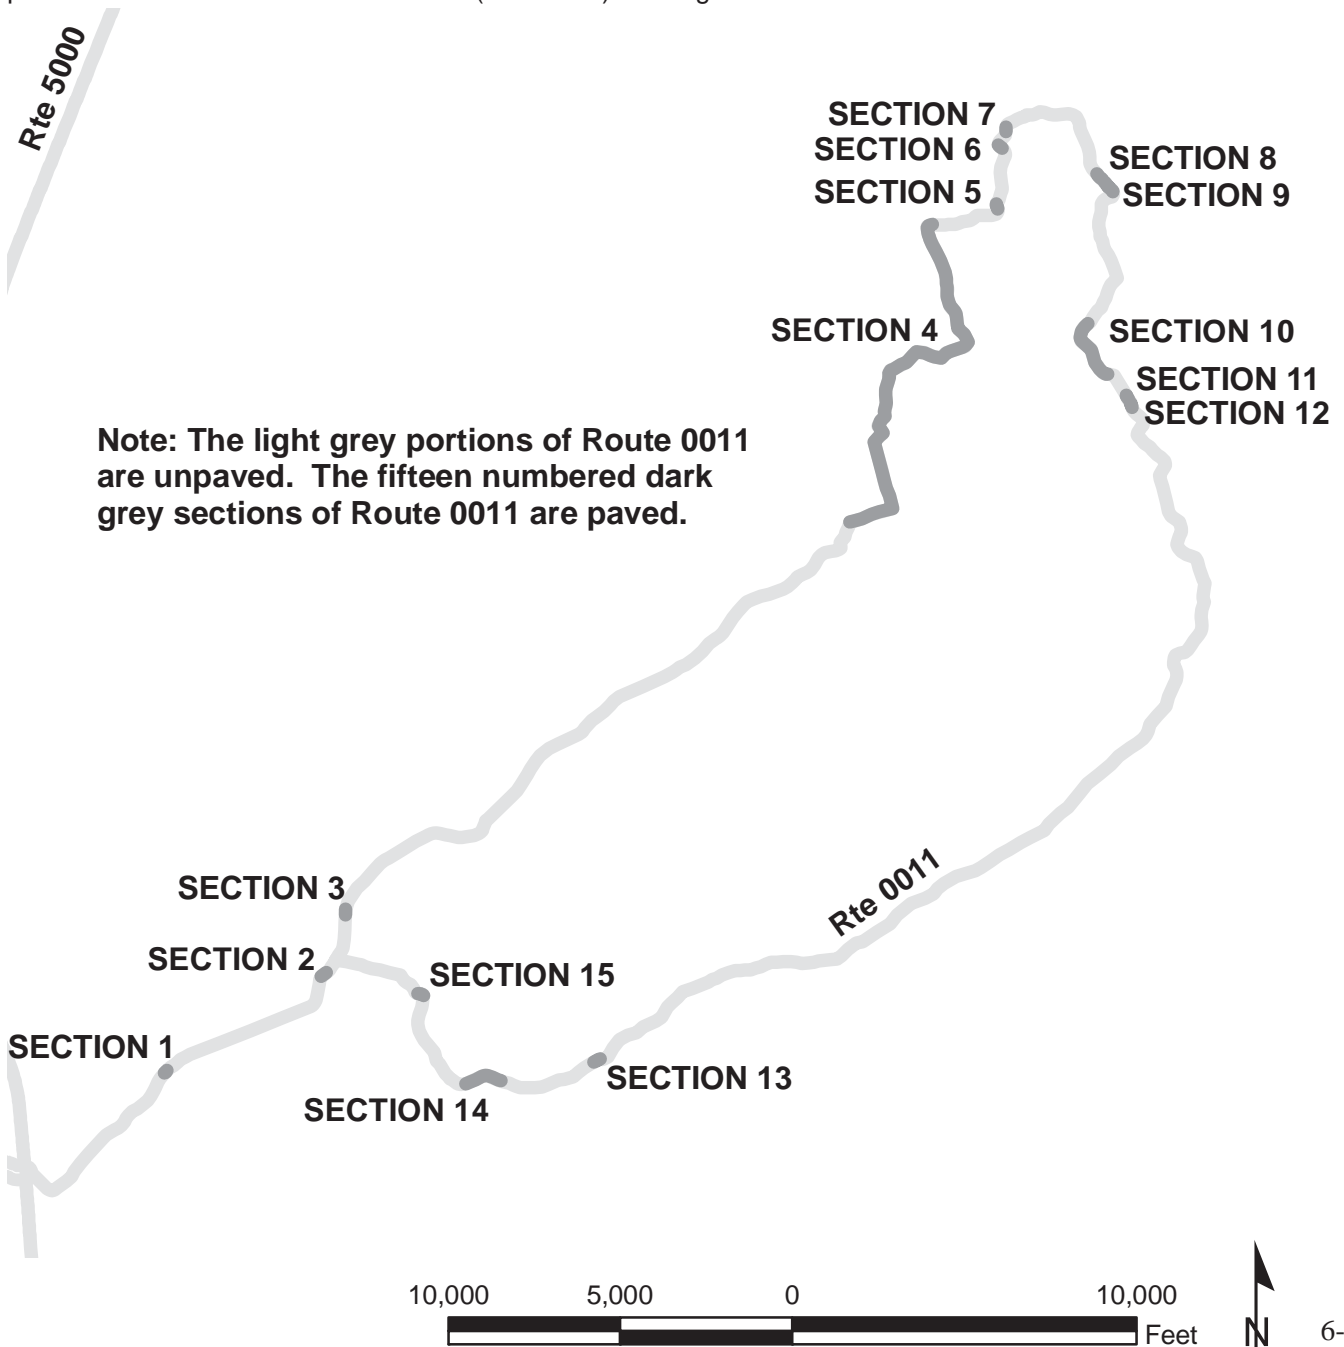


ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 1

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		1,904	0.02	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90

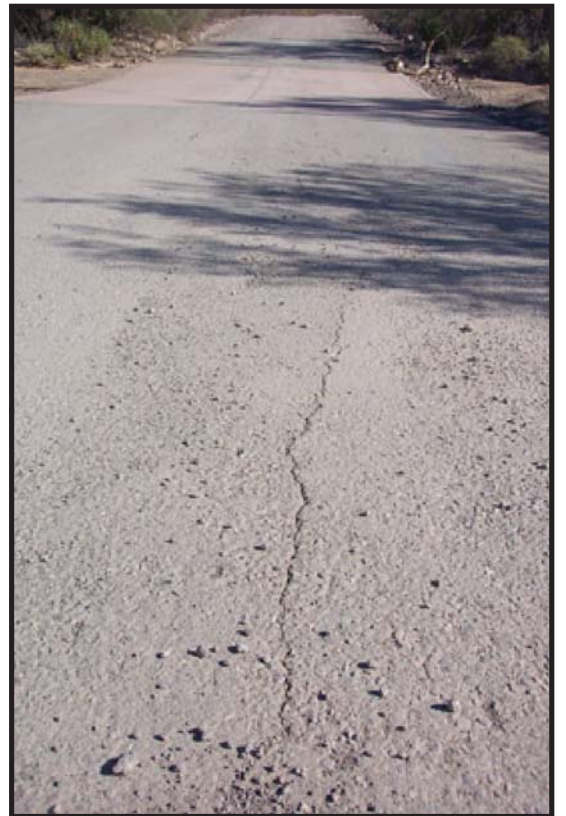


ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 2

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		2,875	0.03	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90





ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 3

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		4,005	0.04	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90

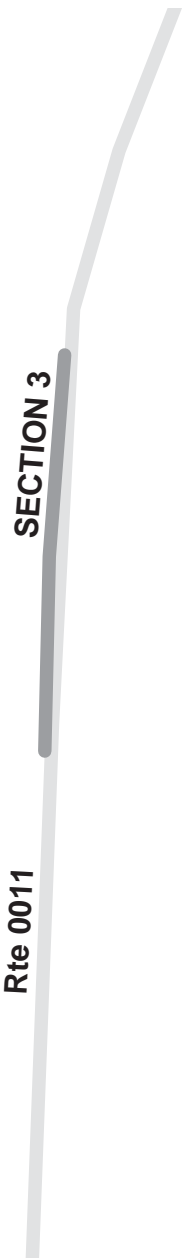

ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 4

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		201,697	2.18	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	CONCRETE CURB	FAIR/73



ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 5

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		2,787	0.03	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90




ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 6

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		2,392	0.03	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90

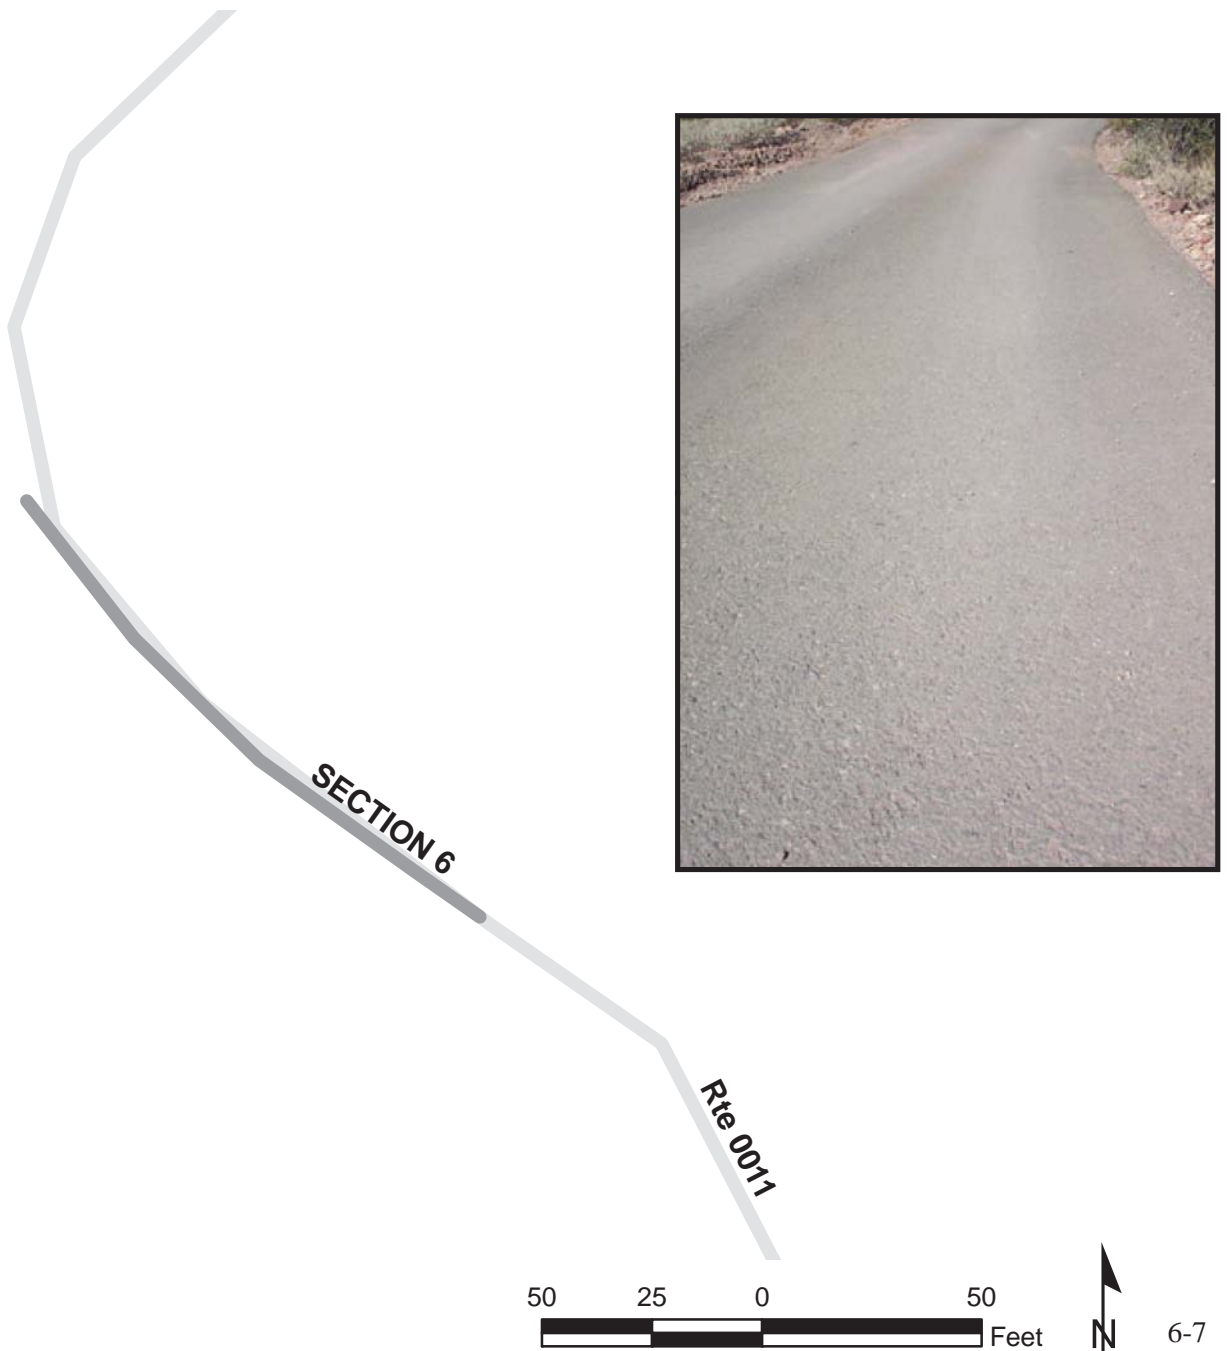


ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 7

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		2,257	0.02	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90

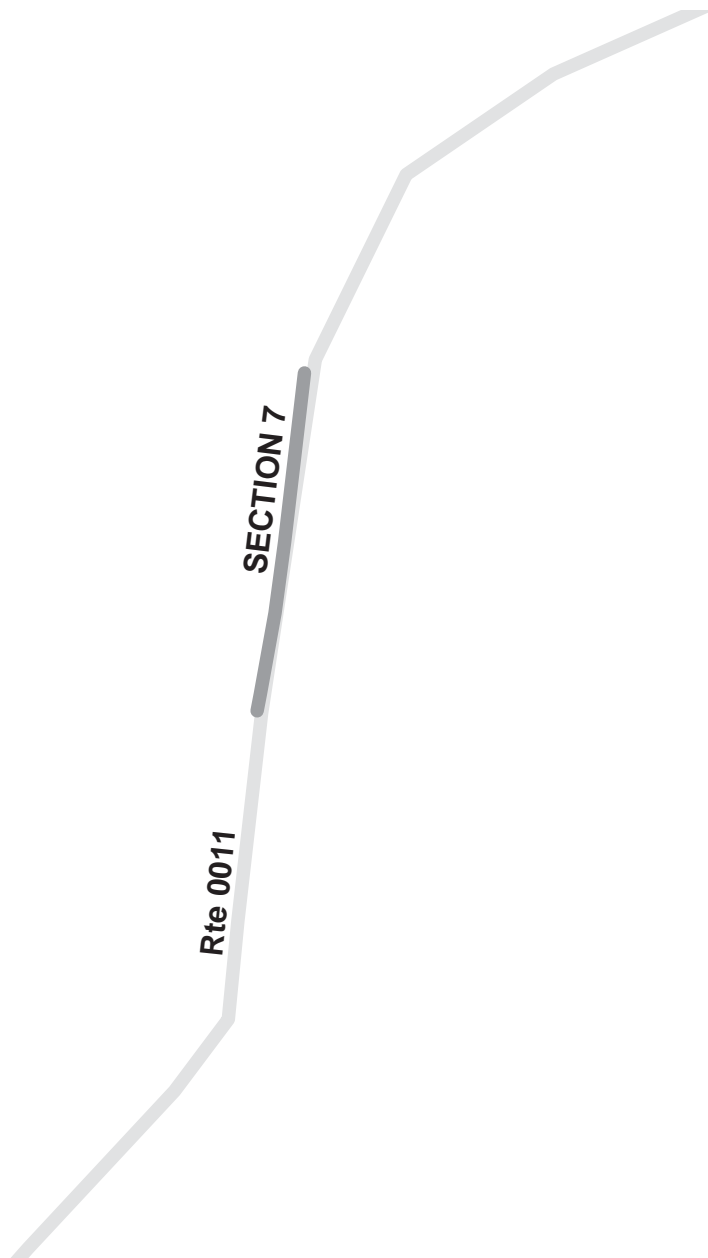


ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 8

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		3,688	0.04	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	POOR/45

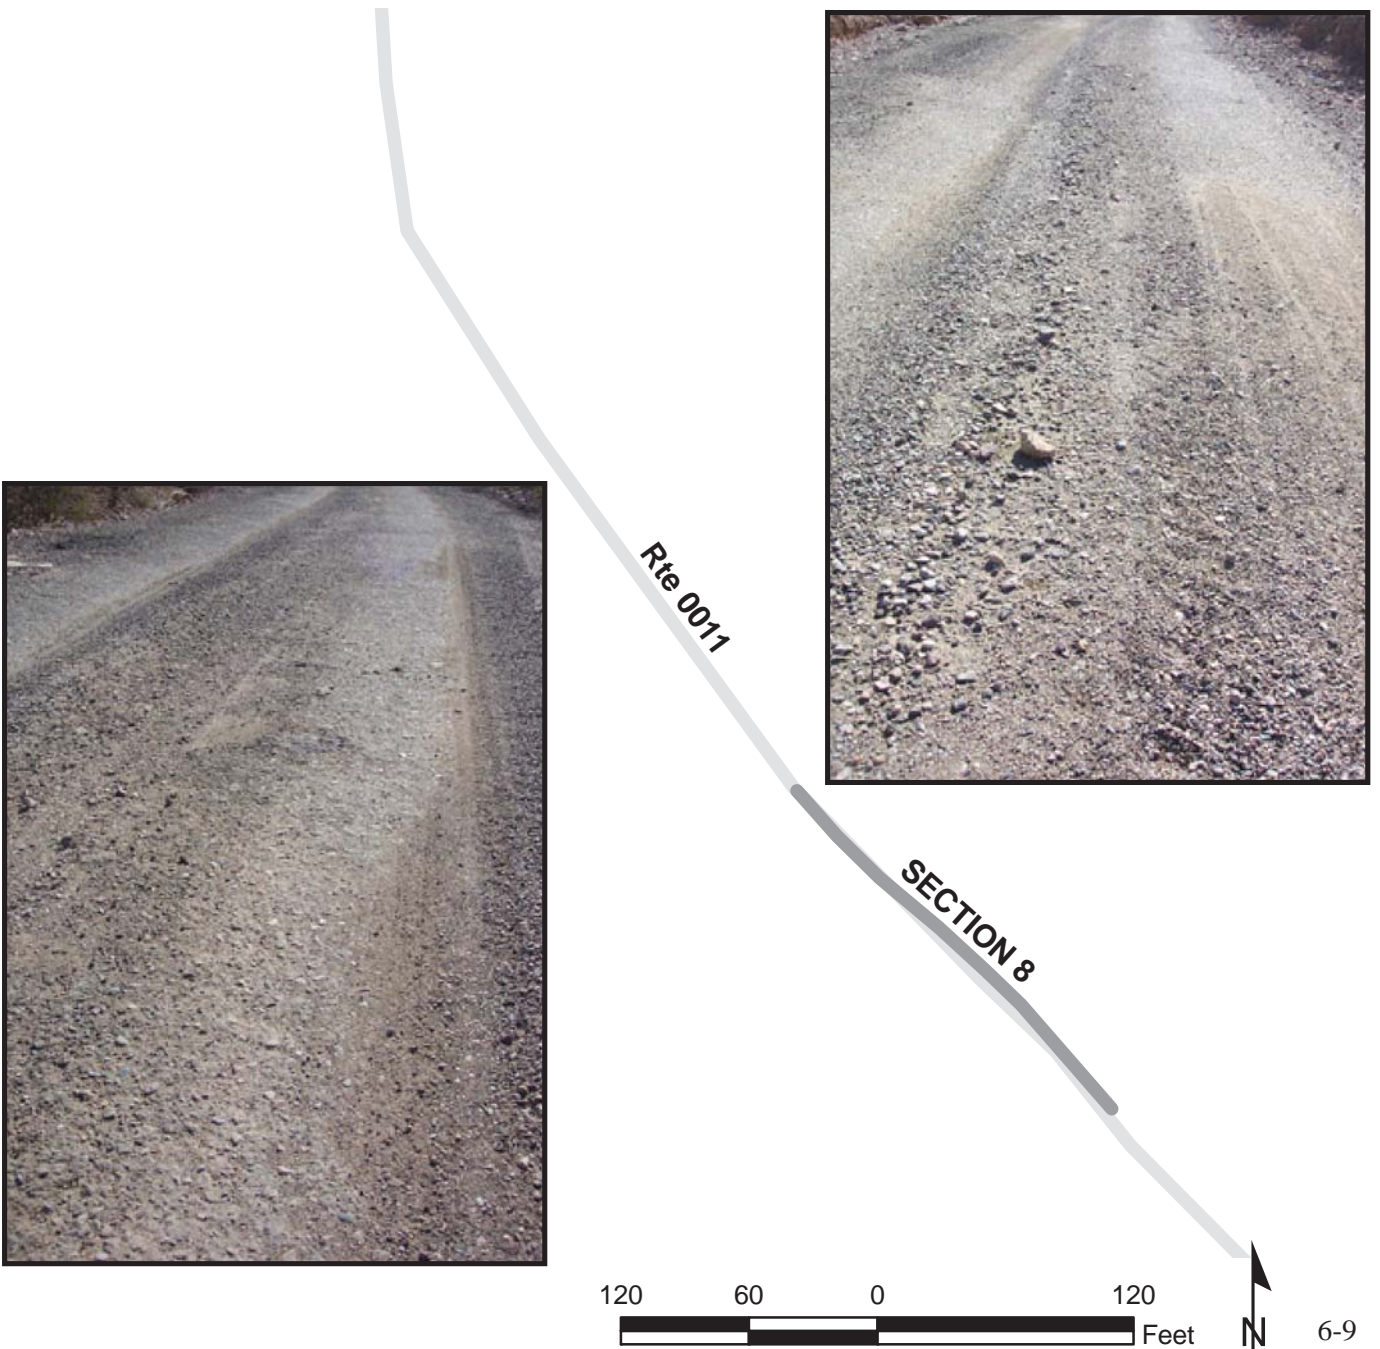


ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 9

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		6,401	0.07	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90




ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 10

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		31,697	0.34	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90



ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 11

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		2,068	0.02	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	POOR/45




ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 12

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		2,713	0.03	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	POOR/45

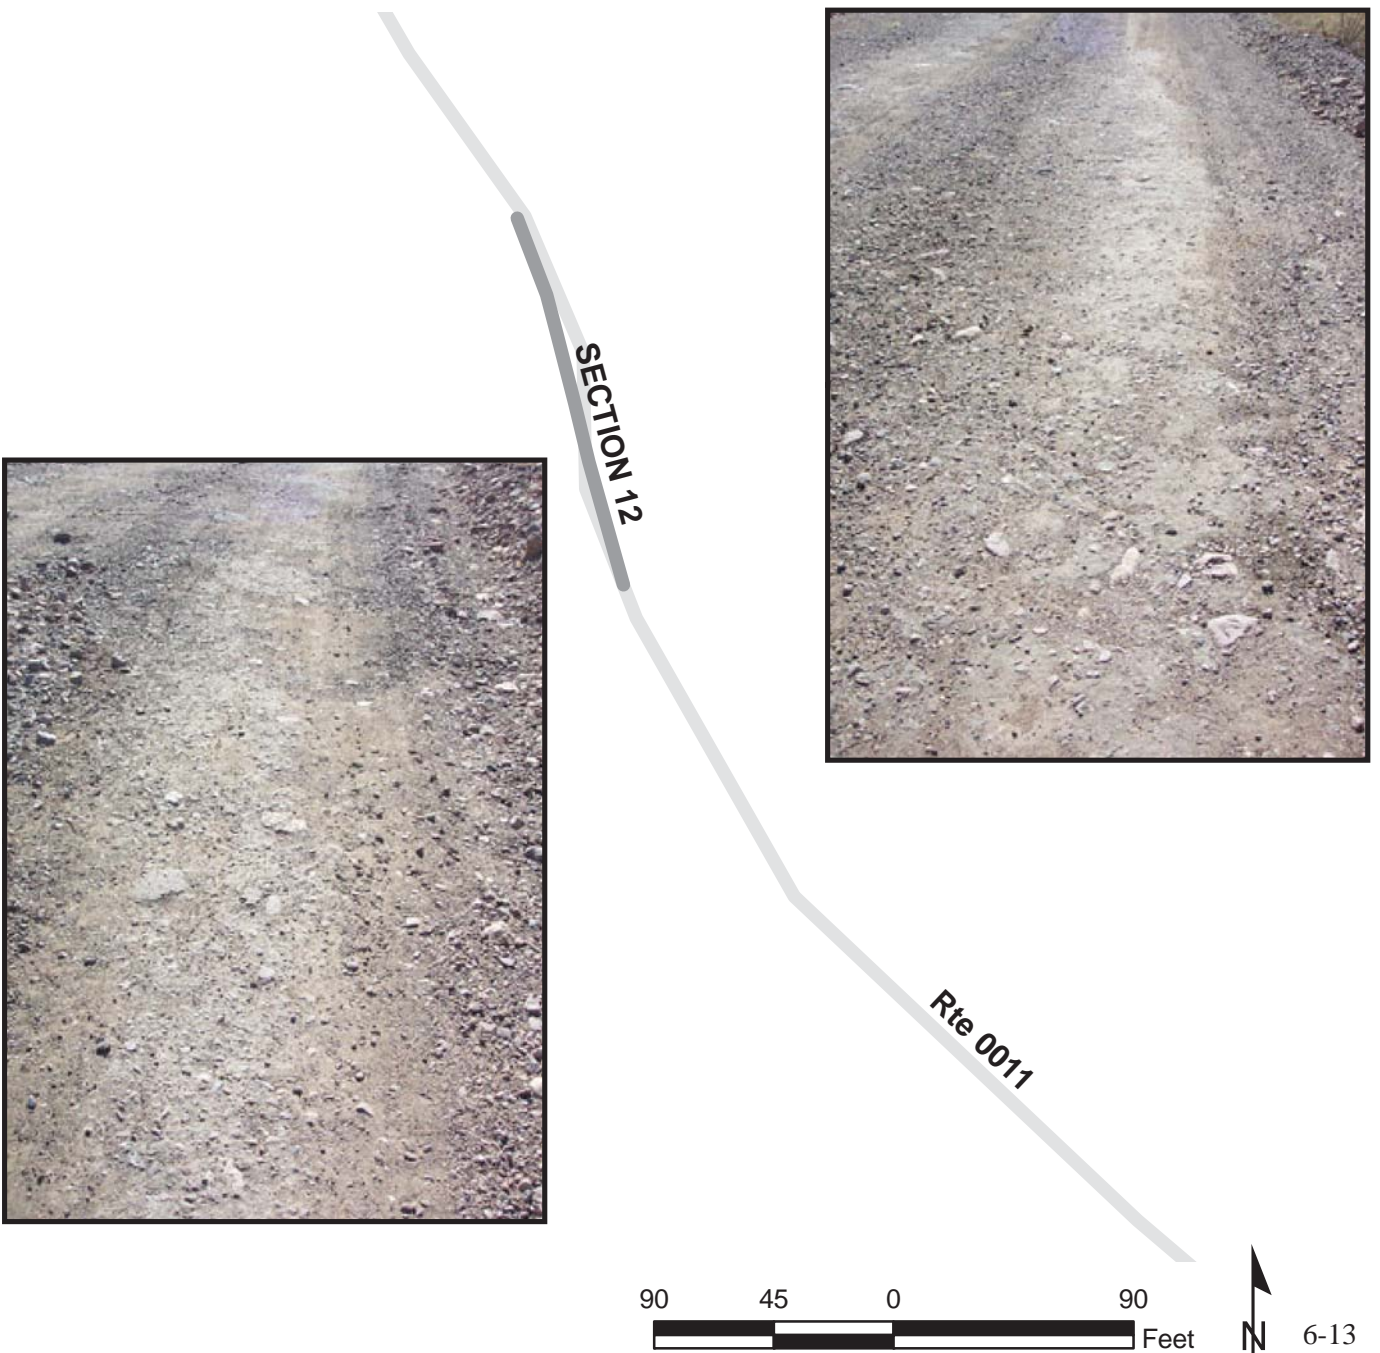

ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 13

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		3,346	0.04	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90




ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 14

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		17,018	0.18	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	POOR/45



ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0011

AJO MOUNTAIN DRIVE

Section 15

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0011	PUBLIC	11/4/2007		3,418	0.04	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90



Organ Pipe Cactus National Monument



Section 7 **Parking Area Condition Rating Sheets**

ORGAN PIPE CACTUS NATIONAL MONUMENT


Route 0903

MAINTENANCE YARD

FROM ROUTE 0205 (MAINTENANCE YARD ACCESS ROAD) AT MP 0.08 (SIDE N/A)
TO PARKING

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0903	NONPUBLIC	12/7/2006		25,728	0.44	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	1	1	NO CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths

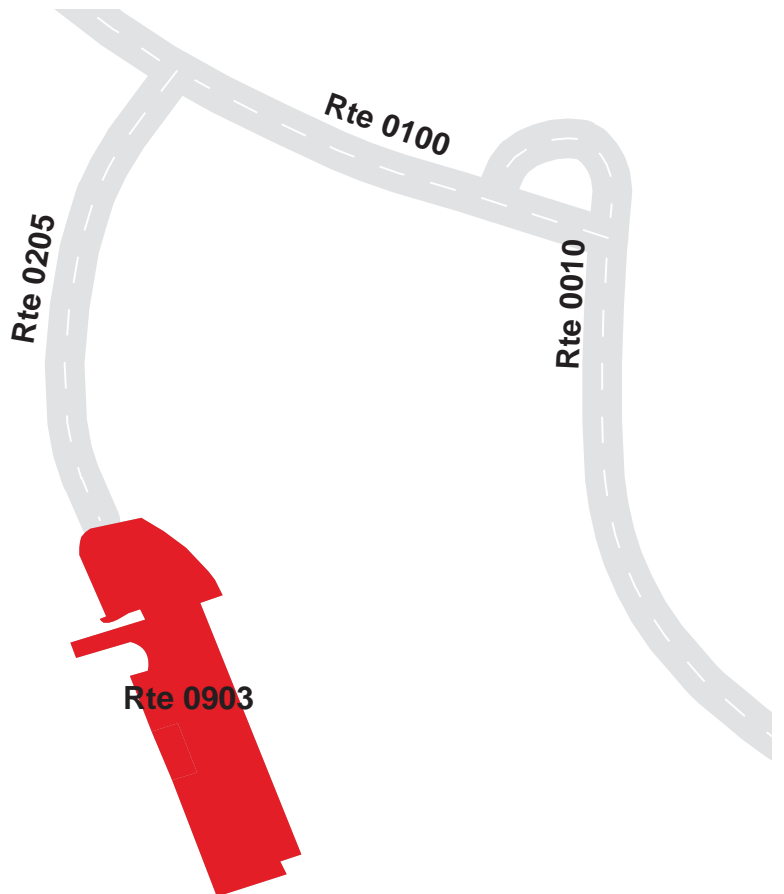

ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0904A


VISITOR CENTER PARKING A

FROM ROUTE 0010 (VISITOR CENTER DRIVE) AT MP 0.07 (ON RIGHT)

TO ROUTE 0010 (VISITOR CENTER DRIVE) AT MP 0.10 (ON RIGHT)

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0904A	PUBLIC	12/7/2006		36,360	0.63	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	1	NO CURB AND GUTTER	CONCRETE CURB	EXCELLENT/97

* Lane miles are based on 11' lane widths



ORGAN PIPE CACTUS NATIONAL MONUMENT


Route 0904B

VISITOR CENTER PARKING B

ADJACENT TO ROUTE 0010 (VISITOR CENTER DRIVE) AT MP 0.10 (ON LEFT)
TO PARKING

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0904B	PUBLIC	12/7/2006		8,246	0.14	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	EXCELLENT/97

* Lane miles are based on 11' lane widths



ORGAN PIPE CACTUS NATIONAL MONUMENT


Route 0905

OFFICE PARKING

FROM ROUTE 0904A (VISITOR CENTER PARKING A)
TO PARKING

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0905	NONPUBLIC	12/7/2006		7,927	0.14	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	1	NO CURB AND GUTTER	NO CURB	EXCELLENT/97

* Lane miles are based on 11' lane widths



ORGAN PIPE CACTUS NATIONAL MONUMENT


Route 0906

GROUP CAMPGROUND PARKING

FROM ROUTE 0409 (GROUP CAMPGROUND ACCESS ROAD) AT MP 0.14 (SIDE N/A)
TO PARKING

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0906	PUBLIC	12/7/2006		10,652	0.18	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	POOR/45

* Lane miles are based on 11' lane widths

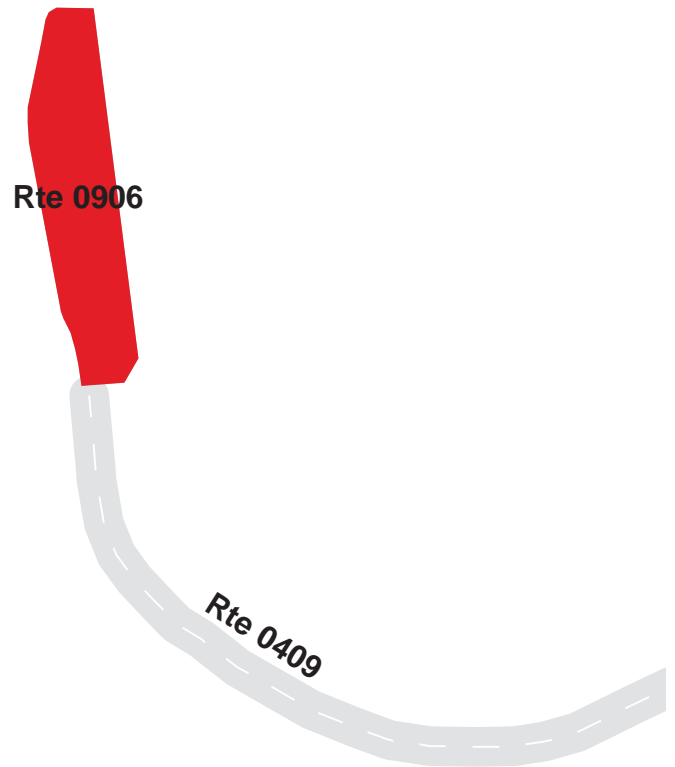

ORGAN PIPE CACTUS NATIONAL MONUMENT


Route 0907

CAMPGROUND PARKING

ADJACENT TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.21 (ON RIGHT)
TO PARKING

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0907	PUBLIC	12/7/2006		902	0.02	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	POOR/45

* Lane miles are based on 11' lane widths

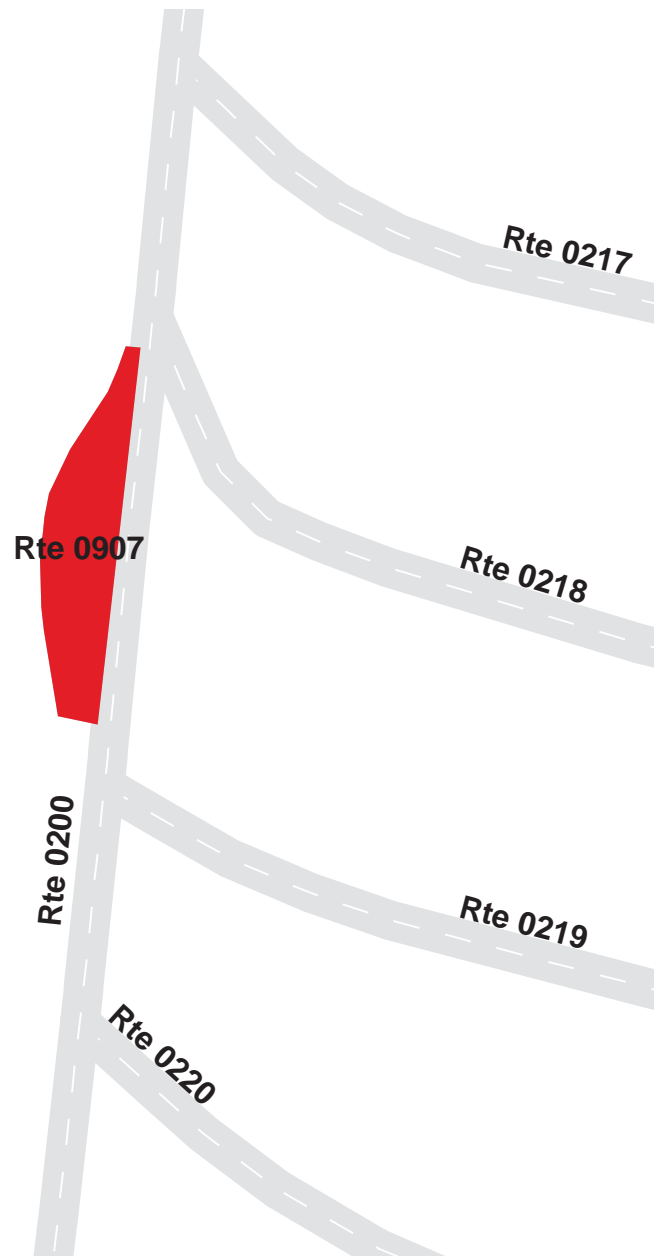

ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0908



DUMP STATION LOOP

FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.34 (ON RIGHT)

TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.38 (ON RIGHT)

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0908	PUBLIC	12/7/2006		7,147	0.12	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	POOR/45

* Lane miles are based on 11' lane widths

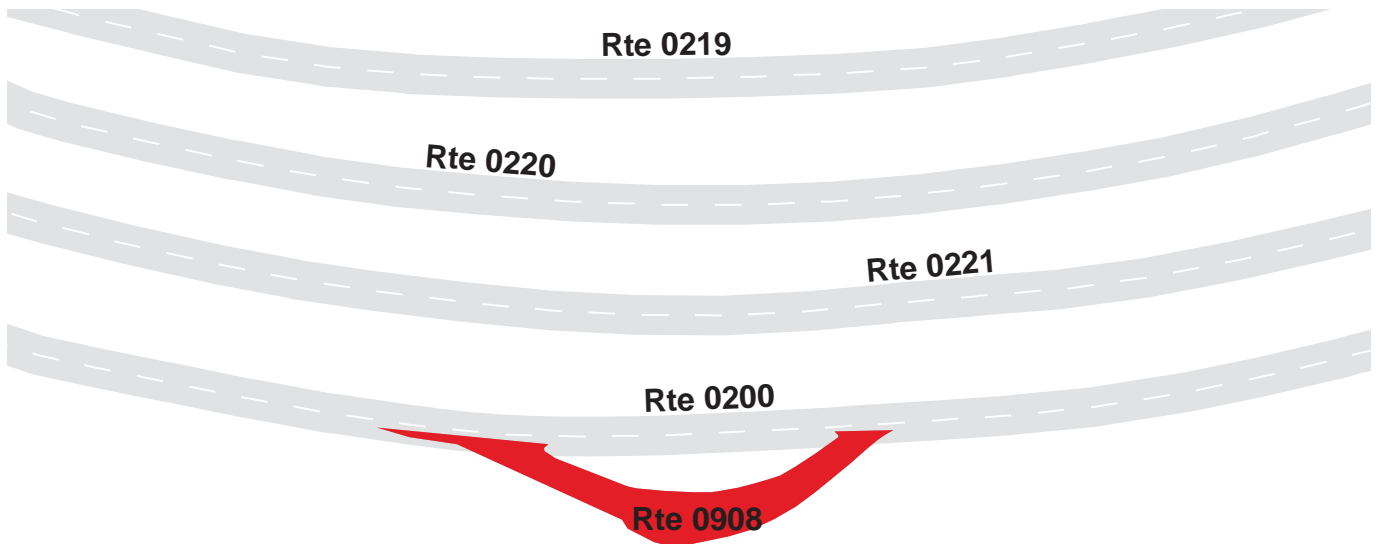



ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0909

CAMPGROUND HOUSING PARKING
 FROM ROUTE 0403 (CAMPGROUND HOUSING ROAD)
 TO PARKING

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0909	NONPUBLIC	12/7/2006		2,639	0.05	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	1	0	NO CURB AND GUTTER	NO CURB	EXCELLENT/97

* Lane miles are based on 11' lane widths

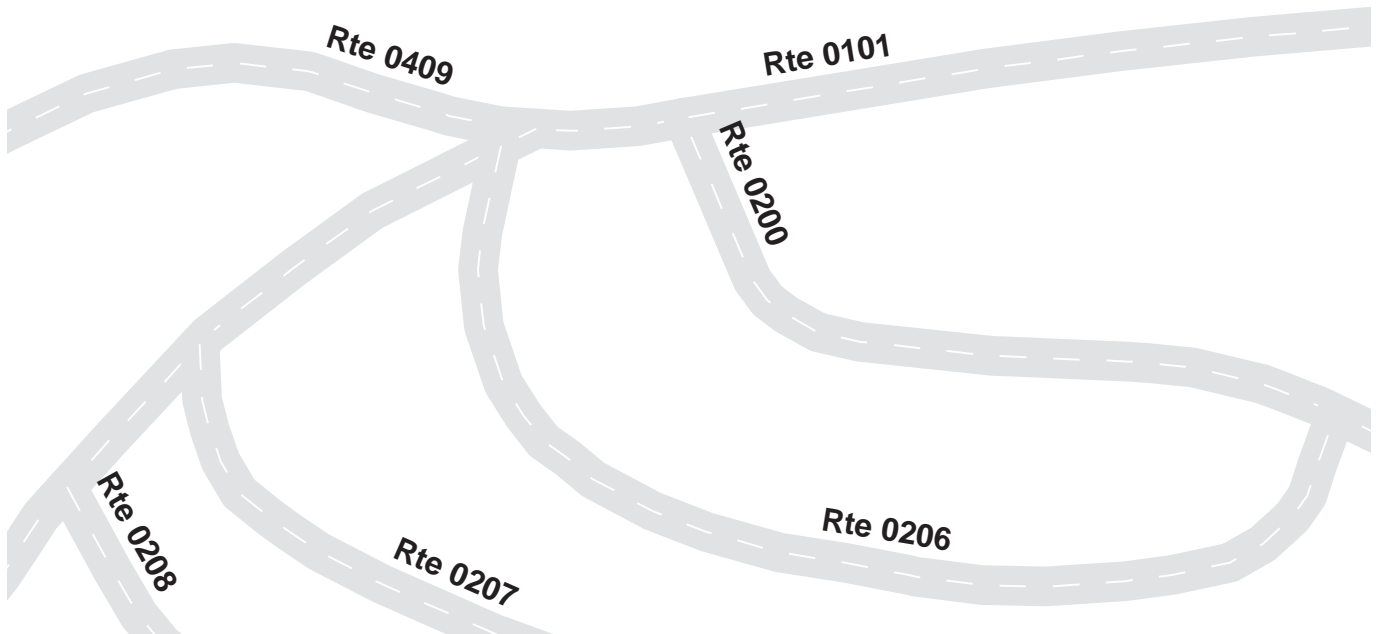



ORGAN PIPE CACTUS NATIONAL MONUMENT

Route 0910

TILLOTSON PEAK WAYSIDE PARKING
 FROM ROUTE 5000 (STATE ROUTE 85) AT MP 14.76 (ON LEFT)
 TO PARKING

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0910	PUBLIC	12/7/2006		28,797	0.50	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	1	0	NO CURB AND GUTTER	ASPHALT CURB	EXCELLENT/97

* Lane miles are based on 11' lane widths

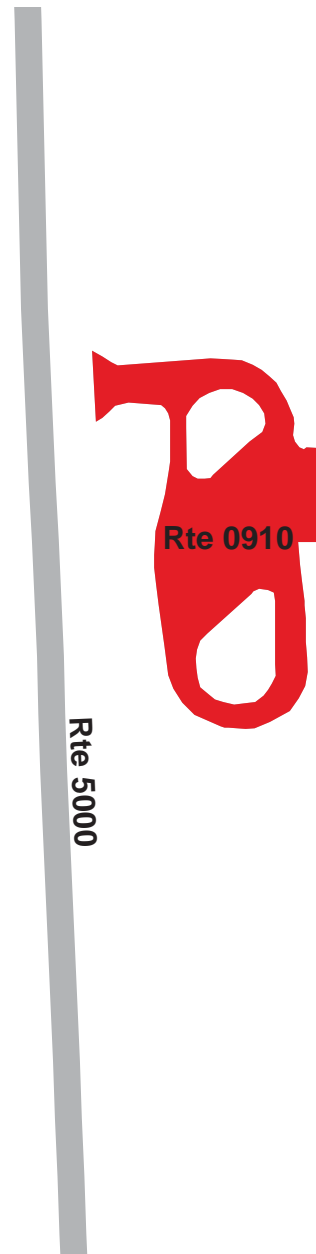

ORGAN PIPE CACTUS NATIONAL MONUMENT



Route 0911

AJO MOUNTAINS WAYSIDE PARKING

FROM ROUTE 5000 (STATE ROUTE 85) AT MP 4.92 (ON RIGHT)
TO PARKING

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0911	PUBLIC	12/7/2006		30,267	0.52	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	1	0	NO CURB AND GUTTER	ASPHALT CURB	EXCELLENT/97

* Lane miles are based on 11' lane widths

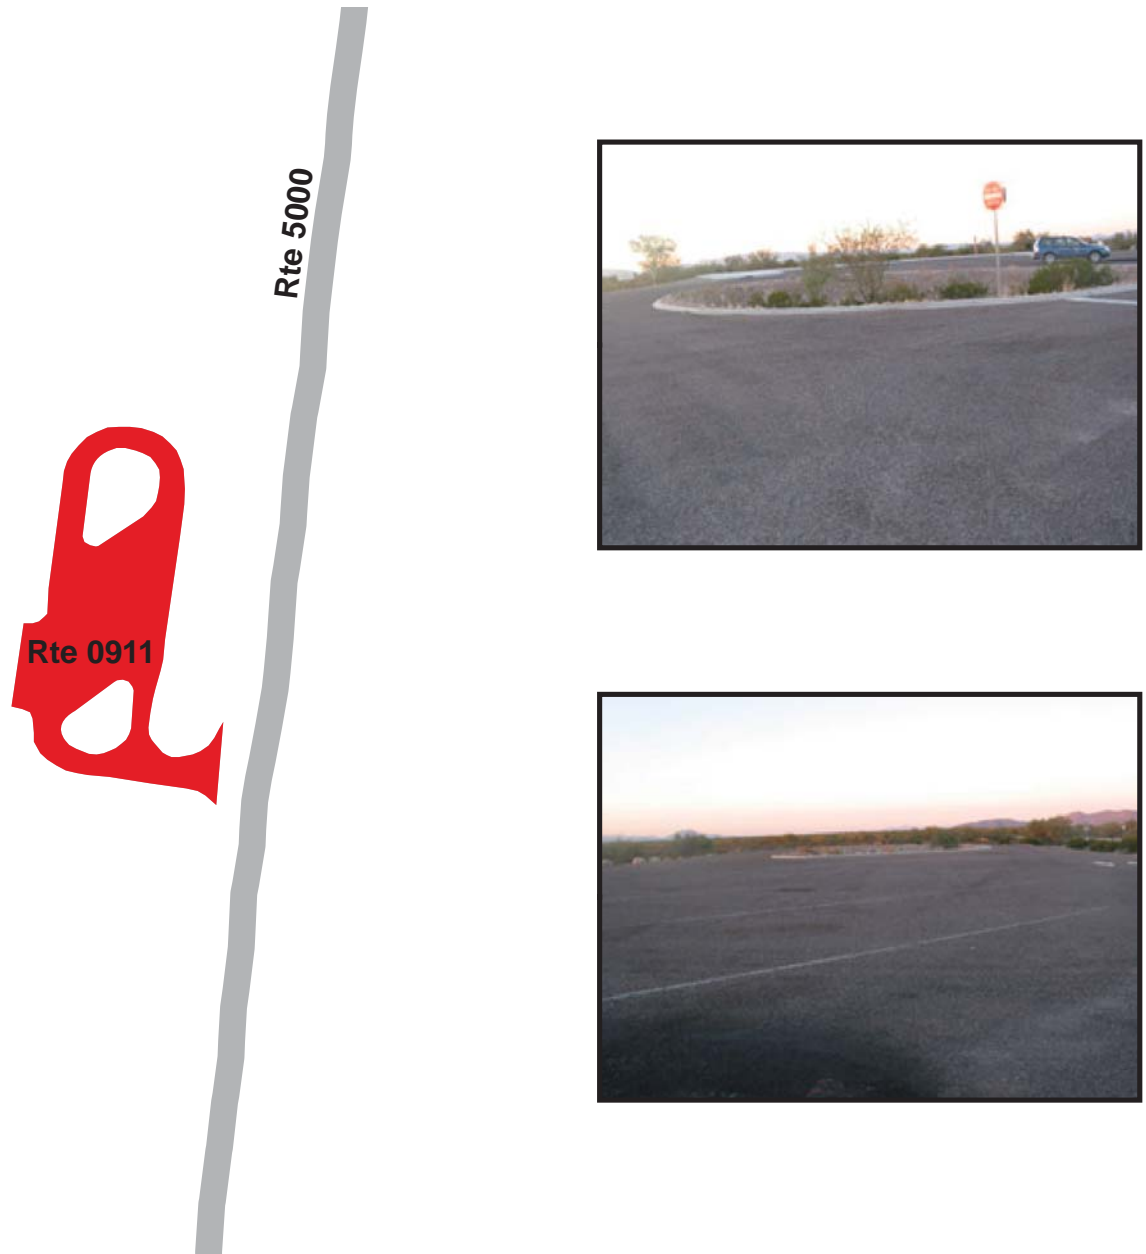

ORGAN PIPE CACTUS NATIONAL MONUMENT


Route 0912

HOUSING AREA DUPLEX HOUSING PARKING

FROM ROUTE 0401 (SPUR RESIDENCE ROAD WEST) AT MP 0.08 (SIDE N/A)
TO PARKING

Route Number	Public / NonPublic	Date Visited		Area (sq ft)	Lane Miles *	Surface Type
0912	NONPUBLIC	11/4/2007		1,697	0.03	AS
Culverts	Drop Inlets	Gates	Fire Hydrants	Curb & Gutter	Curb	PCR
0	0	0	0	NO CURB AND GUTTER	NO CURB	FAIR/73

* Lane miles are based on 11' lane widths

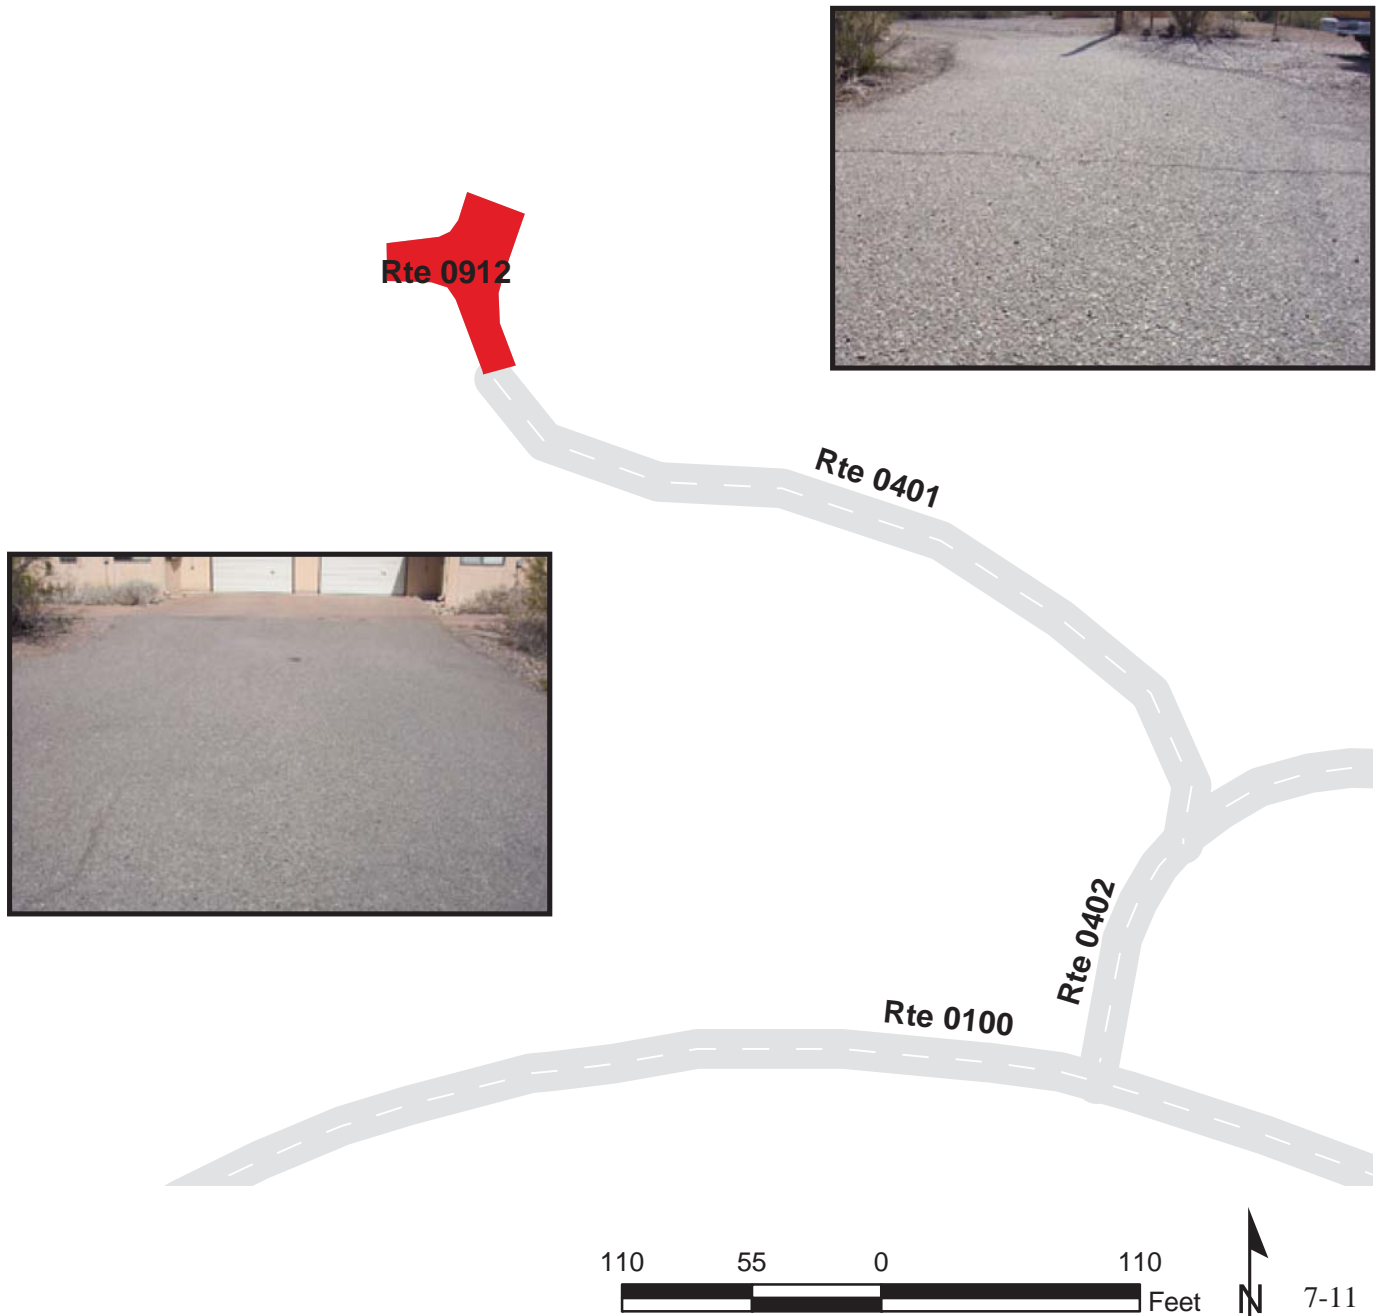

Organ Pipe Cactus National Monument



Section 8 **Parkwide / Route Maintenance** **Features Summaries**

ORPI: PARKWIDE MAINTENANCE FEATURES SUMMARY

Notice: Drop Inlets along ARAN-driven routes were NOT marked by NPS nor were they inventoried by RIP. Culverts that lack a BIP assigned Structure Number along ARAN-driven routes were NOT marked by NPS nor were they inventoried by RIP. Culverts that have a BIP assigned Structure Number along ARAN-driven routes were marked by NPS and were inventoried by RIP. Culverts and Drop Inlets that are associated with Manually Rated Routes and Paved Parking Areas are included in the Cycle 4 counts. To view the Cycle 3 culvert and drop inlet inventory, please refer to the Cycle 3 RIP Report.

FEATURE	LINEAR FEET	COUNT
BARRIER	0	--
BOLLARD	0	--
BRIDGE	--	1
CABLE	0	--
CATTLE GUARD	--	0
CULVERT	--	129
CURB	1,283	--
DROP INLET	--	0
FIRE HYDRANT	--	8
GATE	--	4
GUARD/GUIDE RAIL	0	--
GUARD/GUIDE WALL	0	--
INTERSECTION	--	152
LOW WATER CROSSING	240	8
MILE MARKER	--	0
OVERPASS	--	0
OVERHEAD SIGN	--	0
PARK BOUNDARY	--	0
PAVED DITCH	0	--
PULLOUT	--	1
RAILROAD CROSSING	--	0
RETAINING WALL	--	0
SIGN	--	91
STATE BOUNDARY	--	0
TEMPORARY BARRIER	0	--
TRAFFIC LIGHT	--	0
TUNNEL	--	0
TURNOUT	0	--

ORPI: ROUTE MAINTENANCE FEATURES SUMMARY

FEATURE	ROUTE 0010 VISITOR CENTER DRIVE	ROUTE 0100 RESIDENCE ACCESS ROAD	ROUTE 0101 TWIN PEAKS ACCESS ROAD	ROUTE 0200 CAMPGROUND LOOP ROAD	ROUTE 0205 MAINTENANCE YARD ACCESS ROAD	ROUTE 0206 CAMPGROUND SITES 1-6 ACCESS	UNIT
BARRIER	0	0	0	0	0	0	LINEAR FEET
BOLLARD	0	0	0	0	0	0	LINEAR FEET
BRIDGE	0	0	0	0	0	0	EACH
CABLE	0	0	0	0	0	0	LINEAR FEET
CATTLE GUARD	0	0	0	0	0	0	EACH
CULVERT	0	0	0	0	0	0	EACH
CURB	0	0	1,283	0	0	0	LINEAR FEET
DROP INLET	0	0	0	0	0	0	EACH
FIRE HYDRANT	0	5	0	0	0	0	EACH
GATE	0	0	0	0	0	0	EACH
GUARD/GUIDE RAIL	0	0	0	0	0	0	LINEAR FEET
GUARD/GUIDE WALL	0	0	0	0	0	0	LINEAR FEET
INTERSECTION	11	11	5	41	3	4	EACH
LOW WATER CROSSING	0	0	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	0	0	EACH
OVERHEAD SIGN	0	0	0	0	0	0	EACH
OVERPASS	0	0	0	0	0	0	EACH
PARK BOUNDARY	0	0	0	0	0	0	EACH
PAVED DITCH	0	0	0	0	0	0	LINEAR FEET
PULLOUT	0	0	0	1	0	0	EACH
RAILROAD CROSSING	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	EACH
SIGN	20	12	22	26	1	0	EACH
STATE BOUNDARY	0	0	0	0	0	0	EACH
TEMPORARY BARRIER	0	0	0	0	0	0	LINEAR FEET
TRAFFIC LIGHT	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	EACH
TURNOUT	0	0	0	0	0	0	LINEAR FEET

Notice: Drop Inlets along ARAN-driven routes were NOT marked by NPS nor were they inventoried by RIP. Culverts that lack a BIP assigned Structure Number along ARAN-driven routes were NOT marked by NPS nor were they inventoried by RIP. Culverts that have a BIP assigned Structure Number along ARAN-driven routes were marked by NPS and were inventoried by RIP. To view the Cycle 3 culvert and drop inlet inventory for ARAN-driven routes, please refer to the Cycle 3 RIP Report.

ORPI: ROUTE MAINTENANCE FEATURES SUMMARY

FEATURE	ROUTE 0207 CAMPGROUND SITES 7-15 ACCESS	ROUTE 0208 CAMPGROUND SITES 16-23 ACCESS	ROUTE 0209 CAMPGROUND SITES 24-34 ACCESS	ROUTE 0210 CAMPGROUND SITES 35-45 ACCESS	ROUTE 0211 CAMPGROUND SITES 46-57 ACCESS	ROUTE 0212 CAMPGROUND SITES 58-70 ACCESS	UNIT
BARRIER	0	0	0	0	0	0	LINEAR FEET
BOLLARD	0	0	0	0	0	0	LINEAR FEET
BRIDGE	0	0	0	0	0	0	EACH
CABLE	0	0	0	0	0	0	LINEAR FEET
CATTLE GUARD	0	0	0	0	0	0	EACH
CULVERT	0	0	0	0	0	0	EACH
CURB	0	0	0	0	0	0	LINEAR FEET
DROP INLET	0	0	0	0	0	0	EACH
FIRE HYDRANT	0	0	0	0	0	0	EACH
GATE	0	0	0	0	0	0	EACH
GUARD/GUIDE RAIL	0	0	0	0	0	0	LINEAR FEET
GUARD/GUIDE WALL	0	0	0	0	0	0	LINEAR FEET
INTERSECTION	4	4	4	4	4	4	EACH
LOW WATER CROSSING	0	0	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	0	0	EACH
OVERHEAD SIGN	0	0	0	0	0	0	EACH
OVERPASS	0	0	0	0	0	0	EACH
PARK BOUNDARY	0	0	0	0	0	0	EACH
PAVED DITCH	0	0	0	0	0	0	LINEAR FEET
PULLOUT	0	0	0	0	0	0	EACH
RAILROAD CROSSING	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	EACH
SIGN	0	0	0	0	0	0	EACH
STATE BOUNDARY	0	0	0	0	0	0	EACH
TEMPORARY BARRIER	0	0	0	0	0	0	LINEAR FEET
TRAFFIC LIGHT	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	EACH
TURNOUT	0	0	0	0	0	0	LINEAR FEET

Notice: Drop Inlets along ARAN-driven routes were NOT marked by NPS nor were they inventoried by RIP. Culverts that lack a BIP assigned Structure Number along ARAN-driven routes were NOT marked by NPS nor were they inventoried by RIP. Culverts that have a BIP assigned Structure Number along ARAN-driven routes were marked by NPS and were inventoried by RIP. To view the Cycle 3 culvert and drop inlet inventory for ARAN-driven routes, please refer to the Cycle 3 RIP Report.

ORPI: ROUTE MAINTENANCE FEATURES SUMMARY

FEATURE	ROUTE 0213 CAMPGROUND SITES 71-85 ACCESS	ROUTE 0214 CAMPGROUND SITES 86-95 ACCESS	ROUTE 0215 CAMPGROUND SITES 96-112 ACCESS	ROUTE 0216 CAMPGROUND SITES 113-128 ACCESS	ROUTE 0217 CAMPGROUND SITES 129-145 ACCESS	ROUTE 0218 CAMPGROUND SITES 146-158 ACCESS	UNIT
BARRIER	0	0	0	0	0	0	LINEAR FEET
BOLLARD	0	0	0	0	0	0	LINEAR FEET
BRIDGE	0	0	0	0	0	0	EACH
CABLE	0	0	0	0	0	0	LINEAR FEET
CATTLE GUARD	0	0	0	0	0	0	EACH
CULVERT	0	0	0	0	0	0	EACH
CURB	0	0	0	0	0	0	LINEAR FEET
DROP INLET	0	0	0	0	0	0	EACH
FIRE HYDRANT	0	0	0	0	0	0	EACH
GATE	0	0	0	0	0	0	EACH
GUARD/GUIDE RAIL	0	0	0	0	0	0	LINEAR FEET
GUARD/GUIDE WALL	0	0	0	0	0	0	LINEAR FEET
INTERSECTION	4	4	4	4	4	4	EACH
LOW WATER CROSSING	0	0	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	0	0	EACH
OVERHEAD SIGN	0	0	0	0	0	0	EACH
OVERPASS	0	0	0	0	0	0	EACH
PARK BOUNDARY	0	0	0	0	0	0	EACH
PAVED DITCH	0	0	0	0	0	0	LINEAR FEET
PULLOUT	0	0	0	0	0	0	EACH
RAILROAD CROSSING	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	EACH
SIGN	0	0	0	3	1	0	EACH
STATE BOUNDARY	0	0	0	0	0	0	EACH
TEMPORARY BARRIER	0	0	0	0	0	0	LINEAR FEET
TRAFFIC LIGHT	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	EACH
TURNOUT	0	0	0	0	0	0	LINEAR FEET

Notice: Drop Inlets along ARAN-driven routes were NOT marked by NPS nor were they inventoried by RIP. Culverts that lack a BIP assigned Structure Number along ARAN-driven routes were NOT marked by NPS nor were they inventoried by RIP. Culverts that have a BIP assigned Structure Number along ARAN-driven routes were marked by NPS and were inventoried by RIP. To view the Cycle 3 culvert and drop inlet inventory for ARAN-driven routes, please refer to the Cycle 3 RIP Report.

ORPI: ROUTE MAINTENANCE FEATURES SUMMARY

FEATURE	ROUTE 0219 CAMPGROUND SITES 159-174 ACCESS	ROUTE 0220 CAMPGROUND SITES 175-191 ACCESS	ROUTE 0221 CAMPGROUND SITES 192-208 ACCESS	ROUTE 0402 SPUR RESIDENCE ROAD EAST	ROUTE 0409 GROUP CAMPGROUND ACCESS ROAD	UNIT
BARRIER	0	0	0	0	0	LINEAR FEET
BOLLARD	0	0	0	0	0	LINEAR FEET
BRIDGE	0	0	0	0	0	EACH
CABLE	0	0	0	0	0	LINEAR FEET
CATTLE GUARD	0	0	0	0	0	EACH
CULVERT	0	0	0	0	0	EACH
CURB	0	0	0	0	0	LINEAR FEET
DROP INLET	0	0	0	0	0	EACH
FIRE HYDRANT	0	0	0	0	0	EACH
GATE	0	0	0	0	0	EACH
GUARD/GUIDE RAIL	0	0	0	0	0	LINEAR FEET
GUARD/GUIDE WALL	0	0	0	0	0	LINEAR FEET
INTERSECTION	4	4	4	7	5	EACH
LOW WATER CROSSING	0	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	0	EACH
OVERHEAD SIGN	0	0	0	0	0	EACH
OVERPASS	0	0	0	0	0	EACH
PARK BOUNDARY	0	0	0	0	0	EACH
PAVED DITCH	0	0	0	0	0	LINEAR FEET
PULLOUT	0	0	0	0	0	EACH
RAILROAD CROSSING	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	EACH
SIGN	0	1	1	1	3	EACH
STATE BOUNDARY	0	0	0	0	0	EACH
TEMPORARY BARRIER	0	0	0	0	0	LINEAR FEET
TRAFFIC LIGHT	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	EACH
TURNOUT	0	0	0	0	0	LINEAR FEET

Notice: Drop Inlets along ARAN-driven routes were NOT marked by NPS nor were they inventoried by RIP. Culverts that lack a BIP assigned Structure Number along ARAN-driven routes were NOT marked by NPS nor were they inventoried by RIP. Culverts that have a BIP assigned Structure Number along ARAN-driven routes were marked by NPS and were inventoried by RIP. To view the Cycle 3 culvert and drop inlet inventory for ARAN-driven routes, please refer to the Cycle 3 RIP Report.

ORPI: STRUCTURE LIST

ROUTE NUMBER	FUNCTIONAL CLASS	MILEPOST START	MILEPOST END	FEATURE	STRUCTURE NUMBER
0		0 0	0	0	0

No data available for this section.

Organ Pipe Cactus National Monument



Section 9

Park Route Maintenance Features

Road Logs

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010: VISITOR CENTER DRIVE

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 5000 (STATE ROUTE 85) AT MP 17.53 (ON RIGHT)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 5000 (STATE ROUTE 85)
0.000	0.000	INTERSECTION	LEFT	ROUTE 5000 (STATE ROUTE 85)
0.002	0.002	SIGN	RIGHT	REGULATORY, STOP
0.034	0.034	SIGN	RIGHT	GUIDE, LUKEVILLE USA 5 SONOYTA MEXICO 7 AJO 34
0.042	0.042	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN, NO TEXT
0.049	0.049	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN, NO TEXT
0.049	0.049	SIGN	RIGHT	GUIDE, VISITOR CENTER CAMPGROUND NORTH PUERTO BLANCO DR
0.056	0.056	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN, NO TEXT
0.062	0.062	SIGN	LEFT	GUIDE, VISITOR CENTER HIGHWAY 85
0.064	0.064	INTERSECTION	LEFT	ROUTE 0904B (VISITOR CENTER PARKING B)
0.067	0.067	INTERSECTION	RIGHT	ROUTE 0904A (VISITOR CENTER PARKING A)
0.096	0.096	SIGN	RIGHT	REGULATORY, DO NOT ENTER
0.100	0.100	INTERSECTION	LEFT	ROUTE 0904B (VISITOR CENTER PARKING B)
0.104	0.104	INTERSECTION	RIGHT	ROUTE 0904A (VISITOR CENTER PARKING A)
0.111	0.111	SIGN	RIGHT	REGULATORY, DO NOT ENTER
0.171	0.171	INTERSECTION	LEFT	ROUTE 0101 (TWIN PEAKS ACCESS ROAD)
0.176	0.176	SIGN	LEFT	GUIDE, U.S. FEE AREA
0.176	0.176	SIGN	LEFT	GUIDE, CAMPGROUND 1 1/2 MI. NORTH PUERTO BLANCO DRIVE
0.216	0.216	SIGN	RIGHT	WARNING, GRAPHIC SIGN, NO TEXT
0.239	0.239	SIGN	RIGHT	GUIDE, STOP AHEAD FEE STATION 250 FEET
0.276	0.276	SIGN	RIGHT	WARNING, GRAPHIC SIGN, NO TEXT
0.302	0.302	INTERSECTION	LEFT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
0.312	0.312	SIGN	RIGHT	GUIDE, U.S. FEE AREA
0.318	0.318	INTERSECTION	RIGHT	ROUTE 0012 (PUERTO BLANCO DRIVE)
0.322	0.322	SIGN	RIGHT	REGULATORY, ONE WAY
0.322	0.322	SIGN	RIGHT	REGULATORY, VEHICLE TURNAROUND
0.334	0.334	SIGN	RIGHT	REGULATORY, STOP
0.335	0.335	SIGN	LEFT	REGULATORY, DO NOT ENTER
0.340	0.340	INTERSECTION	LEFT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
0.340	0.340	INTERSECTION	RIGHT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
0.340	0.340	SIGN	N/A	GUIDE, VISITOR CENTER HWY 85 AUTHORIZED VEHICLES ONLY

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010: VISITOR CENTER DRIVE

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.340	0.340	ROUTE END	N/A	TO ROUTE 0100 (RESIDENCE ACCESS ROAD) AT MP 0.12 (ON RIGHT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0100: RESIDENCE ACCESS ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0010 (VISITOR CENTER DRIVE) AT MP 0.30 (ON LEFT)
0.000	0.000	SIGN	RIGHT	REGULATORY, YIELD
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0010 (VISITOR CENTER DRIVE)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0010 (VISITOR CENTER DRIVE)
0.015	0.015	INTERSECTION	RIGHT	ROUTE 0010 (VISITOR CENTER DRIVE)
0.032	0.032	SIGN	RIGHT	REGULATORY, AUTHORIZED VEHICLES ONLY
0.066	0.066	INTERSECTION	LEFT	ROUTE 0205 (MAINTENANCE YARD ACCESS ROAD)
0.136	0.136	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
0.169	0.169	INTERSECTION	LEFT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
0.247	0.247	SIGN	RIGHT	WARNING, SLOW CHILDREN PLAYING
0.268	0.268	SIGN	LEFT	GUIDE, ADMINISTRATIVE BUILDING
0.275	0.275	FIRE HYDRANT	RIGHT	
0.283	0.283	INTERSECTION	LEFT	UNPAVED PARKING
0.314	0.314	FIRE HYDRANT	RIGHT	
0.340	0.340	FIRE HYDRANT	RIGHT	
0.356	0.356	SIGN	RIGHT	REGULATORY, FIRE ALARM
0.410	0.410	FIRE HYDRANT	RIGHT	
0.521	0.521	INTERSECTION	RIGHT	ROUTE 0402 (SPUR RESIDENCE ROAD EAST)
0.523	0.523	SIGN	LEFT	GUIDE, RESOURCES BUILDING
0.526	0.526	SIGN	RIGHT	GUIDE, RESOURCES BUILDING 2
0.673	0.673	FIRE HYDRANT	LEFT	
0.834	0.834	INTERSECTION	RIGHT	ROUTE 0408 (100 K WATER TANK ROAD)
1.081	1.081	SIGN	RIGHT	GUIDE, SLOW DUST AREA
1.081	1.081	SIGN	RIGHT	GUIDE, VIP
1.081	1.081	INTERSECTION	LEFT	ROUTE 0416 (VIP ROAD)
1.090	1.090	SIGN	RIGHT	GUIDE, EMPLOYEES RESIDENTIAL AREA AUTHORIZED VEHICLES ONLY
1.140	1.140	SIGN	RIGHT	REGULATORY, YIELD
1.140	1.140	INTERSECTION	LEFT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
1.140	1.140	INTERSECTION	RIGHT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
1.140	1.140	ROUTE END	N/A	TO ROUTE 0100 (RESIDENCE ACCESS ROAD) AT MP 0.17 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0101: TWIN PEAKS ACCESS ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0010 (VISITOR CENTER DRIVE) AT MP 0.17 (ON LEFT)
0.000	0.000	SIGN	RIGHT	REGULATORY, STOP
0.000	0.000	SIGN	N/A	GUIDE, UNABLE TO READ FROM VIDEO
0.000	0.000	INTERSECTION	LEFT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
0.015	0.015	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
0.077	0.077	SIGN	RIGHT	WARNING, GRAPHIC SIGN, NO TEXT
0.221	0.221	INTERSECTION	LEFT	ROUTE 0410 (DOMESTIC WATER WELLS ROAD)
0.498	0.498	SIGN	RIGHT	WARNING, DIP
0.536	0.536	SIGN	RIGHT	WARNING, DIP
0.560	0.796	CURB	RIGHT	
0.571	0.571	SIGN	RIGHT	WARNING, ROAD NARROWS
0.773	0.773	SIGN	RIGHT	WARNING, ROAD NARROWS
0.825	0.825	SIGN	RIGHT	WARNING, DIP
0.847	0.847	SIGN	RIGHT	WARNING, DIP
1.084	1.084	SIGN	RIGHT	WARNING, DIP
1.126	1.126	SIGN	RIGHT	WARNING, DIP
1.173	1.173	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
1.201	1.201	SIGN	RIGHT	WARNING, GRAPHIC SIGN, NO TEXT
1.204	1.204	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
1.272	1.272	SIGN	RIGHT	GUIDE, RE-ENTRY WITH RECEIPT RIGHT LANE
1.296	1.303	CURB	LEFT	
1.298	1.298	SIGN	LEFT	GUIDE, U.S. FEE AREA
1.298	1.298	SIGN	LEFT	REGULATORY, ORGAN PIPE CACTUS NATIONAL MONUMENT
1.303	1.303	SIGN	LEFT	REGULATORY, STOP
1.304	1.304	SIGN	LEFT	GUIDE, WELCOME TWIN PEAKS CAMPGROUND
1.309	1.309	SIGN	LEFT	REGULATORY, DO NOT ENTER
1.310	1.310	SIGN	RIGHT	REGULATORY, STOP
1.320	1.320	INTERSECTION	N/A	ROUTE 0200 (CAMPGROUND LOOP ROAD)
1.320	1.320	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
1.320	1.320	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.81 (ON RIGHT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0200: CAMPGROUND LOOP ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0409 (GROUP CAMPGROUND ACCESS ROAD) AT MP 0.02 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0409 (GROUP CAMPGROUND ACCESS ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0409 (GROUP CAMPGROUND ACCESS ROAD)
0.006	0.006	INTERSECTION	LEFT	ROUTE 0206 (CAMPGROUND SITES 1-6 ACCESS)
0.007	0.007	SIGN	LEFT	GUIDE, SITES 1-6
0.008	0.008	SIGN	RIGHT	GUIDE, DUMP STATION
0.008	0.008	SIGN	RIGHT	GUIDE, GROUP CAMPSITES CAMPGROUND RIGS 28' - 35' MUST OCCUPY BLUE NUMBERED SITES
0.009	0.009	SIGN	RIGHT	REGULATORY, ONE WAY
0.015	0.015	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.030	0.030	SIGN	RIGHT	GUIDE, CAMPGROUND PERIMETER TRAIL
0.031	0.031	INTERSECTION	LEFT	ROUTE 0207 (CAMPGROUND SITES 7-15 ACCESS)
0.035	0.035	SIGN	LEFT	GUIDE, SITES 7-15
0.045	0.045	INTERSECTION	LEFT	ROUTE 0208 (CAMPGROUND SITES 16-23 ACCESS)
0.050	0.050	SIGN	LEFT	GUIDE, SITES 16-23
0.056	0.087	PULLOUT	RIGHT	
0.061	0.061	INTERSECTION	LEFT	ROUTE 0209 (CAMPGROUND SITES 24-34 ACCESS)
0.066	0.066	SIGN	LEFT	GUIDE, SITES 24-34
0.078	0.078	INTERSECTION	LEFT	ROUTE 0210 (CAMPGROUND SITES 35-45 ACCESS)
0.082	0.082	SIGN	LEFT	GUIDE, SITES 35-45
0.092	0.092	INTERSECTION	LEFT	ROUTE 0211 (CAMPGROUND SITES 46-57 ACCESS)
0.097	0.097	SIGN	LEFT	GUIDE, SITES 46-57
0.108	0.108	INTERSECTION	LEFT	ROUTE 0212 (CAMPGROUND SITES 58-70 ACCESS)
0.114	0.114	SIGN	LEFT	GUIDE, SITES 58-70
0.118	0.118	INTERSECTION	LEFT	ROUTE 0213 (CAMPGROUND SITES 71-85 ACCESS)
0.123	0.123	SIGN	LEFT	GUIDE, SITES 71-85
0.142	0.142	INTERSECTION	LEFT	ROUTE 0214 (CAMPGROUND SITES 86-95 ACCESS)
0.146	0.146	SIGN	LEFT	GUIDE, SITES 86-95
0.158	0.158	INTERSECTION	LEFT	ROUTE 0215 (CAMPGROUND SITES 96-112 ACCESS)
0.162	0.162	SIGN	LEFT	GUIDE, SITES 96-112
0.172	0.172	INTERSECTION	LEFT	ROUTE 0216 (CAMPGROUND SITES 113-128 ACCESS)
0.172	0.172	INTERSECTION	RIGHT	ROUTE 0907 (CAMPGROUND PARKING)
0.178	0.178	SIGN	LEFT	GUIDE, SITES 113-128

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0200: CAMPGROUND LOOP ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.190	0.190	INTERSECTION	LEFT	ROUTE 0217 (CAMPGROUND SITES 129-145 ACCESS)
0.194	0.194	SIGN	LEFT	GUIDE, SITES 129-145
0.203	0.203	INTERSECTION	LEFT	ROUTE 0218 (CAMPGROUND SITES 146-158 ACCESS)
0.206	0.206	INTERSECTION	RIGHT	ROUTE 0907 (CAMPGROUND PARKING)
0.207	0.207	SIGN	LEFT	GUIDE, SITES 146-158
0.209	0.209	SIGN	LEFT	GUIDE, CAMPERS LESS THAN 25 FEET IN LENGTH NO GENERATORS
0.209	0.209	SIGN	LEFT	GUIDE, SITES 146-174
0.218	0.218	SIGN	RIGHT	REGULATORY, ACCESSIBLE ENTRANCE
0.220	0.220	INTERSECTION	LEFT	ROUTE 0219 (CAMPGROUND SITES 159-174 ACCESS)
0.221	0.221	SIGN	RIGHT	GUIDE, AMPHITHEATER
0.223	0.223	SIGN	LEFT	GUIDE, SITES 159-174
0.231	0.231	INTERSECTION	LEFT	ROUTE 0220 (CAMPGROUND SITES 175-191 ACCESS)
0.245	0.245	INTERSECTION	LEFT	ROUTE 0221 (CAMPGROUND SITES 192-208 ACCESS)
0.250	0.250	SIGN	LEFT	GUIDE, SITES 175-191
0.250	0.250	SIGN	LEFT	GUIDE, SITES 192-208
0.251	0.251	SIGN	LEFT	GUIDE, TENT SITES NO GENERATORS
0.276	0.276	INTERSECTION	RIGHT	UNPAVED PARKING
0.338	0.338	INTERSECTION	RIGHT	ROUTE 0908 (DUMP STATION LOOP)
0.378	0.378	INTERSECTION	RIGHT	ROUTE 0908 (DUMP STATION LOOP)
0.535	0.535	INTERSECTION	LEFT	ROUTE 0221 (CAMPGROUND SITES 192-208 ACCESS)
0.560	0.560	INTERSECTION	LEFT	ROUTE 0220 (CAMPGROUND SITES 175-191 ACCESS)
0.569	0.569	INTERSECTION	LEFT	ROUTE 0219 (CAMPGROUND SITES 159-174 ACCESS)
0.586	0.586	INTERSECTION	LEFT	ROUTE 0218 (CAMPGROUND SITES 146-158 ACCESS)
0.595	0.595	INTERSECTION	LEFT	ROUTE 0217 (CAMPGROUND SITES 129-145 ACCESS)
0.610	0.610	INTERSECTION	LEFT	ROUTE 0216 (CAMPGROUND SITES 113-128 ACCESS)
0.625	0.625	INTERSECTION	LEFT	ROUTE 0215 (CAMPGROUND SITES 96-112 ACCESS)
0.636	0.636	INTERSECTION	LEFT	ROUTE 0214 (CAMPGROUND SITES 86-95 ACCESS)
0.653	0.653	INTERSECTION	LEFT	ROUTE 0213 (CAMPGROUND SITES 71-85 ACCESS)
0.666	0.666	INTERSECTION	LEFT	ROUTE 0212 (CAMPGROUND SITES 58-70 ACCESS)
0.680	0.680	INTERSECTION	LEFT	ROUTE 0211 (CAMPGROUND SITES 46-57 ACCESS)
0.697	0.697	INTERSECTION	LEFT	ROUTE 0210 (CAMPGROUND SITES 35-45 ACCESS)
0.709	0.709	INTERSECTION	LEFT	ROUTE 0209 (CAMPGROUND SITES 24-34 ACCESS)
0.721	0.721	INTERSECTION	LEFT	ROUTE 0208 (CAMPGROUND SITES 16-23 ACCESS)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0200: CAMPGROUND LOOP ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.739	0.739	INTERSECTION	LEFT	ROUTE 0207 (CAMPGROUND SITES 7-15 ACCESS)
0.755	0.755	INTERSECTION	LEFT	ROUTE 0206 (CAMPGROUND SITES 1-6 ACCESS)
0.810	0.810	INTERSECTION	LEFT	ROUTE 0409 (GROUP CAMPGROUND ACCESS ROAD)
0.810	0.810	INTERSECTION	RIGHT	ROUTE 0101 (TWIN PEAKS ACCESS ROAD)
0.810	0.810	ROUTE END	N/A	TO END OF ROUTE 0101 / START OF ROUTE 0409

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0205: MAINTENANCE YARD ACCESS ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0100 (RESIDENCE ACCESS ROAD) AT MP 0.07 (ON LEFT)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
0.002	0.002	SIGN	RIGHT	REGULATORY, YIELD
0.080	0.080	INTERSECTION	N/A	ROUTE 0903 (MAINTENANCE YARD)
0.080	0.080	ROUTE END	N/A	TO ROUTE 0903 (MAINTENANCE YARD)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0206: CAMPGROUND SITES 1-6 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.01 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.090	0.090	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.090	0.090	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.090	0.090	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.76 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0207: CAMPGROUND SITES 7-15 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.03 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.110	0.110	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.110	0.110	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.110	0.110	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.74 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0208: CAMPGROUND SITES 16-23 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.05 (ON LEFT)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.129	0.129	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.129	0.129	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.130	0.130	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.72 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0209: CAMPGROUND SITES 24-34 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.06 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.140	0.140	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.140	0.140	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.140	0.140	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.71 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0210: CAMPGROUND SITES 35-45 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.08 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.160	0.160	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.160	0.160	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.160	0.160	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.70 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0211: CAMPGROUND SITES 46-57 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.09 (ON LEFT)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.170	0.170	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.170	0.170	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.170	0.170	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.68 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0212: CAMPGROUND SITES 58-70 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.11 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.170	0.170	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.170	0.170	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.170	0.170	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.67 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0213: CAMPGROUND SITES 71-85 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.12 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.190	0.190	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.190	0.190	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.190	0.190	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.65 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0214: CAMPGROUND SITES 86-95 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.14 (ON LEFT)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.190	0.190	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.190	0.190	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.190	0.190	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.64 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0215: CAMPGROUND SITES 96-112 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.16 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.200	0.200	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.200	0.200	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.200	0.200	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.63 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0216: CAMPGROUND SITES 113-128 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.17 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.050	0.050	SIGN	RIGHT	GUIDE, RESTROOMS
0.089	0.089	SIGN	RIGHT	GUIDE, CAMP HOST IN
0.101	0.101	SIGN	RIGHT	GUIDE, RESTROOMS
0.210	0.210	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.210	0.210	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.210	0.210	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.61 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0217: CAMPGROUND SITES 129-145 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.19 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.108	0.108	SIGN	RIGHT	GUIDE, RESTROOMS
0.210	0.210	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.210	0.210	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.210	0.210	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.60 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0218: CAMPGROUND SITES 146-158 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.20 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.220	0.220	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.220	0.220	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.220	0.220	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.59 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0219: CAMPGROUND SITES 159-174 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.22 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.230	0.230	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.230	0.230	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.230	0.230	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.57 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0220: CAMPGROUND SITES 175-191 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.23 (ON LEFT)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.062	0.062	SIGN	RIGHT	GUIDE, RESTROOMS
0.239	0.239	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.239	0.239	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.240	0.240	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.56 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0221: CAMPGROUND SITES 192-208 ACCESS

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.24 (ON LEFT)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.131	0.131	SIGN	RIGHT	GUIDE, RESTROOMS
0.250	0.250	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.250	0.250	INTERSECTION	RIGHT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.250	0.250	ROUTE END	N/A	TO ROUTE 0200 (CAMPGROUND LOOP ROAD) AT MP 0.54 (ON LEFT)

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0402: SPUR RESIDENCE ROAD EAST

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0100 (RESIDENCE ACCESS ROAD) AT MP 0.52 (ON RIGHT)
0.000	0.000	SIGN	RIGHT	REGULATORY, YIELD
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0100 (RESIDENCE ACCESS ROAD)
0.019	0.019	INTERSECTION	LEFT	ROUTE 0401 (SPUR RESIDENCE ROAD WEST)
0.049	0.049	INTERSECTION	LEFT	ROUTE 0402 (SPUR RESIDENCE ROAD EAST)
0.069	0.069	INTERSECTION	RIGHT	UNPAVED ROUTE
0.120	0.120	INTERSECTION	LEFT	ROUTE 0402 (SPUR RESIDENCE ROAD EAST)
0.120	0.120	INTERSECTION	RIGHT	ROUTE 0402 (SPUR RESIDENCE ROAD EAST)
0.120	0.120	ROUTE END	N/A	TO RESIDENCE LOOP

ORPI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0409: GROUP CAMPGROUND ACCESS ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0101 (TWIN PEAKS ACCESS ROAD) AT MP 1.32 (SIDE N/A)
0.000	0.000	INTERSECTION	N/A	ROUTE 0101 (TWIN PEAKS ACCESS ROAD)
0.000	0.000	SIGN	RIGHT	REGULATORY, YIELD
0.012	0.012	INTERSECTION	LEFT	ROUTE 0206 (CAMPGROUND SITES 1-6 ACCESS)
0.015	0.015	INTERSECTION	LEFT	ROUTE 0200 (CAMPGROUND LOOP ROAD)
0.018	0.018	SIGN	RIGHT	GUIDE, GROUP CAMPGROUND RESERVATIONS REQUIRED
0.034	0.034	INTERSECTION	RIGHT	ROUTE 0403 (CAMPGROUND HOUSING ROAD)
0.037	0.037	SIGN	RIGHT	REGULATORY, AUTHORIZED VEHICLES ONLY
0.140	0.140	INTERSECTION	N/A	ROUTE 0906 (GROUP CAMPGROUND PARKING)
0.140	0.140	ROUTE END	N/A	TO ROUTE 0906 (GROUP CAMPGROUND PARKING)

Organ Pipe Cactus National Monument



Section 10 Appendix

APPENDIX A: GLOSSARY OF TERMS AND ABBREVIATIONS

TERM OR ABBREVIATION	DESCRIPTION OR DEFINITION
AADT	(Annual Average Daily Traffic) The estimate of typical daily traffic on a road segment for all days of the week over the period of one year.
CRS	Condition Rating Sheets. (Section 5)
Excellent	Excellent rating with an index value of 95 or greater
Fair	Fair rating with an index value from 61 to 84
Func. Class	Functional Classification (see Route ID, Section 4)
Good	Good rating with an index value from 85 to 94
IRI	International Roughness Index
Lane Width	Width from road centerline to fogline, or from centerline to edge-of-pavement when no fogline exists
MRR	Manually Rated Route
N/A	Not Applicable
NC	Not Collected
Paved Width	Width from edge-of-pavement to edge-of-pavement
PCR	Pavement Condition Rating (Appendix B, Section 10)
Poor	Poor Rating with an index value of 60 or less
RCI	Roughness Condition Index
SADT	(Seasonal Annual Daily Traffic) The AADT adjusted to represent just the period of the year containing 80 percent of the total annual traffic.
SCR	Surface Condition Rating (Appendix B, Section 10)
Shoulder Width	Distance from fogline to hinge point, or if no fogline, from edge-of-pavement to hinge point.

APPENDIX B: DESCRIPTION OF RATING SYSTEM

A numerical roadway rating system is used to describe the overall condition of the paved roadways and paved parking areas. In this system, a numerical rating between 0 and 100 is ascribed to each 0.02 miles of road. This numerical rating is called a Pavement Condition Rating (PCR). A “perfect” road, newly constructed with no surface distresses and a smooth surface, would be assigned a PCR rating of 100. Based on the type, severity, and extent of surface distresses points are deducted from 100 to arrive at the final PCR.

Data is collected on the following distresses and conditions:

- **Alligator Cracking** - a series of interconnecting cracks resembling alligator skin or chicken wire, which can occur anywhere in the lane.
- **Longitudinal Cracking** - cracks which are parallel to the pavement centerline or asphalt lay-down direction.
- **Transverse Cracking** - cracks perpendicular to the pavement centerline.
- **Pothole (patch)** - a bowl-shaped hole in the pavement surface. May be patched or not.
- **Rutting** - surface depressions in the wheel paths.
- **Roughness** is collected as International Roughness Index (IRI) and is used in the PCR formula. Roughness is measured in inches of vertical displacement of the vehicle per mile traveled.

A Distress Rating Index value is calculated for each of the individual distresses at the 0.02 mile, or every 105.6 feet.

Calculation of Index Values

Note: Index values < 0 default to 0. Index values > 100 default to 100.

For all indices, a higher value indicates a better road condition, and a lower value indicates a poorer road condition.

All severity protocols are taken from the SHRP Distress Identification Manual.

Condition Ranges for all Indices

Excellent	>=95
Good	>=85 and <95
Fair	>60 and <85
Poor	<=60

Alligator Crack Index

$$AC_INDEX = 100 - 40 * [(\%LOW / 70) + (\%MED / 30) + (\%HI / 10)]$$

Where :

The values %LOW, %MED and %HI describe the percent of the total WX measured area that is affected by alligator cracking of each severity level. These values range from ≥ 0 to ≤ 100 .

$\%LOW$ = (Total square area WX measured low severity alligator cracking) / (Section length * WX measured lane width)

$\%MED = (\text{Total square area WX measured medium severity alligator cracking}) / (\text{Section length} * \text{WX measured lane width})$

$\%HI = (\text{Total square area WX measured high severity alligator cracking}) / (\text{Section length} * \text{WX measured lane width})$

The denominators 70, 30, and 10 are the maximum allowable extents for the numerator value in the same units. For example, low severity alligator cracking totaling 70% of the measured section area would alone fail that section of road for this index.

The threshold for failure for this index is $AC_INDEX = 60$.

Severity Levels:

Low severity alligator cracking describes an area of cracks with no or only a few connecting cracks; cracks are not spalled (cracked, broken, chipped, frayed along the cracks); pumping (water seepage from beneath the pavement through the cracks) is not evident. Any sealed alligator cracks are low severity alligator cracks, as long as the sealant is still in good condition. If the sealant has reopened, and the crack is visible and can be measured, the crack severity is assigned according to that measurement.

Medium severity alligator cracking describes an area of interconnected cracks forming a complete pattern; cracks may be slightly spalled; pumping is not evident.

High severity alligator cracking describes an area of moderately or severely spalled interconnected cracks forming a complete pattern; pieces may move when subjected to traffic; pumping may be evident.

Longitudinal Crack Index

$LC_INDEX = 100 - 40 * [(\%LOW / 350) + (\%MED / 200) + (\%HI / 75)]$

Where:

The values %LOW, %MED and %HI describe the length of longitudinal cracking of each severity as a percent of the section length. These values are ≥ 0 and can exceed 100.

$\%LOW = (\text{Total linear feet WX measured low severity longitudinal cracking}) / (\text{Section length in linear feet})$

$\%MED = (\text{Total linear feet WX measured medium severity longitudinal cracking}) / (\text{Section length in linear feet})$

$\%HI = (\text{Total linear feet WX measured high severity longitudinal cracking}) / (\text{Section length in linear feet})$

The denominators 350, 200, and 75 are the maximum allowable extents for the numerator value in the same units. For example, medium severity longitudinal cracking with a total length that is 200% of the length of the section would alone fail that section of road for this index.

The threshold for failure for this index is $LC_INDEX = 60$.

Severity Levels:

Low severity longitudinal cracks have a mean width $\leq 1/4''$, or are sealed cracks of indeterminate width whose sealant material is in good condition.

Medium severity longitudinal cracks have a mean width $> 1/4''$ and $\leq 3/4''$.

High severity longitudinal cracks have a mean width $> 3/4''$.

Transverse Crack Index

$$TC_INDEX = 100 - \{[20 * ((LOW / 15.1) + (MED / 7.5))] + [40 * (HI / 1.9)]\}$$

Where:

The values **LOW**, **MED** and **HI** describe a count of the total number of transverse cracks of each severity level, where one transverse crack unit is equal to the WX measured lane width. These values are ≥ 0 .

LOW = (Total linear feet WX measured low severity transverse cracking) / (WX measured lane width)

MED = (Total linear feet WX measured medium severity transverse cracking) / (WX measured lane width)

HI = (Total linear feet WX measured high severity transverse cracking) / (WX measured lane width)

The denominators **15.1**, **7.5**, and **1.9** are the maximum allowable extents for the numerator value in the same units. For example, high severity transverse cracking with a total length that amounts to 1.9 times the WX measured lane width would alone fail that section of road for this index.

The threshold for failure for this index is $TC_INDEX = 60$.

Severity Levels:

Low severity transverse cracks have a mean width $\leq 1/4$ " , or are sealed cracks of indeterminate width whose sealant material is in good condition.

Medium severity transverse cracks have a mean width $> 1/4$ " and $\leq 3/4$ " .

High severity transverse cracks have a mean width $> 3/4$ " .

Patching Index

$$PATCH_INDEX = 100 - 40 * (%PATCHING / 80)$$

Where:

The value **%PATCHING** describes the percent of the total WX measured area that is affected by patching. This value ranges from ≥ 0 to ≤ 100 .

%PATCHING = (Total area WX measured patching) / (Section length * WX measured lane width)

The denominator **80** is the maximum allowable extent for the numerator value in the same units. Patching totaling 80% or more of the measured section area fails a section of road for this index.

The threshold for failure for this index is $PATCH_INDEX = 60$.

There are no severity levels for patching.

Rutting Index

$$RUT_INDEX = 100 - 40 * [(%LOW / 160) + (%MED / 80) + (%HI / 40)]$$

Where:

10 ARAN rut depth measurements are taken per full .02 section for each of 2 wheel paths (left and right), resulting in a total of 20 measurements taken for both wheel paths. The values %LOW, %MED and %HI describe the number of ARAN rut depth measurements of both wheel paths in the section whose values are of each severity level, calculated as a percentage of the total number of ARAN rut depth measurements taken for a single wheel path in the section. These values range from ≥ 0 to ≤ 200 .

%LOW = (Total number of ARAN measured low severity ruts in section for both wheel paths) / (Total number of ARAN rut measurements in section for a single wheel path)

%MED = (Total number of ARAN measured medium severity ruts in section for both wheel paths) / (Total number of ARAN rut measurements in section for a single wheel path)

%HI = (Total number of ARAN measured high severity ruts in section for both wheel paths) / (Total number of ARAN rut measurements in section for a single wheel path)

The denominators 160, 80, and 40 are the maximum allowable extents for the numerator value in the same units. For example, low severity ruts recorded in 16 of the 20 total readings (or 160% of a full wheel path's worth of readings) for a full .02 section would fail that section for this index.

The threshold for failure for this index is RUT_INDEX = 60.

Severity Levels:

Ruts with an ARAN measured depth $< 0.20''$ are not included in the distress calculations.

Low severity ruts have an ARAN measured depth $\geq 0.20''$ and $\leq 0.49''$.

Medium severity ruts have an ARAN measured depth $\geq 0.50''$ and $\leq 0.99''$.

High severity ruts have an ARAN measured depth $\geq 1.00''$.

Roughness Condition Index

$$RCI = 32 * [5 * (2.718282 ^ (-0.0041 * AVG IRI))]$$

Where:

The value AVG IRI describes the average value of the Left IRI and Right IRI measurements for the section. This value can range from approximately 40 to over 1000.

$$AVG IRI = (ARAN \text{ measured Left IRI} + ARAN \text{ measured Right IRI}) / 2$$

There is no applicable threshold for failure for this index.

NOTE: Collection of roughness data is dependent on the data collection vehicle traveling at a minimum speed of 12 mph. In the event that a route cannot be safely traveled at this minimum speed, and results in no roughness data, the SCR only will be calculated.

Surface Condition Rating Index

$$SCR = 100 - [(100 - AC_INDEX) + (100 - LC_INDEX) + (100 - TC_INDEX) + (100 - PATCH_INDEX) + (100 - RUT_INDEX)]$$

Where:

See above for determinations of [AC_INDEX](#), [LC_INDEX](#), [TC_INDEX](#), [PATCH_INDEX](#) and [RUT_INDEX](#).

The threshold for failure for this index is $SCR = 60$.

Pavement Condition Rating Index Asphaltic Concrete Pavement (AS)

$$PCR = (0.60 * SCR) + (0.40 * RCI)$$

Where:

See above for determinations of [SCR](#) and [RCI](#).

The values [0.60](#) and [0.40](#) function as weights within the formula.

If [SCR](#) equals zero (which means that the road surface condition is very poor), then the formula simply reduces to: $PCR = 0.40 * RCI$.

If [RCI](#) equals zero (which means that this value was not available for some reason), then the formula becomes: $PCR = SCR$.

The threshold for failure for this index is $PCR = 60$.

Pavement Condition Rating Index Portland Cement Concrete Pavement (CO)

$$\text{Concrete PCR} = -0.0012(IRI^2) + 0.0499(IRI) + 99.542$$

Where:

The threshold for failure for this index is $PCR = 60$.

Parking Lot and Manually Rated Road Condition Rating

Surface Condition Distresses- Chip Seal:

- Raveling – loss of surface rock chips revealing previous surface
- Bleeding – asphalt or tar is bleeding through to the surface where surface looks slick with asphalt
- Rutting
- Potholes/Patching

Ratings - Chip Seal:

- Excellent – None of the surface affected by the above (recently constructed)
- Good – Less than 10% of surface affected by the above
- Fair – Between 10% and 40% of surface affected by the above
- Poor – More than 40% of surface affected by the above

Surface Condition - Asphalt:

- Cracking of any type
- Rutting
- Potholes/Patching

Ratings - Asphalt:

Excellent – None of the surface affected by the above (recently constructed)

Good – Less than 10% of surface affected by the above

Fair – Between 10% and 40% of surface affected by the above

Poor – More than 40% of surface affected by the above

Index Values of Visual Ratings on Parking Lots and Manually Rated Roads

Under Construction 100

Excellent 97

Good 90

Fair 73

Poor 45

APPENDIX C: GENERAL INFORMATION ON RIP SYSTEMS

DMI (Distance Measuring Instrument)

The DMI (Distance Measuring Instrument) obtains road length measurements that are highly accurate (to 0.001 miles). The DMI is connected to the outside of the rear wheel on the driver's side, and is wired into the antilock braking system (ABS). The number of pulses recorded for each wheel rotation by the ABS is registered by the DMI, which transmits a measurement of distance traveled to the processing computers in the ARAN. The DMI distance measurements are the foundation to which all the other subsystems are tied.

Digital Image Information

All images collected in Cycle 4 are digital images in .jpg format. These images provide adequate resolution for identifying sign and feature inventories and pavement evaluations. The images can be viewed with an interactive software program called VisiData. Each park will receive a copy of the VisiData program. Cycle 4 data, as well as Cycle 3 data, can be viewed using the Visi-Data software program. This program is a data presentation and analysis tool that can be accessed either at the individual park, park region or at NPS headquarters. The data is organized in a hierarchical manner and presented in tabular and graphical formats. The user is able to perform queries and drill down through the data to find the particular information they are looking for. Associated digital right-of-way images from either the LAN, USB port, individual DVD can be presented along with GPS locations.

Right-of-way (ROW) Video

Three digital cameras are mounted above the vehicle's windshield that point directly forward and slightly to the left and right. These cameras each collect one image every 0.002 miles (10.56 feet) in the primary-direction lane, to give a panoramic field-of-view of about 160 degrees. (Forward-facing video from the center camera only is collected in the opposite-direction lane of travel.)

If data collection speed exceeds 35-40 mph, the network and storage computers may become overwhelmed and may begin to drop individual video frames. Occasional common video quality issues include sun glare and rapid changes between sunlight and shadow. The camera system is equipped with auto risers that sometimes cannot adjust quickly enough to collect optimal video images.

FHWA ARAN CAMERA SPECIFICATIONS	
Forward-Facing Cameras (ROW)	
Focal length	10 mm
Chip size	8.71mm X 6.90mm
Naming convention of each image	chainage.jpg
Image resolution	1300 X 1030
Image pixel size	depends on distance
Relative position of the GPS unit to each camera	2.104 meters from front-center rutbar to camera
<i>The ARAN has a lever arm setting which tells the POS system where the center of the rutbar is with respect to the GPS antennas.</i>	

Pavement Video

Pavement video images are collected by the data collection vehicle to use in later analysis to determine extents and severities of different types of pavement distress. The pavement in the primary-direction road lane is filmed continuously by two analog cameras attached to booms extended from the rear of the ARAN on the left and right sides. Strobe lights fire synchronously with the opening of the camera shutters to eliminate shadows and motion blur. The images from the two cameras overlap, and are stitched together in real time to create a continuous strip image of the pavement in the primary direction lane. This strip has a maximum width of 3.0 meters (actual width depends on pavement camera calibration) and is sectioned for ease of file management every 0.010 miles (52.8 feet).

The cameras both have a resolution of 640 x 480, making the threshold of visible pavement cracks about 3 mm. Because the cameras are triggered by time and not distance traveled, this subsystem requires a minimum operating speed of 6 mph, otherwise images are taken on top of one another and result in checkered or black pavement video.

FHWA ARAN CAMERA SPECIFICATIONS	
Pavement Cameras	
Image Pixel size	3.135 mm /side
Image Resolution	640 X 480
Area that images cover	1.5 m X 1.2 m
Full color or grayscale	grayscale
Vehicle speed limitations	80km/h
Aperture setting	Auto-iris
Exposure setting	1/50000

FHWA ARAN GPS & Inertial System

GPS is collected by a NovAtel MiLlennium, 12 channel, dual frequency L1/L2, DGPS ready receiver with a MiLlennium 502 GPS antenna. An OmniStar 3000 LR provides real-time differential correction. An Applanix POS/LV is the inertial system that fills in when GPS is unavailable. The antenna is mounted in the center of the roof, slightly toward the rear of the vehicle, but a lever arm is applied to place the operational location of GPS recording at the center of the rutbar on the front bumper of the vehicle. Expected accuracy under ideal conditions is sub meter.

GPS Collected on Manually Rated Routes

Parking areas and roads that are not fully drivable with the ARAN data collection vehicle are collected manually by field technicians. GPS is collected for these routes using GPS field data collection utilizes Trimble ProXRS or ProXH Receivers matched with Trimble TSC1 or Ranger handheld Data Loggers, connected to Trimble Hurricane Antennas giving sub meter accuracy in ideal conditions. This collection equipment has varied as technology has improved over the years of RIP data collection. Some GPS files collected as early as 1998 have been verified for accuracy and perpetuated through the current cycle of data collection.

GPS SHAPEFILES

Type of Route and Collection Shape Filename		
Roads driven by ARAN	Line	park_road_04.dbf/.shp/.shx
Parking Areas	Polygon	park_pkg_04.dbf/.shp/.shx
Roads Manually Rated as Lines (not in every park)	Line	park_mrl_04.dbf/.shp/.shx
Roads Manually Rated as Polygons (not in every park)	Polygon	park_mrp_04.dbf/.shp/.shx

- Datum for all GPS shapefiles is LL_WGS84_DD (Latitude Longitude _World Geodetic Survey 1984_Decimal Degrees)
- In filename, “park” is NPS four-letter alphabetic code.
- The source for route data required for data processing and report production is the PARK_RouteInfo.mdb.

Condition Photos Taken of Manually Rated Roads

One or more digital photos are taken by Canon Power Shot G2 4.0 Mega Pixel digital camera for each manually rated route in a National Park. They are stored in .jpg format named with the four-letter NPS park alphabetic code, route number, and the photo number assigned by the camera. For example, YOSE_0900_4434.jpg is the filename of the photo named 4434 by the camera that was taken of Yosemite National Park route 0900.

Scenic Photos

Scenic photos are taken by Canon Power Shot G2 4.0 Mega Pixel digital camera throughout each park and are named with the four-letter NPS park alphabetic code and the count of the photo taken in that park. For example, GRCA003.jpg is the filename of the third scenic photo taken in Grand Canyon National Park. The number of scenic photos provided will vary between parks.

APPENDIX D: METADATA

FHWA – NPS Road Inventory Program Cycle 4 Metadata

The purpose of these sheets is to provide users of the Road Inventory Program’s data with data accuracies and tolerances to help users define ways in which the RIP data can and cannot be used. For further information on specifics of data collection equipment, data collection procedures, equipment calibrations, or quality control/quality assurance procedures, please contact Jim Kennedy, Project Manager, Data Quality Assurance, at 720-963-3560 or jim.kennedy@fhwa.dot.gov.

All Road Inventory Program data undergoes quality control and quality assurance testing. This document represents the known data accuracies and tolerances for the data collection equipment, data collection procedures, and data processing procedures currently in use. Many additional tests conducted on the park databases during the quality assurance phase to ensure data integrity are not listed as a part of this document. Before it is delivered, a park database undergoes a large set of table design consistency, field data format consistency, data completeness, uniqueness of key fields, data reasonableness, acceptable data range, within-field data consistency, between-field data consistency, and between-table data consistency tests. Additional data sampling checks are conducted to ensure proper data upload from raw files into the park database and to quality check the pavement crack analysis. Further information is detailed in the FHWA – NPS RIP Quality Assurance Manual, available upon request.

This description of metadata includes only the known accuracies with which a data field matches its expected value. The tables that follow this page show each database field’s:

- Field – field name
- Format – data type and number of characters of field
- Expected Value – meaning of value assigned to field
- Source – when in process field value obtained
- Validation – how field value obtained
- Expected Accuracy – accuracy with which contents of field match Expected Value

Verifying and continually improving the accuracy of Road Inventory Program data is an ongoing goal of the Federal Highway Administration and the National Park Service. Field testing and post-collection analysis of ARAN (Automatic Road ANalyzer) -collected data will continue in Cycle 4. Data quality is expected to improve as the FHWA – NPS Road Inventory Program continues to operate, due to the fact that future data collection cycles will consist in large part of data updates. Also, technological improvements are expected to render the data increasingly consistent with actual roadway conditions as data collection cycles progress.

Specific Caveats

- MUTCD based on contents & colors of sign, not on size
- Database records that show a Portland Cement Concrete (CO) surface type sometimes include distress index values that seem to show a perfect roadway. Condition assessments on concrete pavements are not conducted for Alligator Cracking, Transverse or Longitudinal Cracking, Patching, or Rutting. Perfect values for concrete road sections for these indexes are default values and do not represent a condition assessment of the concrete surfaces.
- On the USB drive, in the Database folder, parks are provided with intersection lists and exceptions lists. These documents should be treated as raw files and are not accurate. Refer to the final database for accurately post-processed intersection data.
- Most roadway data is collected in the primary direction lane of a roadway. To save data storage space and to reduce data analysis efforts, the assumption was made that the paved surface condition of a route’s primary lane adequately represents the surface condition of the full roadway. Therefore, in the database, opposite-direction records in the PMS_Tenth table do not include assessed values for roadway surface distresses. Values such as 0, N/A, -1, or a repeat of the primary-direction assessed value indicate that no assessment was performed. The PMS_20 and PMS_Mile tables simply exclude all opposite routes.

- Roadway Data is collected in intervals of 0.010 miles (52.8feet) constituting a “station”.
- Most roadway features are collected relative to the primary direction lane of a roadway, using the primary-direction video and mileage. Signs and Mile Markers are the only features collected using the opposite-direction video with mileage location referenced to the primary direction lane of the roadway.
- Route_GPS table contains GPS positional information collected by the ARAN and post processed with Applanix POSPac Land 5.0 post-processing software. No manual adjustments have occurred on this table.
- Modifications to the Park_ROAD_04.dbf/.shp/.shx files may have been necessary for report esthetics.
- Modifications to the Park_PKG_04.dbf/.shp/.shx files may have been necessary for report esthetics.
- Cycle 4 utilizes the Microsoft Office 2003 suite of products and Crystal Reports XI for document and data file generation and reporting.
- All PDF files are in Adobe Acrobat 7.0 Professional format.
- All ArcGIS files are created using ESRI Version 9.x software.
- Thumbnail images are created at 1/10 original image size for Right-of-Way and Pavement Images.
- FHWA is investigating the rutting methodology and calculated values it currently reports. Equipment limitations and analysis methods may be over reporting, low severity rutting.

Key to Notes in Tables

(1): Note that only one value fits in field, so even if this value varies throughout the route, only predominant value is recorded here.

(2): Shoulder width is measured at route start and every half-mile along the route in the primary direction. Width is the entire width of the drivable shoulder, regardless of the presence or absence of pavement, from the fog line to the shoulder hinge point, or if no fog line exists, from the edge of pavement to the hinge point. Identification of shoulder hinge point can be problematic using video analysis. Some paved ditches may be mistakenly recorded as shoulders where the shoulder hinge point and change in slope are not easily distinguished from the video.

(3): Mileage is measured by the ARAN (Automatic Road ANalyzer) data collection vehicle out to the 0.001 decimal place. The DMI (distance measuring instrument) is very accurate, with extremely slight variations in measurement due to air temperature, tire inflation, curves, hills, and equipment calibration.

(4): Features are measured differently depending on whether they are visible in the forward-facing video of the roadway, but every feature milepost measurement depends on the baseline measurement of the data collection vehicle’s mileage. The ARAN (Automatic Road ANalyzer) data collection vehicle’s mileage is measured by the DMI (distance measuring instrument) out to the 0.001 decimal place. The DMI is very accurate, with extremely slight variations in measurement due to air temperature, tire inflation, curves, hills, and equipment calibration. If a feature will not be visible in the forward-facing video, its milepost is determined by the data collectors’ key press tagging the milepost when the ARAN passes the feature. Key presses are entered into the ARAN software when the vehicle travels typically between 15 and 45 miles/hour, so a delay of a single second as the vehicle passes a feature would result in an inaccuracy of 0.004 miles (22 feet) to 0.012 miles (66 feet). If a feature is visible in the video, its milepost is determined during post-processing using a video measurement software called Surveyor.

(5): Condition assessments on concrete (PCC) pavements are not conducted for Alligator Cracking, Transverse or Longitudinal Cracking, Patching, or Rutting. Perfect values for concrete road sections for these indexes are default values and do not represent a condition assessment of the concrete surfaces.

(6): Roadway cracking presence, type, severity, and extent are determined by filming the roadway in the primary lane continuously with two overlapping analog cameras of 640 x 480 resolutions. The images from both cameras are stitched together in real time to create a continuous strip image of the roadway pavement in the primary lane. Cracks 3 mm or greater in width are visible in this video. A semi-automatic process running the WiseCrax software with additional input by human operators provides the cracking quantities recorded in these database fields. Quality checks have determined that a consistent 80% or better of the visible cracks are recorded.

Access Database Metadata

MASTER Table Metadata:

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
1	RIP_CYCLE	XX	4, for data collection cycle 4	Route ID Meeting	FHWA Determination	100% Referenced to other tables
2	STATE	XX	State where route is located	Route ID Meeting	Park Input / FHWA Determination	100%, Referenced to other tables (1)
3	PARK_ALPHA	XXXX	Park alpha code	Route ID Meeting	NPS References	100%, Referenced to other tables
4	PARK_NO	XXXX	Park numeric code	Route ID Meeting	NPS References	100%, Referenced to other tables
5	RTE_NO	9999XXX	Route number	Route ID Meeting	Park Input / FHWA Classification	100%, Referenced to other tables
6	RTE_NAME	(Text)	Route name	Route ID Meeting	Park Input	100%, Referenced to other tables. 100 characters fit in field
7	FUNCT_CLASS	X	Route functional classification	Route ID Meeting	Park Input / FHWA Classification	100%, Referenced to other tables
8	DIRECTION	XXX	Survey lane: PRI (primary) or OPP (opposite)	Route ID Meeting	Park Input / FHWA Determination	100%,
9	BEG_MP_EST	999.999 (miles)	Estimated starting MP	Route ID Meeting	Park Input / FHWA Determination	Estimated before data collected
10	END_MP_EST	999.999 (miles)	Estimated ending MP	Route ID Meeting	Park Input / FHWA Determination	Estimated before data collected
11	RTE_LENGTH	999.999 (miles)	Collected route length	ARAN Data Collection	Automatic Output	100%
12	FROM_DESC	(Text)	Beginning terminus of route	Route ID Meeting	Park Input / FHWA Determination	100% Referenced to other tables
13	TO_DESC	(Text)	Ending terminus of route	Route ID Meeting	Park Input / FHWA Determination	100% Referenced to other tables
14	NO_LANES	X	Number of lanes in route	ARAN Data Collection	Survey Crew Input	Untested. (1)
15	SURF_TYPE	XX	Surface type of route	ARAN Data Collection	Survey Crew Input	100%, Referenced to other tables (1)
16	COMP_DIR	XX	Compass direction of route's primary lane (nearest cardinal direction)	Route ID Meeting	Park Input / FHWA Determination	Untested
17	COMMENTS	(Text)	Special information, if any	Contractor Post-processing	Contractor Input	Untested
18	FILENAME	(Text)	Filename of raw data files	ARAN Data Collection	Automatic Output	100%
19	SECTION	(Text)	Route section ID	Route ID Meeting/ARAN Data Collection	Survey Crew Input/Automatic Output	100%

20	FKEY	9999999	Unique record ID	Contractor Post-processing	Database Processing	100%
21	DATE	MM/DD/YY	Data collection date	ARAN Data Collection	Automatic Output	100%
22	BEG_MP	999.999 (miles)	Beginning MP collected	ARAN Data Collection	Automatic Output	100% (3)
23	END_MP	999.999 (miles)	Ending MP collected	ARAN Data Collection	Automatic Output	100% (3)

PMS_FEATURE Table Metadata:

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
1	RIP_CYCLE	XX	4, for data collection cycle 4	Route ID Meeting	FHWA Determination	100% Referenced to other tables
2	STATE	XX	State where route is located	Route ID Meeting	Park Input / FHWA Determination	Untested (1)
3	PARK_ALPHA	XXXX	Park alpha code	Route ID Meeting	NPS References	100% Referenced to other tables
4	PARK_NO	XXXX	Park numeric code	Route ID Meeting	NPS References	100% Referenced to other tables
5	RTE_NO	9999XXX	Route number	Route ID Meeting	Park Input / FHWA Classification	100% Referenced to other tables
6	FMSS_EQUIP	XXXXXXXX	Facility Management Software System Equipment number	NPS FMSS application	NPS References	Untested
7	FUNCT_CLASS	X	Route functional class	Route ID Meeting	Park Input / FHWA Classification	100% Referenced to other tables
8	DIRECTION	XXX	Survey lane: PRI (primary) or OPP (opposite)	Route ID Meeting	Park Input / FHWA Determination	100%
9	MP	999.999 (miles)	Feature location along route	ARAN Data Collection/Contractor Post-processing	Video Analysis	<=0.001 mile
10	BEG_MP	999.999 (miles)	Feature Beginning location along route	Contractor Post-processing	Video Analysis	<=0.001 mile
11	END_MP	999.999 (miles)	Feature Ending location along route	Contractor Post-processing	Video Analysis	<=0.001 mile
12	FEATURE_LENGTH	999.99 (Feet)	Linear Feature Length	Contractor Post-processing	Database Processing	100%
13	EVENT	XXXX	Event category of feature	Contractor Post-processing	Video Analysis	Untested
14	EVENT_CODE	XXXX	Event sub-category of feature	Contractor Post-processing	Video Analysis	Untested
15	FEATURE_TYPE	(Text)	Feature designation: LINEAR or POINT	Contractor Post-processing	Video Analysis	Untested
16	EVENT_DESC	(Text)	Description of feature/contents of sign	Contractor Post-processing	Video Analysis	Untested
17	MUTCD	(Text)	MUTCD Code of Sign	Contractor Post-processing	Database Processing	95%
18	CONDITION	“N/A”	Sign condition. N/A. Not to be populated	Contractor Post-processing	Video Analysis	Values inaccurate, defaulted to “N/A”
19	COMMENT	(Text)	Sign label, intersecting route, etc.	Contractor Post-processing	Database Processing	Untested
20	OFFSET	“N/A”	Offset from Road Edge. N/A. Not to be populated	Contractor Post-processing	Database Processing	Values inaccurate, defaulted to “N/A”

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
21	SIDE	(Text)	Side of route relative to lane driven	Contractor Post-processing	Video Analysis	95%
22	STR_NUMBER	(Text)	FHWA bridge structure number	FHWA Post-processing	Database Processing	Untested
23	BARR_MAT	(Text)	Barrier Material Type	Contractor Post-processing	Video Analysis	Untested
24	BARR_TYPE	(Text)	Barrier Type	Contractor Post-processing	Video Analysis	Untested
25	BARR_POST_MAT	(Text)	Barrier Post Materials	Contractor Post-processing	Video Analysis	Untested
26	BARR_BEG_TERM	(Text)	Barrier Approach Treatment	Contractor Post-processing	Video Analysis	Untested
27	BARR_END_TERM	(Text)	Barrier End Treatment	Contractor Post-processing	Video Analysis	Untested
28	CURB_MAT	(Text)	Curb Material Type	Contractor Post-processing	Video Analysis	Untested
29	PAVED_DITCH_MAT	(Text)	Paved Ditch Material Type	Contractor Post-processing	Video Analysis	Untested (2)
30	GATE_MAT	(Text)	Gate Material Type	Contractor Post-processing	Video Analysis	Untested
31	GATE_STYLE	(Text)	Gate Style	Contractor Post-processing	Video Analysis	Untested
32	BEG_GPS_LAT	999.999999	GPS Latitude Co-ordinate (decimal degrees)	Contractor Post-processing	Video Analysis	<= 3.00 feet
33	BEG_GPS_LON	-999.999999	GPS Longitude Co-ordinate (-decimal degrees)	Contractor Post-processing	Video Analysis	<= 3.00 feet
34	BEG_GPS_ELEV	99999.9	GPS Elevation Feet	Contractor Post-processing	Video Analysis	Untested
35	BEG_GPS_MODE	(Text)	GPS Satellite Mode	Contractor Post-processing	Video Analysis	Untested
36	END_GPS_LAT	999.999999	GPS Latitude Co-ordinate (decimal degrees)	Contractor Post-processing	Video Analysis	<= 3.00 feet
37	END_GPS_LON	-999.999999	GPS Longitude Co-ordinate (-decimal degrees)	Contractor Post-processing	Video Analysis	<= 3.00 feet
38	END_GPS_ELEV	99999.9	GPS Elevation Feet	Contractor Post-processing	Video Analysis	Untested
39	END_GPS_MODE	(Text)	GPS Satellite Mode	Contractor Post-processing	Video Analysis	Untested
40	DATUM	(Text)	LL_WGS84_DD	Contractor Post-processing	Database Processing	100%
41	VIDEO	<Park>C04VID<#>	Removable USB video hard drive number	Contractor Post-processing	Database Processing	Untested
42	IMAGE	(Text)	Filename of .jpg image showing feature	Contractor Post-processing	Automatic Output	Untested
43	DATE	MM/DD/YY	Data collection date	ARAN Data Collection	Automatic Output	100%
44	FILENAME	(Text)	Filename of raw data files	ARAN Data Collection	Automatic Output	100%
45	SECTION	(Text)	Route section ID	Route ID Meeting/ARAN Data Collection	Survey Crew Input/Automatic Output	100%
46	FKEY	(Numeric)	Unique record ID	Contractor Post-processing	Database Processing	100%
47	VISI_FROM	999999 (millimiles)	Raw MP of first video frame showing feature	Contractor Post-processing	Database Processing	Untested
48	VISI_TO	999999 (millimiles)	Raw MP of last video frame showing feature	Contractor Post-processing	Database Processing	Untested

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
49	IDKEY	(Text)	Unique record ID used by VisiData	Contractor Post-processing	Database Processing	Untested
50	MP_REF	(Text)	Range of mileage to play in VisiData	Contractor Post-processing	Database Processing	Untested

List of Roadway Features						
#	EVENT	EVENT_CODE	FEATURE_TYPE	EVENT_DESC	STRUCTURE #	COLLECTED BY
1	BRIDGE	BRDG	LINEAR	BRIDGE	ALWAYS	ARAN
2	CATTLE GUARD	CGD	POINT	CATTLE GUARD	-	VIDEO RATING
3	CONSTRUCTION	CNST	LINEAR	CONSTRUCTION WORK ZONE	-	ARAN
4	CULVERT	CUL	POINT	CULVERT	SOMETIMES	ARAN
5	CURB	CRBL	LINEAR	CURB ON LEFT	-	VIDEO RATING
	""	CRBR	LINEAR	CURB ON RIGHT	-	VIDEO RATING
6	CURB-AND-GUTTER	CAGL	LINEAR	CURB-AND-GUTTER ON LEFT	-	VIDEO RATING
	""	CAGR	LINEAR	CURB-AND-GUTTER ON RIGHT	-	VIDEO RATING
7	DROP INLET	DINL	POINT	DROP INLET ON LEFT	-	ARAN
	""	DINR	POINT	DROP INLET ON RIGHT	-	ARAN
8	GATE	GATE	POINT	GATE	-	VIDEO RATING
9	FIRE HYDRANT	FHDL	POINT	FIRE HYDRANT ON LEFT	-	VIDEO RATING
	""	FHDR	POINT	FIRE HYDRANT ON RIGHT	-	VIDEO RATING
10	GUARD/GUIDE WALL	GGWL	LINEAR	GUARD/GUIDE WALL ON LEFT	-	VIDEO RATING
	""	GGWR	LINEAR	GUARD/GUIDE WALL ON RIGHT	-	VIDEO RATING
11	GUARD/GUIDE RAIL	GGRL	LINEAR	GUARD/GUIDE RAIL ON LEFT	-	VIDEO RATING
	""	GGRR	LINEAR	GUARD/GUIDE RAIL ON RIGHT	-	VIDEO RATING
12	INTERSECTION	INTL	POINT	INTERSECTION ON LEFT	-	ARAN
	""	INTR	POINT	INTERSECTION ON RIGHT	-	ARAN
	""	INTN	POINT	INTERSECTION SIDE N/A	-	ARAN

13	LANE DEVIATION	LADV	LINEAR	LANE DEVIATION	-	ARAN
14	LOW WATER CROSSING	LWCR	LINEAR	LOW WATER CROSSING	SOMETIMES	VIDEO RATING
15	MILE MARKER	MML	POINT	MILE MARKER ON LEFT	-	VIDEO RATING
	""	MMR	POINT	MILE MARKER ON RIGHT	-	VIDEO RATING
16	OVERPASS	OPV	POINT	OVERPASS VEHICULAR	SOMETIMES	ARAN
	""	OPP	POINT	OVERPASS PEDESTRIAN	SOMETIMES	ARAN
	""	OPRX	POINT	OVERPASS RAILROAD CROSSING	SOMETIMES	ARAN
17	PARK BOUNDARY	PRK	POINT	PARK BOUNDARY	-	ARAN
18	PAVED DITCH	PVDL	LINEAR	PAVED DITCH ON LEFT	-	VIDEO RATING
	""	PVDR	LINEAR	PAVED DITCH ON RIGHT	-	VIDEO RATING
19	PULLOUT	PLOL	LINEAR	PULLOUT ON LEFT	-	VIDEO RATING
	""	PLOR	LINEAR	PULLOUT ON RIGHT	-	VIDEO RATING
20	RAILROAD CROSSING	RRX	POINT	RAILROAD CROSSING	-	VIDEO RATING
21	RETAINING WALL	RTWL	LINEAR	RETAINING WALL ON LEFT	-	VIDEO RATING
	""	RTWR	LINEAR	RETAINING WALL ON RIGHT	-	VIDEO RATING
22	ROUTE BEGIN	RBEG	POINT	ROUTE BEGIN	-	ARAN
23	ROUTE END	REND	POINT	ROUTE END	-	ARAN
24	SIGN	REGU, WARN, GUID, UNKN	POINT	DOCUMENT CONTENTS OF SIGN. (WHAT THE SIGN SAYS) FOR GRAPHICS ONLY SIGNS POPULATED WITH ("GRAPHIC SIGN, NO TEXT") FOR UNREADABLE TEXT POPULATED WITH ("UNABLE TO READ FROM VIDEO")	-	VIDEO RATING
25	STATE BOUNDARY	STB	POINT	STATE BOUNDARY	-	ARAN
26	TRAFFIC LIGHT	TRF	POINT	TRAFFIC LIGHT	-	VIDEO RATING
27	TUNNEL	TUN	LINEAR	TUNNEL	ALWAYS	ARAN

PMS_20, PMS_MILE, & PMS_TENTH Tables Metadata:

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
1	RIP_CYCLE	XX	4, for RIP data collection Cycle 4	Route ID Meeting	FHWA Determination	100% Referenced to other tables
2	STATE	XX	State where route is located	Route ID Meeting	Park Input/FHWA Determination	Untested. (1)
3	PARK_ALPHA	XXXX	Park alpha code	Route ID Meeting	NPS References	100% Referenced to other tables
4	PARK_NO	XXXX	Park numeric code	Route ID Meeting	NPS References	100% Referenced to other tables
5	RTE_NO	9999XXX	Route number	Route ID Meeting	Park Input/FHWA Classification	100% Referenced to other tables
6	FUNCT_CLASS	X	Route functional class	Route ID Meeting	Park Input/FHWA Classification	100% Referenced to other tables
7	DIRECTION	XXX	Survey lane: PRI (primary) or OPP (opposite)	Route ID Meeting	Park Input/FHWA Determination	100%
8	BEG_MP	999.999 (miles)	MP at start of road interval described by database record	Contractor Post-processing	Database Processing	100% (3)
9	END_MP	999.999 (miles)	MP at end of road interval described by database record	Contractor Post-processing	Database Processing	100% (3)
10	INT_LENGTH	999.9 (ft)	Length of road interval as aggregated for data table	Contractor Post-processing	Database Processing	100%
11	RTE_LENGTH	999.999 (miles)	Collected route length	ARAN Data Collection	Automatic Output	100% (3)
12	NO_LANES	99	Number of lanes in route	ARAN Data Collection	Survey Crew Input	Untested. (1)
13	LANE_NO	99	Data collection lane	Contractor Post-processing	Database Processing	Untested
14	D_LANE_WIDTH	99.999 (ft)	WiseCrax (crack detection software) analysis width	Contractor Post-processing	Automatic Output	Untested
15	LANE_WIDTH	99.9 (ft)	Width of lane	Contractor Post-processing	Video Analysis	95%, <=1.0 foot
16	PAVE_WIDTH	99.9 (ft)	Full pavement width	Contractor Post-processing	Video Analysis	95%, <=1.0 foot
17	SHLD_WIDTH_L	99.9 (ft)	Left shoulder width	Contractor Post-processing	Video Analysis	95%, <=1.0 foot (2)
18	SHLD_WIDTH_R	99.9 (ft)	Right shoulder width	Contractor Post-processing	Video Analysis	95%, <=1.0 foot (2)
19	SHLD_COND_L	N/A	N/A. Intended to be Left shoulder condition	ARAN Data Collection	Survey Crew Input	Values inaccurate, defaulted to "N/A"
20	SHLD_COND_R	N/A	N/A. Intended to be Right shoulder condition	ARAN Data Collection	Survey Crew Input	Values inaccurate, defaulted to "N/A"
21	DRAIN_COND_L	N/A	N/A. Intended to be Left drainage condition	ARAN Data Collection	Survey Crew Input	Values inaccurate, defaulted to "N/A"
22	DRAIN_COND_R	N/A	N/A. Intended to be Right drainage condition	ARAN Data Collection	Survey Crew Input	Values inaccurate, defaulted to "N/A"

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
23	SURF_TYPE	XX	Surface type of route	ARAN Data Collection	Survey Crew Input	Untested. (1)
24	PCR	999	Pavement Condition Rating	Contractor Post-processing	Database Processing	100% for calculation (6)
25	RCI	999	Roughness Condition Index; -1 if invalid IRI	Contractor Post-processing	Database Processing	100% for calculation
26	SCR	999	Surface Condition Rating	Contractor Post-processing	Database Processing	100% for calculation (5) (6)
27	IRI_AVG	999.9 (inches/mile)	Average IRI	Contractor Post-processing	Database Processing	Untested
28	IRI_SD	999.9 (inches/mile)	IRI standard deviation	Contractor Post-processing	Database Processing	Untested
29	IRI_L	999.9 (inches/mile)	Left wheel path IRI	ARAN Data Collection	Automatic Output	Untested
30	IRI_R	999.9 (inches/mile)	Right wheel path IRI	ARAN Data Collection	Automatic Output	Untested
31	IRI_FLAG	0 or -1	-1 if invalid IRI data	Contractor Post-processing	Database Processing	Untested
32	RUT_INDEX	999	Rut index	Contractor Post-processing	Database Processing	100% for calculation (5)
33	RUT_AVG	99.99 (inches)	Average rut depth of both wheelpaths	Contractor Post-processing	Database Processing	Untested (5)
34	RUT_MAX	99.99 (inches)	Maximum rut depth of both wheelpaths	Contractor Post-processing	Database Processing	Untested (5)
35	RUT_SD	9.9	Rut depth standard deviation	Contractor Post-processing	Database Processing	Untested (5)
36	RUT_LOW	999 (%)	Percent of low severity ruts (on a 0-200% scale) in both wheelpaths	Contractor Post-processing	Database Processing	Untested (5)
37	RUT_MED	999 (%)	Percent of medium severity ruts (on a 0-200% scale) in both wheelpaths	Contractor Post-processing	Database Processing	Untested (5)
38	RUT_HI	999 (%)	Percent of high severity ruts (on a 0-200% scale) in both wheelpaths	Contractor Post-processing	Database Processing	Untested (5)
39	XFALL	999.9 (% slope)	Cross fall at start of road interval	ARAN Data Collection	Automatic Output	Untested
40	GRADE	999.9 (% slope)	Grade at start of road interval	ARAN Data Collection	Automatic Output	Untested
41	AC_INDEX	999	Alligator cracking index	Contractor Post-processing	Database Processing	100% for calculation (5) (6)
42	AC_LOW	999.9999 (%)	Percent of WiseCrax measured lane area with low-severity alligator cracking	Contractor Post-processing	Pavement Video Analysis	As a Computed 95% Confidence Level (5) (6)
43	AC_MED	999.9999 (%)	Percent of WiseCrax measured lane area with medium-severity alligator cracking	Contractor Post-processing	Pavement Video Analysis	As a Computed 95% Confidence Level (5) (6)
44	AC_HI	999.9999 (%)	Percent of WiseCrax measured lane area with high-severity alligator	Contractor Post-processing	Pavement Video Analysis	As a Computed 95% Confidence Level (5) (6)

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
			cracking			
45	LC_INDEX	999	Longitudinal cracking index	Contractor Post-processing	Database Processing	100% for calculation (5) (6)
46	LC_LOW	999.99 (%)	Low-severity longitudinal cracking in lane as a percentage of road interval length	Contractor Post-processing	Pavement Video Analysis	As a Computed 95% Confidence Level (5) (6)
47	LC_MED	999.99 (%)	Medium-severity longitudinal cracking in lane as a percentage of road interval length	Contractor Post-processing	Pavement Video Analysis	As a Computed 95% Confidence Level (5) (6)
48	LC_HI	999.99 (%)	High-severity longitudinal cracking in lane as a percentage of road interval length	Contractor Post-processing	Pavement Video Analysis	As a Computed 95% Confidence Level (5) (6)
49	TC_INDEX	999	Transverse cracking index	Contractor Post-processing	Database Processing	100% for calculation (5) (6)
50	TC_LOW	999.99 (cracks)	Count of low-severity transverse cracks, where one crack unit equals the WiseCrax measured lane width	Contractor Post-processing	Pavement Video Analysis	As a Computed 95% Confidence Level (5) (6)
51	TC_MED	999.99 (cracks)	Count of medium-severity transverse cracks, where one crack unit equals the WiseCrax measured lane width	Contractor Post-processing	Pavement Video Analysis	As a Computed 95% Confidence Level (5) (6)
52	TC_HI	999.99 (cracks)	Count of high-severity transverse cracks, where one crack unit equals the WiseCrax measured lane width	Contractor Post-processing	Pavement Video Analysis	As a Computed 95% Confidence Level (5) (6)
53	PATCH_INDEX	999	Patching index	Contractor Post-processing	Database Processing	100% for calculation (5) (6)
54	PATCHING	999.9999 (%)	Percent of WiseCrax measured lane area affected by patching	Contractor Post-processing	Pavement Video Analysis	As a Computed 95% Confidence Level (5) (6)
55	GPS_LAT	999.999999	Latitude coordinate	ARAN Data Collection	Automatic Output	<= 3.00 feet
56	GPS_LON	-999.999999	Longitude coordinate	ARAN Data Collection	Automatic Output	<= 3.00 feet
57	GPS_ELEV	99999.9	Elevation	ARAN Data Collection	Automatic Output	Untested
58	GPS_MODE	XXX	GPS Satellite Mode during collection	ARAN Data Collection	Automatic Output	Untested
59	DATUM	(Text)	LL_WGS84_DD	ARAN Data Collection	Database Processing	100%
60	VIDEO	<Park>C04VID<#>	Removable USB video hard	Contractor Post-processing	Database Processing	Untested

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
			drive number			
61	IMAGE	(Text)	Filename of .jpg image showing road interval	Contractor Post-processing	Automatic Output	Untested
62	SPEED	999 (miles/hour)	Average ARAN speed during data collection	ARAN Data Collection	Automatic Output	Untested
63	BRIDGE_FLAG	0 or 1	Flag indicating presence of bridge in interval	ARAN Data Collection	Survey Crew Input	Untested
64	CONSTR_FLAG	0 or 1	Flag indicating construction in interval	ARAN Data Collection	Survey Crew Input	Untested
65	LANEDEV_FLAG	0 or 1	Flag indicating lane deviation in interval	ARAN Data Collection	Survey Crew Input	Untested
66	DATE	MM/DD/YY	Data collection date	ARAN Data Collection	Automatic Output	100%
67	NODISTRESS	0 OR 1	Flag indicating absence of pavement distress	Contractor Post-processing	Database Processing	100%
68	FILENAME	(Text)	Filename of raw data files	ARAN Data Collection	Automatic Output	100%
69	SECTION	(Text)	Route section ID	Route ID Meeting/ARAN Data Collection	Survey Crew Input/Automatic Output	100%
70	FKEY	(Numeric)	Unique record ID	Contractor Post-processing	Database Processing	100%
71	CONTRACTOR1	(Numeric)	Raw MP of first video frame in section	Contractor Post-processing	Database Processing	Untested
72	CONTRACTOR2	(Numeric)	Raw MP of last video frame in section	Contractor Post-processing	Database Processing	Untested
73	CONTRACTOR3	(Text)	Unique record ID used by VisiData	Contractor Post-processing	Database Processing	Untested
74	CONTRACTOR4	(Text)	Range of mileage to play in VisiData	Contractor Post-processing	Database Processing	Untested

ROUTE_GPS table metadata:

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
1	RIP_CYCLE	XX	4, for RIP data collection Cycle 4	Route ID Meeting	FHWA Determination	100% referenced to other tables
2	STATE	XX	State where route is located	Route ID Meeting	Park Input/FHWA Determination	Untested
3	PARK_ALPHA	XXXX	Park alpha code	Route ID Meeting	NPS References	100% Referenced to other tables
4	PARK_NO	XXXX	Park numeric code	Route ID Meeting	NPS References	100% Referenced to other tables
5	RTE_NO	9999XXX	Route number	Route ID Meeting	Park Input/FHWA Classification	100% Referenced to other tables
6	FUNCT_CLASS	X	Route functional classification	Route ID Meeting	Park Input/FHWA Classification	100% Referenced to other tables
7	RTE_NAME	(Text)	Route name	Route ID Meeting	Park Input	100% Referenced to other tables . 100 characters fit in field
8	LANE_NUMBER	99	Data collection lane	Contractor Post-processing	Database Processing	Untested
9	DIRECTION	XXX	Survey lane: PRI (primary) or OPP (opposite)	Route ID Meeting	Park Input/FHWA Determination	Untested
10	MP	999.999	Mile Post (at 0.01 record)	ARAN Data Collection, Contractor Post-processing	Survey Crew Input/GPS Processing	Untested (3)
11	GPS_LAT	999.999999	GPS Latitude Co-ordinate (decimal degrees)	ARAN Data Collection, Contractor Post-processing	Automatic Output	<= 3.00 feet
12	GPS_LON	-999.999999	GPS Longitude Co-ordinate (-decimal degrees)	ARAN Data Collection, Contractor Post-processing	Automatic Output	<= 3.00 feet
13	GPS_ELEV	99999.9	Elevation	ARAN Data Collection, Contractor Post-processing	Automatic Output	Untested
14	GPS_MODE	XXX	GPS Satellite Mode during collection	ARAN Data Collection, Contractor Post-processing	Automatic Output	Untested
15	XFALL	999.9	Cross Fall: % Slope at GPS Location (Caution, Data not Validated)	ARAN Data Collection, Contractor Post-processing	Automatic Output	Untested
16	GRADE	999.9	Grade: % Slope at GPS Location (Caution, Data not Validated)	ARAN Data Collection, Contractor Post-processing	Automatic Output	Untested
17	HEADING	999.9	Heading Relative to True North	ARAN Data Collection	Automatic Output	Untested
18	DATUM	(Text)	LL_WGS84_DD	ARAN Data Collection	Database Processing	Untested
19	FILENAME	(Text)	Filename of raw data files	ARAN Data Collection	Automatic Output	Untested
20	FKEY	9999999	Unique record ID	Contractor Post-processing	Database Processing	Untested

21	DATE	MM/DD/YY	ARAN Data Collection Date	ARAN Data Collection	Automatic Output	Untested
22	COMMENT	(Text)	Source of Any Digitized Data	ARAN Data Collection	Database Processing	Untested
23	CONTRACTOR1	(Numeric)	Visi_from	Contractor Post-processing	Database Processing	Untested
24	CONTRACTOR2	(Numeric)	Visi_to	Contractor Post-processing	Database Processing	Untested
25	CONTRACTOR3	(Text)	Visi_dir (ipdated to chapter 1)	Contractor Post-processing	Database Processing	Untested
26	CONTRACTOR4	(Text)	Comments/exceptions	Contractor Post-processing	Database Processing	Untested

FHWA "Route ID Program" Database
Database Name: ROUTEINFO.mdb
Table Name: ROUTE_ID

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
1	ROUTE_IDENT	XXXX-9999XXX	The Park's Alpha Code + "-" + RTE_NO (below).	Route ID Meeting	Automatic Output	100%, Reference source for all tables
2	RIP_CYCLE	99	4, for RIP data collection Cycle 4	Route ID Meeting	FHWA Determination	100%, Reference source for all tables
3	PARK_ALPHA	XXXX	Park Alpha Code	Route ID Meeting	NPS References	100%, Reference source for all tables
4	GROUP_ALPHA	XXXX	Group Alpha Code	Route ID Meeting	NPS References	100%, Reference source for all tables
5	PARK_NO	9999	Park Numeric Code	Route ID Meeting	NPS References	100%, Reference source for all tables
6	PARK_NAME	(text)	NPS Name of Park	Route ID Meeting	NPS References	100%, Reference source for all tables
7	RTE_NO	9999XXX	Route Number	Route ID Meeting	Park Input	100%, Reference source for all tables
8	RTE_NAME	(Text)	Route Name	Route ID Meeting	Park Input	100%, Reference source for all tables
9	FROM_DESC	(Text)	Beginning terminus of route	Route ID Meeting	Park Input/FHWA Determination	100%, Reference source for all tables
10	TO_DESC	(Text)	Ending terminus of route	Route ID Meeting	Park Input/FHWA Determination	100%, Reference source for all tables
11	INSP_DATE	MM/DD/YYYY	Collection Date	ARAN Data Collection	FHWA Determination	100%, Reference source for all tables
12	FUNCT_CLASS	XX	Functional Class	Route ID Meeting	Park Input/FHWA Determination	100%, Reference source for all tables
13	STATE	XX	State where route is located	Route ID Meeting	Park Input/FHWA Determination	Untested (1)
14	STATE2	XX	Additional State Park Route traverses	Route ID Meeting	Park Input/FHWA Determination	Untested (1)
15	FMSS_NO	(Text)	NPS's Facility Management Software System (FMSS) Asset number	Route ID Meeting	Park Input	100%, Reference source for all tables
16	FMSS_SUR_EQP	(Text)	FMSS Surface Equipment Number	Route ID Meeting	Park Input	Untested
17	M_DISTRICT	(Text)	Park Maintenance District Route resides in	Route ID Meeting	Park Input	100%, Reference source for all tables (1)
18	TOPOGRAPHY	(Text)	Predominate Terrain condition for	Route ID Meeting	FHWA Determination	100%, Reference source for all

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
			Route. (FLAT, ROLLING, MOUNTAINOUS, or URBAN)			tables (1)
19	POSTED_SPEED	99	Posted Speed Limit for Route (Value is Predominate Speed Limit along Route)	Route ID Meeting	Park Input/FHWA Determination	Untested (1)
20	ARAN_ROUTE	XXX	Yes/No	Route ID Meeting	Park Input/FHWA Determination	100%, Reference source for all tables
21	PARKING_AREA	XXX	Yes/No	Route ID Meeting	Park Input/FHWA Determination	100%, Reference source for all tables
22	CONCESSION	XXX	Yes/No	Route ID Meeting	Park Input	100%, Reference source for all tables
23	PAVED_MI	999.999	Paved mileage (to the nearest 0.001)	ARAN Data Collection	Automatic Output	100%, Reference source for all tables
24	UNPAVED_MI	999.999	Unpaved mileage (to the nearest 0.001)	Route ID Meeting	Automatic Output	100%, Reference source for all tables
25	RTE_LENGTH	999.999	Official Route Length	Contractor Post-processing	Automatic Output	100%, Reference source for all tables
26	SURF_TYPE	XX	Surface type (PAVED: AS (asphalt, includes composite), CO (concrete), BR (brick/pavers), CB (cobblestone), OT (other))	Route ID Meeting	Survey Crew Input	100%, Reference source for all tables (1)
27	UNPAVED	XXXX	Unpaved Route (Yes/No/Both)	Route ID Meeting	Automatic Output	100%, Reference source for all tables
28	UNPAVED_CAT	XXX	Unpaved Road Category	Route ID Meeting	Automatic Output	Untested
29	CURB	(Text)	Parking Area with Curb around perimeter.	Route ID Meeting	Park Input/FHWA Determination	Untested
30	CURB_GUTTER	(Text)	Parking Area with Curb and Gutter around perimeter.	Route ID Meeting	Park Input/FHWA Determination	Untested
31	ADJ_ROUTE	9999XXX	Route number	Route ID Meeting	Automatic Output	100%, Reference source for all tables
32	USER_ACCESS	(Text)	Access Designation for Parking	Route ID Meeting	Park Input/FHWA Determination	100%, Reference source for all tables
33	PHOTO_NO	(Text)	Photo or Image	Route ID Meeting	Survey Crew Input	100%, Reference source for all tables
34	PLOT_SIZE	(Text)	Unpaved Parking Area Size	Route ID Meeting	Automatic Output	100%, Reference source for all tables
35	SQ_FEET	999.999	Route Square Footage	Contractor Post-processing	Automatic Output	100%, Reference source for all tables
36	M_RATING	(Text)	Manual Rating	Route ID Meeting	Automatic Output	100%, Reference source for all tables

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
37	SQ_YARDS	999.999	Route Square Yardage	Contractor Post-processing	Automatic Output	100%, Reference source for all tables
38	LANES	XX	Route travel lanes	Route ID Meeting	Automatic Output	Untested (1)
39	PAVE_WIDTH	999.99	Pavement Width (Weighted average)	RIP Post-processing	Automatic Output	100% Referenced to other tables
40	LANE_MILES	999.999	Route Equivalent Lane Miles	RIP Post-processing	Automatic Output	100%, Reference source for all tables
41	AREA_MAP	(Text)	1 or 2-digit number	Contractor Post-processing	FHWA/Contractor Input	100%, Reference source for all tables
42	REMARKS	(Memo)	General remarks on Park route and data collection operations.	Contractor Post-processing	FHWA/Contractor Input	Untested
43	SUMMARY_REC	XXXX-9999XXX	ROUTE_IDENT of summary Park Asset	Route ID Meeting	Park Input/FHWA Determination	100%, Reference source for all tables
44	NPS_REGION	(Text)	Park Region	Route ID Meeting	Park Input/FHWA Determination	100%, Reference source for all tables
45	DIVISION	(Text)	FHWA Division	Route ID Meeting	Park Input/FHWA Determination	100%, Reference source for all tables
46	PCR	999.99	Route Weighted Average PCR value	RIP Post-processing	Automatic Output	100% Referenced to other tables
47	SCR	999.99	Route Weighted Average SCR value	RIP Post-processing	Automatic Output	100% Referenced to other tables
48	AADT	999	Average Adjusted Daily Traffic	RIP	Automatic Output	Untested
49	SADT	999	Seasonal Adjusted Daily Traffic	RIP	Automatic Output	Untested
50	ADT_DATE	MM/DD/YYYY	Traffic Date of Collection	RIP	Automatic Output	Untested
51	BEG_LAT	999.999999	Route Begin GPS Latitude Coordinate (decimal degrees)	ARAN Data Collection	Automatic Output	<= 3.00 feet, Referenced from other tables
52	BEG_LON	-999.999999	Route Begin GPS Longitude Coordinate (-decimal degrees)	ARAN Data Collection	Automatic Output	<= 3.00 feet, Referenced from other tables
53	BEG_ELEV	99999.9	Route Begin Elevation	ARAN Data Collection	Automatic Output	100% Referenced to other tables
54	BEG_MODE	XXX	Route Begin GPS Satellite Mode during collection	ARAN Data Collection	Automatic Output	100% Referenced to other tables
55	END_LAT	999.999999	Route End GPS Latitude Coordinate (decimal degrees)	ARAN Data Collection	Automatic Output	<= 3.00 feet, Referenced from other tables

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
56	END_LON	-999.999999	Route End GPS Longitude Co-ordinate (-decimal degrees)	ARAN Data Collection	Automatic Output	<= 3.00 feet, Referenced from other tables
57	END_ELEV	99999.9	Route End Elevation	ARAN Data Collection	Automatic Output	100% Referenced to other tables
58	END_MODE	XXX	Route End GPS Satellite Mode during collection	ARAN Data Collection	Automatic Output	100% Referenced to other tables
59	DATUM	(Text)	LL_WGS84_DD	ARAN Data Collection	Automatic Output	100% Referenced to other tables
60	CHILD_ROUTE	XXX	Yes/No	Route ID Meeting	Automatic Output	100% Reference source for all tables
61	CULVERT_CNT	999	Route Culvert Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
62	DROP_INLET_CNT	999	Route Drop Inlet Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
63	GATE_CNT	999	Route Gate Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
64	TRAFLIGHT_CNT	999	Route Traffic Light Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
65	SIGN_CNT	999	Route Sign Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
66	LWCROSS_CNT	999	Route Low Water Crossing Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
67	BRIDGE_CNT	999	Route Bridge Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
68	TUNNEL_CNT	999	Route Tunnel Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
69	PULLOUT_CNT	999	Route Pullout Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
70	INTERSEC_CNT	999	Route Intersection Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
71	ST_BNDRY_CNT	999	Route State Boundary Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
72	PRK_BNDRY_CNT	999	Route Park Boundary Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
73	RETWALL_CNT	999	Route Retaining Wall Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
74	RR_CROSS_CNT	999	Route RR Crossing Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
75	CATTLE_CNT	999	Route Cattle Guard Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
76	OVHDSIGN_CNT	999	Route Overhead Sign Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
77	MILEMARK_CNT	999	Route Mile Marker Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
78	FHYD_CNT	999	Route Fire Hydrant Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
79	OVERPASS_CNT	999	Route Overpass Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
80	CABLE_TLNG	9999.999 (ft)	Route Total Length Cable Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
81	GDRAIL_TLNG	9999.999 (ft)	Route Total Length Guard/Guide Rail Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
82	GDWALL_TLNG	9999.999 (ft)	Route Total Length Guard/Guide Wall Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
83	TEMP_BARR_TLNG	9999.999 (ft)	Route Total Length Temporary Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
84	BOLLARD_TLNG	9999.999 (ft)	Route Total Length Bollard Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
85	BARRIER_TLNG	9999.999 (ft)	Route Total Length All Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
86	CURB_TLNG	9999.999 (ft)	Route Total Length Curbing (excludes Parking Areas)	RIP Post-processing	Automatic Output	100% Referenced to other tables
87	LWCROSS_TLNG	9999.999 (ft)	Route Total Length Low Water Crossings	RIP Post-processing	Automatic Output	100% Referenced to other tables
88	PAVDITCH_TLNG	9999.999 (ft)	Route Total Length Paved Ditch	RIP Post-processing	Automatic Output	100% Referenced to other tables (2)
89	TURNOUT_TLNG	9999.999 (ft)	Route Total Length Turnouts	RIP Post-processing	Automatic Output	100% Referenced to other tables
90	LANE_NUMBER	99	Number of Lane Tested	RIP Post-processing	Automatic Output	100% Referenced to other tables
91	LOCAL_FACTOR	9.9999	Park Location Factor	NPS Partner	Automatic Output	100% Reference source for all tables
92	E_ZONE	XXX	Route Environmental Zone	FHWA HPMA	Automatic Output	100% Reference source for all tables
93	PAVEMENT_DM	\$99,999,999.99	Pavement Deferred Maintenance	FHWA HPMA	Automatic Output	100% Reference source for all tables
94	CRV	\$99,999,999.99	Current Replacement Value	RIP Post-processing	Automatic Output	100% Reference source for all tables

Database Name: ROUTEINFO.mdb

Table Name: PARK_TOTALS

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
1	RIP_CYCLE	99	4, for RIP data collection Cycle 4	Route ID Meeting	FHWA Determination	100% Referenced to other tables
2	PARK_ALPHA	XXXX	Park Alpha Code	Route ID Meeting	FHWA Determination	100% Referenced to other tables
3	GROUP_ALPHA	XXXX	Group Alpha Code	Route ID Meeting	NPS References	100% Referenced to other tables
4	PARK_NO	9999	Park Numeric Code	Route ID Meeting	NPS References	100% Referenced to other tables
5	PARK_NAME	XXXX	NPS Name of Park	Route ID Meeting	NPS References	100% Referenced to other tables
6	INSP_DATE	MM/DD/YYYY	Date that data was collected in the park (completion date).	Route ID Meeting and ARAN Data Collection	FHWA Determination	100% Referenced to other tables
7	NPS_REGION	XXXX	Park Region	Route ID Meeting	Park Input	100% Referenced to other tables
8	DIVISION	XXXX	FHWA Division	Route ID Meeting	FHWA Determination	100% Referenced to other tables
9	T_PAVED_MI	999.999	Total Park Paved Miles	RIP Post-processing	Automatic Output	100% Referenced to other tables
10	T_UNPAVED_MI	999.999	Total Park Unpaved Miles	RIP Post-processing	Automatic Output	100% Referenced to other tables
11	T_ROUTE_MILES	999.999	Total Park Route Miles	RIP Post-processing	Automatic Output	100% Referenced to other tables
12	T_ARAN_DRIVEN	999.999	Total Park ARAN Driven Miles	RIP Post-processing	Automatic Output	100% Referenced to other tables
13	T_ARAN_LMILES	999.999	Total Park ARAN Lane Miles	RIP Post-processing	Automatic Output	100% Referenced to other tables
14	T_CONCESS_PAVED	999.999	Total Park Concession Paved Miles	RIP Post-processing	Automatic Output	100% Referenced to other tables
15	T_CONCESS_UNPAVED	999.999	Total Park Concession Unpaved Miles	RIP Post-processing	Automatic Output	100% Referenced to other tables
16	T_PRK_PAVEDSQFT	999.999	Total Park Parking Paved Square Feet	RIP Post-processing	Automatic Output	100% Referenced to other tables
17	T_PRK_UNPAVEDSQFT	999.999	Total Park Parking Unpaved Square Feet	RIP Post-processing	Automatic Output	100% Referenced to other tables
18	T_CPRK_PAVEDSQFT	999.999	Total Park Concession Parking Paved Square Feet	RIP Post-processing	Automatic Output	100% Referenced to other tables

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
19	T_CPRK_UNPAVEDSQFT	999.999	Total Park Concession Parking Unpaved Square Feet	RIP Post-processing	Automatic Output	100% Referenced to other tables
20	T_PARKING_SQFT	999.999	Total Park Parking Square Feet	RIP Post-processing	Automatic Output	100% Referenced to other tables
21	T_PARKING_LMILES	999.999	Total Park Parking Equivalent Lane Miles	RIP Post-processing	Automatic Output	100% Referenced to other tables
22	T_MRR_SQFT	999.999	Total Park Manually Rated Road Square Feet	RIP Post-processing	Automatic Output	100% Referenced to other tables
23	T_CMRR_SQFT	999.999	Total Park Concession Manually Rated Road Square Feet	RIP Post-processing	Automatic Output	100% Referenced to other tables
24	T_MRR_LMILES	999.999	Total Park Manually Rated Road Equivalent Lane Miles	RIP Post-processing	Automatic Output	100% Referenced to other tables
25	T_LMILES	999.999	Total Park Lane Miles	RIP Post-processing	Automatic Output	100% Referenced to other tables
26	T_CULVERT_CNT	999	Total Park Culvert Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
27	T_DROP_INLET_CNT	999	Total Park Drop Inlet Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
28	T_GATE_CNT	999	Total Park Gate Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
29	T_TRAFLIGHT_CNT	999	Total Park Traffic light Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
30	T_SIGN_CNT	999	Total Park Sign Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
31	T_LWCROSS_CNT	999	Total Park Low Water Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
32	T_BRIDGE_CNT	999	Total Park Bridge Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
33	T_TUNNEL_CNT	999	Total Park Tunnel Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
34	T_PULLOUT_CNT	999	Total Park Pullout Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
35	T_INTERSEC_CNT	999	Total Park Intersections Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
36	T_ST_BNDRY_CNT	999	Total Park State Boundaries Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
37	T_PRK_BNDRY_CNT	999	Total Park Boundaries Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
38	T_RETWALL_CNT	999	Total Park Retaining Wall Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
39	T_RR_CROSS_CNT	999	Total Park RR Crossing Count	RIP Post-processing	Automatic Output	100% Referenced to other

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
						tables
40	T_CATTLE_CNT	999	Total Park Cattle Guard Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
41	T_OVHDSIGN_CNT	999	Total Park Overhead Sign Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
42	T_MILEMARK_CNT	999	Total Park Mile Marker Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
43	T_FHYD_CNT	999	Total Park Fire Hydrant Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
44	T_OVERPASS_CNT	999	Total Park Overpass Count	RIP Post-processing	Automatic Output	100% Referenced to other tables
45	T_CABLE_TLNG	9999.999 (ft)	Total Length Park Cable Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
46	T_GDRAIL_TLNG	9999.999 (ft)	Total Length Park Guard/Guide Rail Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
47	T_GDWALL_TLNG	9999.999 (ft)	Total Length Park Guard/Guide Wall Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
48	T_TEMP_BARR_TLNG	9999.999 (ft)	Total Length Park Temporary Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
49	T_BOLLARD_TLNG	9999.999 (ft)	Total Length Park Bollard Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
50	T_BARRIER_TLNG	9999.999 (ft)	Total Length All Park Barriers	RIP Post-processing	Automatic Output	100% Referenced to other tables
51	T_CURB_TLNG	9999.999 (ft)	Total Length Park Curbing	RIP Post-processing	Automatic Output	100% Referenced to other tables
52	T_LWCROSS_TLNG	9999.999 (ft)	Total Length Park Low Water Crossings	RIP Post-processing	Automatic Output	100% Referenced to other tables
53	T_PAVDITCH_TLNG	9999.999 (ft)	Total Length Park Paved Ditches	RIP Post-processing	Automatic Output	100% Referenced to other tables (2)
54	T_TURNOUT_TLNG	9999.999 (ft)	Total Length Park Turnouts	RIP Post-processing	Automatic Output	100% Referenced to other tables
55	PARK_PCR	99.99	Overall Park PCR Rating	RIP Post-processing	Automatic Output	100% Referenced to other tables
56	PARK_RCI	99.99	Overall Park RCI Rating	RIP Post-processing	Automatic Output	100% Referenced to other tables
57	PARK_SCR	99.99	Overall Park SCR Rating	RIP Post-processing	Automatic Output	100% Referenced to other tables
58	PARK_RUT_INDEX	99.99	Overall Park Rutting Index Rating	RIP Post-processing	Automatic Output	100% Referenced to other tables
59	PARK_AC_INDEX	99.99	Overall Park Alligator Cracking Index Rating	RIP Post-processing	Automatic Output	100% Referenced to other tables

	FIELD	FORMAT	EXPECTED VALUE	SOURCE	VALIDATION	EXPECTED ACCURACY
60	PARK_LC_INDEX	99.99	Overall Park Longitudinal Cracking Index Rating	RIP Post-processing	Automatic Output	100% Referenced to other tables
61	PARK_TC_INDEX	99.99	Overall Park Transverse Cracking Index Rating	RIP Post-processing	Automatic Output	100% Referenced to other tables
62	PARK_PATCH_INDEX	99.99	Overall Park Patching Index Rating	RIP Post-processing	Automatic Output	100% Referenced to other tables
63	PARK_CONC_PCR	99.99	Overall Park Concession PCR Rating	RIP Post-processing	Automatic Output	100% Referenced to other tables

Business Practices for Route Numbering and Roadway Asset Identification

Introduction and Background:

Beginning in November 2006, inventory and condition information gathered by the Federal Highway Administration (FHWA) has been stored in FMSS to enable NPS to report Deferred Maintenance (DM) and Current Replacement Value (CRV) for NPS paved roads, paved parking areas, bridges, and tunnels. The NPS Roads Working Group (RWG) has been tasked with developing and implementing the procedures necessary to transfer DM and CRV from FHWA's databases to NPS' Facility Management Software System (FMSS).

Current business practices for roadway definition in national parks involve face-to-face meetings between FHWA personnel and individual park staff known as "Route ID" meetings. These meetings have been ongoing for several years and have been performed within the context of the Road Inventory Program (RIP) executed mainly by FHWA. The primary focus of these meetings has been on defining roadway static information such as route names, numbers, functional class, etc. The FHWA personnel are the primary individuals responsible for implementing the RIP and the route ID meetings are an integral and fundamental part of that process. The RIP process provides route numbers for each individual road and parking area in each park. After the route ID meetings establish a given park's roadway asset base, various types of condition and inventory data are collected either manually or with a data collection van that drives each individual road with an individual route number.

The FMSS requires asset numbers as unique identifiers for all asset types including roadways. **The current practice is that all roadways that are assigned a route number at route ID, also are defined as assets and therefore also receive an FMSS asset number** (Route names and functional classes are also collaboratively assigned during the face-to-face route ID meetings). This practice began midway through the third RIP data collection cycle (ending in 2003) and was further reinforced during an asset alignment process conducted in the summer of 2006. The alignment process ensured that each route number in RIP and each asset number in FMSS were matched to the correct road and parking area.

Issue Statement:

As a result of various pre-existing business practices associated with the RIP, which predates FMSS by several years, route numbers are assigned for routes that are often very small. In tandem with the current business practice that all routes with route numbers are considered assets, this has caused a proliferation of asset numbers within FMSS. Over the past year, the RWG has learned that this business practice has significantly increased time and resources that parks must dedicate to administering FMSS data entry and management. This additional work effort is due to the fact that tying FMSS asset records to the more detailed, granular RIP route numbers has generated numerous new assets that require additional database and work order management. This has led to a situation where assets are not being defined the way they are managed.

The following proposed practices seek to create an asset definition process that is dictated by to how road assets are managed at the park level, not according to the pre-existing practices used in RIP for collecting detailed road information. RIP practices assign route numbers mainly based on how data are collected and driven with a data collection device. These procedures will disassociate the driving of roads with the data collection van from the process of assigning them asset status. **The end goal is to only assign asset numbers based on how parks manage their facilities within guidelines set up within FMSS and herein.** Driving the road with the data collection van allows for the collection of higher quality data as well as the ability to view road segments with video viewing software (Visidata). By de-linking driving the roads with the assignment of “asset status”, we are able to get the best quality data without the proliferation of assets that has serious negative ramifications for managing roadways in parks using asset management tools.

Proposed Actions:

1. Make a distinction within the route number field in the RIP database between those route numbers that represent assets, those that are subcomponents of assets and those that are groups of sub-components. The route number field in the RIP database will be expanded from 6 to 7 characters. The additional character will denote the asset status of the route in question. Combined routes will be designated with a double “zz”, while subcomponents will be designated with one “z”. Whenever possible, a combined route should use the lowest route number to be combined as the combined route number.
2. Only show assets, whether a group of subcomponents or a single component, on the Route ID report. Assets that are composed of subcomponents will have “zz” in the route number. Individual routes will have no additional characters in the route number. Subcomponents (designated in RIP with a “z”) will not be listed on the route ID report. Only assign asset numbers to those routes listed on the route ID report.
3. Provide a separate reporting function (other than the Route ID report) to identify and display information for route numbers not representing assets. Specific reporting requirements and format TBD.
4. Add a new field to the RIP database to indicate the “asset status” of a route number. The flag will have three possible values:
 - a. Asset with no subcomponents.
 - b. Asset with subcomponents.
 - c. Non-asset (i.e. subcomponent).

Both a change in the route number and a new “asset ID” field in the RIP database are recommended. It is easier to perform queries and other database manipulations using a separate field instead of a character within the route number field. The character in the route number field allows for rapid identification of the asset status of a road without having to access the database as a whole. Even though non-asset routes will not be included in the route ID report (the primary location for parks to view road information in RIP), there are many other reports as well as the Visidata application where the route number is

displayed. In these cases, the character in the route number will clearly identify the asset status of the roadway.

5. Focus asset definition practices on NPS asset management needs. Create roadway assets based on how parks manage these assets within the following guidelines:
 - a. Individual road segments (asset subcomponents) may be combined into a single asset. **Note that all the attributes of individual subcomponents (paved area, equipment, work orders, etc) will be included in the combined asset.**
 - b. In general, combination should be used in complex circulatory environments such as campground areas, housing and other administrative areas, maintenance areas, etc.
 - c. Public and non-public segments may not be combined.
 - d. Segments with differing functional classes may not be combined.
 - e. Discrete parking areas may be combined into a single asset where they service the same facility or resource and are within walking distance of each other.
 - f. Parking areas and roads may not be combined. This includes short road segments that may be near or adjacent to parking areas. See 5h below for exceptions to this.
 - g. Where the primary purpose of a road is to provide access to a parking area, and that road segment is approximately 0.25 miles in length or shorter, the access road should be considered part of the parking area (Note that this is an existing RIP business practice).
 - h. Particularly long routes may be divided into multiple assets based on how a park manages the roadway network. This should not be confused with the use of sub-components listed in 5a.
 - i. Roads that are actively managed by concession operations may not be combined with those managed by the NPS.

Discussion:

The first four items listed above are actions required by FHWA RIP to allow for the adoption of the practices shown in 5a-i. The following will provide additional direction and examples for guidelines listed.

Individual road segments (asset subcomponents) may be combined into a single asset. Where previous route ID practices have generated more assets (routes) than are practical from an asset management standpoint, small, discrete road lengths may be designated as asset subcomponents and then combined into a larger single asset. A subcomponent is NOT an FMSS term. Subcomponents will be used in RIP to indicate which routes are small, drivable individual road segments and which routes may include these segments. Once a piece of road is designated a subcomponent of another route, it will no longer have any individual identity in FMSS. Only those routes listed on the RIP Route ID report will have asset numbers in FMSS. As stated in business rule 2 above, subcomponents will not be listed on the route ID. The quantity information (length, area) will be included into the larger route of which they are a part. See Figures 1 and 2 for an example of how existing assets may be combined using subcomponents. Note that

subcomponents will have an identity in the RIP database and, if driven by RIP team, may be referenced in RIP reports, Visidata, or other RIP documentation.

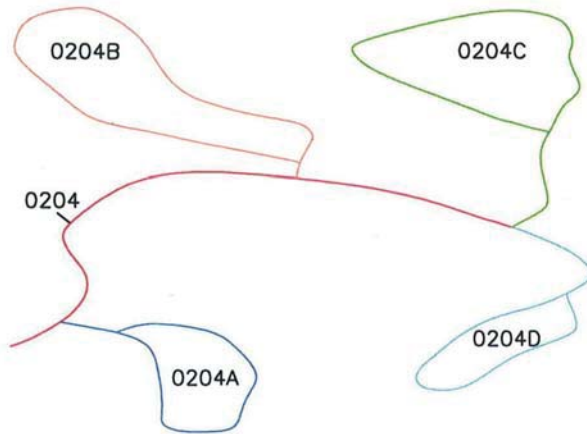


Figure 1: Campground with five routes and five assets

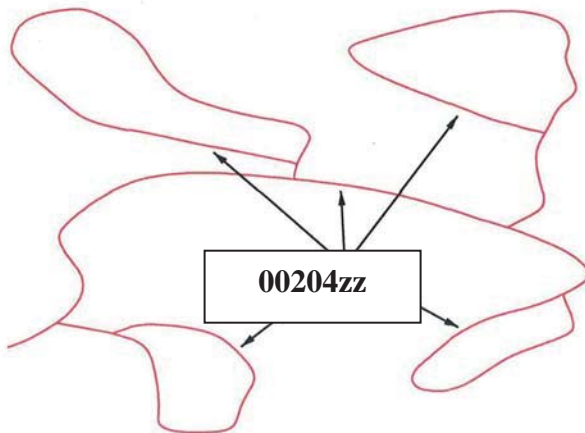


Figure 2: Campground with all loops combined into one route and one asset. This has eliminated four assets.

In general, combination should occur in complex circulatory environments such as campground areas, housing and other administrative areas, maintenance areas, etc.

Typically these complex situations are where too many assets have been used to define roadways. Combining simple “point A to point B” roads that are clearly defined and provide access to different facilities or locations may not be done.

Public and non-public segments may not be combined. Roads that are posted as closed to the public or are intended as administrative access only (maintenance areas, housing areas, fire roads, etc) can not be combined with roads open to the public.

Segments with differing functional classes may not be combined. The roadway functional class is found on the Route ID report. Functional class indicates the type of circulatory function a given road provides. Functional class is used in a variety of applications (engineering, safety, funding) so it is important to maintain the correct functional class attributes of individual roads/assets. There are some cases where functional class was erroneously assigned in prior Route ID meetings such as where campground loops have a different functional class than the campground road. Functional classes of individual roads may be modified to correct discrepancies. The functional class definitions may not be modified.

Discrete parking areas may be combined into a single asset where they service the same facility or resource and are within walking distance of each other. These combined areas should be maintained as one asset. There are many instances where small (5-10 space), discrete parking areas have been separated into individual assets even though they provide parking for the same area or facility. These may be combined into a single asset. Figures 3 and 4 shows examples of combining parking areas.

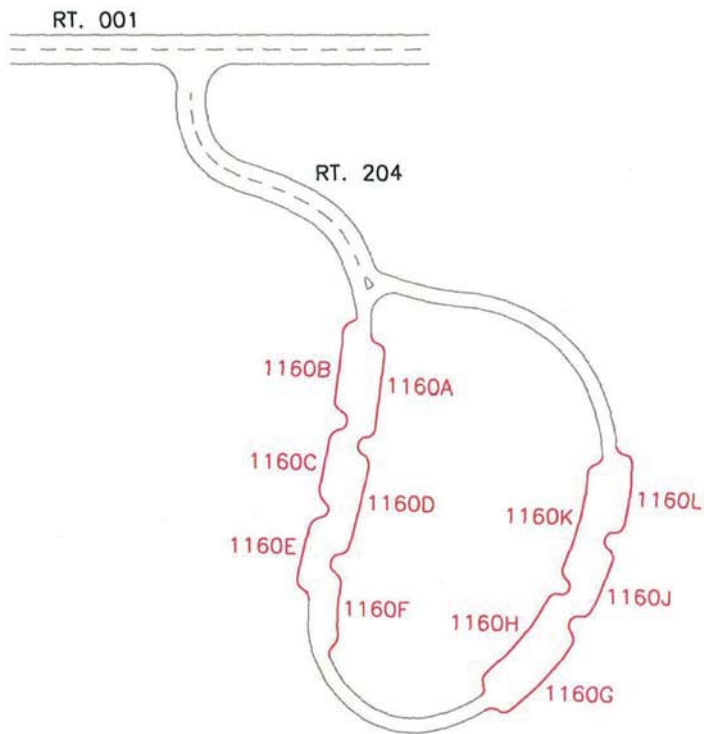


Figure 3: Parking with access route 204 and multiple parking areas (1160 A-L). Currently, this parking area is 12 routes and 12 assets (one 1100 asset and 11 1300 assets).

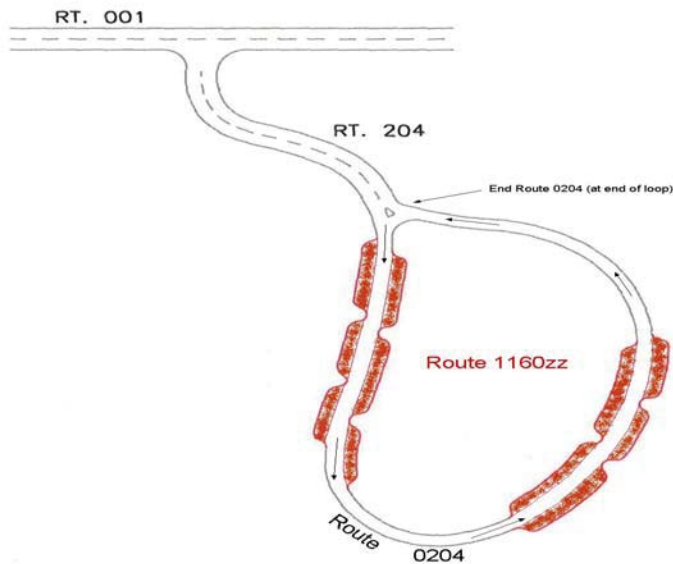


Figure 4: Parking with access route 204 and one parking area 1160zz. Route 204 is assumed longer than 0.25 miles. There are now 2 assets (one 1100 asset, one 1300 asset) instead of 12.

Parking areas and roads may not be combined. Parking areas and roads are tracked as separate asset types (1300 vs. 1100) in FMSS and as such should not be combined except in situations described by 5g. In Figure 5, Route 207 is a spur road from the main route running through parking area 1102. Since the spur road continues through and beyond the parking area, it will remain a separate route.

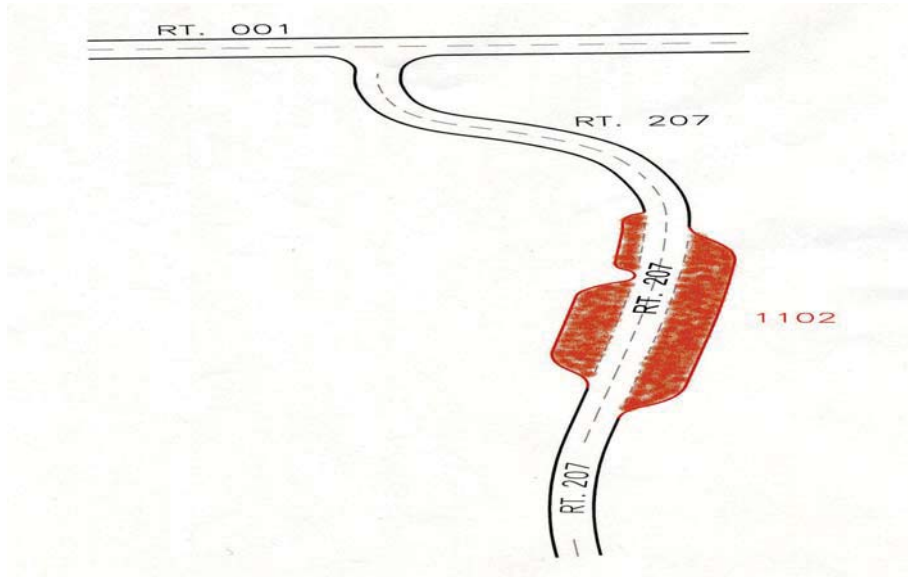


Figure 5: Parking with access route 207 running through and continuing beyond parking 1102. This access route cannot be considered a part of the parking area and two routes and two assets continue to exist.

Where the primary purpose of a road is to provide access to a parking area, and that road segment is less than 0.25 miles in length, the access road should be considered part of the parking area. See Figures 8. Where a road continues on past a parking area to another facility or destination, even if it is less than 0.25 miles to the initial parking area, the road and parking area may not be combined.

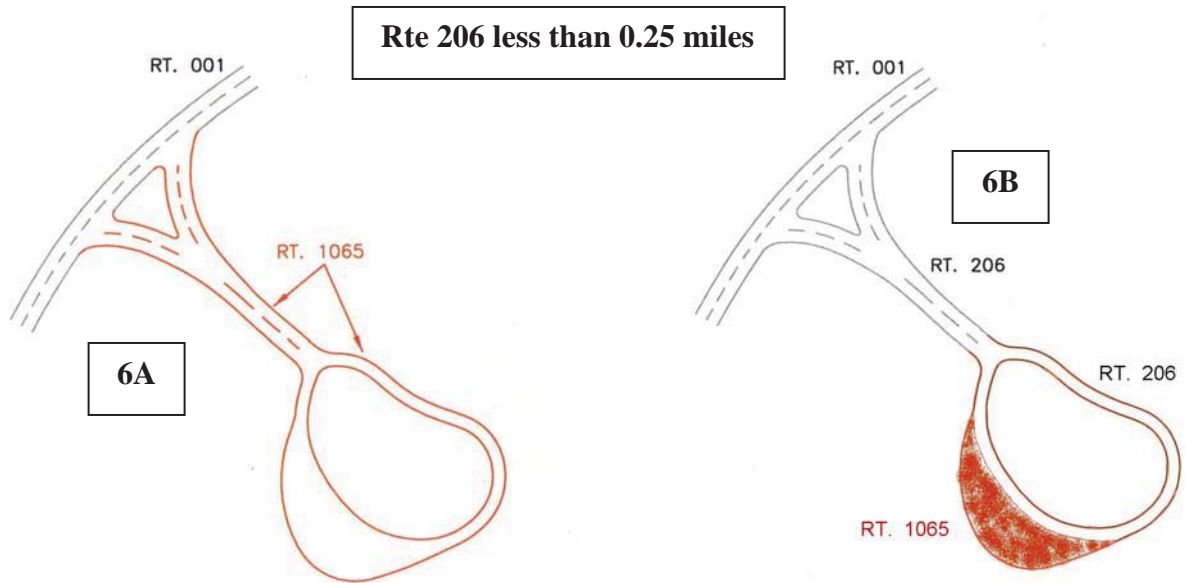


Figure 6: Since the access route is less than .25 miles in length and the only use of the access is to the parking, one route for both the access and the parking area can be established.

Particularly long routes may be divided into multiple assets based on how a park manages the roadway network. This should not be confused with the use of sub-components listed in 5a. Routes like the Blue Ridge Parkway or the Yellowstone Grand Loop may not lend themselves to management as a single asset by virtue of their length. Often management districts are created for sections of these routes and maintenance activities occur primarily within these districts. Parks may break routes up into separate assets during the Route ID process if the road is managed as discrete sections. This should only be done for very long roads.

The following example illustrates a complex road system and how the proposed business practice and several of the guidelines could be applied to create fewer assets that are consistent with local management.

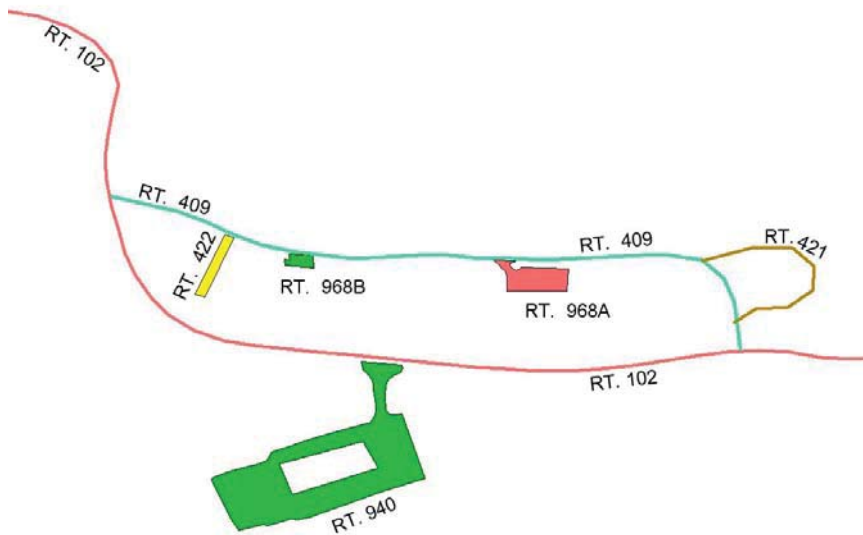


Figure 7 – Current Housing area access configuration. Route 409 is less than 0.25 miles long.

The area serviced by Routes 409, 421, 422, 968A, and 968B is all employee housing. Route 940 provides access to visitor services and not to the housing area. Routes may be combined to create assets that reflect local management. Routes 409, 421, and 422 are all the same functional class, provide access to one type of activity (housing) and are all posted as non-public. These routes may be combined. They should not be combined with any parking areas even though they are all less than 0.25 miles long. This is because their main function is not to provide access to parking. Routes 968A and B provide parking for access to the same facility (housing). Even though these discrete areas may provide parking to different housing units, it's reasonable to manage them as a single asset. They may also be combined.

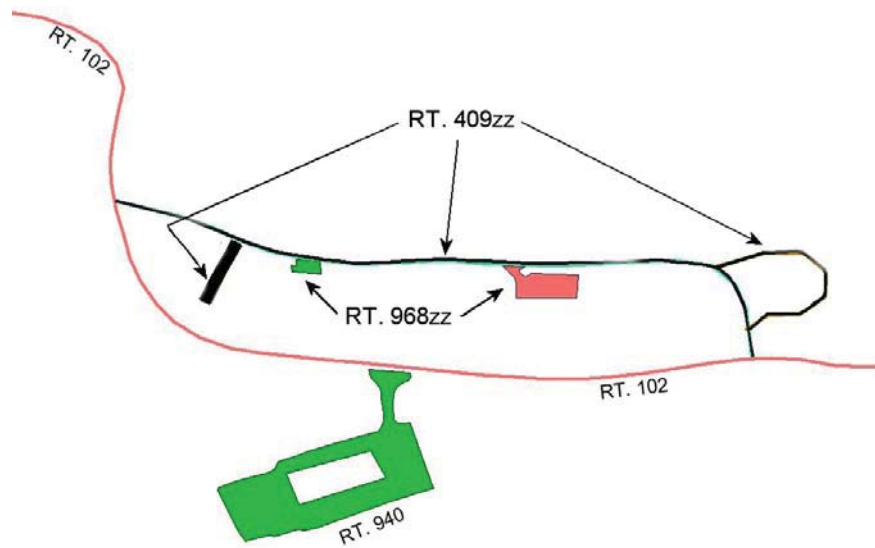


Figure 8 – Combined housing area access configuration – Parking and road assets combined to eliminate 3 assets.