


Road Inventory and Condition Assessment

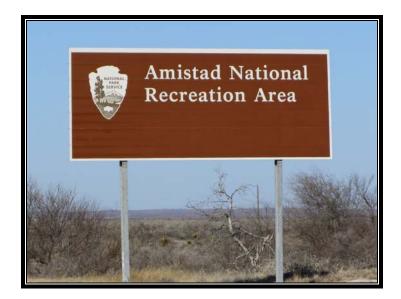

Amistad National Recreation Area AMIS - 7100

Cycle 5 Report

Prepared By: Federal Highway Administration Road Inventory Program (RIP) Data Collected: 01/2012 Report Date: 10/2012

Amistad National Recreation Area in Texas





TABLE OF CONTENTS

	<u>SECTION</u>	PAGE
1.	INTRODUCTION	1 - 1
2.	PARK ROUTE INVENTORY	
	Route IDs, Subcomponents & Changes Report (As Applicable)	2 – 1
3.	PARK SUMMARY INFORMATION	
	Paved Route Miles and Percentages by Functional Class and PCR	3 – 1
	DCV Road Condition Summary	3 - 3
	Parkwide DCV Condition Summary	3-6
4.	PARK ROUTE LOCATION MAPS	
	Route Location Key Map	4 – 1
	Route Location Area Map	4 – 2
	Route Condition Key Map – PCR Mile by Mile	4 – 6
	Route Condition Area Map – PCR Mile by Mile	4 – 7
5.	PAVED ROUTE CONDITION RATING SHEETS	
	CRS Pages	5 – 1
6.	MANUALLY RATED PAVED ROUTE CONDITION RATING SHEETS	
	MRR Pages	6 – 1
7.	PARKING AREA CONDITION RATING SHEETS	
	Paved Parking Area Pages	7 – 1
8.	PARKWIDE / ROUTE MAINTENANCE FEATURES SUMMARIES	
	Parkwide Maintenance Features Summary	8 – 1
	DCV Route Maintenance Features Summary	8 – 2
	Structure List	8 – 4
9.	ROUTE MAINTENANCE FEATURES ROAD LOGS	
	Route Maintenance Features Road Logs	9 – 1
10.	APPENDIX	
	Explanation of Changes to the RIP Index Equations and Determination of PCR	10 – 1
	Explanation of the Excellent, Good, Fair and Poor Condition Descriptions	10 - 2
	Description of Rating System	10 – 3
	Surface Distresses	10 - 5
	Index Formulas	10 - 12
	Data Collection Vehicle Subsystems	10 – 16
	Geodatabase – Background and Metadata	10 – 19
	Glossary of Terms and Abbreviations	10 - 20

Section 1 Introduction



Amistad National Recreation Area



INTRODUCTION

The Federal Highway Administration, (FHWA), in the mid 1970s, was charged with the task of identifying surface condition deficiencies and corrective priorities on National Park Service (NPS) roads and parkways. Additionally, FHWA was tasked with establishing an integrated maintenance features inventory, locating features such as culverts, guardrails, and signs, among others, along NPS roads and parkways. As a result, in 1976 the NPS and FHWA entered into an MOA (Memorandum Of Agreement) which established the RIP (Road Inventory Program). This MOA was terminated and revised in 1980 to establish a new MOA aiming to update RIP data and develop a long-range program to improve and maintain NPS roads to designated condition standards and establish a maintenance management program.

The FHWA completed this initial phase of the RIP in the early 1980s. As a result of this effort, each NPS site included in the study received a RIP Report known as the "Brown Book" which included the information collected during this first RIP phase.

In the 1990s, the effort was again renewed to update and maintain the RIP data. By this time the computer age was upon us and a process was employed that relied heavily on electronic data collection and computer technology. A cyclical program was developed and the RIP completed two cycles of data collection from 1994 to 2001. Cycle 1, starting in 1994, was conducted in 44 "large parks" (parks containing 10 or more paved route miles). Cycle 2 began in 1997 and comprised 79 large parks and 5 small parks totaling 4,874 paved route miles. Each of these parks received a RIP Report known as the "Blue Book". Cycle 3, from 2001 to 2004, was conducted in all parks, large and small, that contained any paved routes, including parking areas and, again, each park received a RIP Report and associated electronic files.

Cycle 4 was initiated in the spring of 2006 covering 86 large parks and several associated small parks consisting of 5,553 paved route miles and 6,232 paved parking areas. Data collection has been completed for Cycle 4 and all data has been delivered to the NPS.

In 2005, the FHWA began implementing the use of a Pavement Management System (PMS) to assist the NPS in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Regional, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions, an extensive study was completed throughout 2010 that has resulted in changes to the RIP condition reporting method, specifically the distresses and indexes that comprise the Pavement Condition Rating (PCR). It was determined that a better representation of PCR could

be achieved by modifying the relative impact certain distresses would have on the overall rating. The changes that were implemented were endorsed by management at both the FHWA and NPS in October 2010. These changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection. Because of these changes, the PCR Condition ratings reported in Cycle 5 do not directly relate to the condition ratings reported in previous cycle RIP Reports. For more detailed information about the changes, see Section 3 and Section 10 in this RIP Report.

Cycle 5 has launched in the summer of 2010 and will again comprise all parks, large and small, that are served by paved roads and/or parking areas. For Cycle 5, the decision was made to collect condition data in large parks on Functional Class 1, 2, and 7 paved routes only, as well as any new routes that were previously not collected. In small parks, all paved routes and parking areas will be collected. As a result, this will include 81 large parks with 4,459 paved route miles and 168 small parks with 529 paved route miles and associated paved parking areas.

Since 1984, the Road Inventory Program has been funded through the Federal Lands Highway Park Roads and Parkways (PRP) Program. Currently, coordination of the RIP with FLH is under the NPS Washington Headquarters Park Facility Management Division. The FLH Washington office coordinates policy and prepares national reports and needs assessment studies for Congress.

In 1998, the Transportation Equity Act for the 21st Century (TEA-21) amended Title 23 U.S.C., and inserted Section 204(a)(6) requiring the FHWA and NPS, to develop by rule, a Pavement Management System (PMS) applied to park roads and parkways serving the National Park System.

FLH is responsible for the accuracy of all data presented in this report. Any questions or comments concerning the contents of this report should be directed to the national RIP Coordinator located in Sterling, Virginia.

Respectfully,

FHWA RIP Team

FHWA/Eastern Federal Lands 21400 Ridgetop Circle Sterling, VA 20166 (703) 404-6371 FHWA/Central Federal Lands 12300 West Dakota Ave Lakewood, CO 80228 (720) 963-3560

<u>Section 2</u> Park Route Inventory



Amistad National Recreation Area



Road I	nvento	ory Progra	m 10		cle 5 NPS	(Numerical By Route #		port					Pag	e 1 of
Shadi	ng Colc	or Key: Wh	nite = P	aved Routes, DCV Driver	Yellow = Unpaved Re	outes, DCV not Driven	ue = All Paved Parkii	ng Areas	G	ireen = All	Unpaved	Parking Area	S	
appro	ext deno x. milea	ige Gre *Ur ** [npaved DCV - E	ived Routes, DCV not Dri route data was obtained Data Collection Vehicle	from NPS and was not invento NC - Not Collected	or Private non-NPS Routes bried by the Road Inventory P	rogram (RIP).	ion Route F	lag ON					
Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route De From	scription To	Maint. District	Paved Miles	Un- Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Are Map
0001	5	31675		DI ABLO EAST ENTRANCE ROAD	FROM U.S. HIGHWAY 90	TO DIABLO EAST BOAT RAMP	N/A	0.79	0.00	0.79	1		AS	3
0002	5	31676		ROUGH CANYON ENTRANCE ROAD	FROM PARK BOUNDARY / END ROUTE 5002 (RECREATION ROAD 2)	TO ROUGH CANYON HIGH WATER BOAT RAMP	N/A	0.20	0.00	0.20	1		AS	4
0003	5	235755		DAM ROAD	FROM INTERSECTION OF TEXAS SPUR 349 (NON NPS) AND SOUTH AMISTAD VILLAGE ROAD	TO PARK BOUNDARY / TEXAS SPUR 349 (NON NPS)	N/A	0.20	0.00	0.20	1		AS	3
0004	NC			SOUTHWIND MARINA ROAD	FROM PARK BOUNDARY	TO MARINA AREA	N/A	0.00	0.00	0.00	1		AS	
0100	5	25017		SPUR 454	FROM PARK BOUNDARY / END ROUTE 5100 (SPUR 454 (NON NPS SECTION))	TO END OF PAVEMENT	N/A	0.83	0.00	0.83	1		AS	4
0101	NC	25016		SAN PEDRO FLATS ROAD	FROM ROUTE 0100 (SPUR 454)	TO END	N/A	0.00	1.66	1.66	2		GR	
0102	5	24969		BLACKBRUSH ROAD	FROM U.S. HIGHWAY 90	TO BLACKBRUSH HIGH WATER BOAT RAMP	N/A	0.63	0.00	0.63	2		AS	3
0103	NC	31685		VIEWPOINT ROAD	FROM ROUTE 0001 (DIABLO EAST ENTRANCE ROAD)	TO END OF LOOP	N/A	0.00	1.43	1.43	2		GR	
0104	NC	52939		BOX CANYON ROAD	FROM PARK BOUNDARY / END ROUTE 5104 (BOX CANYON ROAD (NON NPS SECTION))	TO BOX CANYON BOAT RAMP	N/A	0.00	0.20	0.20	2		GR	
0200	5	31678		PECOS ROAD	FROM END ROUTE 5200 (PECOS ROAD (NON NPS SECTION))	TO ROUTE 0904 (PECOS BOAT DOCK PARKING)	N/A	0.54	0.00	0.54	1		AS	1
0201	5	21974		SPUR 406	FROM PARK BOUNDARY / END ROUTE 5201 (SPUR 406 (NON NPS SECTION))	TO END	N/A	1.22	0.00	1.22	1		AS	2
0202	5	24987		SPUR 277 SOUTH	FROM PARK BOUNDARY / END ROUTE 5202 (SPUR 277 SOUTH (NON NPS SECTION))	TO END	N/A	0.13	0.00	0.13	1		AS	4
0203	5	24994		SPUR 277 NORTH	FROM PARK BOUNDARY / END ROUTE 5203 (SPUR 277 NORTH (NON NPS SECTION))	TO END	N/A	0.19	0.00	0.19	1		AS	4

Road In	vento	ory Program	n 10		cle 5 NPS	(Numerical By Route		port					Pag	e 2 of
Shadir	•	,	ite = P	aved Routes, DCV Driven	Yellow = Unpaved R	outes, DCV not Driven	Blue = All Paved Parkir	ng Areas	G	Freen = All	Unpaved	Parking Area	IS	
Red te approx		ge Gre *Un ** D	npaved DCV - E	ived Routes, DCV not Driv route data was obtained f Data Collection Vehicle AD NATIONAL REC	rom NPS and was not invento NC - Not Collected	or Private non-NPS Routes pried by the Road Inventory		ion Route F	lag ON					
Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route De From	scription To	Maint. District	Paved Miles	Un- Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Are Map
0204	NC	31686		KOWSKI ROAD	FROM ROUTE 0203 (SPUR 277 NORTH)	TO END	N/A	0.00	0.70	0.70	2		GR	
0205	NC	24972		BLACKBRUSH BIG PICNIC LOOP	FROM ROUTE 0911 (BLACKBRUSH PARKING)	TO END OF LOOP	N/A	0.00	0.32	0.32	3		GR	
0207	NC	31688		HUNT AREA 2 ROAD	FROM LARSON ROAD	TO ROUTE 0401 (HUNT AREA 2 RANGE ROAD)	N/A	0.00	0.40	0.40	5		GR	
0208	5	31680		GOVERNORS LANDING ROAD	FROM TEXAS SPUR 349 (NON NPS)	TO ROUTE 0905 (GOVERNORS LANDING PARKING)	, N/A	1.24	0.00	1.24	1		AS	3
0210	NC	31684		SAN PEDRO CAMPGROUND LOOP	FROM ROUTE 0101 (SAN PEDRO FLATS ROAD)	TO END OF LOOP	N/A	0.00	0.12	0.12	2		GR	
0211	NC	31689		CLIFFS AREA	FROM ROUTE 0103 (VIEWPOINT ROAD)	TO END OF LOOP	N/A	0.00	0.25	0.25	2		GR	
0212	NC	31690		FINA COVE ROAD	FROM ROUTE 0103 (VIEWPOINT ROAD)	TO END	N/A	0.00	0.27	0.27	2		GR	
0213	NC	31692		STEAMPLANT ROAD	FROM ROUTE 5000 (AIR FORCE MARINA ROAD)	TO BOAT RAMP	N/A	0.00	0.20	0.20	2		GR	
214ZZ	5	52922		GOVERNORS LANDING CAMPGROUND ROADS	FROM ROUTE 0208 (GOVERNORS LANDING ROAD)	THROUGH CAMPGROUND	N/A	0.24	0.00	0.24	3		AS	3
0215	NC	235746		BLACKBRUSH LITTLE PICNIC LOOP	FROM ROUTE 0102 (BLACKBRUSH ROAD)	TO END OF LOOP	N/A	0.00	0.00	0.00	3		GR	
0400	5	31682		RESIDENCE AREA ROAD	FROM ROUTE 0917 (ROUGH CANYON MAINTENANCE AREA)	TO END	N/A	0.08	0.00	0.08	6		AS	4
0401	NC	235748		HUNT AREA 2 RANGE ROAD	FROM ROUTE 0207 (HUNT AREA 2 ROAD)	TO END	N/A	0.00	0.45	0.45	6		GR	
0402	NC	31691		DE/WELL HOUSE ROAD	FROM ROUTE 0001 (DIABLO EAST ENTRANCE ROAD)	TO END OF LOOP	N/A	0.00	0.00	0.00	6		GR	
0403	NC	227341		HUNT AREA 4 ROAD	FROM PARK BOUNDARY	TO END	N/A	0.00	0.00	0.00	6		GR	
0404	NC	227342		HUNT AREA 5 ROAD	FROM U.S. HIGHWAY 277	TO RANCH FENCE	N/A	0.00	0.00	0.00	6		GR	
0405	NC	235757		RIVER ROAD	FROM IBWC SERVICE ROAD	TO SECOND GATE	N/A	0.00	0.00	0.00	6		GR	
0900	5	21976		PECOS UPPER PARKING	FROM ROUTE 0200 (PECOS ROAD)	TO PARKING	N/A	0.00	0.00	0.00		59,819	AS	1
0901	5	21977		PECOS COMFORT STATION PARKING	FROM ROUTE 0200 (PECOS ROAD)	TO ROUTE 0200 (PECOS ROAD)	S N/A	0.00	0.00	0.00		11,072	AS	1

Shadi	ng Colo	r Kov: Whi	to – P	aved Routes. DCV Driver	Vollow – Uppavod P	outes, DCV not Driven	Blue = All Paved Parki	ng Aroos			Uppoyod	Parking Area	•	
Red te	xt deno	otes		aved Routes, DCV Driver		or Private non-NPS Routes		<u> </u>			Unpaveu	Faiking Alea	5	
approx	. milea	ge			from NPS and was not invento			SION ROUTE F	lag ON					
				Data Collection Vehicle	NC - Not Collected		-3-4 ()							
AN	AI S	5 АЛ	nist.	AD NATIONAL REC	REATION AREA									
Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route De From	escription To	Maint. District	Paved Miles	Un- Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Are Map
0902	5	52923		PECOS RESIDENCE AREA	FROM ROUTE 0901 (PECOS COMFORT STATION PARKING)	TO PARKING	N/A	0.00	0.00	0.00		12,451	AS	1
0903A	5	52941		PECOS BOAT RAMP PARKING A	ADJACENT TO ROUTE 0200 (PECOS ROAD) ON LEFT		N/A	0.00	0.00	0.00		15,553	AS	1
0903B	5	52942		PECOS BOAT RAMP PARKING B	ADJACENT TO ROUTE 0200 (PECOS ROAD) ON RIGHT		N/A	0.00	0.00	0.00		45,501	AS	1
0904	5	235751		PECOS BOAT DOCK PARKING	ADJACENT TO ROUTE 0200 (PECOS ROAD)		N/A	0.00	0.00	0.00		7,792	со	1
0905	5	52925		GOVERNORS LANDING PARKING	FROM END OF ROUTE 0208 (GOVERNORS LANDING ROAD)	TO PARKING	N/A	0.00	0.00	0.00		49,973	AS	3
0907A	5	24956		DIABLO EAST RANGER STATION PARKING A	FROM ROUTE 0001 (DI ABLO EAST ENTRANCE ROAD) ON LEFT	TO ROUTE 0001 (DIABLO EAST ENTRANCE ROAD)	N/A	0.00	0.00	0.00		55,054	AS	3
907B	5	24957		DIABLO EAST RANGER STATION PARKING B	FROM ROUTE 0001 (DI ABLO EAST ENTRANCE ROAD) ON RIGHT	TO ROUTE 0001 (DIABLO EAST ENTRANCE ROAD)	N/A	0.00	0.00	0.00		69,297	AS	3
0908	5	52928		DIABLO EAST MARINA PARKING	FROM ROUTE 0907B (DIABLO EAST RANGER STATION PARKING B)	TO PARKING	N/A	0.00	0.00	0.00		106,773	AS	3
0910	5	52930		DIABLO EAST WATERPLANT AREA	FROM ROUTE 0001 (DI ABLO EAST ENTRANCE ROAD)	TO WATER PLANT	N/A	0.00	0.00	0.00		23,173	AS	3
0911	5	24971		BLACKBRUSH PARKING	FROM ROUTE 0102 (BLACKBRUSH ROAD)	TO ROUTE 0102 (BLACKBRUSH ROAD)	N/A	0.00	0.00	0.00		35,823	AS	3
)913A	5	24988		277 SOUTH BOAT RAMP APPROACH AND PARKING	ADJACENT TO ROUTE 0202 (SPUR 277 SOUTH)		N/A	0.00	0.00	0.00		6,622	AS	4
0914	5	52931		ROUGH CANYON MARINA PARKING	FROM ROUTE 0002 (ROUGH CANYON ENTRANCE ROAD)	TO ROUTE 0002 (ROUG CANYON ENTRANCE ROAD)	H N/A	0.00	0.00	0.00		85,953	AS	4
0915	5	23895		ROUGH CANYON AREA PARKING	FROM ROUTE 0002 (ROUGH CANYON ENTRANCE ROAD)	TO ROUGH CANYON LO WATER BOAT RAMP	N∕A	0.00	0.00	0.00		77,909	AS	4

	wente	ny Progra		0/03/2012		(Numerical By Route #)							Pag	e 4 of
	ng Colo	,	/hite =	Paved Routes, DCV Driver	n Yellow = Unpaved R	outes, DCV not Driven	e = All Paved Parki	ng Areas	G	Green = All	Unpaved	Parking Area	S	
	ext deno x. milea		rey = P	Paved Routes, DCV not Driv	ven Black = State, Local	or Private non-NPS Routes	= Concess	sion Route F	lag ON					
		*	DCV -	d route data was obtained Data Collection Vehicle	NC - Not Collected	oried by the Road Inventory Pr	ogram (RIP).							
Rte. No.	Cycle Collected	FMSS No.	Concess	7		escription To	Maint. District	Paved Miles	Un- Paved Miles	Total Route	Func. Class	Manual Rated	Surf. Type	Are Map
NO.	Col	NO.	CO	2					wines	Length		SQ/FT	5.	•
0917	5	52934		ROUGH CANYON MAINTENANCE AREA	FROM ROUTE 0915 (ROUGH CANYON AREA PARKING)	TO MAINTENANCE AREA	N/A	0.00	0.00	0.00		37,339	AS	4
0919	NC	24965		DE/MAINTENANCE YARD PARKING	FROM 0921 (DE/OVERFLOW PARKING)	TO PARKING	N/A	0.00	0.00	0.00			GR	
0920	5	98661		BOX CANYON PARKING AREA	FROM ROUTE 0104 (BOX CANYON ROAD)	TO PARKING	N/A	0.00	0.00	0.00		18,521	AS	2
0921	NC	235753		DE/OVERFLOW PARKING	FROM ROUTE 0001 (DIABLO EAST ENTRANCE ROAD)	TO PARKING	N/A	0.00	0.00	0.00		21,577	GR	
5000	5			AIR FORCE MARINA ROAD	FROM ROUTE 0003 (DAM ROAD)	TO ROUTE 0213 (STEAMPLANT ROAD)	N/A	1.67	0.00	1.67			AS	3
5002	5			RECREATION ROAD 2	FROM U.S. HIGHWAY 277	TO PARK BOUNDARY / BEGIN ROUTE 0002 (ROUGH CANYON ENTRANCE ROAD)	N/A	7.18	0.00	7.18			AS	4
5100	5			SPUR 454 (NON NPS SECTION)	FROM U.S. HIGHWAY 90	TO PARK BOUNDARY / BEGIN ROUTE 0100 (SPUR 454)	N/A	0.64	0.00	0.64			AS	4
104	5		- ·	BOX CANYON ROAD (NON NPS SECTION)	FROM U.S. HIGHWAY 90	TO PARK BOUNDARY / BEGIN ROUTE 0104 (BOX CANYON ROAD)	N/A	7.60	0.00	7.60			AS	2
200	5			PECOS ROAD (NON NPS SECTION)	FROM U.S. HIGHWAY 90	TO PARK BOUNDARY / BEGIN ROUTE 0200 (PECOS ROAD)	N/A	1.10	0.00	1.10			AS	1
201	5			SPUR 406 (NON NPS SECTION)	FROM U.S. HIGHWAY 90	TO PARK BOUNDARY / BEGIN ROUTE 0201 (SPUR 406)	N/A	3.68	0.00	3.68			AS	2
202	5			SPUR 277 SOUTH (NON NPS SECTION)	FROM U.S. HIGHWAY 277	TO PARK BOUNDARY / BEGIN ROUTE 0202 (SPUR 277 SOUTH)	N/A	0.52	0.00	0.52			AS	4
5203	5		-	SPUR 277 NORTH (NON NPS SECTION)	FROM U.S. HIGHWAY 277	TO PARK BOUNDARY / BEGIN ROUTE 0203	N/A	0.27	0.00	0.27			AS	4

Road Inventory Pro	ogram 10/03/2012		P Rout	te ID Report		Page 5 of 6	
Shading Color Key:	White = Paved Routes, DCV Driven	ellow = Unpaved Routes, DC	V not Driven	Blue = All Paved Parking Areas	Green = All Unpaved Parking A	Areas	
Red text denotes approx. mileage	Grey = Paved Routes, DCV not Driven	ack = State, Local or Private	e non-NPS Routes	= Concession Route Flag ON			
	*Unpaved route data was obtained from NPS ** DCV - Data Collection Vehicle NC - N	and was not inventoried by th ot Collected	ne Road Inventory	Program (RIP).			
	CYCLE 5 SUMMARY TOTALS FOR AMISTAD NATIONAL RECREATION AREA						
	CYCLE 5 ROUTE TOTALS			CYCLE 5 CONCES	SION TOTALS		
	DCV Driven Route Mile	es 6.27		Conces	sion Paved Route Miles	0.00	
	Manually Rated Route Mile	es 0.00		Concession Unpaved Route Mile			
TOTAL PAR	RK ROUTE MILES COLLECTED IN CYCLE	5 6.27		TOTAL CONCESSION ROUTE MILI			
	Manually Rated Routes (SQF	r) o		ved Parking Area SQFT	0		
	TOTAL UNPAVED PARK ROUTE MIL	S 6.00		Concession Unpa	ved Parking Area SQFT	0	
				TOTAL CONCESSIO	N PARKING AREA SQFT	0	
				Concession Man	ually Rated Rotes SQFT	0	
* <u>C`</u>	YCLE 5 PARKING AREA TO	TALS	<u>C</u>	YCLE 5 WEIGHTED AVE	ERAGE PARK VAL	<u>UES</u>	
	Paved Parking (SQF	718,625			DCV Driven PCR	64	
	Unpaved Parking (SQF) 21,577		**Manu	ually Rated Routes PCR	N/A	
	TOTAL PARKING (SQF	740,202			* * Parking PCR	70	
				***Tota	I Equivalent Lane Miles	26.70	

* - The Parking Area Totals SQFT value represents **all** parking areas collected in Cycle 5, both park and concessionaire.

** - Parking and Manually Rated Routes are assigned the following PCR values based on their observed condition: Construction=-1, Excellent=97, Good=90, Fair=73, and Poor=45.

*** - Equivalent Lane Miles are calculated by route using the following equations : DCV and Manually Rated Lines Routes=(PAVE_WIDTHxPAVED_MI)/11 foot lane. Parking Areas=SQ_FEET/5280/11. Manually Rated Polygons=SQ_FEET/5280/11.

Shading	Color Key:	White = Paved Routes, DCV Driven	Yellow = Unpaved Routes, DCV not Driven Blue = All Paved Parking Areas	Green = All Unpaved Parking Areas
Red text		Grey = Paved Routes, DCV not Driven	Black = State, Local or Private non-NPS Routes = Concession Route F	Flag ON
		•	NPS and was not inventoried by the Road Inventory Program (RIP).	
		General Park	Road Functional Classification Table	Surface Type Abbreviations
class 1			ich constitute the main access route, circulatory tour, or thoroughfare for park visitors. z Trace) are numbered 1 - 9. State Routes Inventoried for Park. Route Numbers 5000-5999	AS - Asphaltic Concrete Pavement
lass 2	Connector Pa		ccess within a park to areas of scenic, scientific, recreational or cultural interest, such as overlooks,	CO - Portland Cement Concrete Pavement BR - Brick or Pavers Road Bed
ass 3			vide circulation within public areas, such as campgrounds, picnic areas, visitor center complexes, w-speed traffic and are often designed for one-way circulation. Route Numbers 200-299.	CB - Cobble Stone Road Bed GR - Gravel Road Bed
ass 4	roads freque	ntly have no minimum design standards and the	irculation through remote areas and/or access to primitive campgrounds and undeveloped areas. The eir use may be limited to specially equipped vehicles. Route Numbers 200-299. ers because, historically, they were numbered similarly.	ese SA - Sand Road Bed NV - Native or Dirt Material Road Bed
ass 5	Administrativ		lic roads intended for access to administrative developments or structures such as park offices, emplo	oyee OT - Other Materials Road Bed
<u>ass 6</u>	Note: Funct	tional Classes 5 and 6 have the same route num	closed to the public, including patrol roads, truck trails, and other similar roads. Route Numbers 400 bers because historically they were numbered similarly and often there is little distinction between ree housing are often closed to the public, this restriction would result in classification of FC 6 rather	
lass 7	an urban are		cilities serve high volumes of park and non-park related traffic and are restricted, limited-access facil s the major parkways which serve as gateways to our nation's capital. Other major park roads or po umbers 1-9.	
lass 8			are usually extensions of the adjoining street system that are owned and maintained by the National form with accepted local engineering practice and local conditions. Route Numbers 600-699.	l Park
			a park or other unit of the NPS which are administered by the NPS, or by the Service in cooperation ark road is not based on traffic volumes or design speed, but on the intended use or function of that r	
ationwide	e which are des	signated by the 300 and 500 series. The numbe	eries for interpretive roads, and a 500 series for one-way roads. There are approximately 250 roads rs for these roads will be maintained for reporting consistency. However, since these interpretive and 00 and 500 series will be discontinued for future use.	
	0 route number for GPS and V		e, County or City owned which border, traverse, or provide access to Park Facilities or Assets. 5000	Routes

Road Inv	ventory P	rogra	NPS/R am 10/03/2012	IP Subcompone (Numerical By Su		r A	MI	S			Page 1 of 1
0	l Color Key: t denotes mileage	G	hite = Paved Routes, DCV Driven rey = Paved Routes, DCV not Driven Japaved route data was obtained from NF	Yellow = Unpaved Routes, DCV not Drive Black = State, Local or Private non-NPS F PS and was not inventoried by the Road Inv	Routes = Concession Ro			reen = All Un	paved Parl	king Areas	
AN	MIS		AMISTAD NATIONAL RECR								
Asset Rte. No.	Enter FMSS No.	Cycle Collected D	IN FMSS System	Route Desc From	cription To	Concess Route	Func. Class	Paved Miles	Un- Paved Miles	Total Route Length	Manual Rated SQ/FT
0214ZZ	52922	5	GOVERNORS LANDING CAMPGROUND ROADS	FROM ROUTE 0208 (GOVERNORS LANDING ROAD)	THROUGH CAMPGROUND		3	0.24	0.00	0.24	
Asset	AMIS	-02	14ZZ Subcomponent	Breakdown							
Rte. No.	FMSS No.	Cycle Collecte	Route Name	Route Desc From	cription To	Concess Route	Func. Class	Paved Miles	Un- Paved Miles	Total Route Length	Manual Rated SQ/FT
0214AZ	52922	5	GOVERNORS LANDING CAMPGROUND ROAD A	FROM ROUTE 0208 (GOVERNORS LANDING ROAD)	TO END OF LOOP		3	0.19	0.00	0.19	
0214BZ	52922	5	GOVERNORS LANDING CAMPGROUND ROAD B	FROM ROUTE 0214AZ (GOVERNORS LANDING CAMPGROUND ROAD A)	TO END		3	0.05	0.00	0.05	

	ROUTES	S ADDED FROM PREVIOUS IN	VENTORY:
Route #	Route Name	Reason for Addition	Comments
0003	DAM ROAD	OTHER	ADDED TO INVENTORY IN CYCLE 5.
0004	SOUTHWIND MARINA ROAD	OTHER	ROAD RECENTLY ACQUIRED BY THE PARK. IT WAS ADDED TO THE INVENTORY AFTER CYCLE 5 DATA COLLECTION AT THE PARK. THEREFORE, NO CONDITION DATA IS REPORTED. THE FMSS NUMBER HAS NOT BEEN DETERMINED AT THE TIME OF THIS REPORT PUBLICATION.
0202	SPUR 277 SOUTH	ROUTE SPLIT	ADDED TO INVENTORY IN CYCLE 5. SPLIT OUT FROM THE SHAPE OF 0913A.
0400	RESIDENCE AREA ROAD	ROUTE SPLIT	ROUTE 0400 WAS SPLIT OUT OF THE SHAPE OF PARKING AREA 0917 IN CYCLE 5.
0920	BOX CANYON PARKING AREA	OTHER	ADDED TO INVENTORY IN CYCLE 5.
5000	AIR FORCE MARINA ROAD	OTHER	ADDED TO INVENTORY IN CYCLE 5.
5002	RECREATION ROAD 2	OTHER	ADDED TO INVENTORY IN CYCLE 5.
5100	SPUR 454 (NON NPS SECTION)	OTHER	ADDED TO INVENTORY IN CYCLE 5.
5104	BOX CANYON ROAD (NON NPS SECTION)	OTHER	ADDED TO INVENTORY IN CYCLE 5.
5200	PECOS ROAD (NON NPS SECTION)	OTHER	ADDED TO INVENTORY IN CYCLE 5.

	ROUTES	S ADDED FROM PREVIOUS IN	VENTORY:
Route #	Route Name	Reason for Addition	Comments
5201	SPUR 406 (NON NPS SECTION)	OTHER	ADDED TO INVENTORY IN CYCLE 5.
5202	SPUR 277 SOUTH (NON NPS SECTION)	OTHER	ADDED TO INVENTORY IN CYCLE 5.
5203	SPUR 277 NORTH (NON NPS SECTION)	OTHER	ADDED TO INVENTORY IN CYCLE 5.
	ROUTES	MODIFIED FROM PREVIOUS II	NVENTORY:
Route #	Route Name	Type of Modification	Comments
0214ZZ	GOVERNORS LANDING CAMPGROUND ROADS	OTHER	A CAMPGROUND ROAD WAS ADDED TO THE MAIN CAMPGROUND LOOP IN CYCLE 5. THE ROUTE NUMBER CHANGED FROM 0214 TO 0214ZZ.
0917	ROUGH CANYON MAINTENANCE AREA	ROUTE SPLIT	ROUTE 0400 WAS SPLIT OUT OF THE SHAPE OF PARKING AREA 0917 IN CYCLE 5.

	OTHER C	CHANGES FROM PREVIOUS IN	IVENTORY:
Route #	Route Name	Type of Change	Comments
0100	SPUR 454	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 2 TO 1 IN CYCLE 5 BECAUSE IT IS A PRINCIPAL PARK ROAD. LENGTH COLLECTED IS SHORTER IN CYCLE 5 DUE TO CHANGES IN THE WATER LEVEL FROM LAST CYCLE.
0200	PECOS ROAD	LENGTH CHANGE	LENGTH INCREASED .15 MILES AT THE BEGINNING TO EXTEND THE ROUTE TO THE BEGINNING OF THE STONE WALL. FUNCTIONAL CLASS CHANGED FROM 3 TO 1 IN CYCLE 5 BECAUSE IT IS A PRINCIPAL PARK ROAD.
0201	SPUR 406	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 3 TO 1 IN CYCLE 5 BECAUSE IT IS A PRINCIPAL PARK ROAD. LENGTH COLLECTED IS SHORTER IN CYCLE 5 DUE TO CHANGES IN THE WATER LEVEL FROM LAST CYCLE.
0203	SPUR 277 NORTH	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 3 TO 1 IN CYCLE 5 BECAUSE IT IS A PRINCIPAL PARK ROAD. LENGTH COLLECTED IS SHORTER IN CYCLE 5 DUE TO CHANGES IN THE WATER LEVEL FROM LAST CYCLE.
0208	GOVERNORS LANDING ROAD	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 3 TO 1 IN CYCLE 5 BECAUSE IT IS A PRINCIPAL PARK ROAD. LENGTH INCREASED BY 90FT AT THE BEGINNING TO EXTEND THE ROUTE TO TEXAS SPUR 349.
0904	PECOS BOAT DOCK PARKING	SQ FEET CHANGE	GPS WAS UPDATED IN CYCLE 5 TO EXLUDE THE BOAT RAMP FROM THE SHAPE.
0913A	277 SOUTH BOAT RAMP APPROACH AND PARKING	ROUTE SPLIT	ROUTE 0202 WAS SPLIT OUT OF THE SHAPE OF 0913A IN CYCLE 5.

	ROUTES	REMOVED FROM PREVIOUS I	NVENTORY:
Route #	Route Name	Reason for Removal	Comments
0906	DIABLO EAST DUMP STATION	OTHER	ROUTE WAS REMOVED IN CYCLE 5 BECAUSE IT WAS DETERMINED TO BE A PULLOUT.
0912A	BLACKBRUSH BOAT RAMP A	OTHER	ROUTE WAS REMOVED IN CYCLE 5 BECAUSE IT IS A BOAT RAMP (BOAT RAMPS ARE NO LONGER INVENTORIED BY RIP).
0912B	BLACKBRUSH BOAT RAMP B	OTHER	ROUTE WAS REMOVED IN CYCLE 5 BECAUSE IT IS A BOAT RAMP (BOAT RAMPS ARE NO LONGER INVENTORIED BY RIP).
0913B	277 SOUTH BOAT RAMP	OTHER	ROUTE WAS REMOVED IN CYCLE 5 BECAUSE IT IS A BOAT RAMP (BOAT RAMPS ARE NO LONGER INVENTORIED BY RIP).
0916	ROUGH CANYON BOAT RAMP	OTHER	ROUTE WAS REMOVED IN CYCLE 5 BECAUSE IT IS A BOAT RAMP (BOAT RAMPS ARE NO LONGER INVENTORIED BY RIP).
0918	ROUGH CANYON HIGH WATER RAMP	OTHER	ROUTE WAS REMOVED IN CYCLE 5 BECAUSE IT IS A BOAT RAMP (BOAT RAMPS ARE NO LONGER INVENTORIED BY RIP).

<u>Section 3</u> Park Summary Information



Amistad National Recreation Area



AMIS: PAVED ROUTE MILES AND PERCENTAGES BY FUNCTIONAL CLASS AND PCR

	Pavement Condition Rating (PCR)								
	Poor (0-60)		Fair (61-84)		Good (85-94)		Excellent (95-100)		TOTAL
F.C.	MILES	%	MILES	%	MILES	%	MILES	%	MILES
1	1.54	24.56%	1.15	18.34%	1.93	30.78%	0.70	11.16%	5.32
2			0.14	2.23%	0.27	4.31%	0.22	3.51%	0.63
3	0.16	2.55%	0.08	1.28%					0.24
4									
5									
6					0.08	1.28%			0.08
7									
8									
Totals	1.70	27.11%	1.37	21.85%	2.28	36.36%	0.92	14.67%	6.27


Note: The information in this table is derived from the PMS_20 table in the Park database, which only contains processed data from routes collected with the Data Collection Vehicle (DCV). Information for Manually Rated Routes (MRR) and Parking Areas is not reported in this table. Only Functional Class 1, 2, & 7 routes, and any new routes not previously collected by RIP, are collected in Large Parks.

Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that have been implemented in Cycle 5, we will also aim to provide greater assistance in translating excellent/good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 0-60. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.

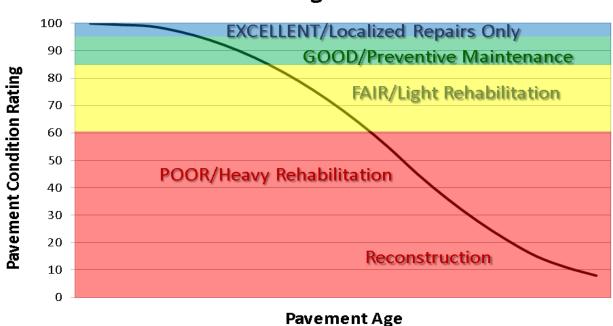


Condition Categories and Treatments

AMIS: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle


ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	PAVED LENGTH		AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0001	DIABLO EAST ENTRANCE ROAD	1	0.79	ASPHALT	95	84
0002	ROUGH CANYON ENTRANCE ROAD	1	0.20	ASPHALT	92	92
0003	DAM ROAD	1	0.20	ASPHALT	95	95
0100	SPUR 454	1	0.83	ASPHALT	33	51
0102	BLACKBRUSH ROAD	2	0.63	ASPHALT	95	90

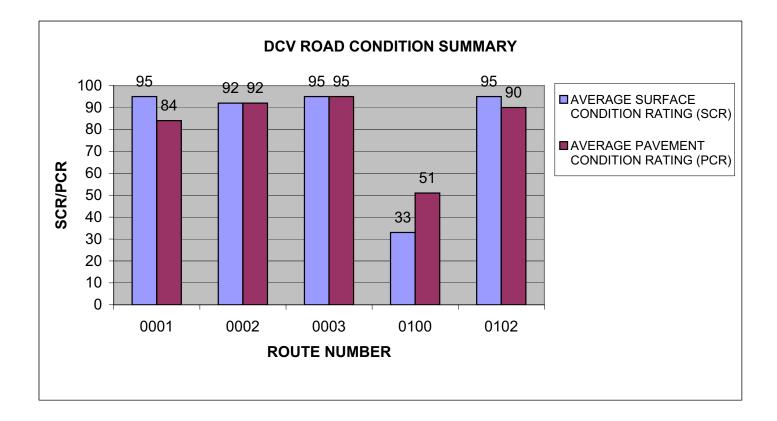

AMIS: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle


ROUTE NUMBER	ROUTE NAME	101101	PAVED LENGTH		AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0200	PECOS ROAD	1	0.54	ASPHALT	0	0
0201	SPUR 406	1	1.22	ASPHALT	21	47
0202	SPUR 277 SOUTH	1	0.13	ASPHALT	0	0
0203	SPUR 277 NORTH	1	0.19	ASPHALT	75	75
0208	GOVERNORS LANDING ROAD	1	1.24	ASPHALT	80	88

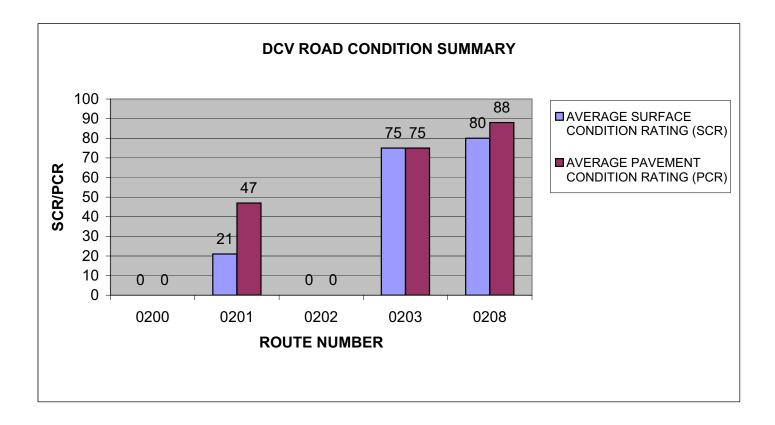

AMIS: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle

					AVERAGE	AVERAGE
					SURFACE	PAVEMENT
ROUTE		FUNCT	PAVED	SURFACE	CONDITION	CONDITION
NUMBER	ROUTE NAME	CLASS	LENGTH	TYPE	RATING (SCR)	RATING (PCR)
0214ZZ	GOVERNORS LANDING CAMPGROUND ROADS	3	0.24	ASPHALT	39	39
0400	RESIDENCE AREA ROAD	6	0.08	ASPHALT	88	88

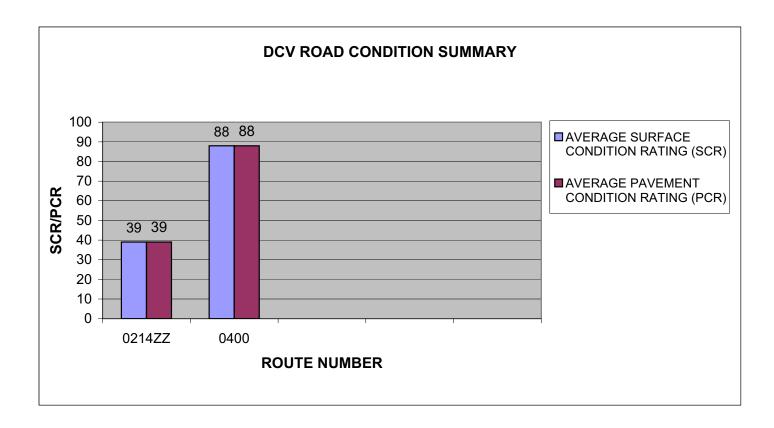


AMIS: PARKWIDE DCV CONDITION SUMMARY

AVERAGE	AVERAGE	AVERAGE		AVERAGE	AVERAGE	AVERAGE	
PAVEMENT	ROUGHNESS	SURFACE		ALLIGATOR	LONGITUDINAL	TRANSVERSE	AVERAGE
CONDITION	CONDITION	CONDITION	AVERAGE	CRACKING	CRACKING	CRACKING	PATCHING
RATING (PCR)	INDEX (RCI)	RATING (SCR)	RUT INDEX	INDEX	INDEX	INDEX	INDEX
64	85	57	95	65	93	94	100

All Index values are based on Data Collection Vehicle (DCV) driven roads that were collected in Cycle-5.

Roughness data is only collected on routes with lengths greater than 0.5 miles and a posted speed limit of 25 MPH or greater.

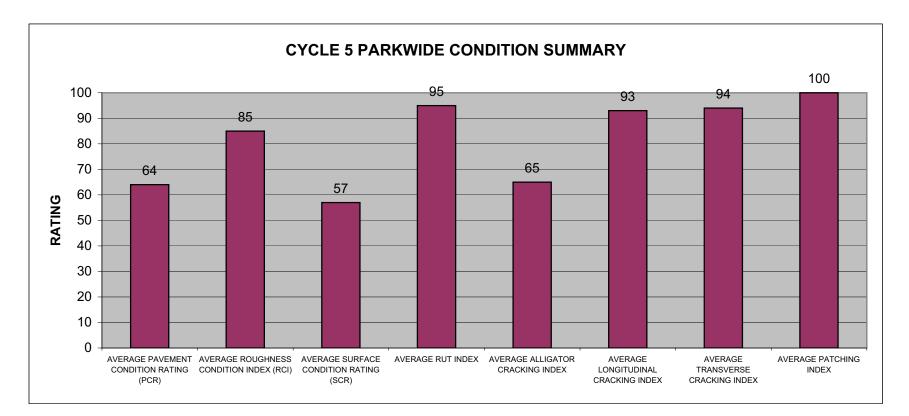


<u>Section 4</u> Park Route Location Maps




Amistad National Recreation Area



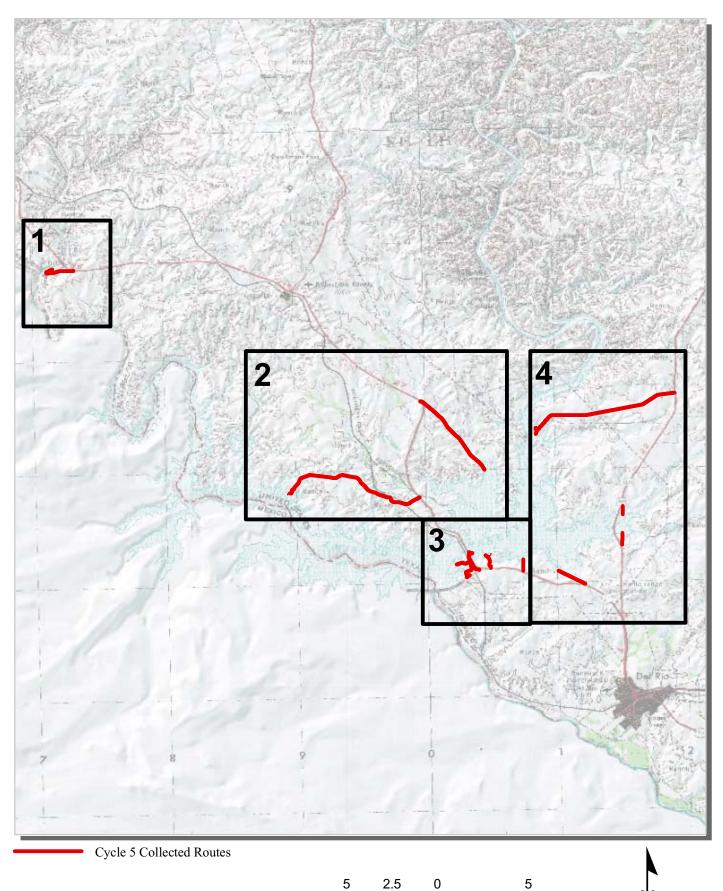




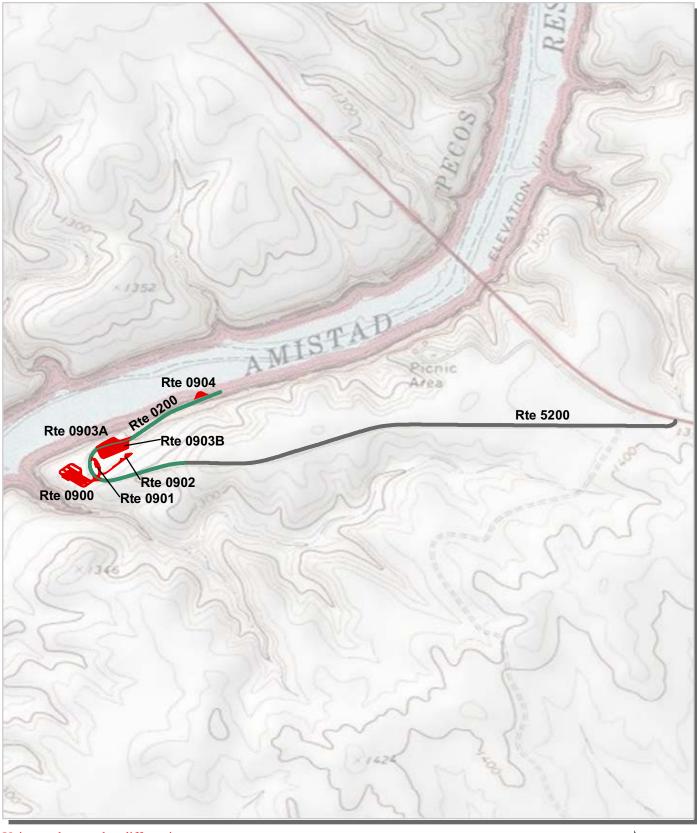


Unique colors used to differentiate routes




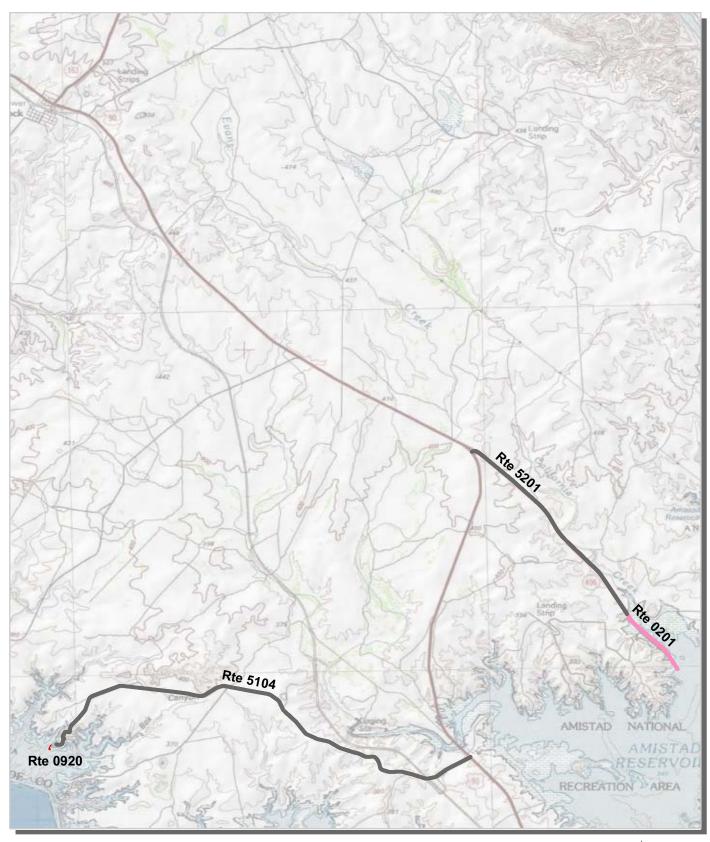


Unique colors used to differentiate routes



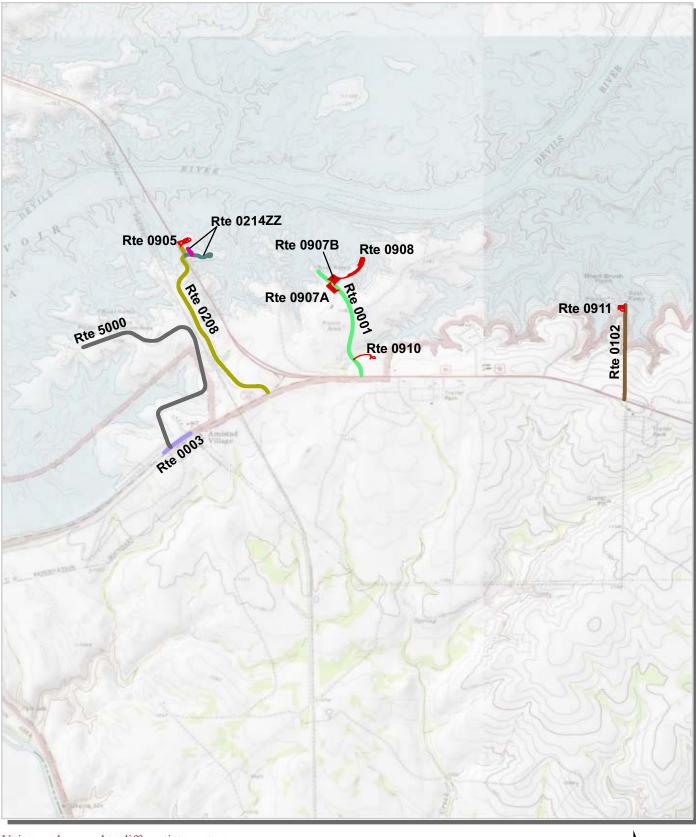






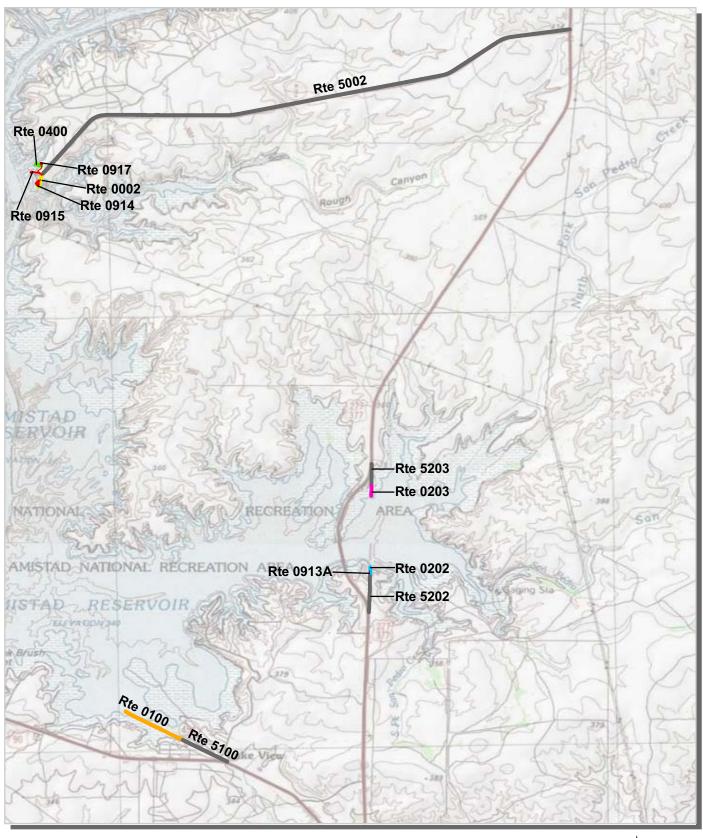

Unique colors used to differentiate routes



Amistad National Recreation Area Route Condition Map PCR - Mile by Mile Key Map

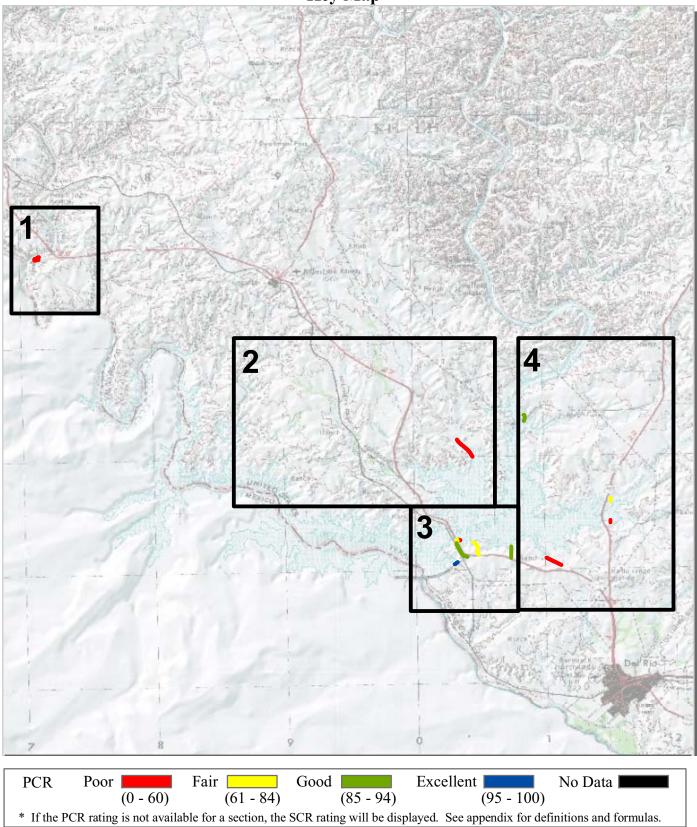


Note: Only routes collected by the DCV in Cycle-5 are displayed.




Amistad National Recreation Area Route Condition Map PCR - Mile by Mile Area 1






Miles


Amistad National Recreation Area Route Condition Map PCR - Mile by Mile Area 2

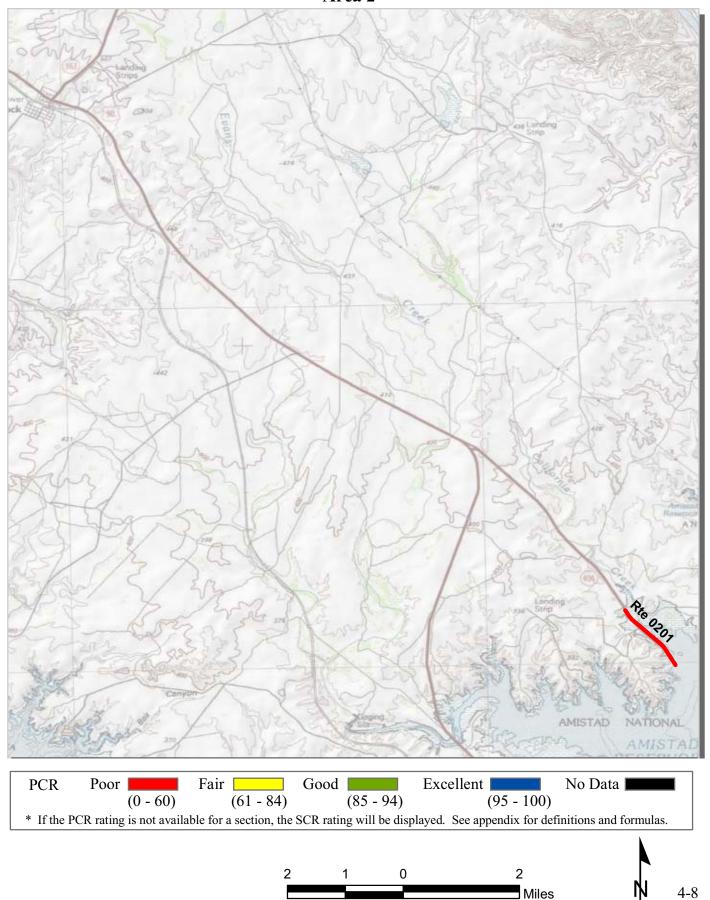

Amistad National Recreation Area Route Condition Map PCR - Mile by Mile Area 3

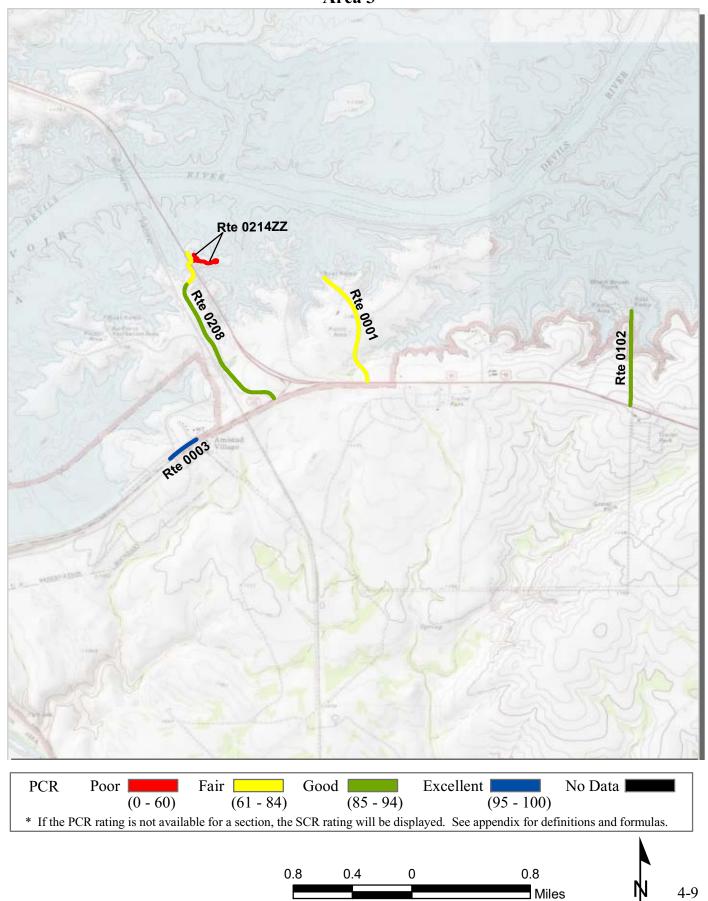

Amistad National Recreation Area Route Condition Map PCR - Mile by Mile

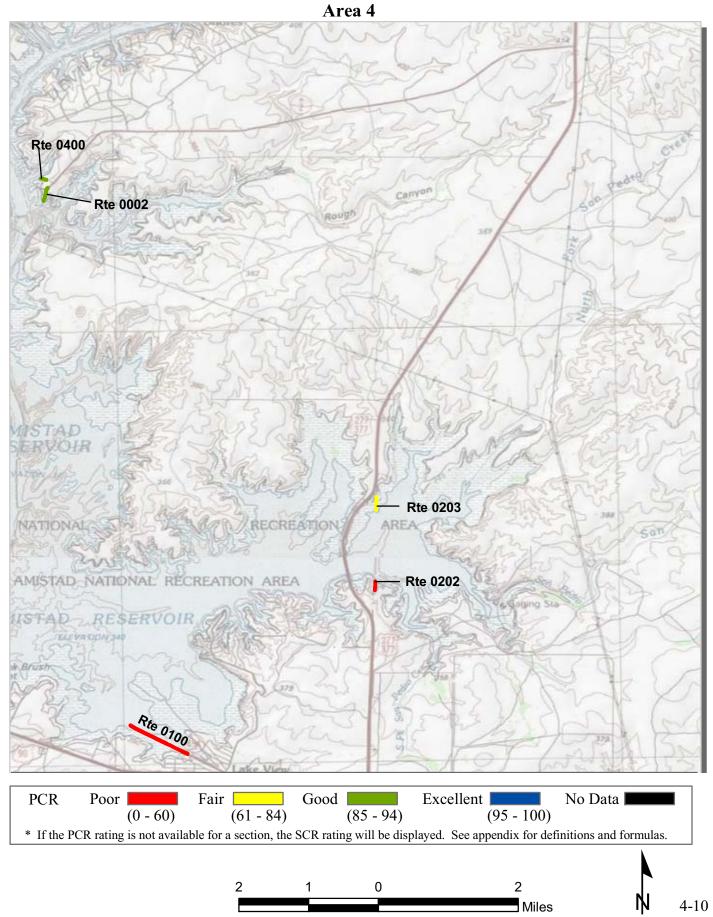

<u>Section 5</u> Paved Route Condition Rating Sheets



Amistad National Recreation Area





PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100))
* If the PCF	R rating is not availa	ble for a section, the	SCR rating will be dis	played. See appendix for	definitions and formulas.

ROUTE: 0001 DIABLO EAST ENTRANCE ROAD AMIS : AMISTAD NATIONAL RECREATION AREA

INTERMOUNTAIN REGION			LLECTED: LENGTH:	1/18/2012 0.79 Miles
Section Number	0	_		
Section Length (mi)	0.79			
Cross Section Information				
Number of Lanes	2			
Paved Width (ft)	24			
Lane Width (ft)	12			
Roadway Condition Information				
SCR (Surface Condition Rating)	95			
PCR (Pavement Condition Rating)	84			
Distress Index Values				
Structural Crack Index	100			
Transverse Cracking Index	99			
Patching Index	100			
Rutting Index	95			
Roughness Condition Index (RCI)	68			

ROUTE: 0001 DIABLO EAST ENTRANCE ROAD

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.



PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60) (61 - 84)	(85 - 94)	(95 - 10	0)
* If the PCI	R rating is not avai	lable for a section, the	SCR rating will be disp	played. See appendix fo	r definitions and formulas.

ROUTE: 0002 ROUGH CANYON ENTRANCE ROAD AMIS : AMISTAD NATIONAL RECREATION AREA


INTERMOUNTAIN REGION			LLECTED: LENGTH:	1/18/2012 0.20 Miles
Section Number	0			0.20 miles
Section Length (mi)	0.20			
Cross Section Information				
Number of Lanes	2			
Paved Width (ft)	23			
Lane Width (ft)	12			
Roadway Condition Information				
SCR (Surface Condition Rating)	92			
PCR (Pavement Condition Rating)	92			
Distress Index Values				
Structural Crack Index	93			
Transverse Cracking Index	94			
Patching Index	99			
Rutting Index	92			
Roughness Condition Index (RCI)	NC			

ROUTE: 0002 ROUGH CANYON ENTRANCE ROAD

Ņ

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

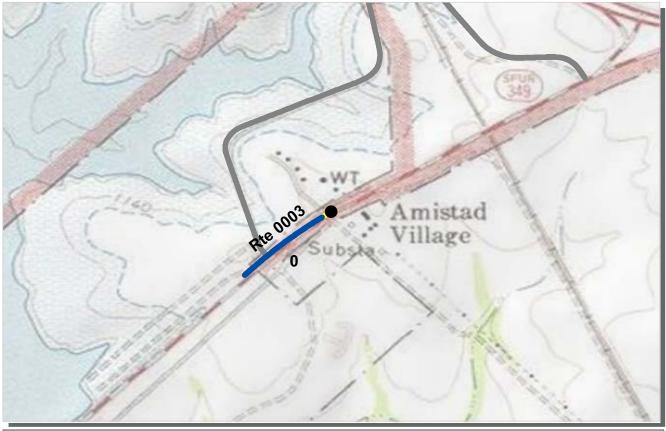

 PCR
 Poor
 Fair
 Good
 Good
 Excellent
 No Data

 * If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0003 DAM ROAD AMIS : AMISTAD NATIONAL RECREATION AREA

INTERMOUNTAIN REGION			LLECTED: LENGTH:	1/18/2012 0.20 Miles
Section Number	0			
Section Length (mi)	0.20			
Cross Section Information				
Number of Lanes	2			
Paved Width (ft)	27			
Lane Width (ft)	12			
Roadway Condition Information				
SCR (Surface Condition Rating)	95			
PCR (Pavement Condition Rating)	95			
Distress Index Values				
Structural Crack Index	95			
Transverse Cracking Index	98			
Patching Index	100			
Rutting Index	99			
Roughness Condition Index (RCI)	NC			

ROUTE: 0003 DAM ROAD


ψ

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable

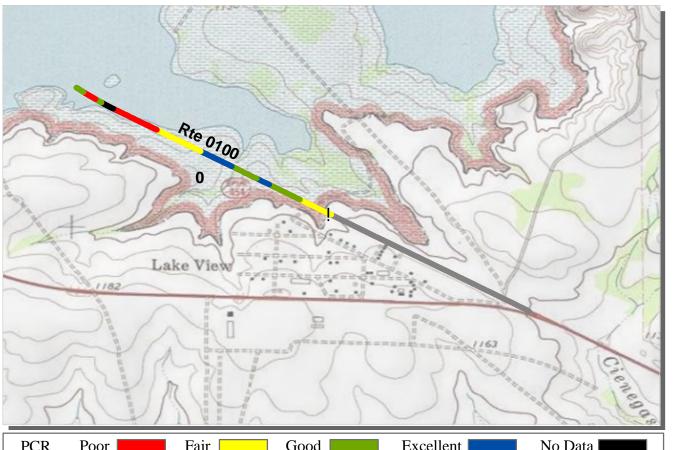

PCR	Poor	Fair	Good	Excellent	No Data English
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100))
* If the PC	R rating is not availa	ble for a section, the	SCR rating will be dis	played. See appendix for	definitions and formulas.

ROUTE: 0100 SPUR 454 AMIS : AMISTAD NATIONAL RECREATION AREA


INTERMOUNTAIN REGION		•••	LLECTED: LENGTH:	1/18/2012 0.83 Miles
Section Number	0			
Section Length (mi)	0.83			
Cross Section Information				
Number of Lanes	2			
Paved Width (ft)	28			
Lane Width (ft)	14			
Roadway Condition Information				
SCR (Surface Condition Rating)	33			
PCR (Pavement Condition Rating)	51			
Distress Index Values				
Structural Crack Index	33			
Transverse Cracking Index	93			
Patching Index	100			
Rutting Index	93			
Roughness Condition Index (RCI)	77	 		

ROUTE: 0100 SPUR 454

0

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

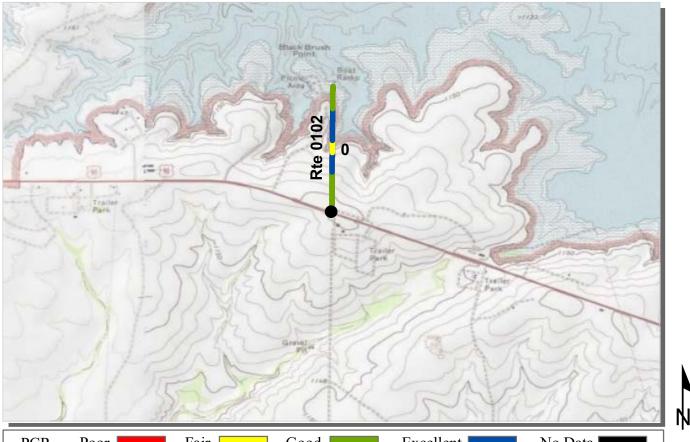

L	PCR	Poor		Fair	Good	Excellent	No Data
			(0 - 60)	(61 - 84)	(85 - 94)	(95 - 10	0)
L	* If the PC	R rating i	is not availab	le for a section, the	SCR rating will be dis	played. See appendix for	r definitions and formulas.

ROUTE: 0102 BLACKBRUSH ROAD AMIS : AMISTAD NATIONAL RECREATION AREA

INTERMOUNTAIN REGION			LLECTED: LENGTH:	1/18/2012 0.63 Miles
Section Number	0	_		
Section Length (mi)	0.63			
Cross Section Information				
Number of Lanes	2			
Paved Width (ft)	22			
Lane Width (ft)	11			
Roadway Condition Information				
SCR (Surface Condition Rating)	95			
PCR (Pavement Condition Rating)	90			
Distress Index Values				
Structural Crack Index	100			
Transverse Cracking Index	99			
Patching Index	100			
Rutting Index	95			
Roughness Condition Index (RCI)	82			

ROUTE: 0102 BLACKBRUSH ROAD

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.



PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100))
* If the PCI	R rating is not availab	ble for a section, the	SCR rating will be dis	played. See appendix for	definitions and formulas.

ROUTE: 0200 PECOS ROAD AMIS : AMISTAD NATIONAL RECREATION AREA


INTERMOUNTAIN REGION			LLECTED: LENGTH:	1/15/2012 0.54 Miles
Section Number	0			
Section Length (mi)	0.54			
Cross Section Information				
Number of Lanes	2			
Paved Width (ft)	21			
Lane Width (ft)	10			
Roadway Condition Information				
SCR (Surface Condition Rating)	0			
PCR (Pavement Condition Rating)	0			
Distress Index Values				
Structural Crack Index	0			
Transverse Cracking Index	95			
Patching Index	100			
Rutting Index	93			
Roughness Condition Index (RCI)	NC			


NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable

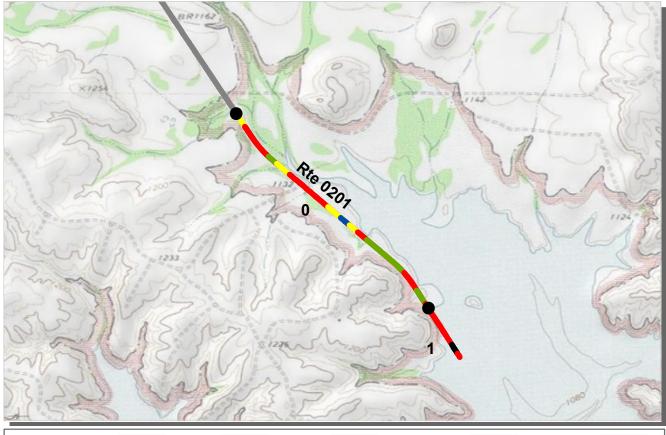



ROUTE: 0201 SPUR 406 AMIS : AMISTAD NATIONAL RECREATION AREA


INTERMOUNTAIN REGION			COLLECTED: TOTAL LENGTH:	1/15/2012 1.22 Miles
Section Number	0	1		
Section Length (mi)	1.00	0.22		
Cross Section Information				
Number of Lanes	2	2		
Paved Width (ft)	28	24		
Lane Width (ft)	14	12		
Roadway Condition Information				
SCR (Surface Condition Rating)	25	0		
PCR (Pavement Condition Rating)	51	31		
Distress Index Values				
Structural Crack Index	25	0		
Transverse Cracking Index	94	100		
Patching Index	100	100		
Rutting Index	93	95		
Roughness Condition Index (RCI)	90	77		

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

Ŵ

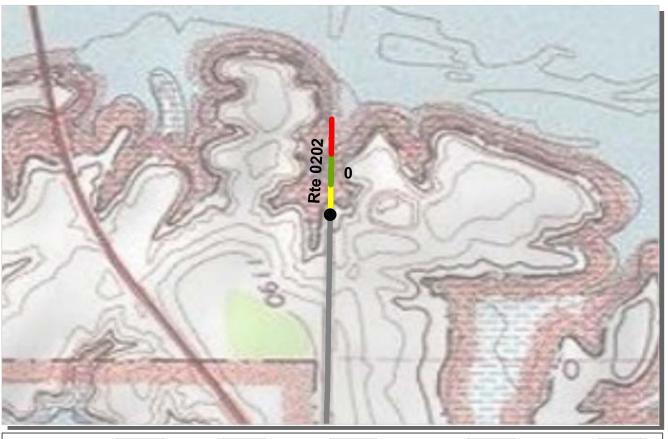

PCR	Poor	Fair Fair	Good	Excellent	No Data
	(0 - 60	0) (61 - 84) (85 - 94)) (95 - 10	00)
* If the PCI	R rating is not ava	ilable for a section, th	e SCR rating will be d	isplayed. See appendix f	or definitions and formulas.

ROUTE: 0202 SPUR 277 SOUTH AMIS : AMISTAD NATIONAL RECREATION AREA

INTERMOUNTAIN REGION			LLECTED: LENGTH:	1/18/2012 0.13 Miles
Section Number	0			
Section Length (mi)	0.13			
Cross Section Information				
Number of Lanes	2			
Paved Width (ft)	23			
Lane Width (ft)	12			
Roadway Condition Information				
SCR (Surface Condition Rating)	0			
PCR (Pavement Condition Rating)	0			
Distress Index Values				
Structural Crack Index	0			
Transverse Cracking Index	90			
Patching Index	98			
Rutting Index	93			
Roughness Condition Index (RCI)	NC			


NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable

ROUTE: 0202 SPUR 277 SOUTH

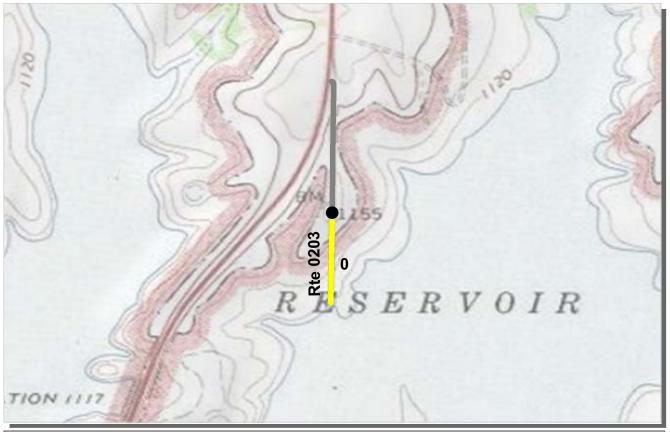

PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 10	0)
* If the PC	R rating is not availal	ble for a section, the	SCR rating will be dis	played. See appendix fo	or definitions and formulas.

ROUTE: 0203 SPUR 277 NORTH AMIS : AMISTAD NATIONAL RECREATION AREA

INTERMOUNTAIN REGION			LLECTED: LENGTH:	1/18/2012 0.19 Miles
Section Number	0			
Section Length (mi)	0.19			
Cross Section Information				
Number of Lanes	2			
Paved Width (ft)	22			
Lane Width (ft)	11			
Roadway Condition Information				
SCR (Surface Condition Rating)	75			
PCR (Pavement Condition Rating)	75			
Distress Index Values				
Structural Crack Index	75			
Transverse Cracking Index	85			
Patching Index	100			
Rutting Index	91			
Roughness Condition Index (RCI)	NC			

ROUTE: 0203 SPUR 277 NORTH

ψ

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.



 PCR
 Poor
 Fair
 Good
 Excellent
 No Data

 * If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0208 GOVERNORS LANDING ROAD AMIS : AMISTAD NATIONAL RECREATION AREA

INTERMOUNTAIN REGION			COLLECTED: TOTAL LENGTH:	
Section Number	0	1		
Section Length (mi)	1.00	0.24		
Cross Section Information				
Number of Lanes	2	2		
Paved Width (ft)	28	27		
Lane Width (ft)	11	12		
Roadway Condition Information				
SCR (Surface Condition Rating)	84	64		
PCR (Pavement Condition Rating)	90	78		
Distress Index Values				
Structural Crack Index	84	64		
Transverse Cracking Index	91	90		
Patching Index	100	100		
Rutting Index	100	100		
Roughness Condition Index (RCI)	100	100		

ROUTE: 0208 GOVERNORS LANDING ROAD

Ŵ

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.



PCR	Poor		Fair	Good	Excellent	No Data
		(0 - 60)	(61 - 84)	(85 - 94)	(95 - 10	0)
* If the PCI	R rating i	is not availab	ole for a section, the	SCR rating will be di	splayed. See appendix fo	r definitions and formulas.

ROUTE: 0214ZZ GOVERNORS LANDING CAMPGROUND ROADS AMIS : AMISTAD NATIONAL RECREATION AREA

Summary Record		COLLECTED:		
INTERMOUNTAIN REGION		TOTAL I	0.24 Miles	
Section Number				
Section Length (mi)				
Cross Section Information				
Number of Lanes	N/A			
Paved Width (ft)	N/A			
Lane Width (ft)	N/A			
Roadway Condition Information				
SCR (Surface Condition Rating)	39			
PCR (Pavement Condition Rating)	39			
Distress Index Values				
Structural Crack Index	N/A			
Transverse Cracking Index	N/A			
Patching Index	N/A			
Rutting Index	N/A			
Roughness Condition Index (RCI)	N/A			

ROUTE: 0214ZZ GOVERNORS LANDING CAMPGROUND ROADS

ψ

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.



PCR	Poor		Fair	Good	Excellent	No Data
		(0 - 60)	(61 - 84)	(85 - 94) (95 - 10)0)
* If the PC	R rating is	s not available	e for a section, the	SCR rating will be c	lisplayed. See appendix fo	or definitions and formulas.

ROUTE: 0214AZ GOVERNORS LANDING CAMPGROUND ROAD A AMIS : AMISTAD NATIONAL RECREATION AREA

Subcomponent Record		COLLECTED			1/18/2012	
INTERMOUNTAIN REGION		TOTAL LENGTH			0.19 Miles	
Section Number	0					
Section Length (mi)	0.19					
Cross Section Information						
Number of Lanes	1					
Paved Width (ft)	19					
Lane Width (ft)	13					
Roadway Condition Information						
SCR (Surface Condition Rating)	42					
PCR (Pavement Condition Rating)	42					
Distress Index Values						
Structural Crack Index	42					
Transverse Cracking Index	81					
Patching Index	100					
Rutting Index	98					
Roughness Condition Index (RCI)	NC					

ROUTE: 0214AZ GOVERNORS LANDING CAMPGROUND ROAD A

ψ

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

ĥ

PCR	Poor	Fair		Good	Excellent	No Data
	(0	- 60)	(61 - 84)	(85 - 94)	(95 - 1	00)
* If the PC	R rating is not	available for a	section, the S	SCR rating will be di	splayed. See appendix f	or definitions and formulas.


ROUTE: 0214BZ GOVERNORS LANDING CAMPGROUND ROAD B AMIS : AMISTAD NATIONAL RECREATION AREA

Subcomponent Record		CO	LLECTED:	1/18/2012	
INTERMOUNTAIN REGION		TOTAL LENGTH			0.05 Miles
Section Number	0				
Section Length (mi)	0.05				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	22				
Lane Width (ft)	11				
Roadway Condition Information					
SCR (Surface Condition Rating)	29				
PCR (Pavement Condition Rating)	29				
Distress Index Values					
Structural Crack Index	29				
Transverse Cracking Index	84				
Patching Index	100				
Rutting Index	99				
Roughness Condition Index (RCI)	NC				

ROUTE: 0214BZ GOVERNORS LANDING CAMPGROUND ROAD B

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

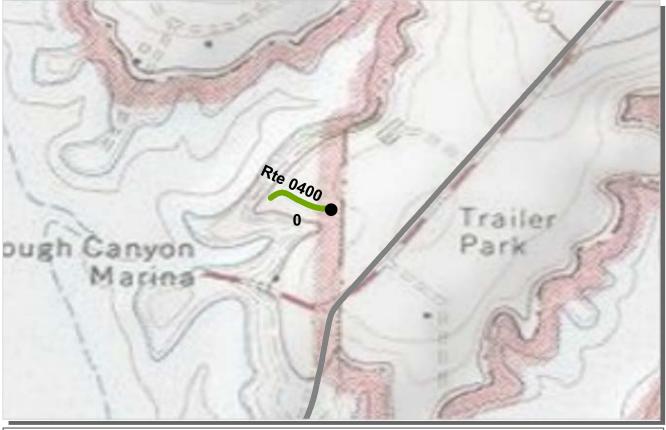

PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 1	.00)
* If the PCI	R rating is not availa	ble for a section, the	SCR rating will be dis	played. See appendix	for definitions and formulas.

ROUTE: 0400 RESIDENCE AREA ROAD AMIS : AMISTAD NATIONAL RECREATION AREA

INTERMOUNTAIN REGION	COLLECTED: REGION TOTAL LENGTH:			1/18/2012 0.08 Miles	
Section Number	0				
Section Length (mi)	0.08				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	22				
Lane Width (ft)	11				
Roadway Condition Information					
SCR (Surface Condition Rating)	88				
PCR (Pavement Condition Rating)	88				
Distress Index Values					
Structural Crack Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	88				
Roughness Condition Index (RCI)	NC				

ROUTE: 0400 RESIDENCE AREA ROAD

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

<u>Section 6</u> Manually Rated Paved Route Condition Rating Sheets



Amistad National Recreation Area



MANUALLY RATED ROUTE CONDITION RATING SHEETS

No data available for this section.

<u>Section 7</u> Parking Area Condition Rating Sheets



Amistad National Recreation Area



PECOS UPPER PARKING


FROM ROUTE 0200 (PECOS ROAD)

TO PARKING

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0900	PUBLIC	2/12/2011	59,819	1.03	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			CONCRETE CURB		
0	2	0	AND GUTTER	NO CURB	FAIR/73





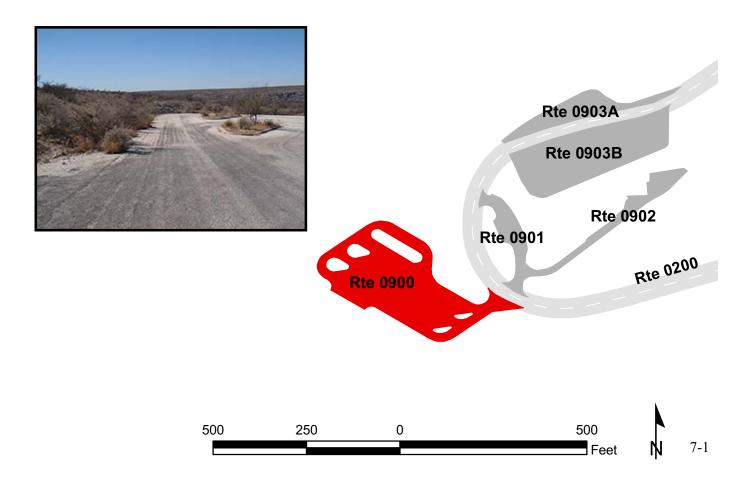


PECOS COMFORT STATION PARKING FROM ROUTE 0200 (PECOS ROAD) TO ROUTE 0200 (PECOS ROAD)

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0901	PUBLIC	2/12/2011	11,072	0.19	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			CONCRETE CURB		
2	0	0	AND GUTTER	NO CURB	FAIR/73





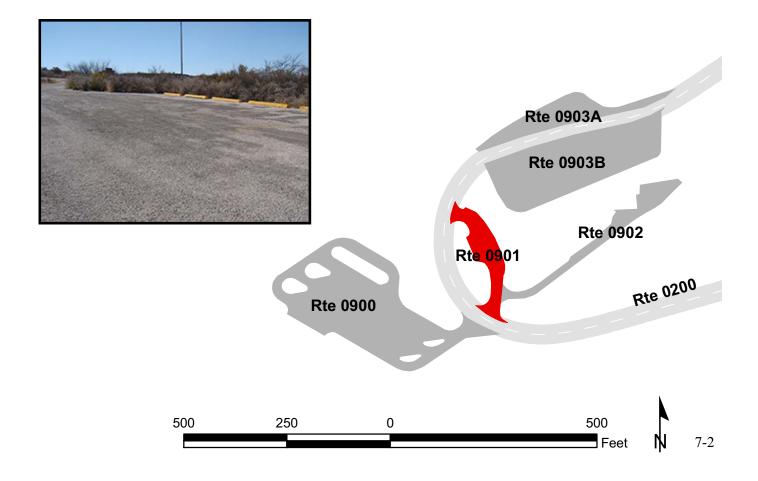


PECOS RESIDENCE AREA FROM ROUTE 0901 (PECOS COMFORT STATION PARKING) TO PARKING

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0902	NONPUBLIC	2/12/2011	12,451	0.21	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND		
0	0	2	GUTTER	NO CURB	POOR/45





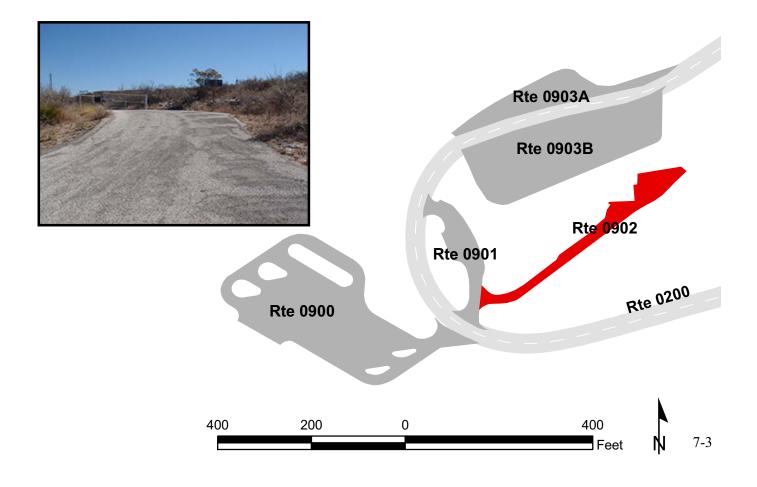


PECOS BOAT RAMP PARKING A ADJACENT TO ROUTE 0200 (PECOS ROAD) ON LEFT

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0903A	PUBLIC	2/12/2011	15,553	0.27	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND		
0	0	0	GUTTER	NO CURB	FAIR/73





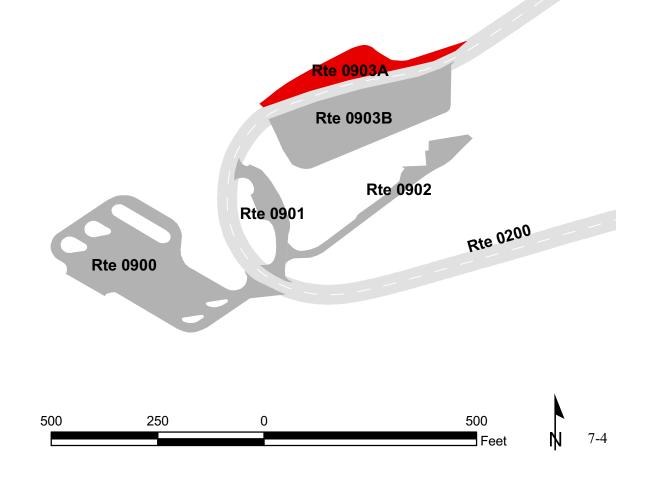


PECOS BOAT RAMP PARKING B ADJACENT TO ROUTE 0200 (PECOS ROAD) ON RIGHT

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0903B	PUBLIC	2/12/2011	45,501	0.78	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND		
0	0	0	GUTTER	NO CURB	FAIR/73





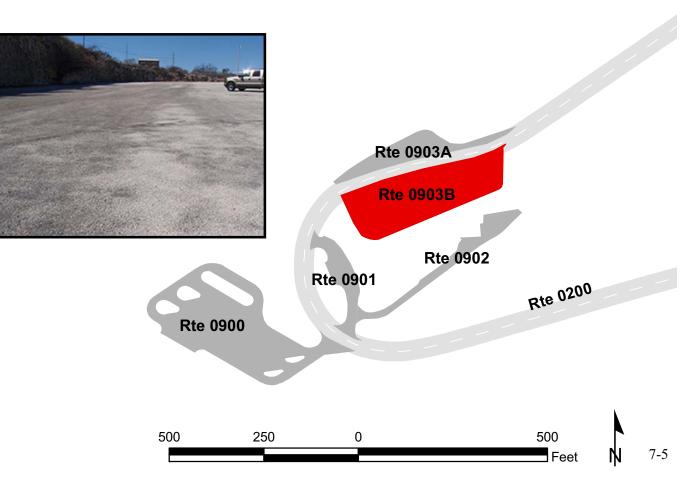


PECOS BOAT DOCK PARKING ADJACENT TO ROUTE 0200 (PECOS ROAD)

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0904	PUBLIC	2/12/2011	7,792	0.13	СО
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND		
0	0	0	GUTTER	NO CURB	FAIR/73





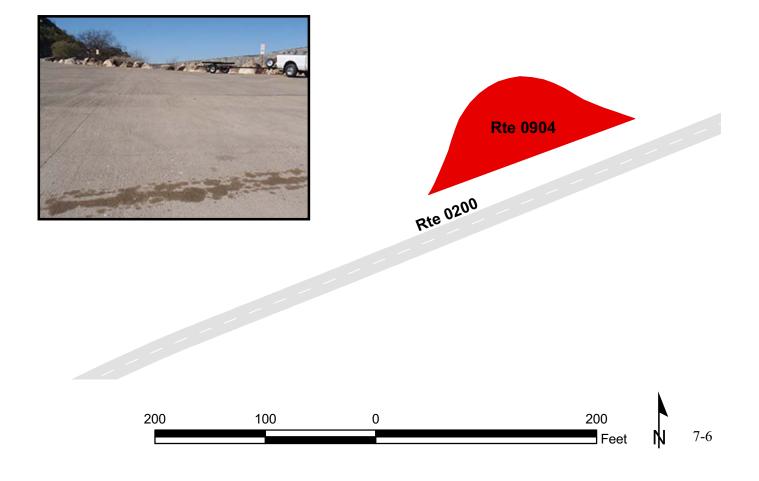

GOVERNORS LANDING PARKING FROM END OF ROUTE 0208 (GOVERNORS LANDING ROAD) TO PARKING


Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0905	PUBLIC	2/11/2011	49,973	0.86	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			CONCRETE CURB		
0	1	1	AND GUTTER	NO CURB	FAIR/73

* Lane miles are based on 11' lane widths







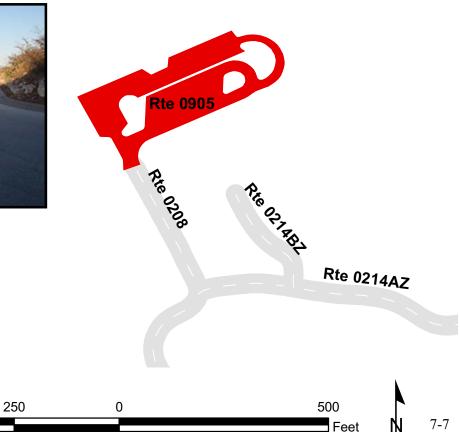

DIABLO EAST RANGER STATION PARKING A FROM ROUTE 0001 (DIABLO EAST ENTRANCE ROAD) ON LEFT TO ROUTE 0001 (DIABLO EAST ENTRANCE ROAD)

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0907A	PUBLIC	2/12/2011	55,054	0.95	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND	CONCRETE	
0	0	0	GUTTER	CURB	FAIR/73


* Lane miles are based on 11' lane widths







1,000

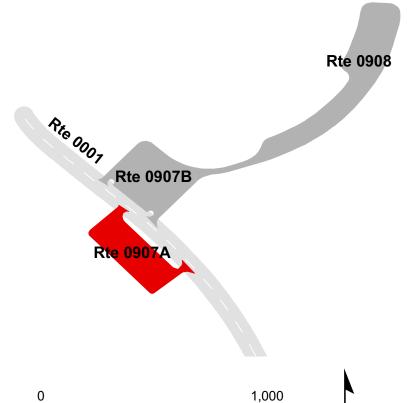

DIABLO EAST RANGER STATION PARKING B FROM ROUTE 0001 (DIABLO EAST ENTRANCE ROAD) ON RIGHT TO ROUTE 0001 (DIABLO EAST ENTRANCE ROAD)

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0907B	PUBLIC	2/12/2011	69,297	1.19	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			CONCRETE CURB	CONCRETE	
0	5	0	AND GUTTER	CURB	FAIR/73


* Lane miles are based on 11' lane widths







1,000

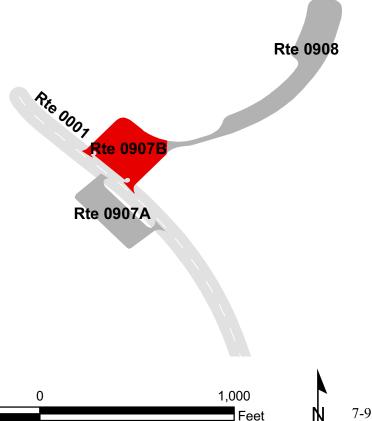

DIABLO EAST MARINA PARKING

FROM ROUTE 0907B (DIABLO EAST RANGER STATION PARKING B)

TO PARKING

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0908	PUBLIC	2/12/2011	106,773	1.84	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			CONCRETE CURB	CONCRETE	
0	1	0	AND GUTTER	CURB	FAIR/73


* Lane miles are based on 11' lane widths







1,000

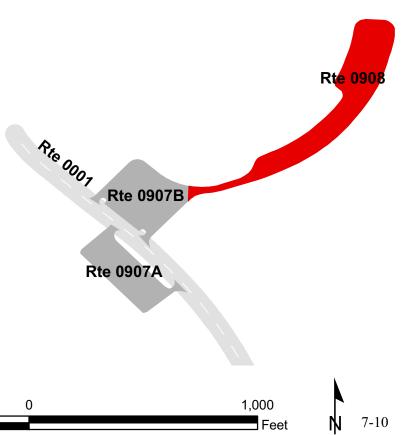


DIABLO EAST WATERPLANT AREA FROM ROUTE 0001 (DIABLO EAST ENTRANCE ROAD) TO WATER PLANT

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0910	NONPUBLIC	2/12/2011	23,173	0.40	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND		
0	0	3	GUTTER	NO CURB	FAIR/73

* Lane miles are based on 11' lane widths





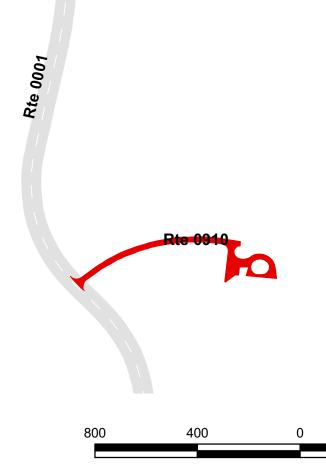



800

Feet



BLACKBRUSH PARKING FROM ROUTE 0102 (BLACKBRUSH ROAD) TO ROUTE 0102 (BLACKBRUSH ROAD)

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0911	PUBLIC	2/12/2011	35,823	0.62	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND		
0	0	1	GUTTER	NO CURB	POOR/45


* Lane miles are based on 11' lane widths







300

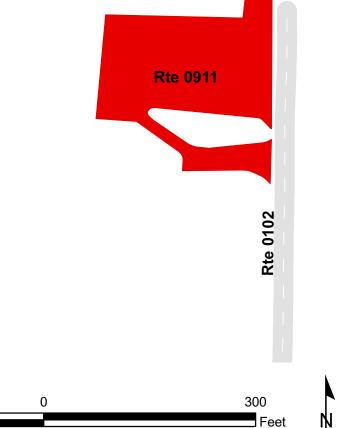

277 SOUTH BOAT RAMP APPROACH AND PARKING ADJACENT TO ROUTE 0202 (SPUR 277 SOUTH)

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0913A	PUBLIC	2/11/2011	6,622	0.11	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND		
0	0	0	GUTTER	NO CURB	FAIR/73

* Lane miles are based on 11' lane widths







300

150



0

ROUGH CANYON MARINA PARKING FROM ROUTE 0002 (ROUGH CANYON ENTRANCE ROAD) TO ROUTE 0002 (ROUGH CANYON ENTRANCE ROAD)

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0914	PUBLIC	2/11/2011	85,953	1.48	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND	CONCRETE	
0	0	0	GUTTER	CURB	FAIR/73











ROUGH CANYON AREA PARKING FROM ROUTE 0002 (ROUGH CANYON ENTRANCE ROAD) TO ROUGH CANYON LOW WATER BOAT RAMP

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0915	PUBLIC	2/11/2011	77,909	1.34	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND	CONCRETE	
0	0	0	GUTTER	CURB	FAIR/73


* Lane miles are based on 11' lane widths







1,000

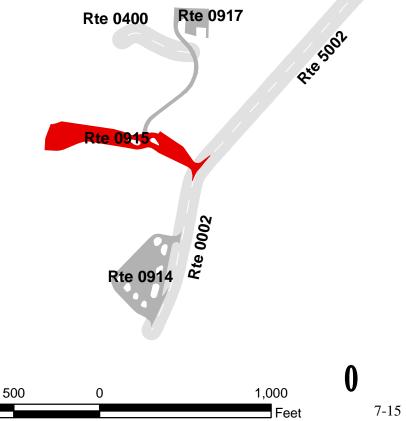

ROUGH CANYON MAINTENANCE AREA FROM ROUTE 0915 (ROUGH CANYON AREA PARKING) TO MAINTENANCE AREA

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0917	NONPUBLIC	2/11/2011	37,339	0.64	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND	CONCRETE	
0	0	1	GUTTER	CURB	FAIR/73


* Lane miles are based on 11' lane widths







1,000

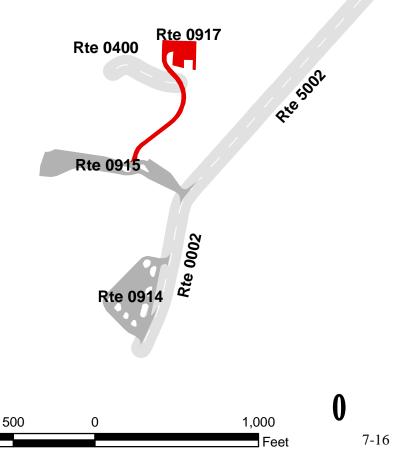

BOX CANYON PARKING AREA FROM ROUTE 0104 (BOX CANYON ROAD) TO PARKING

Route	Public /				
Number	NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0920	PUBLIC	2/12/2011	18,521	0.32	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
			NO CURB AND		
0	0	0	GUTTER	NO CURB	POOR/45

* Lane miles are based on 11' lane widths









0

275





<u>Section 8</u> Parkwide/Route Maintenance Features Summaries



Amistad National Recreation Area



AMIS: PARKWIDE MAINTENANCE FEATURES SUMMARY Includes DCV, MRL, MRP & PKG routes collected in Cycle-5

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all DCV driven routes. Culverts, drop inlets, and gates were also collected on all Manually Rated Routes and Paved Parking areas. Those totals are reflected below.

FEATURE	LINEAR FEET	COUNT		
BRIDGE		0		
CATTLE GUARD		0		
CULVERT		12		
CURB	2,102			
DROP INLET		10		
GATE		13		
GUARD/GUIDE RAIL	90			
CABLE	0			
NON-CABLE	90			
GUARD/GUIDE WALL	2,688			
BOLLARD	175			
TEMPORARY BARRIER	0			
NON TEMP/BOLLARD	2,513			
INTERSECTION		82		
LOW WATER CROSSING	0	0		
MILE MARKER		0		
OVERPASS		1		
PARK BOUNDARY		7		
PAVED DITCH	0			
PULLOUT	264	1		
RAILROAD CROSSING		0		
RETAINING WALL	148	1		
SIGN		117		
STATE BOUNDARY		0		
TRAFFIC LIGHT		0		
TUNNEL	0	0		

AMIS: DCV ROUTE MAINTENANCE FEATURES SUMMARY

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5.

FEATURE	ROUTE 0001 DIABLO EAST ENTRANCE ROAD	ROUTE 0002 ROUGH CANYON ENTRANCE ROAD	ROUTE 0003 DAM ROAD	ROUTE 0100 SPUR 454	ROUTE 0102 BLACKBRUSH ROAD	ROUTE 0200 PECOS ROAD	UNIT
BRIDGE	0	0	0	0	0	0	EACH
CATTLE GUARD	0	0	0	0	0	0	EACH
CULVERT	2	0	0	4	1	0	EACH
CURB	1,161	21	0	0	0	898	LINEAR FEET
DROP INLET	0	0	0	0	0	0	EACH
GATE	0	0	0	0	0	0	EACH
GUARD/GUIDE RAIL	0	0	0	0	0	0	LINEAR FEET
CABLE	0	0	0	0	0	0	LINEAR FEET
NON-CABLE	0	0	0	0	0	0	LINEAR FEET
GUARD/GUIDE WALL	164	11	707	0	0	1,758	LINEAR FEET
BOLLARD	164	11	0	0	0	0	LINEAR FEET
TEMPORARY BARRIER	0	0	0	0	0	0	LINEAR FEET
NON TEMP/BOLLARD	0	0	707	0	0	1,758	LINEAR FEET
INTERSECTION	13	6	6	5	11	7	EACH
LOW WATER CROSSING	0	0	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	0	0	EACH
OVERPASS	0	0	0	0	0	0	EACH
PARK BOUNDARY	0	1	1	1	0	1	EACH
PAVED DITCH	0	0	0	0	0	0	LINEAR FEET
PULLOUT	0	0	0	0	0	0	EACH
PULLOUT	0	0	0	0	0	0	LINEAR FEET
RAILROAD CROSSING	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	LINEAR FEET
SIGN	18	10	8	8	19	4	EACH
STATE BOUNDARY	0	0	0	0	0	0	EACH
TRAFFIC LIGHT	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	LINEAR FEET

AMIS: DCV ROUTE MAINTENANCE FEATURES SUMMARY

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5.

FEATURE	ROUTE 0201 SPUR 406	ROUTE 0202 SPUR 277 SOUTH	ROUTE 0203 SPUR 277 NORTH	ROUTE 0208 GOVERNORS LANDING ROAD	ROUTE 0214ZZ GOVERNORS LANDING CAMPGROUND ROADS	ROUTE 0400 RESIDENCE AREA ROAD	UNIT
BRIDGE	0	0	0	0	0	0	EACH
CATTLE GUARD	0	0	0	0	0	0	EACH
CULVERT	3	0	0	0	0	0	EACH
CURB	0	0	0	22	0	0	LINEAR FEET
DROP INLET	0	0	0	1	0	0	EACH
GATE	1	1	1	1	1	0	EACH
GUARD/GUIDE RAIL	0	0	0	90	0	0	LINEAR FEET
CABLE	0	0	0	0	0	0	LINEAR FEET
NON-CABLE	0	0	0	90	0	0	LINEAR FEET
GUARD/GUIDE WALL	0	0	0	48	0	0	LINEAR FEET
BOLLARD	0	0	0	0	0	0	LINEAR FEET
TEMPORARY BARRIER	0	0	0	0	0	0	LINEAR FEET
NON TEMP/BOLLARD	0	0	0	48	0	0	LINEAR FEET
INTERSECTION	6	3	8	5	9	3	EACH
LOW WATER CROSSING	0	0	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	0	0	EACH
OVERPASS	0	0	0	1	0	0	EACH
PARK BOUNDARY	1	1	1	0	0	0	EACH
PAVED DITCH	0	0	0	0	0	0	LINEAR FEET
PULLOUT	0	0	0	1	0	0	EACH
PULLOUT	0	0	0	264	0	0	LINEAR FEET
RAILROAD CROSSING	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	1	0	0	EACH
RETAINING WALL	0	0	0	148	0	0	LINEAR FEET
SIGN	11	4	7	22	6	0	EACH
STATE BOUNDARY	0	0	0	0	0	0	EACH
TRAFFIC LIGHT TUNNEL	0 0	0 0	0 0	0	0 0	0	EACH
TUNNEL				0		0	EACH
IUNNEL	0	0	0	0	0	0	LINEAR FEET

STRUCTURE LIST

No data available for this section.

<u>Section 9</u> Route Maintenance Features Road Logs



Amistad National Recreation Area



ROUTE 0001: DIABLO EAST ENTRANCE ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM U.S. HIGHWAY 90
0.000	0.000	INTERSECTION	RIGHT	PAVED ROUTE (U.S. HIGHWAY 90 / NON NPS)
0.000	0.000	INTERSECTION	LEFT	PAVED ROUTE (U.S. HIGHWAY 90 / NON NPS)
0.005	0.005	SIGN	LEFT	REGULATORY, STOP
0.029	0.029	SIGN	RIGHT	GUIDE, RAMP OPEN
0.029	0.029	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
0.029	0.029	SIGN	RIGHT	GUIDE, DIABLO EAST AMISTAD NATIONAL RECREATION AREA NATIONAL PARK SERVICES U.S. DEPARTMENT OF THE INTERIOR
0.055	0.055	SIGN	RIGHT	REGULATORY, SPEED LIMIT 35
0.115	0.115	INTERSECTION	RIGHT	ROUTE 0910 (DIABLO EAST WATERPLANT AREA)
0.130	0.147	GUARD/GUIDE WALL	RIGHT	N/A
0.139	0.148	GUARD/GUIDE WALL	LEFT	N/A
0.140	0.140	CULVERT	N/A	N/A
0.178	0.178	SIGN	RIGHT	REGULATORY, SPEED LIMIT 35
0.185	0.185	INTERSECTION	LEFT	ROUTE 0402 (DE/WELL HOUSE ROAD)
0.299	0.299	SIGN	RIGHT	GUIDE, 100 FT
0.315	0.315	INTERSECTION	LEFT	PAVED PULLOUT
0.355	0.355	INTERSECTION	LEFT	PAVED PULLOUT
0.459	0.459	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
0.459	0.459	SIGN	RIGHT	GUIDE, BANK FISHING PICNIC AREA
0.459	0.459	SIGN	RIGHT	GUIDE, NO CAMPING
0.465	0.465	INTERSECTION	RIGHT	ROUTE 0103 (VIEWPOINT ROAD)
0.544	0.544	SIGN	RIGHT	WARNING, CAUTION SPEED BUMPS AHEAD
0.544	0.544	SIGN	RIGHT	REGULATORY, 15 MPH
0.566	0.566	INTERSECTION	LEFT	ROUTE 0921 (DE/OVERFLOW PARKING)
0.577	0.577	SIGN	RIGHT	WARNING, CAUTION ROAD ENDS 1000 FT
0.602	0.607	GUARD/GUIDE WALL	LEFT	N/A
0.604	0.604	CULVERT	N/A	N/A
0.610	0.610	INTERSECTION	LEFT	ROUTE 0907A (DIABLO EAST RANGER STATION PARKING A)
0.641	0.641	SIGN	RIGHT	WARNING, AVISO CAMINO SE TERMINA 150 M

ROUTE 0001: DIABLO EAST ENTRANCE ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.650	0.650	SIGN	RIGHT	GUIDE, LAUNCH RAMP RANGER STATION MARINA STORE
0.658	0.658	INTERSECTION	RIGHT	ROUTE 0907B (DIABLO EAST RANGER STATION PARKING B)
0.665	0.705	CURB-AND-GUTTER	RIGHT	N/A
0.680	0.680	INTERSECTION	LEFT	ROUTE 0907A (DIABLO EAST RANGER STATION PARKING A)
0.685	0.685	SIGN	LEFT	REGULATORY, NO
0.685	0.790	CURB	LEFT	N/A
0.708	0.708	INTERSECTION	RIGHT	ROUTE 0907B (DIABLO EAST RANGER STATION PARKING B)
0.711	0.786	CURB-AND-GUTTER	RIGHT	N/A
0.747	0.747	SIGN	LEFT	REGULATORY, 15 MPH
0.747	0.747	SIGN	LEFT	WARNING, CAUTION SPEED BUMP AHEAD
0.790	0.790	INTERSECTION	N/A	DIABLO EAST BOAT RAMP
0.790	0.790	ROUTE END	N/A	TO DIABLO EAST BOAT RAMP

ROUTE 0002: ROUGH CANYON ENTRANCE ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM PARK BOUNDARY / END ROUTE 5002 (RECREATION ROAD 2)
0.000	0.000	INTERSECTION	N/A	ROUTE 5002 (RECREATION ROAD 2)
0.000	0.000	PARK BOUNDARY	N/A	N/A
0.007	0.007	SIGN	LEFT	GUIDE, R 2 ROAD
0.007	0.007	SIGN	LEFT	REGULATORY, STATE MAINTENANCE BEGINS
0.007	0.007	SIGN	RIGHT	GUIDE, RANGER STATION FISH CLEANING MARINA GAS BOAT RAMPS PICNIC AREAS
0.008	0.008	SIGN	RIGHT	GUIDE, ROUGH CANYON AMISTAD NATIONAL RECREATION AREA
0.018	0.018	INTERSECTION	RIGHT	ROUTE 0915 (ROUGH CANYON AREA PARKING)
0.029	0.029	SIGN	RIGHT	GUIDE, RAMP OPEN
0.029	0.029	SIGN	RIGHT	GUIDE, ANNUAL OR DAILY BOATING PERMIT REQUIRED FOR PERMIT INFORMATION TUNE TO 1540 AM U.S. FEE AREA
0.040	0.040	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.096	0.096	INTERSECTION	RIGHT	ROUTE 0914 (ROUGH CANYON MARINA PARKING)
0.142	0.146	CURB	LEFT	N/A
0.150	0.150	INTERSECTION	LEFT	PAVED PARKING (NON NPS)
0.176	0.176	INTERSECTION	RIGHT	ROUTE 0914 (ROUGH CANYON MARINA PARKING)
0.187	0.189	GUARD/GUIDE WALL	LEFT	N/A
0.202	0.202	SIGN	RIGHT	GUIDE, AMISTAD NATIONAL RECREATION AREA CAMPING FEES \$4.00 PER NIGHT \$7.00 PER NIGHT WITH SENIOR/ACCESS PA
0.204	0.204	INTERSECTION	N/A	ROUGH CANYON BOAT RAMP
0.204	0.204	SIGN	RIGHT	GUIDE, RAMP OPEN
0.204	0.204	SIGN	RIGHT	GUIDE, NO GROUND FIRES
0.204	0.204	ROUTE END	N/A	TO ROUGH CANYON HIGH WATER BOAT RAMP

ROUTE 0003: DAM ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM INTERSECTION OF TEXAS SPUR 349 (NON NPS) AND SOUTH AMISTAD VILLAGE ROAD
0.000	0.000	INTERSECTION	N/A	PAVED ROUTE (TEXAS SPUR 349 / NON NPS)
0.010	0.010	INTERSECTION	RIGHT	PAVED PARKING (AMISTAD DAM HEADQUARTERS PARKING / NON NPS)
0.012	0.012	INTERSECTION	LEFT	UNPAVED ROUTE (SOUTH AMISTAD VILLAGE ROAD / NON NPS)
0.020	0.142	GUARD/GUIDE WALL	RIGHT	N/A
0.021	0.033	GUARD/GUIDE WALL	LEFT	N/A
0.024	0.024	SIGN	RIGHT	REGULATORY, WARNING TICK ERADICATION QUARANTINE LINE
0.104	0.104	SIGN	RIGHT	WARNING, ROAD CLOSED
0.130	0.130	SIGN	RIGHT	GUIDE, LAFB SOUTHWINDS MARINA REC. AREA 1.75 MILES
0.145	0.145	INTERSECTION	RIGHT	ROUTE 5000 (AIR FORCE MARINA ROAD)
0.179	0.179	SIGN	RIGHT	REGULATORY, WARNING ILLEGAL TO CARRY FIREARMS / AMMUNITION INTO MEXICO PENALTY - PRISON
0.195	0.195	INTERSECTION	RIGHT	PAVED ROUTE (NON NPS)
0.200	0.200	SIGN	RIGHT	REGULATORY, NO UNAUTHORIZED PARKING
0.200	0.200	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
0.202	0.202	SIGN	RIGHT	REGULATORY, SPEED LIMIT 35
0.202	0.202	SIGN	RIGHT	REGULATORY, WEIGHT LIMIT 70.000 LBS
0.202	0.202	INTERSECTION	N/A	PAVED ROUTE (TEXAS SPUR 349 / NON NPS)
0.202	0.202	PARK BOUNDARY	N/A	N/A
0.202	0.202	ROUTE END	N/A	TO PARK BOUNDARY / TEXAS SPUR 349 (NON NPS)

ROUTE 0100: SPUR 454

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM PARK BOUNDARY / END ROUTE 5100 (SPUR 454 (NON NPS SECTION))
0.000	0.000	SIGN	RIGHT	GUIDE, SPUR 454 AMISTAD NATIONAL RECREATION AREA NATIONAL PARK SERVICE U.S. DEPARTMENT OF THE INTERIOR WE
0.000	0.000	INTERSECTION	N/A	ROUTE 5100 (SPUR 454 (NON NPS SECTION))
0.000	0.000	PARK BOUNDARY	N/A	N/A
0.009	0.009	SIGN	LEFT	REGULATORY, STATE MAINTENANCE BEGINS
0.029	0.029	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
0.029	0.029	SIGN	RIGHT	GUIDE, NO GLASS/ VIDRIO
0.037	0.037	INTERSECTION	RIGHT	ROUTE 0101 (SAN PEDRO FLATS ROAD)
0.045	0.045	CULVERT	N/A	N/A
0.078	0.078	SIGN	RIGHT	GUIDE, ANNUAL OR DAILY BOATING PERMIT REQUIRED FOR PERMIT INFORMATION TUNE TO 1540 AM U.S. FEE AREA
0.095	0.095	SIGN	RIGHT	REGULATORY, SPEED LIMIT 30
0.310	0.310	CULVERT	N/A	N/A
0.512	0.512	CULVERT	N/A	N/A
0.575	0.575	SIGN	RIGHT	GUIDE, VEHICLES ON PAVED ROADS ONLY
0.645	0.645	CULVERT	N/A	N/A
0.681	0.681	SIGN	LEFT	REGULATORY, SPEED LIMIT 30
0.715	0.720	DEBRIS ON ROAD	N/A	N/A
0.720	0.720	INTERSECTION	RIGHT	UNPAVED ROUTE (NON NPS)
0.745	0.745	INTERSECTION	RIGHT	UNPAVED ROUTE (NON NPS)
0.825	0.825	INTERSECTION	N/A	DEAD END AT WATER
0.825	0.825	ROUTE END	N/A	TO END OF PAVEMENT

ROUTE 0102: BLACKBRUSH ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM U.S. HIGHWAY 90
0.000	0.000	INTERSECTION	RIGHT	PAVED ROUTE (U.S. HIGHWAY 90 / NON NPS)
0.000	0.000	INTERSECTION	LEFT	PAVED ROUTE (U.S. HIGHWAY 90 / NON NPS)
0.005	0.005	SIGN	LEFT	REGULATORY, STOP
0.006	0.006	INTERSECTION	RIGHT	UNPAVED ROUTE (NON NPS)
0.009	0.009	SIGN	RIGHT	GUIDE, BLACK BRUSH AMISTAD NATIONAL RECREATION AREA NATIONAL PARK SERVICES U.S. DEPARTMENT OF THE INTERIOR
0.022	0.022	SIGN	RIGHT	GUIDE, RAMP OPEN
0.032	0.032	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
0.032	0.032	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
0.032	0.032	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
0.039	0.039	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
0.039	0.039	SIGN	RIGHT	GUIDE, NO GROUND FIRES
0.069	0.069	SIGN	RIGHT	REGULATORY, SPEED LIMIT 35
0.090	0.090	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.132	0.132	INTERSECTION	RIGHT	ESTABLO CAMINO
0.139	0.139	SIGN	RIGHT	GUIDE, ESTABLO CAMINO
0.268	0.268	SIGN	LEFT	GUIDE, ALICE DR.
0.268	0.268	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.275	0.275	INTERSECTION	LEFT	ALICE DRIVE
0.353	0.353	CULVERT	N/A	N/A
0.460	0.460	SIGN	RIGHT	WARNING, CAUTION ROAD ENDS 1000 FT
0.527	0.527	SIGN	RIGHT	WARNING, CAUTION SPEED BUMPS AHEAD
0.527	0.527	SIGN	RIGHT	WARNING, STOP AHEAD
0.572	0.572	INTERSECTION	LEFT	UNPAVED PARKING
0.579	0.579	INTERSECTION	LEFT	ROUTE 0911 (BLACKBRUSH PARKING)
0.584	0.584	SIGN	RIGHT	REGULATORY, STOP
0.584	0.584	SIGN	RIGHT	REGULATORY, NO PARKING
0.589	0.589	INTERSECTION	RIGHT	ROUTE 0215 (BLACKBRUSH LITTLE PICNIC LOOP)
0.596	0.596	INTERSECTION	LEFT	ROUTE 0911 (BLACKBRUSH PARKING)

ROUTE 0102: BLACKBRUSH ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.599	0.599	SIGN	RIGHT	REGULATORY, NO PARKING
0.625	0.625	INTERSECTION	RIGHT	BOAT RAMP
0.631	0.631	INTERSECTION	N/A	BLACKBRUSH HIGHWATER BOAT RAMP
0.631	0.631	ROUTE END	N/A	TO BLACKBRUSH HIGH WATER BOAT RAMP

ROUTE 0200: PECOS ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM END ROUTE 5200 (PECOS ROAD (NON NPS SECTION))
0.000	0.000	INTERSECTION	N/A	ROUTE 5200 (PECOS ROAD (NON NPS SECTION))
0.000	0.080	GUARD/GUIDE WALL	RIGHT	N/A
0.000	0.000	PARK BOUNDARY	N/A	N/A
0.156	0.156	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.200	0.200	INTERSECTION	LEFT	ROUTE 0900 (PECOS UPPER PARKING)
0.205	0.205	INTERSECTION	RIGHT	ROUTE 0901 (PECOS COMFORT STATION PARKING)
0.210	0.230	GUARD/GUIDE WALL	LEFT	N/A
0.211	0.211	SIGN	RIGHT	GUIDE, ANNUAL OR DAILY BOATING PERMIT REQUIRED U.S. FEE AREA
0.214	0.214	SIGN	LEFT	GUIDE, NO CAMPING
0.214	0.214	SIGN	RIGHT	GUIDE, PECOS AMISTAD NATIONAL RECREATION AREA NATIONAL PARK SERVICE U.S. DEPARTMENT OF THE INTERIOR WELCOM
0.231	0.295	GUARD/GUIDE WALL	LEFT	N/A
0.260	0.260	INTERSECTION	RIGHT	ROUTE 0901 (PECOS COMFORT STATION PARKING)
0.300	0.300	INTERSECTION	LEFT	ROUTE 0903A (PECOS BOAT RAMP PARKING A)
0.300	0.300	INTERSECTION	RIGHT	ROUTE 0903B (PECOS BOAT RAMP PARKING B)
0.367	0.536	GUARD/GUIDE WALL	LEFT	N/A
0.368	0.538	CURB-AND-GUTTER	RIGHT	N/A
0.538	0.538	INTERSECTION	N/A	ROUTE 0904 (PECOS BOAT DOCK PARKING)
0.538	0.538	ROUTE END	N/A	TO ROUTE 0904 (PECOS BOAT DOCK PARKING)

ROUTE 0201: SPUR 406

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM PARK BOUNDARY / END ROUTE 5201 (SPUR 406 (NON NPS SECTION))
0.000	0.000	INTERSECTION	N/A	ROUTE 5201 (SPUR 406 (NON NPS SECTION))
0.000	0.000	PARK BOUNDARY	N/A	N/A
0.005	0.005	SIGN	LEFT	REGULATORY, SPUR 406
0.005	0.005	SIGN	LEFT	REGULATORY, SPEED LIMIT 55
0.006	0.006	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.018	0.018	SIGN	RIGHT	GUIDE, SPUR 406 AMISTAD NATIONAL RECREATION AREA NATIONAL PARK SERVICES U.S. DEPARTMENT OF THE INTERIOR WE
0.019	0.019	GATE	N/A	N/A
0.020	0.020	SIGN	RIGHT	REGULATORY, STOP
0.031	0.031	SIGN	RIGHT	REGULATORY, SPEED LIMIT 35
0.248	0.248	CULVERT	N/A	N/A
0.350	0.350	INTERSECTION	RIGHT	UNPAVED ROUTE (NON NPS)
0.380	0.380	CULVERT	N/A	N/A
0.683	0.683	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.702	0.702	SIGN	RIGHT	GUIDE, SPUR 406 CAMPGROUND AMISTAD NATIONAL RECREATION AREA CAMPING FEES \$4.00/NIGHT-GOLDEN AGE/ACCESS \$2.
0.735	0.735	SIGN	RIGHT	REGULATORY, REDUCE SPEED AHEAD
0.754	0.754	SIGN	RIGHT	WARNING, STOP AHEAD
0.768	0.768	INTERSECTION	LEFT	UNPAVED PARKING
0.783	0.783	SIGN	RIGHT	GUIDE, BOAT & CAMP FEE INFORMATION DISPERSED CAMPING AREA
0.905	0.905	CULVERT	N/A	N/A
0.930	0.930	INTERSECTION	LEFT	UNPAVED ROUTE (NON NPS)
0.970	0.970	INTERSECTION	LEFT	UNPAVED ROUTE (NON NPS)
1.176	1.186	DEBRIS ON ROAD	N/A	N/A
1.215	1.215	INTERSECTION	N/A	DEAD END AT WATER
1.215	1.215	ROUTE END	N/A	TO END

ROUTE 0202: SPUR 277 SOUTH

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM PARK BOUNDARY / END ROUTE 5202 (SPUR 277 SOUTH (NON NPS SECTION))
0.000	0.000	PARK BOUNDARY	N/A	N/A
0.000	0.000	INTERSECTION	N/A	ROUTE 5202 (SPUR 277 SOUTH (NON NPS SECTION))
0.004	0.004	GATE	N/A	N/A
0.031	0.031	SIGN	RIGHT	GUIDE, NO GROUND FIRES
0.050	0.050	INTERSECTION	LEFT	ROUTE 0913A (277 SOUTH BOAT RAMP APPROACH AND PARKING)
0.072	0.072	SIGN	RIGHT	REGULATORY, NO PARKING BEYOND THIS POINT
0.073	0.073	SIGN	LEFT	REGULATORY, NO PARKING BEYOND THIS POINT
0.077	0.077	SIGN	RIGHT	REGULATORY, NO PARKING
0.125	0.125	INTERSECTION	N/A	DEAD END AT WATER
0.125	0.125	ROUTE END	N/A	TO END

ROUTE 0203: SPUR 277 NORTH

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM PARK BOUNDARY / END ROUTE 5203 (SPUR 277 NORTH (NON NPS SECTION))
0.000	0.000	INTERSECTION	N/A	ROUTE 5203 (SPUR 277 NORTH (NON NPS SECTION))
0.000	0.000	PARK BOUNDARY	N/A	N/A
0.005	0.005	SIGN	LEFT	REGULATORY, STOP
0.005	0.005	GATE	N/A	N/A
0.010	0.010	SIGN	RIGHT	GUIDE, 277 NORTH CAMPGROUND AMISTAD NATIONAL RECREATION AREA CAMPING FEES \$4.00/NIGHT-GOLDEN AGE/ACCESS \$2
0.020	0.020	INTERSECTION	RIGHT	ROUTE 0204 (KOWSKI ROAD)
0.025	0.025	SIGN	RIGHT	REGULATORY, SPEED BUMPS AHEAD
0.025	0.025	SIGN	RIGHT	GUIDE, NO GLASS/ VIDRIO
0.055	0.055	INTERSECTION	RIGHT	UNPAVED ROUTE
0.072	0.072	INTERSECTION	LEFT	UNPAVED ROUTE
0.072	0.072	SIGN	RIGHT	GUIDE, PICNIC AREA GROUP CAMP (RESERVATIONS) GATE CLOSED AT DARK
0.085	0.085	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
0.085	0.085	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
0.130	0.130	INTERSECTION	LEFT	UNPAVED PARKING
0.150	0.150	INTERSECTION	LEFT	UNPAVED PARKING
0.150	0.150	INTERSECTION	RIGHT	UNPAVED PARKING
0.185	0.185	INTERSECTION	N/A	DEAD END AT WATER
0.185	0.185	ROUTE END	N/A	TO END

ROUTE 0208: GOVERNORS LANDING ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM TEXAS SPUR 349 (NON NPS)
0.000	0.000	INTERSECTION	LEFT	SPUR 349
0.000	0.000	INTERSECTION	RIGHT	SPUR 349
0.008	0.008	SIGN	LEFT	REGULATORY, STOP
0.024	0.024	SIGN	RIGHT	GUIDE, GOVERNORS LANDING AMISTAD NATIONAL RECREATION AREA NATIONAL PARK SERVICES U.S. DEPARTMENT OF THE IN
0.072	0.072	SIGN	RIGHT	REGULATORY, SPEED LIMIT 30
0.072	0.072	SIGN	RIGHT	GUIDE, NO GLASS/ VIDRIO
0.570	0.570	INTERSECTION	LEFT	UNPAVED ROUTE
0.847	0.847	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
1.102	1.102	SIGN	RIGHT	WARNING, 15 MPH
1.102	1.102	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
1.130	1.130	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
1.150	1.178	RETAINING WALL	RIGHT	N/A
1.152	1.152	SIGN	LEFT	REGULATORY, SPEED LIMIT 30
1.158	1.175	GUARD/GUIDE RAIL	LEFT	N/A
1.164	1.164	OVERPASS	N/A	U.S. HIGHWAY 90 (NON NPS)
1.165	1.165	DROP INLET	RIGHT	N/A
1.171	1.180	GUARD/GUIDE WALL	LEFT	N/A
1.174	1.174	SIGN	N/A	WARNING, UNABLE TO READ FROM VIDEO
1.174	1.174	SIGN	N/A	WARNING, 14 FT 10 IN
1.179	1.179	SIGN	RIGHT	GUIDE, DAY USE AREA BEACH OVERNIGHT CAMPING CAMPERS ONLY
1.183	1.183	INTERSECTION	RIGHT	ROUTE 0214AZ (GOVERNORS LANDING CAMPGROUND ROAD A)
1.188	1.188	SIGN	RIGHT	GUIDE, GOVERNOR'S LANDING CAMPGROUND AMISTAD NATIONAL RECREATION AREA CAMPING FEES \$4.00 NIGHT- GOLDEN AGE
1.193	1.193	GATE	N/A	N/A
1.194	1.194	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
1.194	1.194	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT

ROUTE 0208: GOVERNORS LANDING ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
1.194	1.244	PULLOUT	LEFT	N/A
1.195	1.195	SIGN	RIGHT	REGULATORY, NO PARKING
1.196	1.196	SIGN	RIGHT	WARNING, ROAD CLOSED
1.228	1.228	SIGN	RIGHT	REGULATORY, SPEED LIMIT 10
1.242	1.244	CURB-AND-GUTTER	LEFT	N/A
1.242	1.244	CURB-AND-GUTTER	RIGHT	N/A
1.244	1.244	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
1.244	1.244	SIGN	RIGHT	GUIDE, NO CAMPING
1.244	1.244	SIGN	RIGHT	GUIDE, CARS ONLY RVS BUSES
1.244	1.244	SIGN	RIGHT	REGULATORY, BEGIN ONE WAY
1.244	1.244	INTERSECTION	N/A	ROUTE 0905 (GOVERNORS LANDING PARKING)
1.244	1.244	ROUTE END	N/A	TO ROUTE 0905 (GOVERNORS LANDING PARKING)

ROUTE 0214AZ: GOVERNORS LANDING CAMPGROUND ROAD A

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0208 (GOVERNORS LANDING ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0208 (GOVERNORS LANDING ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0208 (GOVERNORS LANDING ROAD)
0.005	0.005	SIGN	LEFT	REGULATORY, STOP
0.010	0.010	GATE	N/A	N/A
0.012	0.012	SIGN	RIGHT	REGULATORY, STOP
0.035	0.035	INTERSECTION	LEFT	ROUTE 0214BZ (GOVERNORS LANDING CAMPGROUND ROAD B)
0.037	0.037	SIGN	LEFT	GUIDE, AMPHITHEATER
0.037	0.037	SIGN	LEFT	GUIDE, CAMPGROUND
0.038	0.038	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.135	0.135	INTERSECTION	LEFT	ROUTE 0214AZ (GOVERNORS LANDING CAMPGROUND ROAD A)
0.135	0.189	ONE-WAY	N/A	N/A
0.136	0.136	SIGN	N/A	REGULATORY, ONE WAY
0.189	0.189	INTERSECTION	LEFT	ROUTE 0214AZ (GOVERNORS LANDING CAMPGROUND ROAD A)
0.189	0.189	INTERSECTION	N/A	ROUTE 0214AZ (GOVERNORS LANDING CAMPGROUND ROAD A)
0.189	0.189	ROUTE END	N/A	TO END OF LOOP

ROUTE 0214BZ: GOVERNORS LANDING CAMPGROUND ROAD B

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0214AZ (GOVERNORS LANDING CAMPGROUND ROAD A)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0214AZ (GOVERNORS LANDING CAMPGROUND ROAD A)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0214AZ (GOVERNORS LANDING CAMPGROUND ROAD A)
0.049	0.049	INTERSECTION	N/A	DEAD END
0.049	0.049	ROUTE END	N/A	TO END

ROUTE 0400: RESIDENCE AREA ROAD

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0917 (ROUGH CANYON MAINTENANCE AREA)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0917 (ROUGH CANYON MAINTENANCE AREA)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0917 (ROUGH CANYON MAINTENANCE AREA)
0.076	0.076	INTERSECTION	N/A	DEAD END
0.076	0.076	ROUTE END	N/A	TO END

Section 10 Appendix



Amistad National Recreation Area



Explanation of Changes to the RIP Index Equations and Determination of PCR

In 2005, the FHWA began implementing the use of a Pavement Management System to assist the National Park Service in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Region, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA as well.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions vis a vis the distresses and indexes that comprise the Pavement Condition Rating (PCR), an extensive study was completed throughout 2010 that has resulted in changes to the Road Inventory Program condition reporting method and specifically, the calculation of PCR. It was determined that a better representation of PCR could be achieved by modifying the relative impact certain distresses would have on the overall rating.

Through the use of HPMA data, it was noted that false failure indicators existed with the existing PCR model, and that it would be necessary to reduce their impact. The distresses affected in this way were Rutting and Roughness. Conversely, experience showed that roadways with extensive cracking present were often shown to have a high PCR. Therefore, the crack index models were adjusted to be more sensitive to changes in crack severity or quantity. It was also determined that these issues were not due to a problem with data acquisition (i.e. the RIP "van"), but with the way the collected data was processed. The final change was to provide guidance on when to use the Roughness Condition Index (RCI) in the PCR calculation. Roughness data is of little value to determining overall condition on routes that, due to their length or geometrics, have lower vehicle operating speeds. Therefore, in Cycle 5, only routes that have lengths of one half mile or greater and posted speed limits of 25 mph or greater will have RCI reported and included in the PCR calculations.


The changes that were implemented were endorsed by management at both the FHWA and NPS. In order to show the effectiveness of these changes, several sites were ground truth tested to ensure that an improvement was achieved between the relationship of PCR and the actual Maintenance and Rehabilitation needs that were represented. The changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection.

Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that will be implemented in Cycle 5, we will also aim to provide greater assistance in translating good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 60 or below. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.

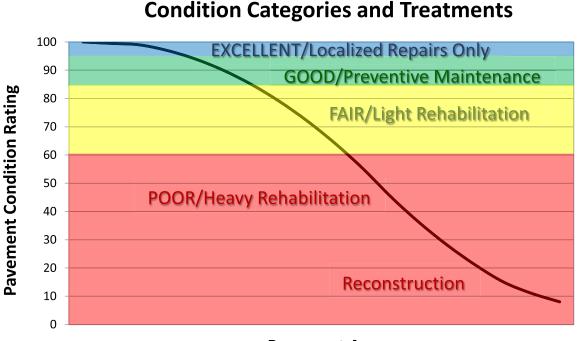

Pavement Age

DESCRIPTION OF RATING SYSTEM

The Federal Highway Administration (FHWA), Road Inventory Program (RIP) for the National Park Service (NPS), collects roadway condition data on paved surfaces (asphalt, concrete, brick, and cobblestone) on roads, parkways, and parking areas in national parks nationwide. The road surface condition data is collected using an automated Data Collection Vehicle (DCV). Roads having brick or cobblestone surfacing are not normally surveyed with the DCV, but are manually rated for condition rating.

The FHWA RIP is implemented based on the premise that an accurate pavement surface condition assessment can be accomplished using automated crack detection technology as applied to digital images. Various methods of pavement condition assessment have been developed over the years with varying degrees of accuracy and acceptance. The use of digital photography to record pavement images and subsequent crack detection and classification has undergone continuous improvements over the past decade. Digital cameras with increasingly superior resolution and high definition have been more affordable, and the proprietary programming code and algorithms have been improved in crack detection software.

With the use of quality digital photography and automated crack detection software, FHWA RIP is tasked with executing a pavement condition assessment on about 5000 miles of National Park Service roads and parkways. Foremost in setting up the basis of pavement distress identification is employing the distress identification protocols used by FHWA. There is no single distress identification system that is universal among entities conducting a program of distress identification. For the purpose of the NPS RIP, FHWA employs distress identification protocols that are specific to this program.

FHWA has referenced the "Distress Identification Manual for the Long-Term Pavement Performance Program", Publication No. FHWA-RD 03-031, June 2003, as the point-ofreference for distress types on NPS pavement. In truth, the FHWA RIP distress types are similar to those described in the LTPP manual with some modifications. This document, "Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013" was developed using the "Distress Identification Manual for the Long-Term Pavement Performance Program" as a guideline. Definitions of severity levels based on crack width contained in this document adhere to the LTPP Distress ID Manual. Modifications have been made to the definition of Alligator and Longitudinal Cracking and determination of Alligator Cracking severity. This manual also addresses Rutting and Roughness and its application to RIP.

In 2010, FHWA RIP began the fifth cycle of data collection in national parks. For Cycle 5, data will be collected in approximately 81 large parks (10 or more paved route miles) on Functional Class 1, 2, and 7 routes plus any new routes or parking areas previously not collected, totaling an estimated 4,459 paved route miles. Additionally, 168 small parks will be collected comprising approximately 529 paved route miles and associated paved parking areas. The data is used to support the National Park Service road maintenance program and Pavement Management System (PMS) developed and maintained by FHWA.

This "Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013" will be used as a reference resource in crack detection and classification, determination of distress severity and extent, and in the calculation of distress index values for the FHWA RIP Cycle 5.

SURFACE DISTRESSES

Surface Condition Rating - SCR

Surface distresses are measured in the primary lane only. In the classification and measurement of all paved surface condition data, results will be reported in the database in record intervals of 0.02 miles (105.6 feet) (smallest granularity) along the route.

Surface distresses determined from digital images

- Transverse Cracks
- Longitudinal Cracks
- Alligator Cracks
- Patching/Potholes

Surface distress measured by DCV (Data Collection Vehicle) LRMS (Laser Rut Measuring System)

• Rutting

Each of the five surface distresses is assigned a computed surface distress index

- Transverse Crack Index
- Longitudinal Crack Index
- Alligator Crack Index
- Patching/Pothole Index
- Rutting Index

Surface distress data are classified as listed above, measured for severity, and quantified for extent. Classification, severity, and extent of these five surface distresses comprise the three main elements for calculation of SCR (Surface Condition Rating).

In addition to the five surface distresses, a **Structural Crack Index** is computed, which is a combination of the Longitudinal Crack Index and the Alligator Crack Index. The Structural Crack Index is then used in lieu of the LC and AC indices to compute SCR.

Roughness Condition Index - RCI

Additional condition data measured by DCV (lasers and accelerometers)

• Roughness (IRI)

Roughness is measured by FHWA's DCV and reported as International Roughness Index (IRI) in inches/mile. Using IRI, the Roughness Condition Index (RCI) is computed.

Pavement Condition Rating - PCR

Using the SCR (computed from the five surface distresses) and the RCI, an overall Pavement Condition Rating (PCR) is computed. The formula for PCR is:

Asphalt PCR = (0.60 * SCR) + (0.40 * RCI) **Concrete PCR** = RCI

A detailed description of each distress index formula, roughness index formula, SCR and PCR is provided in this document beginning on page 23.

Each classified surface distress will fall into one or more *severity*...LOW, MEDIUM, or HIGH based on criteria listed. For each severity, an *extent* is established based on the measured quantity of the distress within that severity. Within each *severity* individual distresses are assigned a *Maximum Allowable Extent* (MAE). For example, LOW severity transverse cracking may be allowed up to 21.1 cracks within a 0.02 interval before it reaches MAE and fails.

The index formulas are based on a scale of 0-100. A PCR index value of 100 would indicate a "new" road with no measurable distresses or rough ride. A PCR value of 60 is determined to be *terminable serviceability* and the road is considered failed. The range of index values with condition descriptors is:

POOR (<=60), FAIR (61 - 84), GOOD (85 - 94), EXCELLENT (95 - 100)

Index values are generally computed based on cumulative deducts of the measured severities. As shown in the index formulas below, as any single severity reaches or exceeds MAE, the index computes to a value of 60 or less, and the road fails for that 0.02 interval.

Note: As a result of a unique combination of measured surface distresses and IRI, index values occasionally compute to less than 0 or greater than 100. In this instance, an index value < 0 defaults to 0. Index values > 100 default to 100. For all indices, a higher value indicates a better road condition, and a lower value indicates a poorer road condition.

On the following page, Table 1 summarizes the different types of distresses measured.

ASPHALT-SURFA	ASPHALT-SURFACED PAVEMENT DISTRESS TYPES with RUTTING and ROUGHNESS					
DISTRESS TYPE	UNIT OF MEASURE	CONVERTED TO	DEFINED SEVERITY LEVELS?	MEASURED BY		
Alligator Cracking	Square Feet	Percent of Lane Per 0.02 Mile	Yes	Digital Image Crack Detection Software		
Transverse Cracking	Linear Feet	Number of Cracks Per 0.02 Mile	Yes	Digital Image Crack Detection Software		
Longitudinal Cracking	Linear feet	Percent of Lane Length Per 0.02 Mile	Yes	Digital Image Crack Detection Software		
Patching/Potholes	Square Feet	Percent of Lane Per 0.02 Mile	No	Digital Image Crack Detection Software		
Rutting	Inches	Rut Depth Per 0.02 Mile	Yes	DCV – Laser Rut Measuring System (LRMS)		
Roughness	IRI	*RCI Per 0.02 Mile	No	DCV – Lasers /Accelerometers		

*Note: Roughness is measured on concrete roadways, but surface distresses and rutting are not measured. For concrete, PCR = RCI

ALLIGATOR CRACKING

Description

Alligator cracking is considered a combination of fatigue and block cracking. It is a series of interconnected cracks in various stages of development. Alligator cracking develops into a many-sided pattern that resembles chicken wire or alligator skin. It can occur anywhere in the road lane. Alligator cracking must have a quantifiable area.

Severity Levels

LOW

An area of cracks with no or very few interconnecting cracks and the cracks are not spalled. Cracks are ≤ 0.25 in (6mm) in mean width. Cracks in the pattern are no further apart than 1 foot (0.328 m). May be sealed cracks with sealant in good condition and a crack width that cannot be determined.

MEDIUM

An area of interconnected cracks that form a complete pattern. Cracks may be slightly spalled. Cracks are >0.25 in. (6 mm) and <= 0.75 in. (19 mm) or any crack with a mean width <= 19 mm and adjacent low severity cracking. Cracks in the pattern are no further apart than 6 in. (150 mm).

HIGH

An area of interconnected cracks forming a complete pattern. Cracks are moderately or severely spalled. Cracks are >0.75 in (19mm) or any crack with a mean width ≤ 0.75 in (19mm) and adjacent medium to high severity random cracking.

A combination of observed crack width and crack pattern is used to determine overall severity of alligator cracking. Based on above description of each severity, the highest level of crack width and crack pattern determines overall severity. Table 2 illustrates this.

	Crack Pattern			
ALLIGATOR CRACKING SE LEVELS	LOW	MED	HIGH	
	LOW	L	М	Н
ack idth	MED	М	М	Н
Crao Wid	HI	Н	Н	Н

TABLE 2: Alligator Crack Severity Levels

LONGITUDINAL CRACKING

Description

Longitudinal cracking occurs predominantly parallel to the pavement centerline. It can occur anywhere within the lane. Longitudinal cracks occurring in the wheelpath may be noteworthy.

Severity Levels

LOW

Cracks with a mean width of < 0.25 in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

MED

Cracks with a mean width > 0.25 in. (6 mm) and ≤ 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random low severity cracking.

HIGH

Cracks with a mean width > 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random medium to high severity cracking.

TRANSVERSE CRACKING

Description

Transverse cracking occurs predominantly perpendicular to the pavement centerline. It can occur anywhere within the lane.

Severity Levels

LOW

Cracks with a mean width of < 0.25 in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

MED

Cracks with a mean width > 0.25 in. (6 mm) and <= 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random low severity cracking.

HIGH

Cracks with a mean width > 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random medium to high severity cracking.

PATCHING AND POTHOLES

Description

Patching is an area of pavement surface that has been removed and replaced with patching material or an area of pavement surface that has had additional patching material applied. Patching may encompass partial lane or full lane width On full lane width patching; the total, contiguous length of patch may not exceed 0.30 mi. (0.48 km). (Any full-lane patch exceeding 0.30 mi. in length is considered a pavement change). Patching must have a quantifiable area.

Potholes are bowl-shaped holes of various sizes occurring in the pavement surface.

Severity Levels

There are no stratified severities for Patching/Potholes. They either are present or they are not.

RUTTING

Description

Rutting is a longitudinal surface depression in the wheelpath.

Severity Levels

LOW Ruts with a measured depth ≥ 0.20 " and ≤ 0.49 "

MED Ruts with a measured depth ≥ 0.50 " and ≤ 0.99 "

HIGH

Ruts with a measured depth ≥ 1.00 "

Ruts < 0.20" are not included in the distress calculations.

ROUGHNESS

Description

Roughness is the measurement of the unevenness of the pavement in the direction of travel. It is measured in units of IRI (International Roughness Index), inches per mile, and is indicative of ride comfort.

Severity Levels

There are no stratified severity levels for roughness. The roughness (or smoothness) of a road surface can be defined by IRI in the following table.

TABLE 3: IRI				
IRI Descriptions				
Type of Road	Typical IRI (in/mile)			
New Road, no noticeable roughness	<90			
Small level of roughness	90 - 126			
Road of average roughness	126 – 190			
Road with above average roughness	190 – 253			
Road with severe roughness	253 - 380			
Nearly impassable	>380			

INDEX FORMULAS

Note: All index formulas listed below contain MAE applicable to 0.02 mile (105.6 feet) interval.

Alligator Crack Index

 $AC_INDEX = 100 - 40 * [(\%LOW / 35) + (\%MED / 15) + (\%HI / 5)]$

Where:

The values %LOW, %MED and %HI report the percentage of the observed pavement (0.02 mile, primary lane) that contains alligator cracking within the respective severities. These values range from 0 to 100.

%LOW = Percent of total area (primary lane, 0.02 in length), low severity %MED = Percent of total area (primary lane, 0.02 in length), medium severity %HI = Percent of total area (primary lane, 0.02 in length), high severity

Percent of total area is computed as:

square foot area of alligator crack severity 0.02 mile * lane width

In AC_INDEX, the denominators 35, 15, and 5 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 35% of low severity alligator cracking for a 0.02 interval before failure, 15% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Longitudinal Crack Index

LC_INDEX = 100 - 40 * [(%LOW / 175) + (%MED / 75) + (%HI / 25)]

Where:

The values %LOW, %MED, and %HI report the length of longitudinal cracking within each severity as a percent of the section length (0.02 mile, primary lane). These values are ≥ 0 and can exceed 100.

%LOW = Percent of interval length (primary lane, 0.02 in length), low severity %MED = Percent of interval length (primary lane, 0.02 in length), medium severity %HI = Percent of interval length (primary lane, 0.02 in length), high severity

Percent of interval length is computed as: <u>length of respective longitudinal cracking</u> 0.02 mile (105.6 feet) In LC_INDEX, the denominators 175, 75, and 25 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 175% of low severity alligator cracking for a 0.02 interval before failure, 75% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Structural Crack Index

 $SC_{INDEX} = [100 - ((100 - AC_{INDEX}) + (100 - LC_{INDEX}))]$

Structural Crack Index is a combination of Alligator Cracking and Longitudinal Cracking, and is used in the SCR formula in lieu of AC and LC separately.

Transverse Crack Index

 $TC_INDEX = 100 - 40 * [(LOW / 21.1) + (MED / 4.4) + (HI / 2.6)]$

Where:

The values *LOW*, *MED* and *HI* report a count of the total number of transverse cracks (reported to three decimals) within each severity level, where one transverse crack is equal to the lane width. These values are ≥ 0 .

LOW = Number of cracks in interval (primary lane, 0.02 in length), low severity MED = Number of cracks in interval (primary lane, 0.02 in length), medium severity HI = Number of cracks in interval (primary lane, 0.02 in length), high severity

Number of cracks is computed as: <u>Total length of transverse cracks</u> Lane width

In TC_INDEX, the denominators 21.1, 4.4, and 2.6 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 21.1 low severity transverse cracks for a 0.02 interval before failure, 4.4 cracks for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Patching Index

PATCH_INDEX = 100 - 40 * (%PATCHING / 80)

Where:

The value *%PATCHING* reports the percentage of the observed pavement (0.02 mile, primary lane) that contains patching/potholes. This value ranges from 0 to 100.

%PATCHING = Percent of total area (primary lane, 0.02 in length)

Percent of total area is computed as:

square foot area of patching/potholes 0.02 mile * lane width

There are no severity levels for patching. It either exists or does not.

In PATCH_INDEX, the denominator 80 is the Maximum Allowable Extent (MAE) for each severity. In other words, we will allow up to 80% patching for a 0.02 interval before failure. As you can see, if patching/potholes reaches MAE the resulting index value is 60, or failure.

Rutting Index

RUT_INDEX = 100 - 40 * [(% LOW / 535) + (% MED / 205) + (% HI / 40)]

Where:

20 rut depth measurements are taken per 0.02 interval for each of 2 wheel paths (left and right), resulting in a total of 40 measurements taken for both wheel paths. *Each wheelpath is analyzed independently for rut severities*. The values %LOW, %MED and %HI are a *total percentage* of left wheelpath percentage and right wheelpath percentage added together for the respective severity. These values range from 0 to 200.

%LOW = Percent of LOW ruts in left wheelpath based on 20 ruts, plus percent of LOW ruts in right wheelpath based on 20 ruts.

%MED = Percent of MED ruts in left wheelpath based on 20 ruts, plus percent of MED ruts in right wheelpath based on 20 ruts.

%HI = Percent of HI ruts in left wheelpath based on 20 ruts, plus percent of HI ruts in right wheelpath based on 20 ruts.

Percent of rut measurements within each severity can also be computed as:

total number of ruts within each severity in both wheelpaths 20 * 100

In RUT_INDEX, the denominators 535, 205, and 40 are the Maximum Allowable Extents for each severity. In other words, the formula allows up to 535% low severity

ruts for a 0.02 interval before. However, since 200 is the highest measurable percentage allowed, 535% is unattainable and therefore, no amount of LOW severity rutting will cause the RUT_INDEX to fail a road. Similarly, since the MAE for MED severity rutting is 205, no amount of MED severity rutting will cause the RUT_INDEX to reach 60 and fail the road. As you can see, LOW severity rutting reaches MAE the resulting index value is 60, or failure. This formula was intentionally designed to minimize the impact of LOW and MED severity rutting on RUT_INDEX.

Roughness Condition Index (Asphalt)

$$\mathbf{RCI} = 32 * [5 * (2.718282^{(-0.0041 * AVG IRI)})]$$

Where:

The value *AVG IRI* reports the average value of the Left IRI and Right IRI measurements for the interval (0.02 mile, primary lane). This value can range from approximately 40 to 999.0.

Average IRI is computed as:

 $\frac{\text{Left wheelpath IRI} + \text{Right wheelpath IRI}}{2}$

There is no applicable threshold for failure for this index.

Roughness Condition Index (Concrete)

 $\mathbf{RCI} = -0.0012(\mathbf{IRI}^2) + 0.0499(\mathbf{IRI}) + 99.542$

For concrete, PCR = RCI

Surface Condition Rating Index

SCR = *Lowest* Index Value Of: [SC_INDEX, TC_INDEX, PATCH_INDEX, RUT_INDEX]

Note: The modified SCR equation above combines AC_INDEX and LC_INDEX, and considers that a single AC/LC index value of the Structural Crack Index (SC_INDEX). The lowest of the four computed index values (SC_INDEX, TC_INDEX, PATCH_INDEX, or RUT_INDEX) becomes the SCR.

Where:

See above for determinations of SC_INDEX, TC_INDEX, PATCH_INDEX and RUT_INDEX.

The threshold for failure for this index is SCR = 60.

Data Collection Vehicle Subsystems

Data on paved roads in Cycle 5 is collected by FHWA using a Pathway Services Inc. Data Collection Vehicle (DCV), called PathRunner. The DCV is driven in the primary-direction lane at posted speed limits and less.

CAMERAS

Forward-facing and rear-facing video is collected as .jpg digital imagery at a frequency of 26.4 feet.

Two forward-facing cameras are mounted above the vehicle cab, one pointed straight ahead and the other to the right shoulder providing seamless 120 degree viewing.

CAMERA SPECIFICATIONS				
Two Forward/ One Rear Facing				
Camera lens/type	FUJINON CCTV LENS H16x10B-Y41			
Focal length	10 mm – 160 mm			
Image size	8.8 mm x 6.6mm			
Image format	*.jpg			
Image resolution	HD 2000 X 1200			
Image pixel size	depends on distance			
Zoom ratio	16x			
Max Relative Aperture	1:2.5			
Iris range	F25-T800 (Equivalent to F800)			

Pavement images are created using a Laser Scan Imaging System. This system is composed of a single high resolution line-scan camera and two lasers configured to image an approximate 11-foot wide lane with 1 mm resolution.

CAMERA SPECIFICATIONS				
Pavement Line Scan				
Image size	4280 pixels/line			
Image width	4 meters (3950 mm nominal)			
Laser class	3B			
Power	250W			
Vehicle speed limitations	62 mph			
Environment	Dry pavement, day or night			
Sensor size (approx)	300 mm(H) x 375 mm(L) x 200 mm(D)			
Image frame length	26.4 feet			

DMI (Distance Measuring Instrument)

The DMI (Distance Measuring Instrument) obtains road length measurements that are accurate to 0.1% for speeds up to 60 mph. The DMI is connected to the hub of the rear wheel on the driver's side, and is calibrated to the revolutions of the rear vehicle axle on a regular basis.

ROUGHNESS (IRI)

The collection system includes a South Dakota type laser profiler manufactured based on active Class 1 ASTM E950 standards. The dynamic profile of the pavement surface is collected from which the IRI roughness data is computed. The sensors include one accelerometer on each wheelpath, one height sensor (laser) on each wheelpath, and a distance transducer.

IRI SPECIFICATIONS	
Reported IRI units	Inches/mile
Vehicle speed limitations	12-62 mph
IRI equipment certification	Texas Transportation Institute (TTI)
Wavelengths accommodated	6 in. – 300 feet
IRI computed & reported	World Bank Technical Paper Number 46
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E950-98 (2004), ASTM E 1926-08,
	AASHTO MP 11-08, AASHTO PP 49-08

RUTTING

Rutting depths are measured using an INO Laser Rut Measurement System (LRMS). This system is a transverse profiling device that detects and characterizes pavement rutting. The LRMS can acquire full 4 meter width profiles of a pavement lane at normal traffic speeds and uses two laser profilers that digitize transverse sections of the pavement.

RUTTING SPECIFICATIONS	
Reported rut depth units	Inches
Vehicle speed limitations	Up to 62 mph
Sampling rate	30-150 profiles/second
Transverse resolution	1280 points/profile
Transverse field-of-view	4 m
Depth accuracy (nominal)	+/- 1 mm
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E1703M-95 (reapproved 2005)

GPS & INERTIAL SYSTEMS

GPS is collected by an onboard system employing Omnistar real time correction and a gyroscope Inertial Measuring Unit (IMU) to provide accurate positioning data in instances of satellite obstruction. All GPS coordinates are tied to image and linear distance measurements.

GPS SPECIFICATIONS	
Static accuracy	Sub-meter
Dynamic accuracy	2-3 meters
Receiver	12 satellite tracking
Coordinate system	Lat Lon WGS 84
Environment	Day or night
Cross-slope	+- 0.1 degrees
Grade	+- 0.1 degrees

GPS on Manually Rated Roads (MRR)

Parking areas, some roads, and other paved areas that are not fully drivable with the DCV are collected manually by field technicians. GPS is collected for these routes using portable Trimble GPS backpack units.

Geodatabase - Background and Metadata

In addition to this park report, a *geodatabase* containing both tabular and spatial data specific to this park has been provided. All data disseminated in the preceding report has been obtained from the tables and fields within said geodatabase. The geodatabase can be referenced for tabular data via Microsoft Access or for both tabular and spatial data via ESRI's ArcGIS Suite of software which consists of; ArcMap, ArcCatalog and ArcExplorer. Consolidating the RIP data into one database creates a seamless relationship of tables and geographic data. It will allow RIP to facilitate easier updates and enhancements in the future.

A geodatabase can be thought of as simply a database containing spatial data. Many different tables are contained with the park's geodatabase. A complete and thorough description of the tables and fields contained within this geodatabase can be found in the *metadata*. The metadata is attached directly within the geodatabase and can be accessed via ESRI's ArcCatalog.

GLOSSARY OF TERMS AND ABBREVIATIONS

TERM ORABBREVIATIONDESCRIPTION OR DEFINITION

AC	Alligator Cracking
CRS	Condition Rating Sheets (Section 5)
DCV	Data Collection Vehicle
Excellent	Excellent rating with an index value of 95 to 100
Fair	Fair rating with an index value from 61 to 84
FUNCT_CLASS	Functional Classification (see Route ID, Section 2)
Good	Good rating with an index value from 85 to 94
IRI	International Roughness Index
Lane Width	Width from road centerline to fogline, or from centerline to edge- of-pavement when no fogline exists
LC	Longitudinal Cracking
MRR	Manually Rated Route
MRL	Manually Rated Line
MRP	Manually Rated Polygon
N/A	Not Applicable
NC	Not Collected
РАТСН	Patching and Potholes
Paved Width	Width from edge-of-pavement to edge-of-pavement
PCR	Pavement Condition Rating
PKG	Parking Area
Poor	Poor rating with an index value of 0 to 60
RCI	Roughness Condition Index
SC	Structural Cracking
SCR	Surface Condition Rating
TC	Transverse Cracking