




# Federal Lands Highway Road Inventory Program

Road Inventory and Condition Assessment

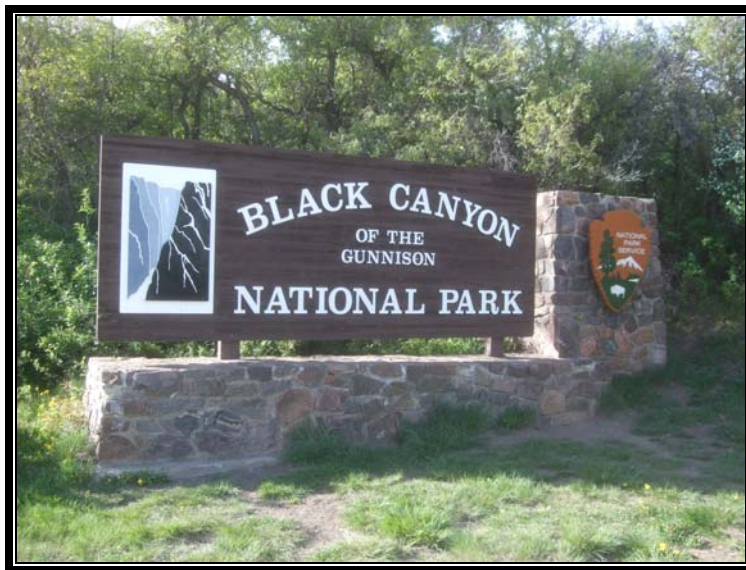


## Black Canyon of the Gunnison National Park BLCA - 1377

### Cycle 5 Report

Prepared By: Federal Highway Administration  
Road Inventory Program (RIP)  
Data Collected: 10/2011  
Report Date: 09/2012

# Black Canyon of the Gunnison National Park in Colorado

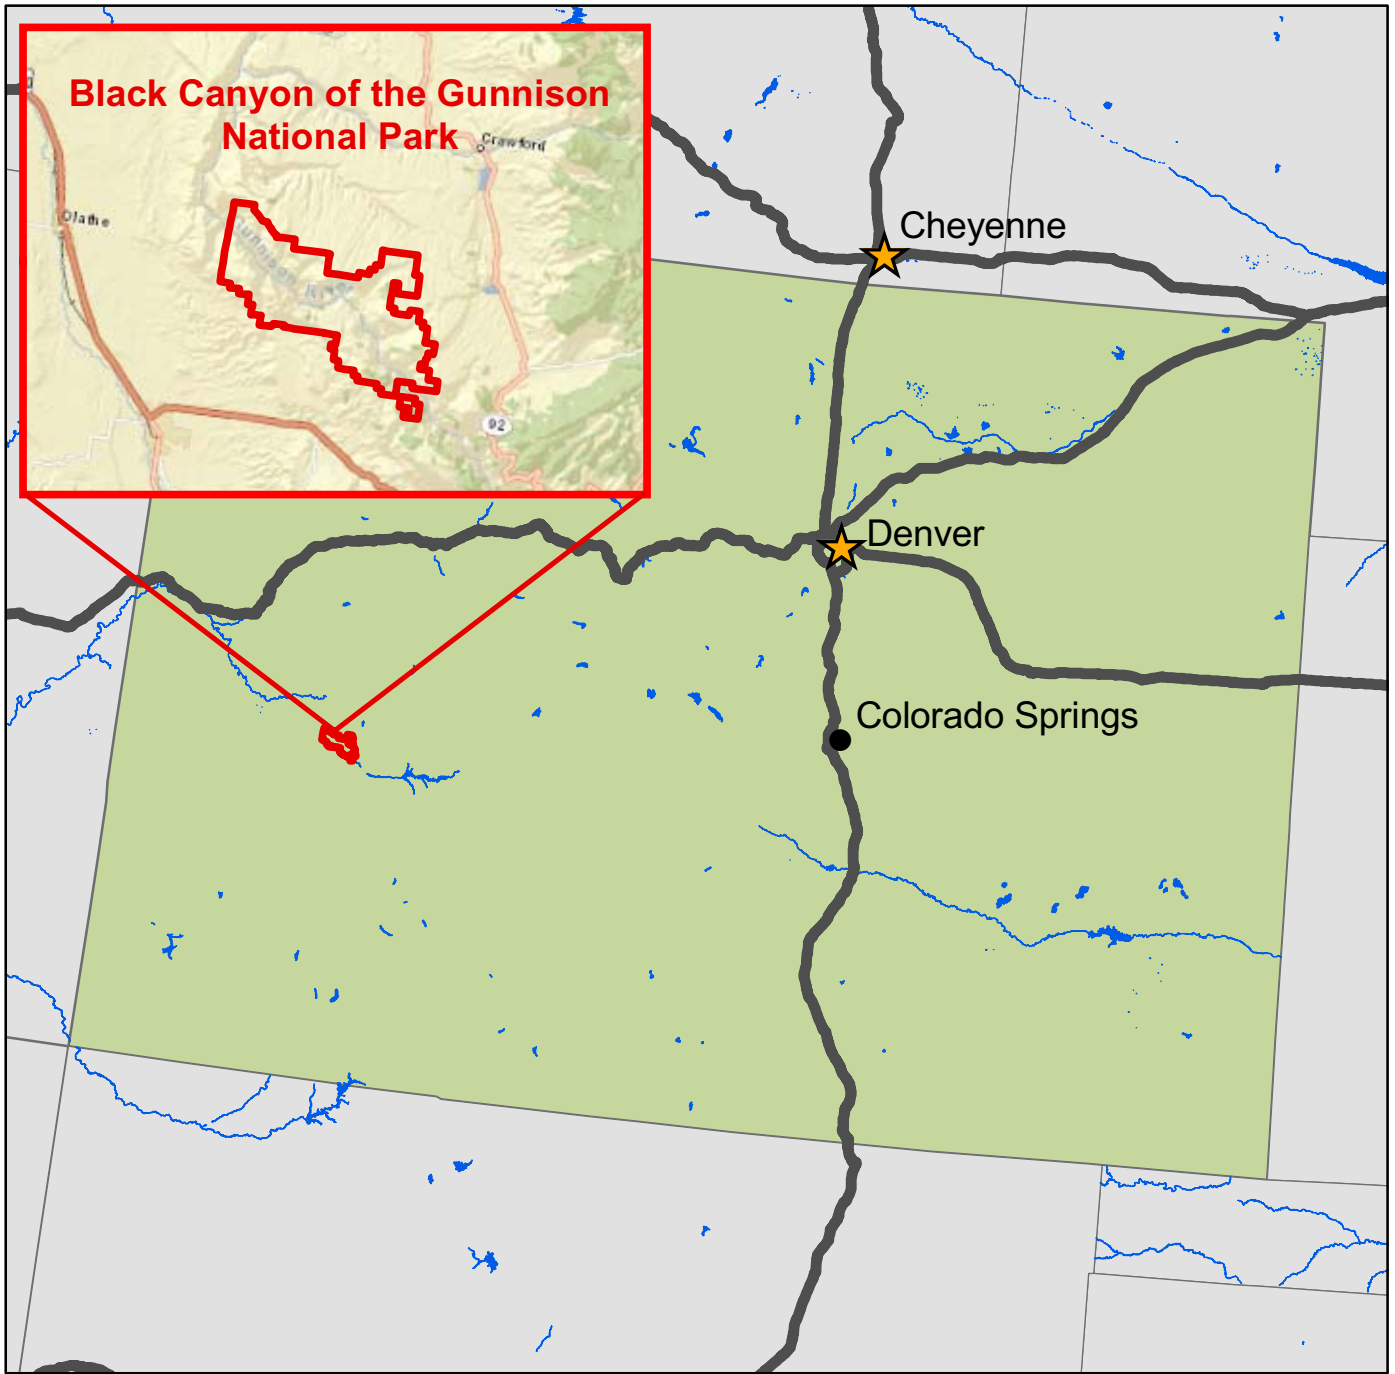



DCV = Data Collection Vehicle

## TABLE OF CONTENTS

<b><u>SECTION</u></b>	<b><u>PAGE</u></b>
<b>1. INTRODUCTION</b>	<b>1 - 1</b>
<b>2. PARK ROUTE INVENTORY</b> Route IDs, Subcomponents & Changes Report (As Applicable)	<b>2 - 1</b>
<b>3. PARK SUMMARY INFORMATION</b> Paved Route Miles and Percentages by Functional Class and PCR DCV Road Condition Summary Parkwide DCV Condition Summary	<b>3 - 1</b> <b>3 - 3</b> <b>3 - 5</b>
<b>4. PARK ROUTE LOCATION MAPS</b> Route Location Key Map Route Location Area Map Route Condition Key Map – PCR Mile by Mile Route Condition Area Map – PCR Mile by Mile	<b>4 - 1</b> <b>4 - 2</b> <b>4 - 6</b> <b>4 - 7</b>
<b>5. PAVED ROUTE CONDITION RATING SHEETS</b> CRS Pages	<b>5 - 1</b>
<b>6. MANUALLY RATED PAVED ROUTE CONDITION RATING SHEETS</b> MRR Pages	<b>6 - 1</b>
<b>7. PARKING AREA CONDITION RATING SHEETS</b> Paved Parking Area Pages	<b>7 - 1</b>
<b>8. PARKWIDE / ROUTE MAINTENANCE FEATURES SUMMARIES</b> Parkwide Maintenance Features Summary DCV Route Maintenance Features Summary Structure List	<b>8 - 1</b> <b>8 - 2</b> <b>8 - 3</b>
<b>9. ROUTE MAINTENANCE FEATURES ROAD LOGS</b> Route Maintenance Features Road Logs	<b>9 - 1</b>
<b>10. APPENDIX</b> Explanation of Changes to the RIP Index Equations and Determination of PCR Explanation of the Excellent, Good, Fair and Poor Condition Descriptions Description of Rating System Surface Distresses Index Formulas Data Collection Vehicle Subsystems Geodatabase – Background and Metadata Glossary of Terms and Abbreviations	<b>10 - 1</b> <b>10 - 2</b> <b>10 - 3</b> <b>10 - 5</b> <b>10 - 12</b> <b>10 - 16</b> <b>10 - 19</b> <b>10 - 20</b>

# Section 1 Introduction



## Black Canyon of the Gunnison National Park



Federal Lands Highway  
Road Inventory Program

## INTRODUCTION

The Federal Highway Administration, (FHWA), in the mid 1970s, was charged with the task of identifying surface condition deficiencies and corrective priorities on National Park Service (NPS) roads and parkways. Additionally, FHWA was tasked with establishing an integrated maintenance features inventory, locating features such as culverts, guardrails, and signs, among others, along NPS roads and parkways. As a result, in 1976 the NPS and FHWA entered into an MOA (Memorandum Of Agreement) which established the RIP (Road Inventory Program). This MOA was terminated and revised in 1980 to establish a new MOA aiming to update RIP data and develop a long-range program to improve and maintain NPS roads to designated condition standards and establish a maintenance management program.

The FHWA completed this initial phase of the RIP in the early 1980s. As a result of this effort, each NPS site included in the study received a RIP Report known as the “Brown Book” which included the information collected during this first RIP phase.

In the 1990s, the effort was again renewed to update and maintain the RIP data. By this time the computer age was upon us and a process was employed that relied heavily on electronic data collection and computer technology. A cyclical program was developed and the RIP completed two cycles of data collection from 1994 to 2001. Cycle 1, starting in 1994, was conducted in 44 “large parks” (parks containing 10 or more paved route miles). Cycle 2 began in 1997 and comprised 79 large parks and 5 small parks totaling 4,874 paved route miles. Each of these parks received a RIP Report known as the “Blue Book”. Cycle 3, from 2001 to 2004, was conducted in all parks, large and small, that contained any paved routes, including parking areas and, again, each park received a RIP Report and associated electronic files.

Cycle 4 was initiated in the spring of 2006 covering 86 large parks and several associated small parks consisting of 5,553 paved route miles and 6,232 paved parking areas. Data collection has been completed for Cycle 4 and all data has been delivered to the NPS.

In 2005, the FHWA began implementing the use of a Pavement Management System (PMS) to assist the NPS in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Regional, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions, an extensive study was completed throughout 2010 that has resulted in changes to the RIP condition reporting method, specifically the distresses and indexes that comprise the Pavement Condition Rating (PCR). It was determined that a better representation of PCR could

be achieved by modifying the relative impact certain distresses would have on the overall rating. The changes that were implemented were endorsed by management at both the FHWA and NPS in October 2010. These changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection. Because of these changes, the PCR Condition ratings reported in Cycle 5 do not directly relate to the condition ratings reported in previous cycle RIP Reports. For more detailed information about the changes, see Section 3 and Section 10 in this RIP Report.

Cycle 5 has launched in the summer of 2010 and will again comprise all parks, large and small, that are served by paved roads and/or parking areas. For Cycle 5, the decision was made to collect condition data in large parks on Functional Class 1, 2, and 7 paved routes only, as well as any new routes that were previously not collected. In small parks, all paved routes and parking areas will be collected. As a result, this will include 81 large parks with 4,459 paved route miles and 168 small parks with 529 paved route miles and associated paved parking areas.

Since 1984, the Road Inventory Program has been funded through the Federal Lands Highway Park Roads and Parkways (PRP) Program. Currently, coordination of the RIP with FLH is under the NPS Washington Headquarters Park Facility Management Division. The FLH Washington office coordinates policy and prepares national reports and needs assessment studies for Congress.

In 1998, the Transportation Equity Act for the 21<sup>st</sup> Century (TEA-21) amended Title 23 U.S.C., and inserted Section 204(a)(6) requiring the FHWA and NPS, to develop by rule, a Pavement Management System (PMS) applied to park roads and parkways serving the National Park System.

FLH is responsible for the accuracy of all data presented in this report. Any questions or comments concerning the contents of this report should be directed to the national RIP Coordinator located in Sterling, Virginia.

Respectfully,

FHWA RIP Team

FHWA/Eastern Federal Lands  
21400 Ridgetop Circle  
Sterling, VA 20166  
(703) 404-6371

FHWA/Central Federal Lands  
12300 West Dakota Ave  
Lakewood, CO 80228  
(720) 963-3560

# Section 2

## Park Route Inventory



## Black Canyon of the Gunnison National Park



Federal Lands Highway  
Road Inventory Program





# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 08/30/2012

(Numerical By Route #)

Page 2 of 5

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle NC - Not Collected

## BLCA

### BLACK CANYON OF THE GUNNISON NATIONAL PARK

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description From To	Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
0900	5	73354		GUNNISON POINT VISITOR CENTER PARKING	FROM ROUTE 0010 (SOUTH RIM DRIVE) TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		29,123	AS	3
0901	5	72382		HIGH POINT PARKING	FROM END OF ROUTE 0010 (SOUTH RIM DRIVE) TO PARKING	N/A	0.00	0.00	0.00		16,356	AS	1
0902	5	72377		SUNSET VIEW PARKING	FROM ROUTE 0010 (SOUTH RIM DRIVE) TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		7,692	AS	1
0903	5	72375		DRAGON POINT PARKING	ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		2,221	AS	1
0904	5	72370		CEDAR POINT OVERLOOK	ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		2,984	AS	1
0905	5	72367		PAINTED WALL VIEW PARKING	ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		2,344	AS	2
0906	5	72364		CHASM VIEW OVERLOOK	ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		5,994	AS	2
0907	5	72363		DEVIL'S OVERLOOK	ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		2,802	AS	2
0908	5	72344		ROCK POINT PARKING	ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		3,086	AS	2
0909	5	72320		CROSS FISSURES OVERLOOK	ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		3,264	AS	2
0910	5	72281		PULPIT ROCK OVERLOOK	ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		3,686	AS	2
0911	5	72258		TOMICHI POINT PARKING	FROM ROUTE 0010 (SOUTH RIM DRIVE) TO ROUTE 0010 (SOUTH RIM DRIVE)	N/A	0.00	0.00	0.00		10,467	AS	3
0912	5	84657		SOUTH RIM RESIDENCE AREA	FROM ROUTE 0400 (SOUTH RIM RESIDENCE ROAD) TO PARKING	N/A	0.00	0.00	0.00		5,958	AS	3
0913	5	84658		SOUTH RIM MAINTENANCE AREA	FROM END OF ROUTE 0400 (SOUTH RIM RESIDENCE ROAD) TO PARKING	N/A	0.00	0.00	0.00		11,320	CO	3

# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 08/30/2012

(Numerical By Route #)

Page 3 of 5

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle NC - Not Collected

## BLCA

### BLACK CANYON OF THE GUNNISON NATIONAL PARK

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description From To	Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
0914	5	84659		FEE STATION PARKING	ADJACENT TO ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)	N/A	0.00	0.00	0.00		5,968	AS	3
0915	NC	84660		PULPIT ROCK GRAVEL PARKING AREA	FROM ROUTE 0910 (PULPIT ROCK OVERLOOK) TO PARKING	N/A	0.00	0.00	0.00		6,000	GR	
0916	NC	84661		SOUTH RIM MAINTENANCE UNPAVED	FROM ROUTE 0913 (SOUTH RIM MAINTENANCE AREA) TO PARKING	N/A	0.00	0.00	0.00		4,000	GR	
0917	NC	90816		RANGER STATION PARKING	FROM ROUTE 0011 (NORTH RIM MAIN ROAD) TO PARKING	N/A	0.00	0.00	0.00		3,240	GR	
0918	NC	90817		THE NARROWS PARKING	FROM ROUTE 0012 (NORTH RIM - RIM DRIVE) TO PARKING	N/A	0.00	0.00	0.00		1,266	GR	
0919	NC	90821		BALANCE ROCK PARKING	FROM ROUTE 0012 (NORTH RIM - RIM DRIVE) TO PARKING	N/A	0.00	0.00	0.00		4,940	GR	
0920	NC	90822		BIG ISLAND PARKING	FROM ROUTE 0012 (NORTH RIM - RIM DRIVE) TO PARKING	N/A	0.00	0.00	0.00		9,493	GR	
0921	NC	90823		ISLAND PEAKS PARKING	FROM ROUTE 0012 (NORTH RIM - RIM DRIVE) TO PARKING	N/A	0.00	0.00	0.00		1,800	GR	
0922	NC	90824		KNEELING CAMEL PARKING	FROM ROUTE 0012 (NORTH RIM - RIM DRIVE) TO PARKING	N/A	0.00	0.00	0.00		18,080	GR	
0923	NC	90825		END OF ROAD PARKING	FROM ROUTE 0012 (NORTH RIM - RIM DRIVE) TO PARKING	N/A	0.00	0.00	0.00		9,396	GR	
0924	5	239673		SOUTH RIM RESIDENCE ROAD PARKING	ADJACENT TO ROUTE 0400 (SOUTH RIM RESIDENCE ROAD)	N/A	0.00	0.00	0.00		1,501	AS	3
0961	NC	108463		RED ROCK CANYON PARKING AREA SR	FROM K-73 TRAIL TO PARKING	N/A	0.00	0.00	0.00		4,000	GR	
5347	5			STATE HIGHWAY 347	FROM US HIGHWAY 50 TO ROUTE 0010 (SOUTH RIM DRIVE) AT CATTLE GUARD/PAVEMENT CHANGE	N/A	5.19	0.00	5.19			AS	3

# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 08/30/2012

(Numerical By Route #)

Page 4 of 5

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle      NC - Not Collected

## CYCLE 5 SUMMARY TOTALS FOR BLACK CANYON OF THE GUNNISON NATIONAL PARK

### CYCLE 5 ROUTE TOTALS

DCV Driven Route Miles	8.81
Manually Rated Route Miles	0.14
<b>TOTAL PARK ROUTE MILES COLLECTED IN CYCLE 5</b>	<b>8.95</b>
Manually Rated Routes (SQFT)	13,944
<b>TOTAL UNPAVED PARK ROUTE MILES</b>	<b>16.76</b>

### CYCLE 5 CONCESSION TOTALS

Concession Paved Route Miles	0.00
Concession Unpaved Route Miles	0.00
<b>TOTAL CONCESSION ROUTE MILES</b>	<b>0.00</b>
Concession Paved Parking Area SQFT	0
Concession Unpaved Parking Area SQFT	0
<b>TOTAL CONCESSION PARKING AREA SQFT</b>	<b>0</b>
Concession Manually Rated Routes SQFT	0

### \* CYCLE 5 PARKING AREA TOTALS

Paved Parking (SQFT)	114,766
Unpaved Parking (SQFT)	62,215
<b>TOTAL PARKING (SQFT)</b>	<b>176,981</b>

### CYCLE 5 WEIGHTED AVERAGE PARK VALUES

DCV Driven PCR	88
**Manually Rated Routes PCR	90
**Parking PCR	90
<b>***Total Equivalent Lane Miles</b>	<b>21.37</b>

\* - The Parking Area Totals SQFT value represents all parking areas collected in Cycle 5, both park and concessionaire.

\*\* - Parking and Manually Rated Routes are assigned the following PCR values based on their observed condition: Construction=-1, Excellent=97, Good=90, Fair=73, and Poor=45.

\*\*\* - Equivalent Lane Miles are calculated by route using the following equations : DCV and Manually Rated Lines Routes=(PAVE\_WIDTHxPAVED\_MI)/11 foot lane. Parking Areas=SQ\_FEET/5280/11. Manually Rated Polygons=SQ\_FEET/5280/11.

# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 08/30/2012

(Numerical By Route #)

Page 5 of 5

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle NC - Not Collected

## General Park Road Functional Classification Table

- Class 1** Principal Park Road/Rural Parkway (Public Roads) Roads which constitute the main access route, circulatory tour, or thoroughfare for park visitors. Route Numbers 1 - 99. Note: Rural parkways (e.g. Natchez Trace) are numbered 1 - 9. State Routes Inventoried for Park. Route Numbers 5000-5999
- Class 2** Connector Park Road (Public Roads) - Roads which provide access within a park to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, etc. Route Numbers 100-199.
- Class 3** Special Purpose Park Road (Public Roads) - Roads which provide circulation within public areas, such as campgrounds, picnic areas, visitor center complexes, concessionaire facilities, etc. These roads generally serve low-speed traffic and are often designed for one-way circulation. Route Numbers 200-299.
- Class 4** Primitive Park Roads (Public Roads) - Roads which provide circulation through remote areas and/or access to primitive campgrounds and undeveloped areas. These roads frequently have no minimum design standards and their use may be limited to specially equipped vehicles. Route Numbers 200-299. Note: Functional Classes 3 and 4 have the same route numbers because, historically, they were numbered similarly.
- Class 5** Administrative Access Road (Administrative Roads) - All public roads intended for access to administrative developments or structures such as park offices, employee quarters, or utility areas. Route Numbers 400-499.
- Class 6** Restricted Road (Administrative Roads) - All roads normally closed to the public, including patrol roads, truck trails, and other similar roads. Route Numbers 400-499. Note: Functional Classes 5 and 6 have the same route numbers because historically they were numbered similarly and often there is little distinction between these routes. For example, because utility areas and employee housing are often closed to the public, this restriction would result in classification of FC 6 rather than FC 5.
- Class 7** Urban Parkway (Urban Parkways and City Streets) - These facilities serve high volumes of park and non-park related traffic and are restricted, limited-access facilities in an urban area. This category of roads primarily encompasses the major parkways which serve as gateways to our nation's capital. Other major park roads or portions thereof, however, may be included in this category. Route Numbers 1-9.
- Class 8** City Streets (Urban Parkways and City Streets) - City streets are usually extensions of the adjoining street system that are owned and maintained by the National Park Service. The construction and/or reconstruction should conform with accepted local engineering practice and local conditions. Route Numbers 600-699.

\*\*\*\*\*

A park road system contains those roads within or giving access to a park or other unit of the NPS which are administered by the NPS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a park road is not based on traffic volumes or design speed, but on the intended use or function of that road or route.

The historic route numbering system also included a 300 number series for interpretive roads, and a 500 series for one-way roads. There are approximately 250 roads nationwide which are designated by the 300 and 500 series. The numbers for these roads will be maintained for reporting consistency. However, since these interpretive and one-way routes are not as clearly tied to a specific functional class, the 300 and 500 series will be discontinued for future use.

5000 route numbers are assigned to Non-NPS Routes that are State, County or City owned which border, traverse, or provide access to Park Facilities or Assets. 5000 Routes are driven for GPS and Video Log only.

## Surface Type Abbreviations:

- AS - Asphaltic Concrete Pavement**
- CO - Portland Cement Concrete Pavement**
- BR - Brick or Pavers Road Bed**
- CB - Cobble Stone Road Bed**
- GR - Gravel Road Bed**
- SA - Sand Road Bed**
- NV - Native or Dirt Material Road Bed**
- OT - Other Materials Road Bed**

**ROUTE IDENTIFICATION CHANGES TO PAVED ROUTES FROM PREVIOUS CYCLE - BLCA**

<b>ROUTES ADDED FROM PREVIOUS INVENTORY:</b>			
<b>Route #</b>	<b>Route Name</b>	<b>Reason for Addition</b>	<b>Comments</b>
0222	EAST PORTAL CAMPGROUND ACCESS ROAD	OTHER	CHANGED FROM A CURE LOCATION TO A BLCA LOCATION THROUGH ALIGNMENT.
0924	SOUTH RIM RESIDENCE ROAD PARKING	OTHER	ADDED TO INVENTORY IN CYCLE 5.
5347	STATE HIGHWAY 347	OTHER	ADDED TO INVENTORY IN CYCLE 5.
<b>ROUTES MODIFIED FROM PREVIOUS INVENTORY:</b>			
<b>Route #</b>	<b>Route Name</b>	<b>Type of Modification</b>	<b>Comments</b>
0913	SOUTH RIM MAINTENANCE AREA	RECONSTRUCTED	NEW SECTION ADDED TO SHAPE IN CYCLE 5. SURFACE TYPE CHANGED FROM ASPHALT TO CONCRETE.

# Section 3

## Park Summary Information



## Black Canyon of the Gunnison National Park



Federal Lands Highway  
Road Inventory Program

## BLCA: PAVED ROUTE MILES AND PERCENTAGES BY FUNCTIONAL CLASS AND PCR

F.C.	Pavement Condition Rating (PCR)								TOTAL MILES
	Poor (0-60)		Fair (61-84)		Good (85-94)		Excellent (95-100)		
	MILES	%	MILES	%	MILES	%	MILES	%	
1	0.04	0.45%	2.62	29.74%	3.56	40.41%	1.44	16.35%	7.66
2									
3			0.06	0.68%	0.39	4.43%	0.57	6.47%	1.02
4									
5			0.02	0.23%	0.07	0.79%	0.04	0.45%	0.13
6									
7									
8									
<b>Totals</b>	<b>0.04</b>	<b>0.45%</b>	<b>2.70</b>	<b>30.65%</b>	<b>4.02</b>	<b>45.63%</b>	<b>2.05</b>	<b>23.27%</b>	<b>8.81</b>

**Note:** The information in this table is derived from the PMS\_20 table in the Park database, which only contains processed data from routes collected with the Data Collection Vehicle (DCV). Information for Manually Rated Routes (MRR) and Parking Areas is not reported in this table. Only Functional Class 1, 2, & 7 routes, and any new routes not previously collected by RIP, are collected in Large Parks.


### Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that have been implemented in Cycle 5, we will also aim to provide greater assistance in translating excellent/good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 0-60. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.

### Condition Categories and Treatments

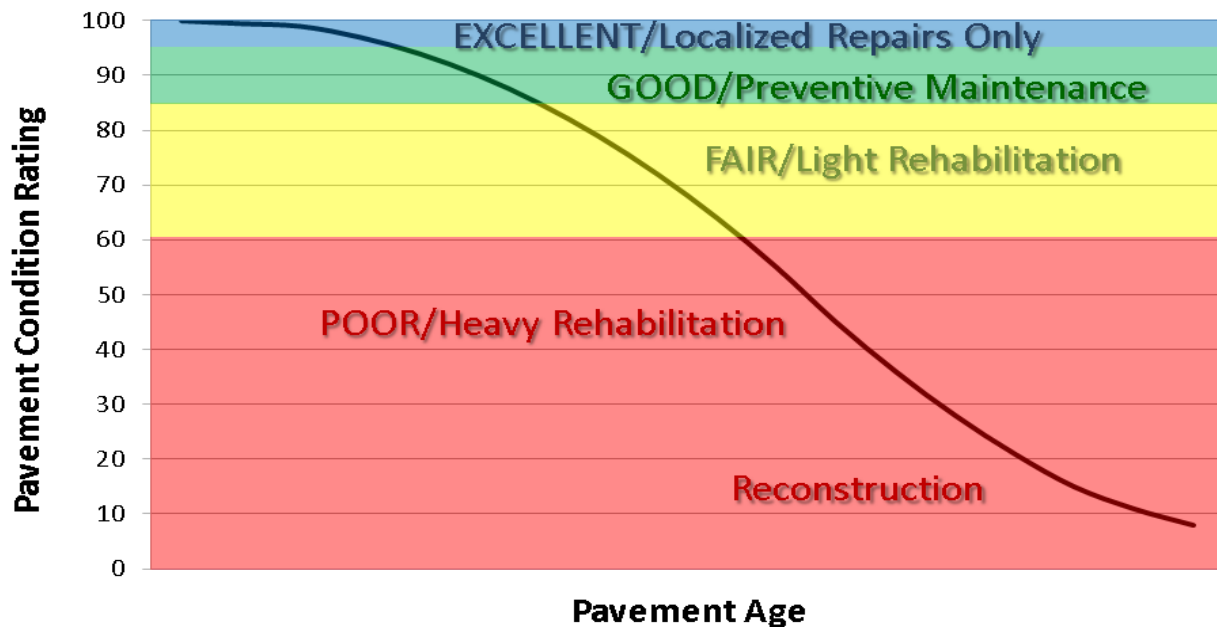




# BLCA: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle


ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	PAVED LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0010	SOUTH RIM DRIVE	1	7.66	ASPHALT	97	86
0200	SOUTH RIM CAMPGROUND ROAD	3	0.31	ASPHALT	96	96
0205	CAMPGROUND LOOP A	3	0.24	ASPHALT	90	90
0206	CAMPGROUND LOOP B	3	0.24	ASPHALT	95	95
0207	CAMPGROUND LOOP C	3	0.23	ASPHALT	94	94

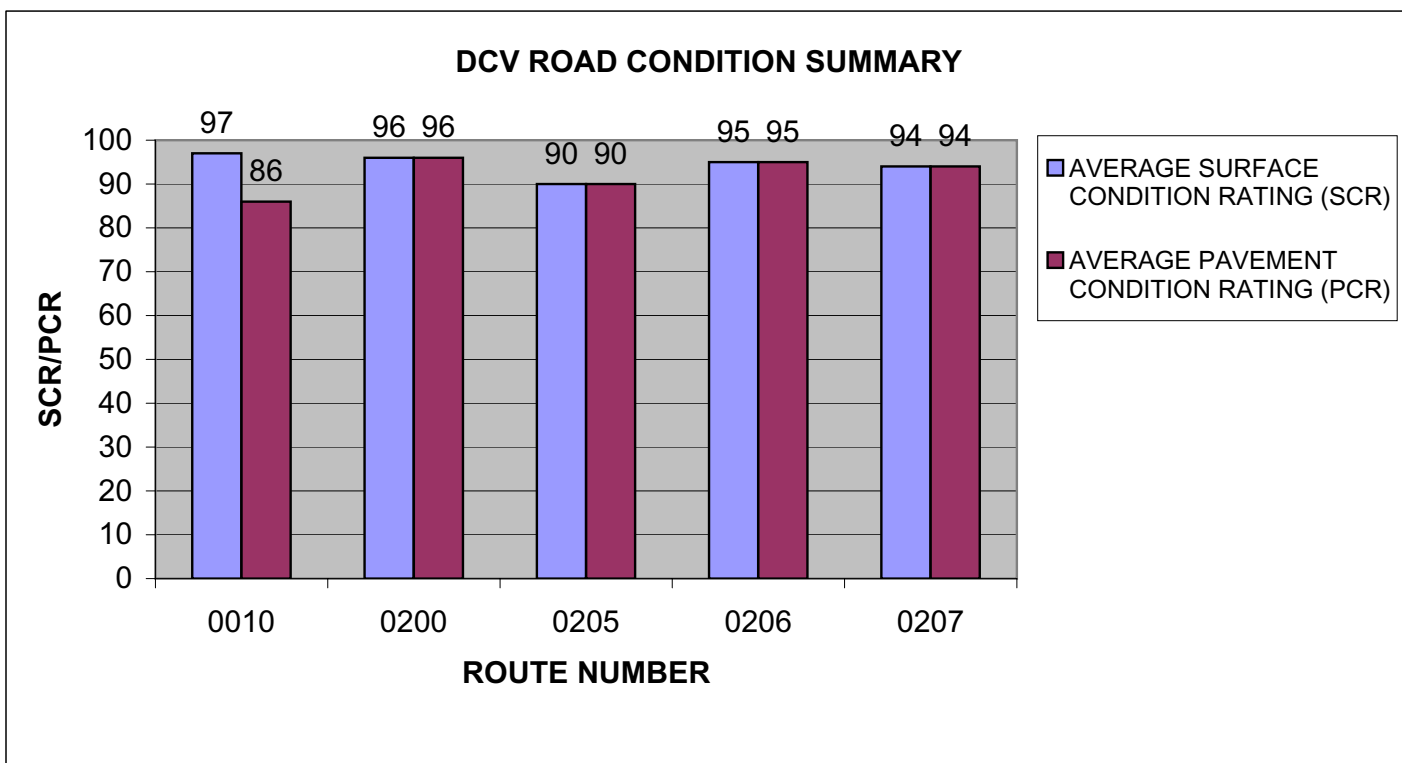

# BLCA: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle


ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	PAVED LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0400	SOUTH RIM RESIDENCE ROAD	5	0.13	ASPHALT	94	94

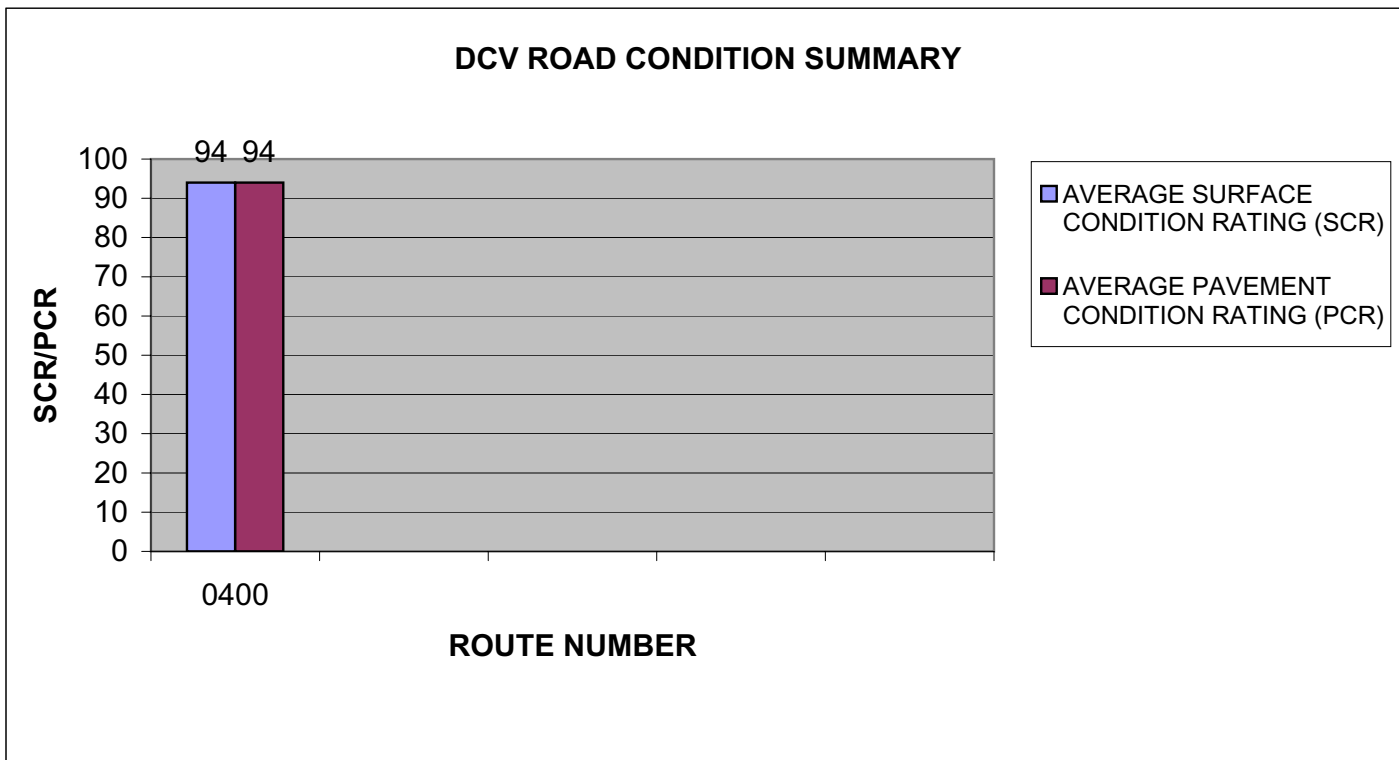

# BLCA: PARKWIDE DCV CONDITION SUMMARY

AVERAGE PAVEMENT CONDITION RATING (PCR)	AVERAGE ROUGHNESS CONDITION INDEX (RCI)	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE RUT INDEX	AVERAGE ALLIGATOR CRACKING INDEX	AVERAGE LONGITUDINAL CRACKING INDEX	AVERAGE TRANSVERSE CRACKING INDEX	AVERAGE PATCHING INDEX
88	70	97	97	100	100	100	100

All Index values are based on Data Collection Vehicle (DCV) driven roads that were collected in Cycle-5.  
 Roughness data is only collected on routes with lengths greater than 0.5 miles and a posted speed limit of 25 MPH or greater.

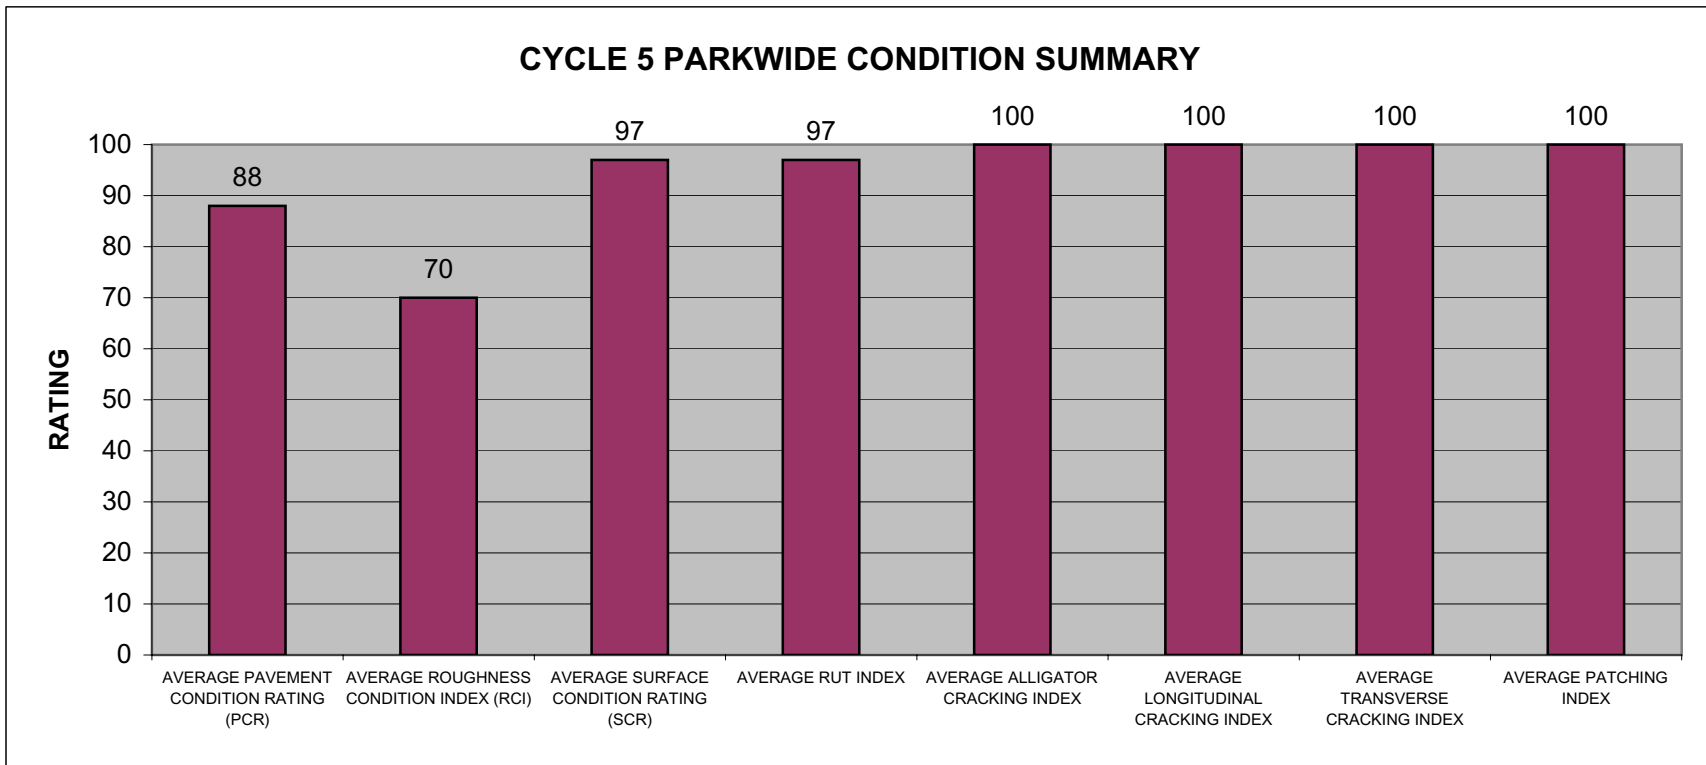

# Section 4

## Park Route Location Maps





## Black Canyon of the Gunnison National Park



Federal Lands Highway  
Road Inventory Program


# Black Canyon of the Gunnison National Park Route Location Map Key Map

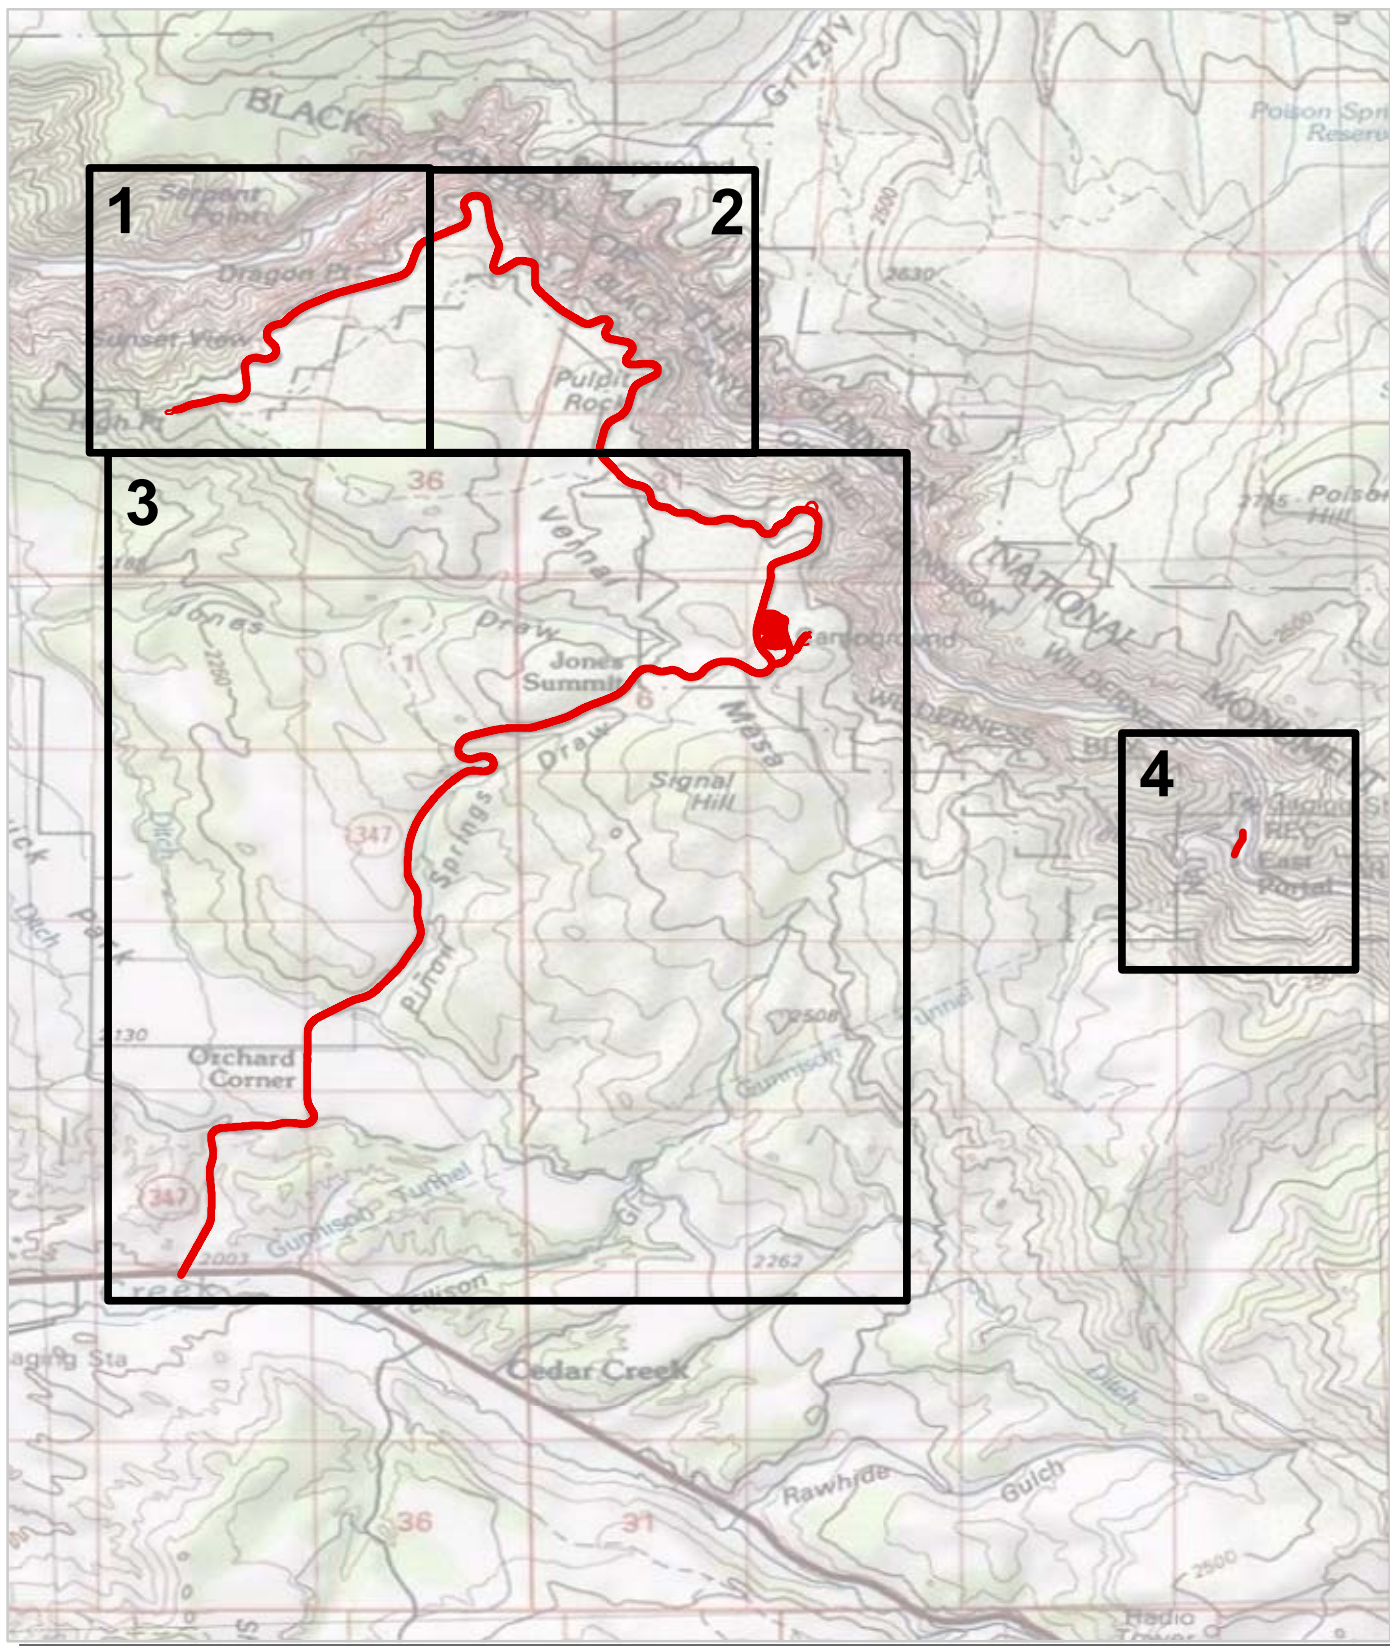

 Cycle 5 Collected Routes




**Black Canyon of the Gunnison National Park  
Route Location Map  
Area 1**

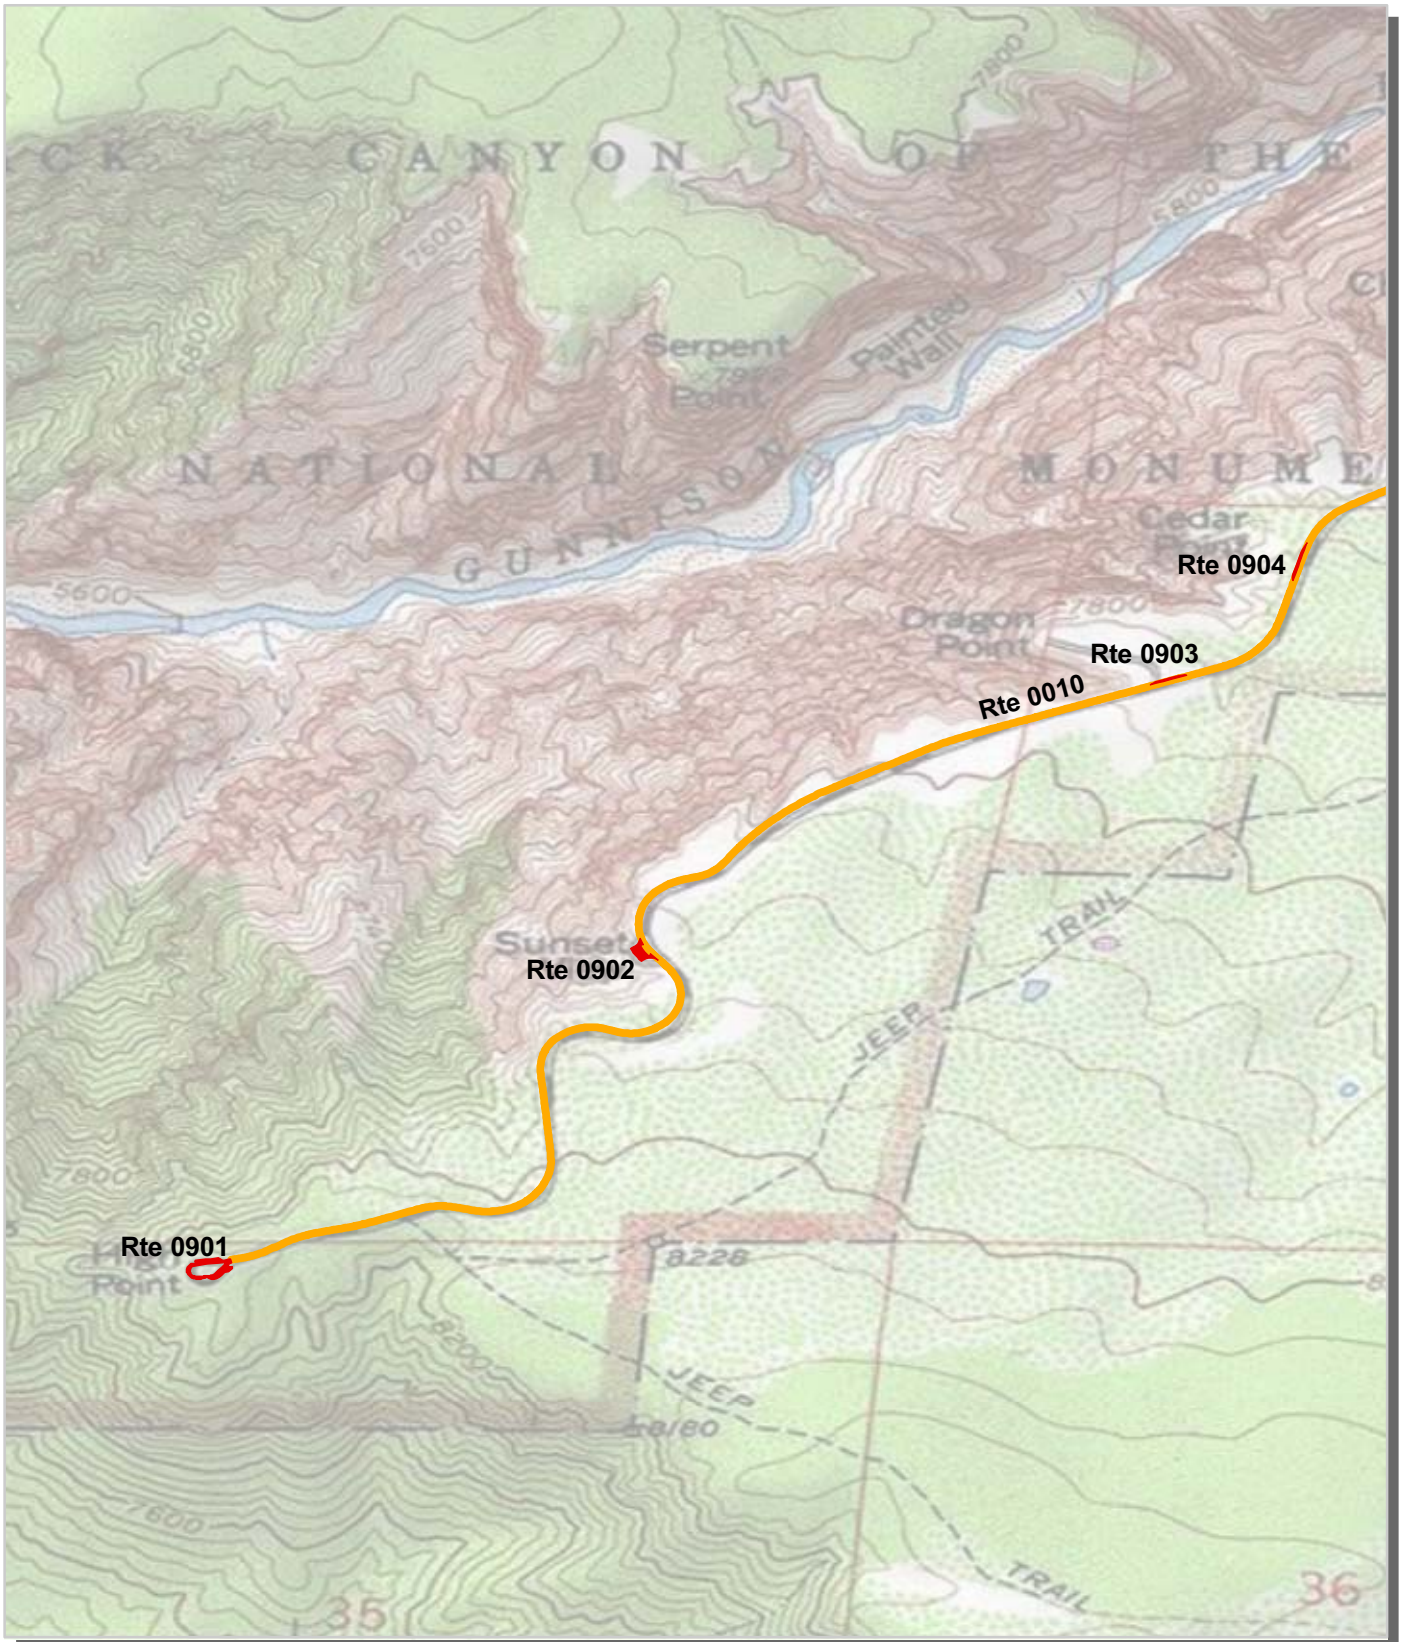

Unique colors used to differentiate routes




# Black Canyon of the Gunnison National Park Route Location Map Area 2

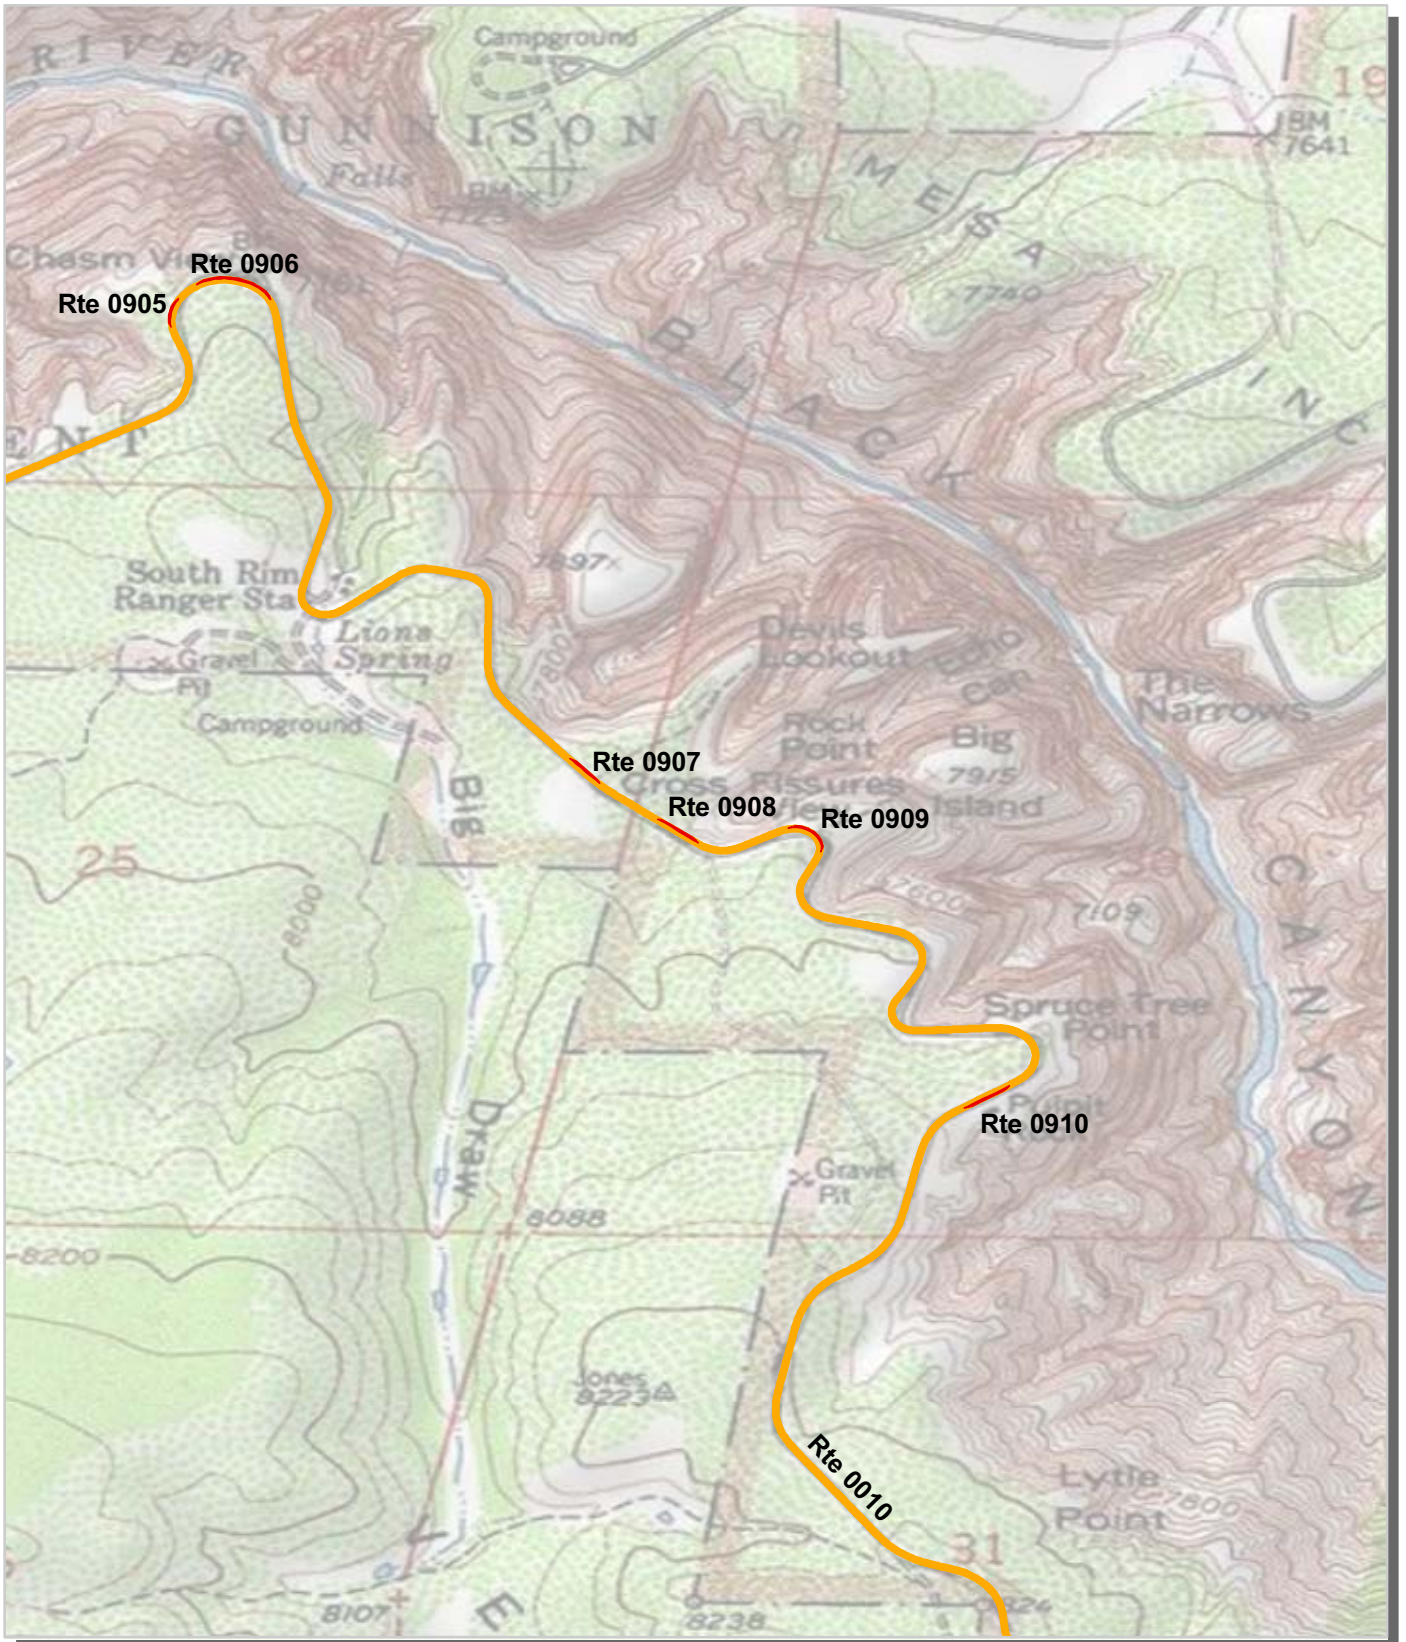


Unique colors used to differentiate routes



# Black Canyon of the Gunnison National Park Route Location Map Area 3

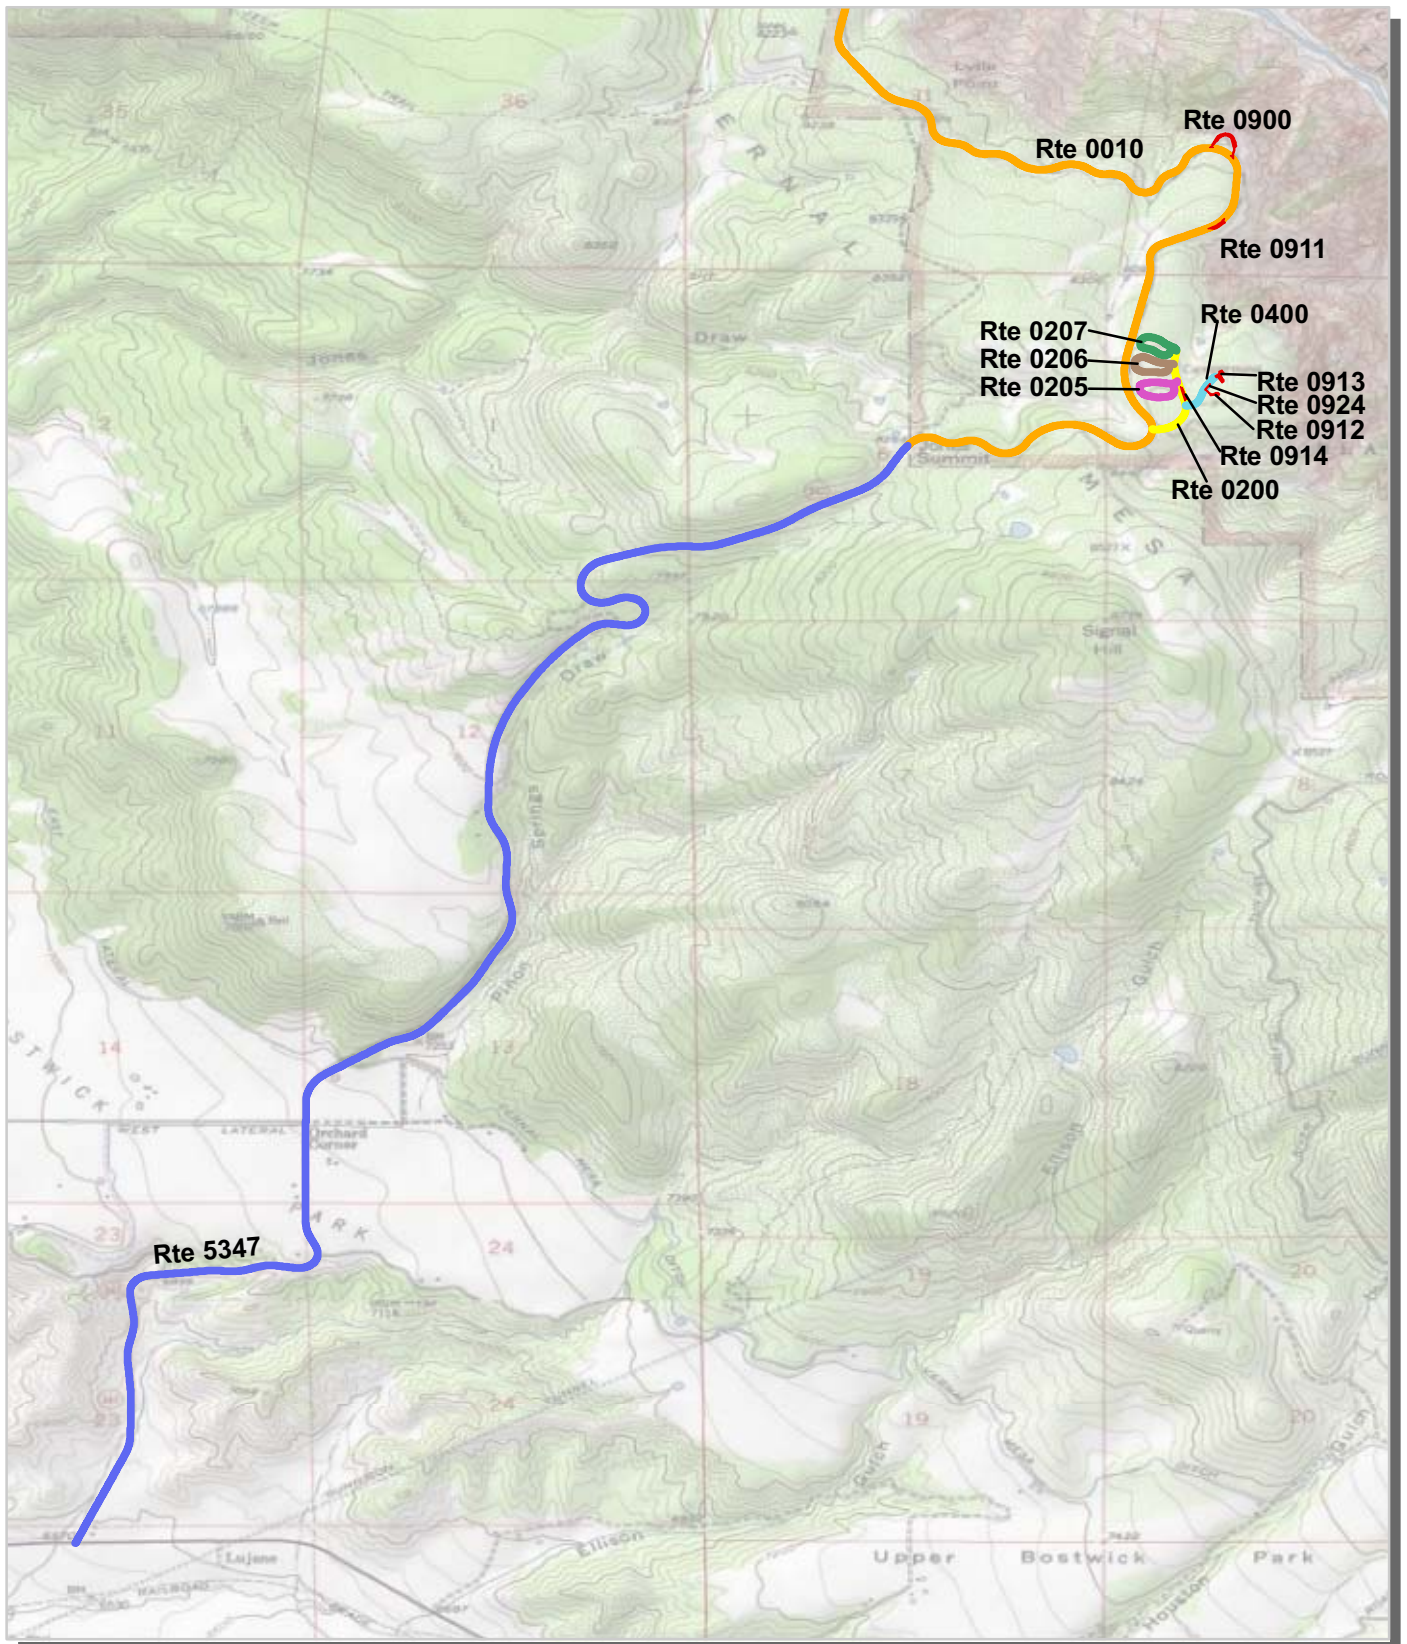


Unique colors used to differentiate routes







# Black Canyon of the Gunnison National Park Route Location Map Area 4

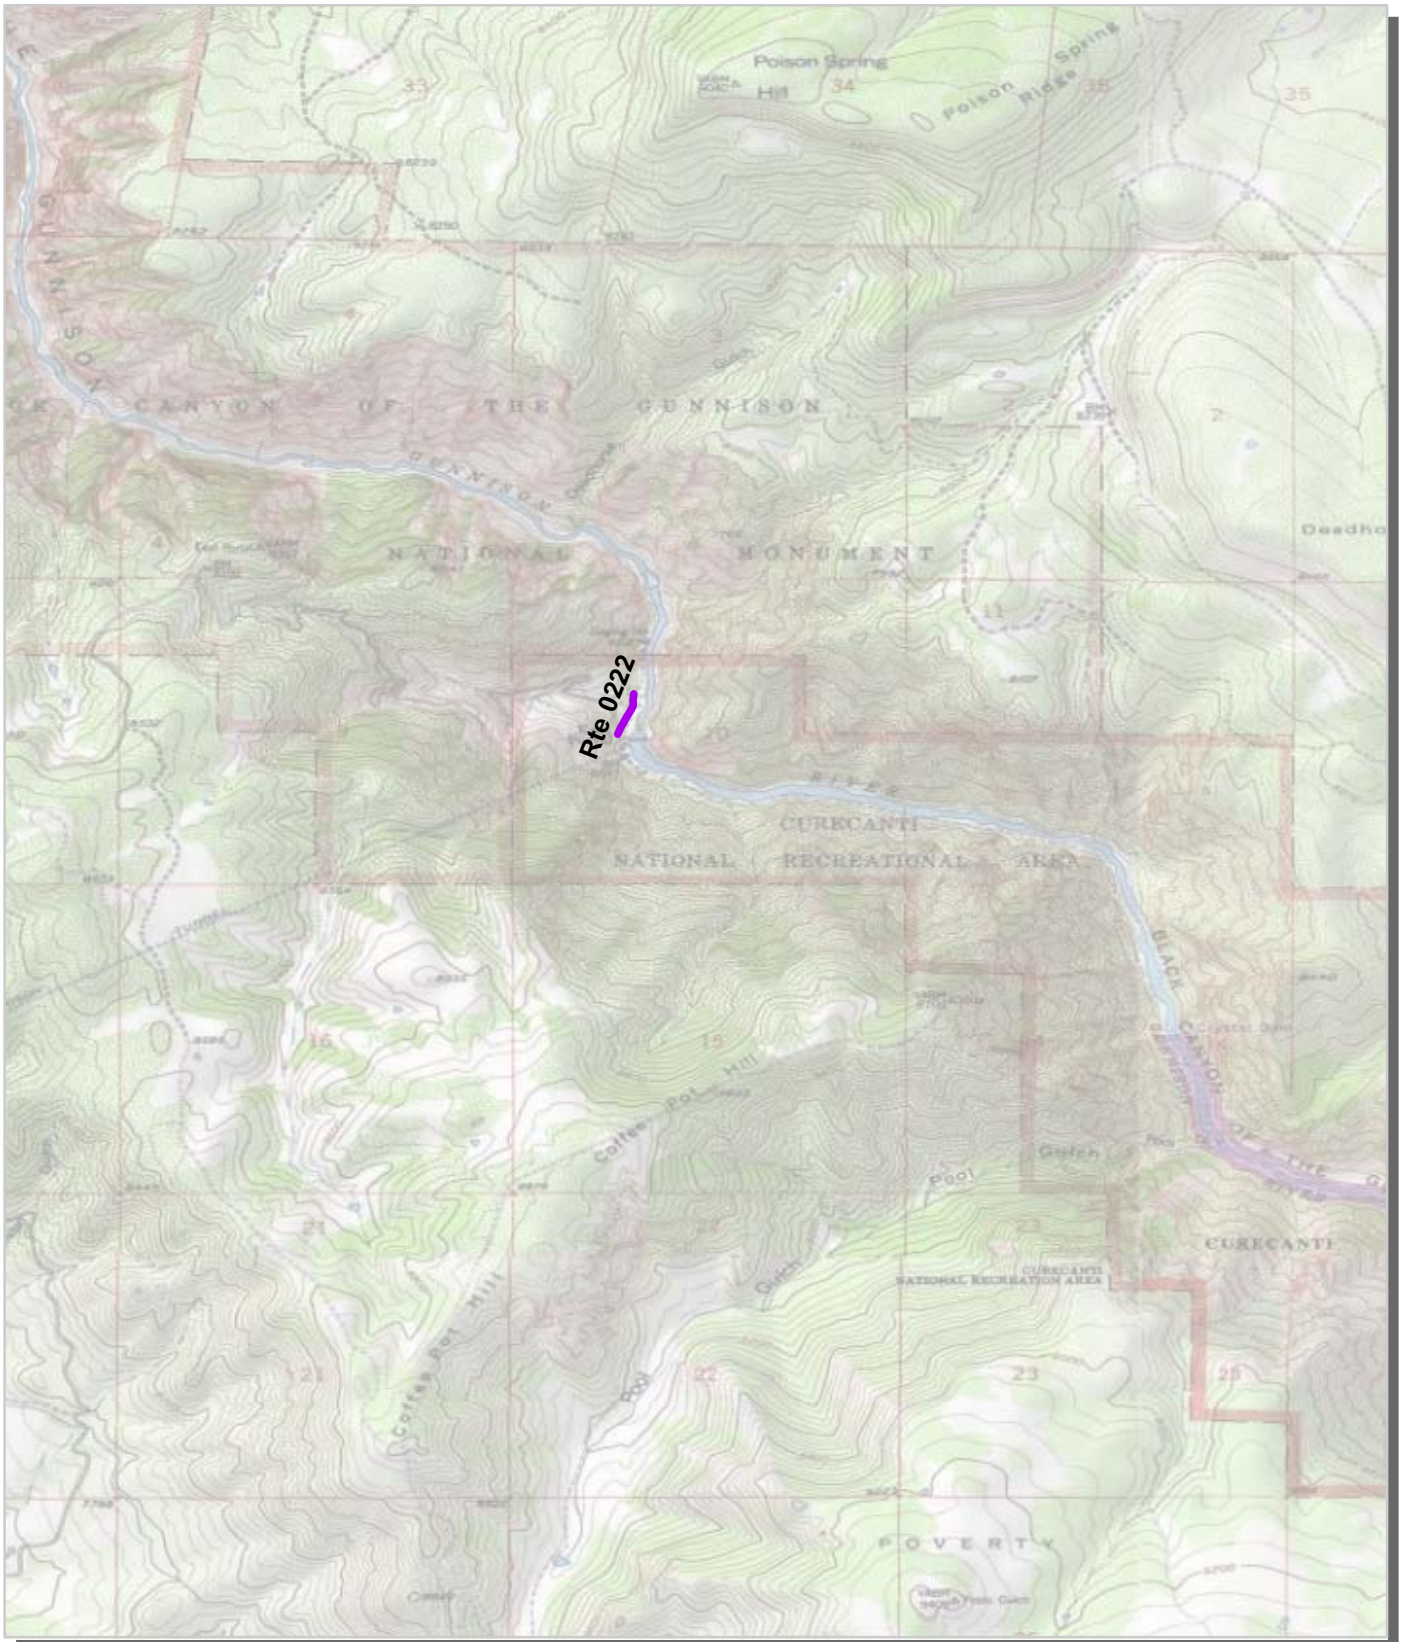

Unique colors used to differentiate routes




**Black Canyon of the Gunnison National Park  
Route Condition Map  
PCR - Mile by Mile  
Key Map**

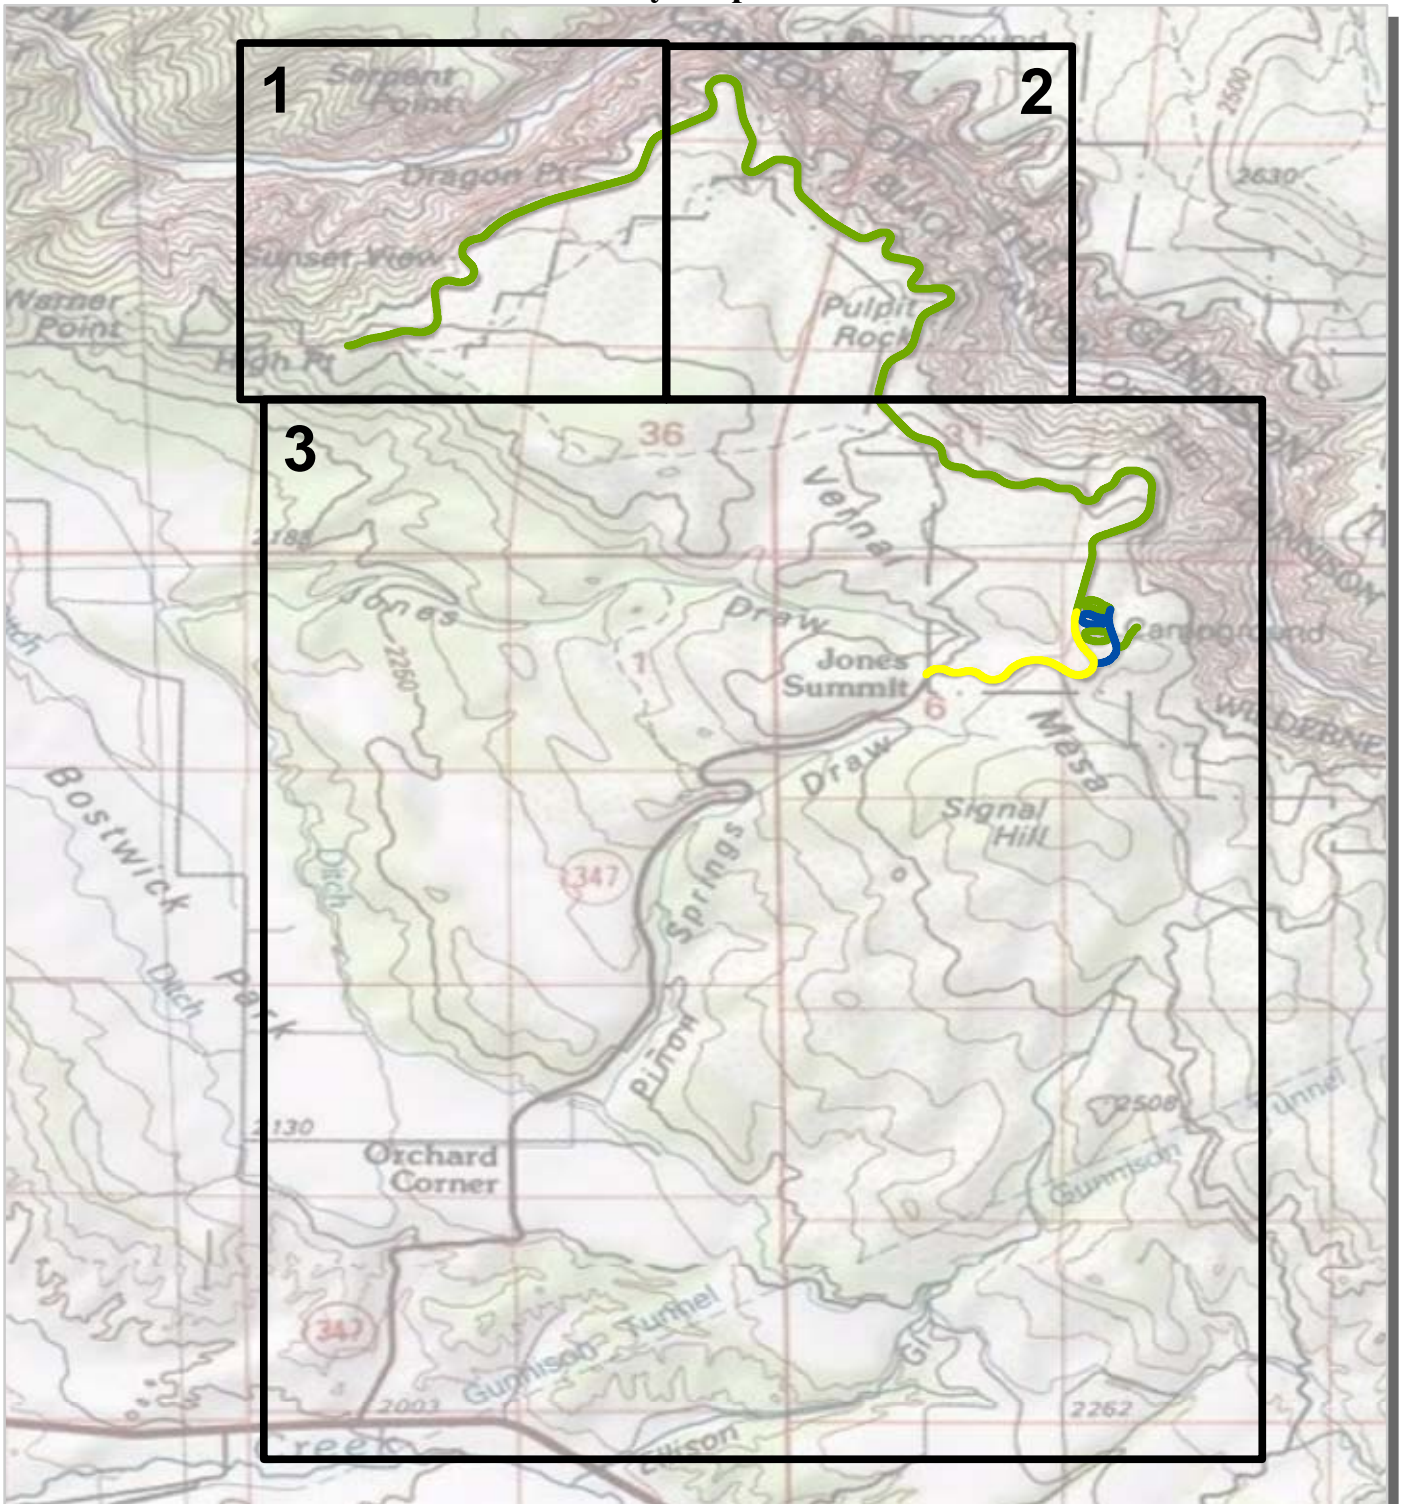

PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

Note: Only routes collected by the DCV in Cycle-5 are displayed.




**Black Canyon of the Gunnison National Park  
Route Condition Map  
PCR - Mile by Mile  
Area 1**





PCR	Poor	<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	Fair	<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	Good	<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	Excellent	<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	No Data	<span style="display:inline-block; width:15px; height:15px; background-color:black;"></span>
	(0 - 60)		(61 - 84)		(85 - 94)		(95 - 100)			

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.



0

**Black Canyon of the Gunnison National Park  
Route Condition Map  
PCR - Mile by Mile  
Area 2**

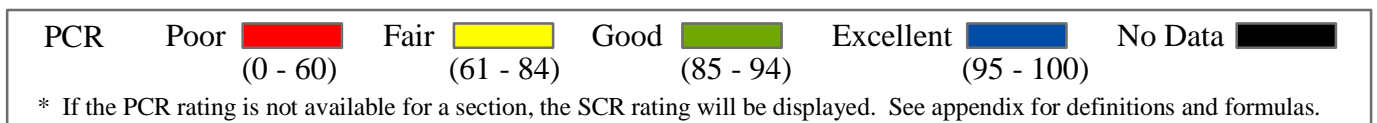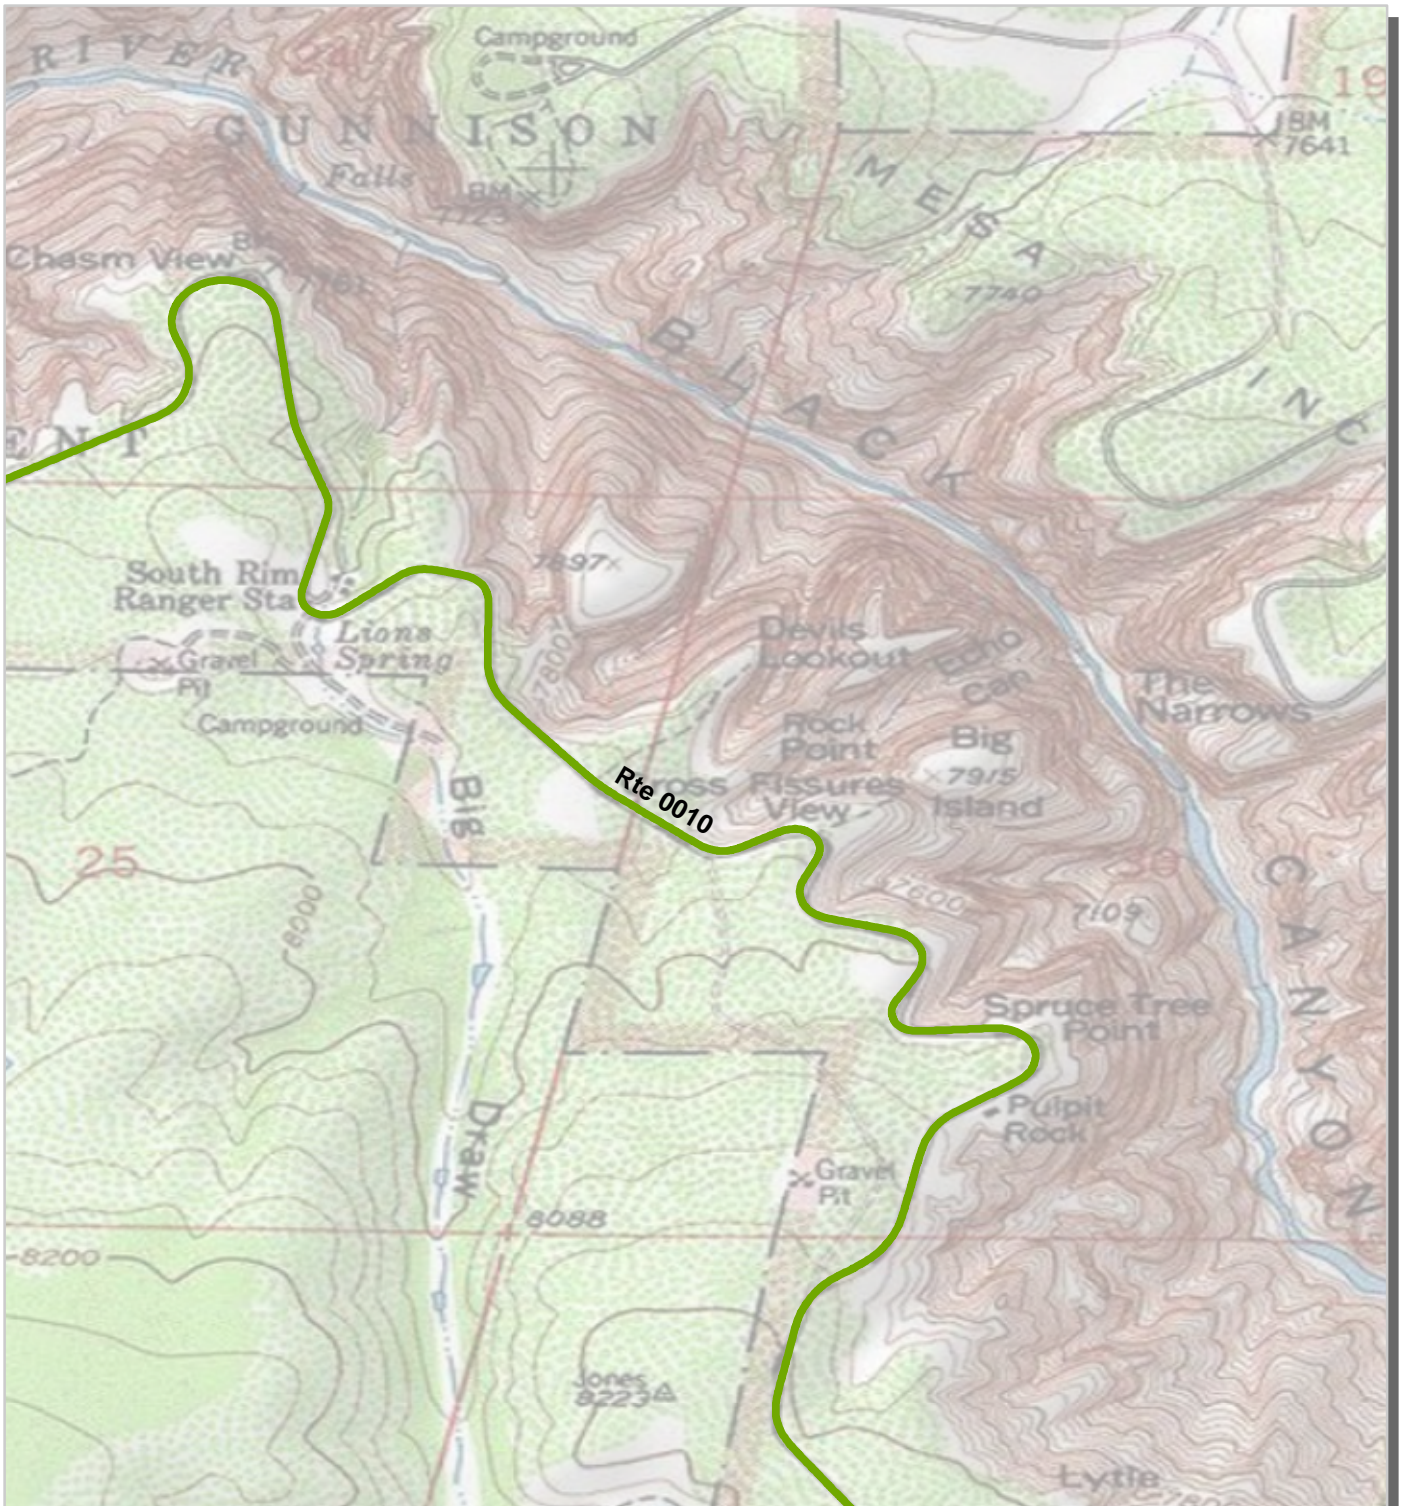


0

# Black Canyon of the Gunnison National Park

## Route Condition Map


### PCR - Mile by Mile

#### Area 3

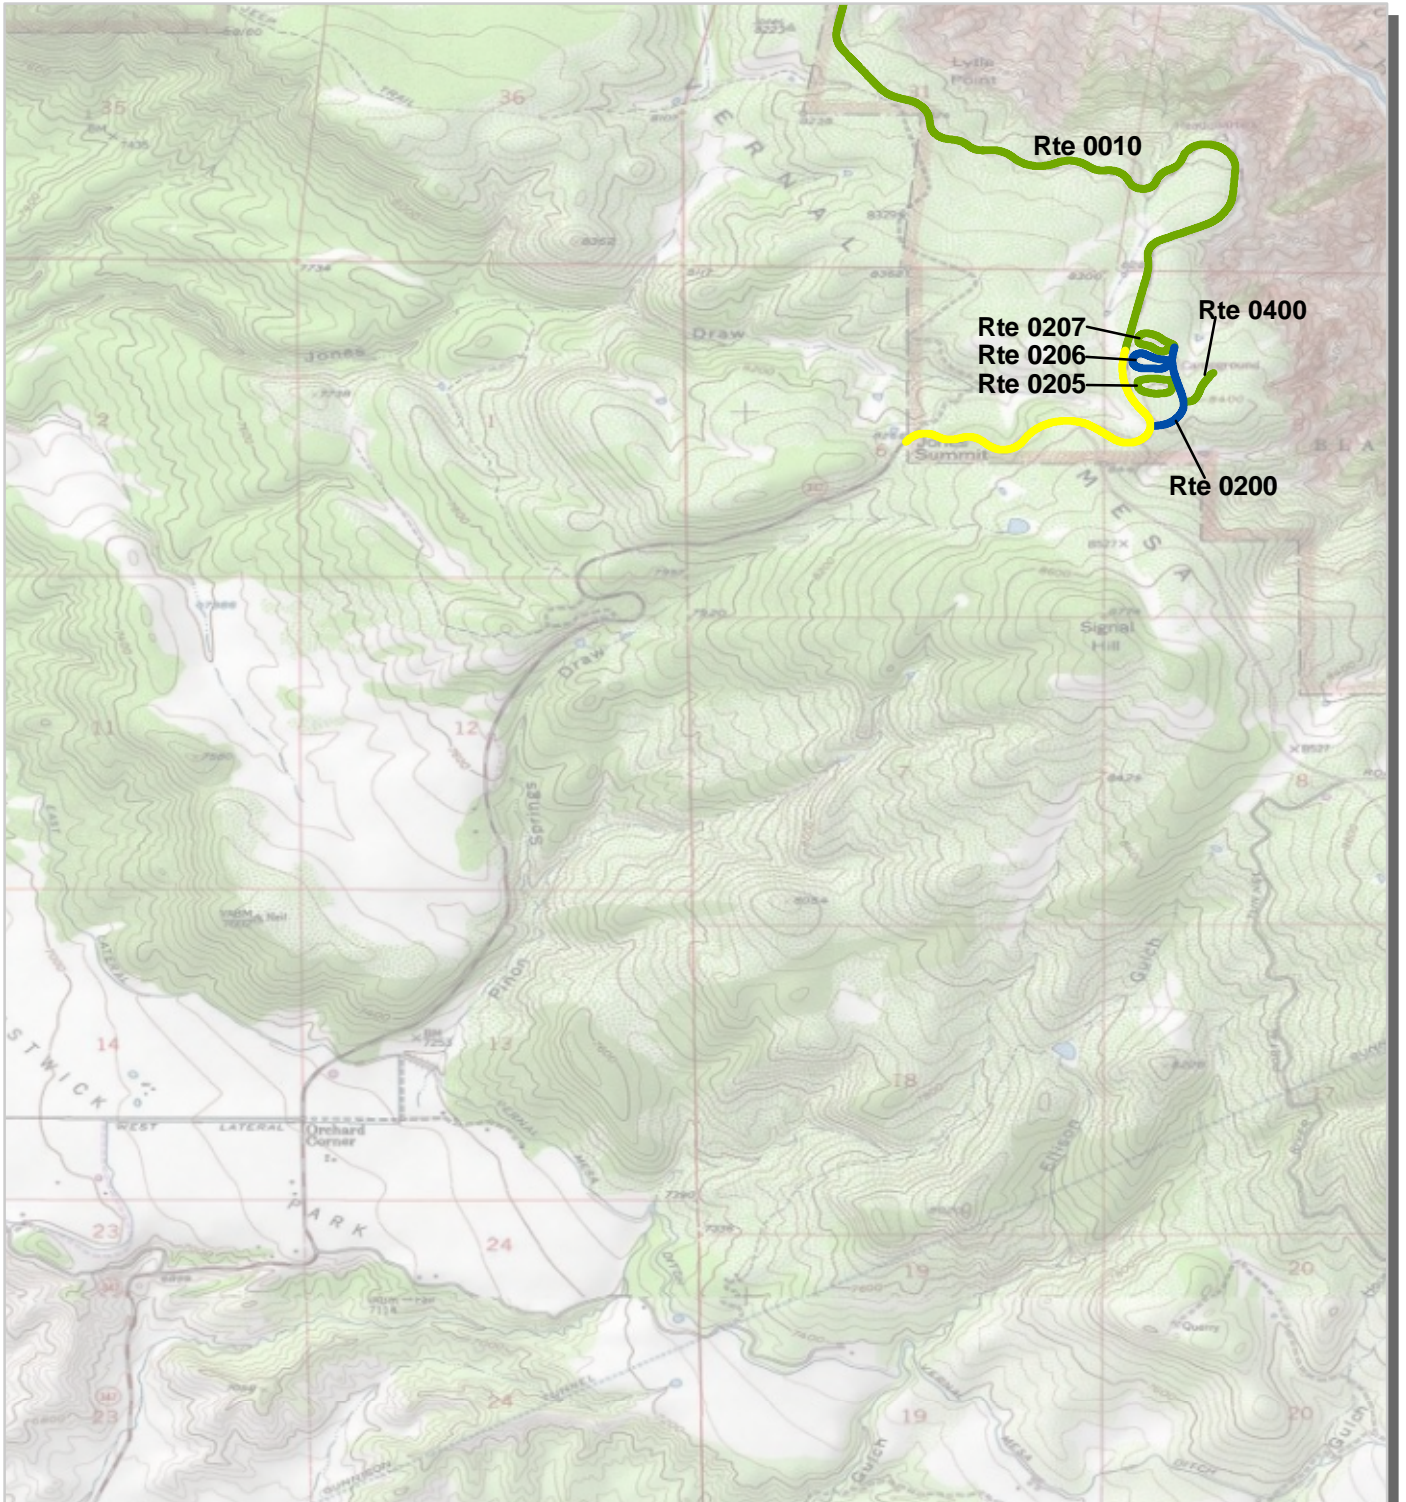

PCR	Poor	<span style="display: inline-block; width: 15px; height: 15px; background-color: red; border: 1px solid black;"></span>	Fair	<span style="display: inline-block; width: 15px; height: 15px; background-color: yellow; border: 1px solid black;"></span>	Good	<span style="display: inline-block; width: 15px; height: 15px; background-color: green; border: 1px solid black;"></span>	Excellent	<span style="display: inline-block; width: 15px; height: 15px; background-color: blue; border: 1px solid black;"></span>	No Data	<span style="display: inline-block; width: 15px; height: 15px; background-color: black; border: 1px solid black;"></span>
	(0 - 60)		(61 - 84)		(85 - 94)		(95 - 100)			

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.



0


**Section 5**  
**Paved Route**  
**Condition Rating Sheets**



Black Canyon of the Gunnison  
National Park



Federal Lands Highway  
Road Inventory Program

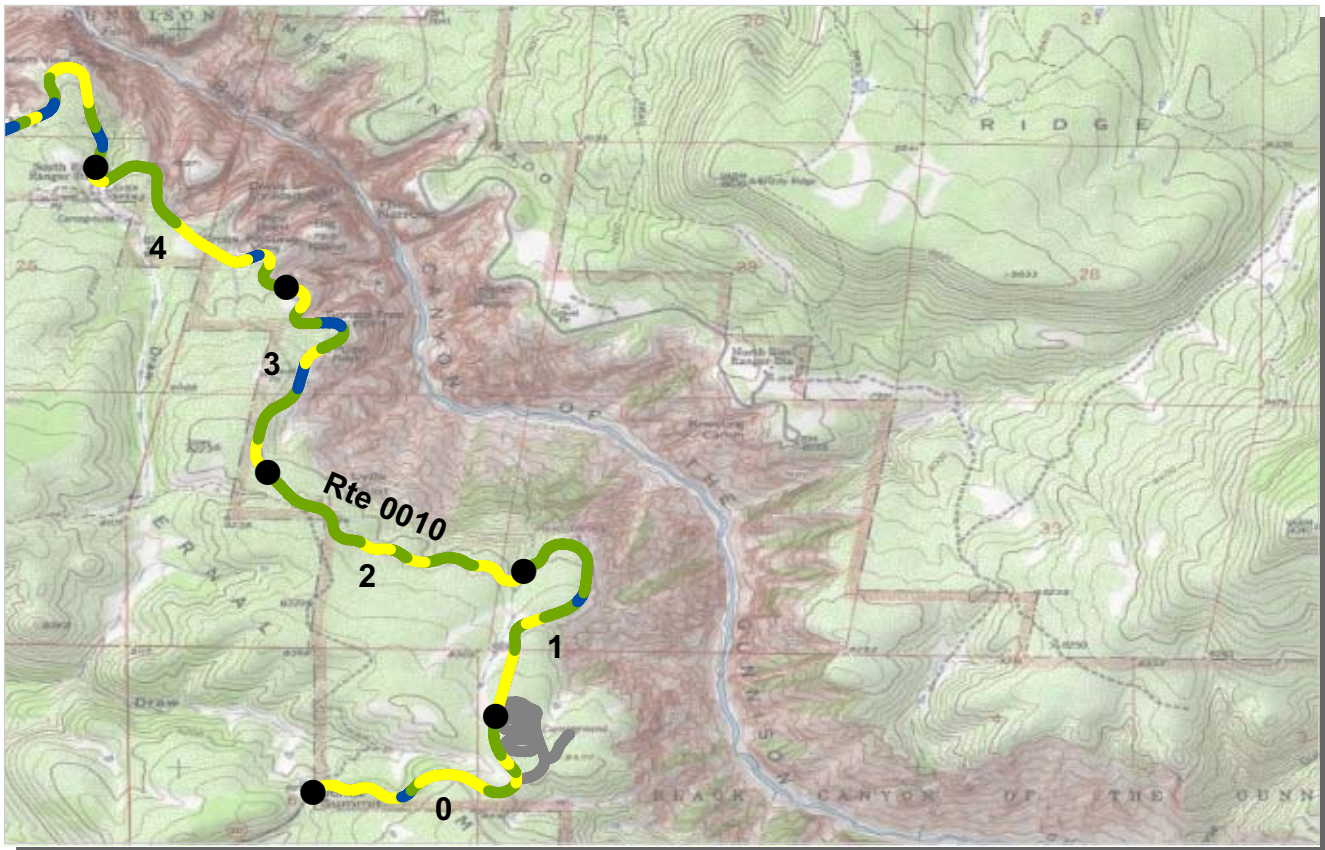

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0010 SOUTH RIM DRIVE**

**BLCA : BLACK CANYON OF THE GUNNISON NATIONAL PARK**

**COLLECTED: 10/17/2011**

**INTERMOUNTAIN REGION**

**TOTAL LENGTH: 7.66 Miles**

<i>Section Number</i>	0	1	2	3	4
<i>Section Length (mi)</i>	1.00	1.00	1.00	1.00	1.00
<i>Cross Section Information</i>					
Number of Lanes	2	2	2	2	2
Paved Width (ft)	25	25	25	27	25
Lane Width (ft)	10	11	11	11	11
<i>Roadway Condition Information</i>					
SCR (Surface Condition Rating)	95	97	99	98	97
PCR (Pavement Condition Rating)	79	86	85	87	85
<i>Distress Index Values</i>					
Structural Crack Index	100	100	100	100	100
Transverse Cracking Index	100	100	100	100	100
Patching Index	100	100	100	100	100
Rutting Index	95	97	99	98	97
Roughness Condition Index (RCI)	54	70	65	70	67

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable

**ROUTE: 0010 SOUTH RIM DRIVE**



PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0010 SOUTH RIM DRIVE**

**BLCA : BLACK CANYON OF THE GUNNISON NATIONAL PARK**

**COLLECTED: 10/17/2011**  
**TOTAL LENGTH: 7.66 Miles**

**INTERMOUNTAIN REGION**

<i>Section Number</i>	5	6	7		
<i>Section Length (mi)</i>	1.00	1.00	0.66		
<i>Cross Section Information</i>					
Number of Lanes	2	2	2		
Paved Width (ft)	25	25	24		
Lane Width (ft)	11	10	11		
<i>Roadway Condition Information</i>					
SCR (Surface Condition Rating)	97	98	99		
PCR (Pavement Condition Rating)	87	92	94		
<i>Distress Index Values</i>					
Structural Crack Index	100	100	100		
Transverse Cracking Index	100	100	100		
Patching Index	100	100	100		
Rutting Index	97	98	99		
Roughness Condition Index (RCI)	73	83	86		

**NOTES:**


Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0010 SOUTH RIM DRIVE**



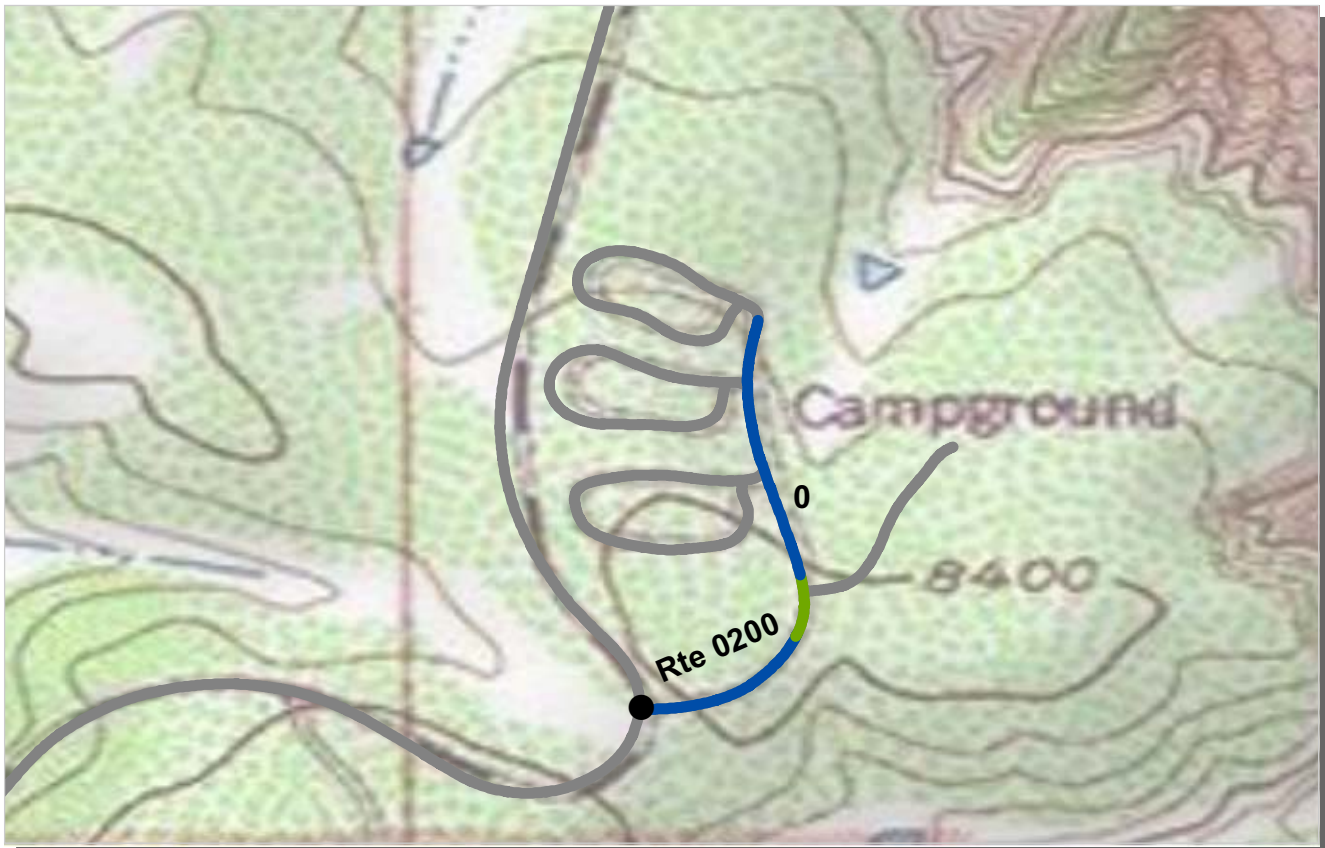

PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0200 SOUTH RIM CAMPGROUND ROAD**  
**BLCA : BLACK CANYON OF THE GUNNISON NATIONAL PARK**

**COLLECTED: 10/17/2011**  
**TOTAL LENGTH: 0.31 Miles**

**INTERMOUNTAIN REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.31				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	23				
Lane Width (ft)	11				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	96				
PCR (Pavement Condition Rating)	96				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	96				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable



**ROUTE: 0200 SOUTH RIM CAMPGROUND ROAD**

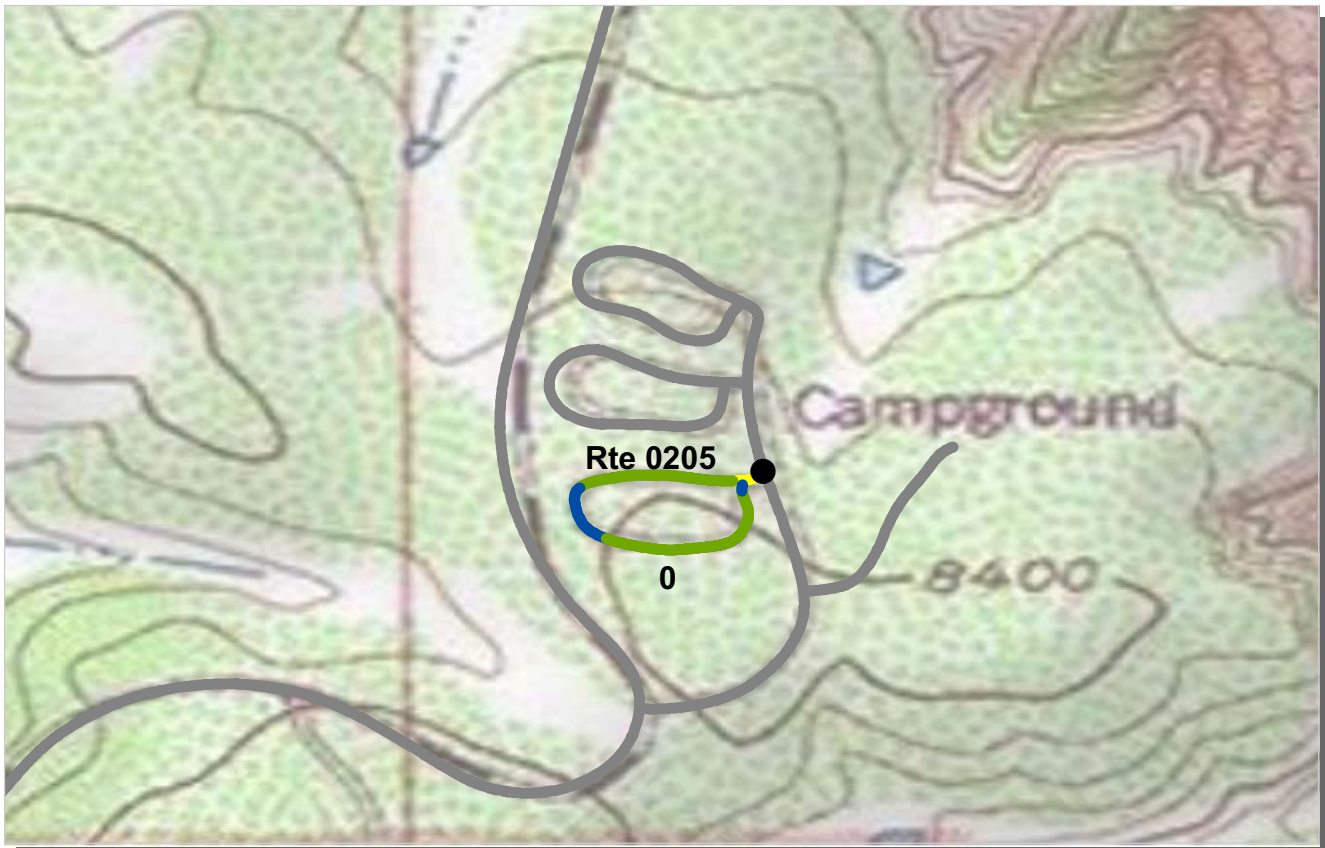

PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0205 CAMPGROUND LOOP A**  
**BLCA : BLACK CANYON OF THE GUNNISON NATIONAL PARK**

**COLLECTED: 10/17/2011**  
**TOTAL LENGTH: 0.24 Miles**

**INTERMOUNTAIN REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.24				
<b>Cross Section Information</b>					
Number of Lanes	1				
Paved Width (ft)	13				
Lane Width (ft)	13				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	90				
PCR (Pavement Condition Rating)	90				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	90				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable



**ROUTE: 0205 CAMPGROUND LOOP A**

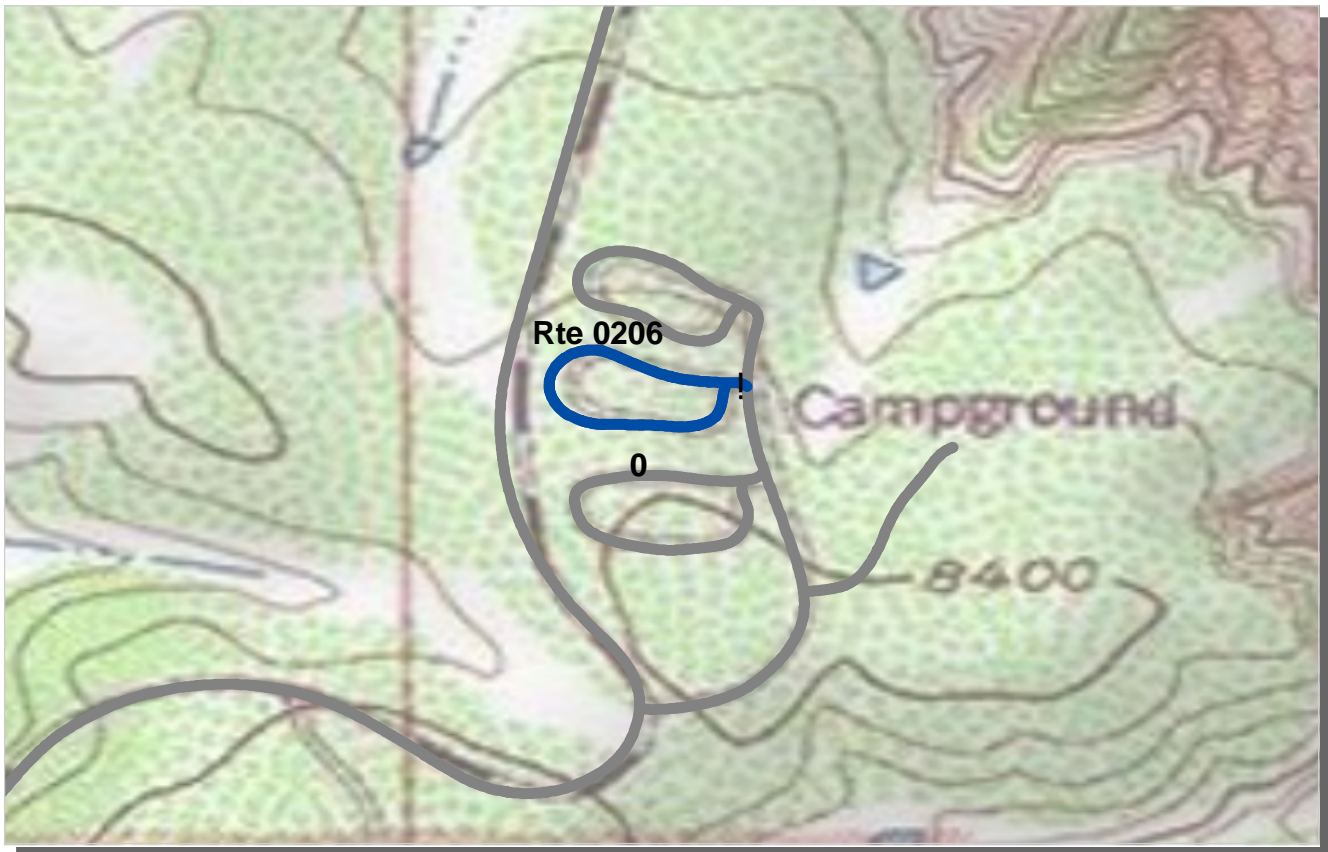

0

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0206 CAMPGROUND LOOP B**  
**BLCA : BLACK CANYON OF THE GUNNISON NATIONAL PARK**

**COLLECTED: 10/17/2011**  
**TOTAL LENGTH: 0.24 Miles**

**INTERMOUNTAIN REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.24				
<b>Cross Section Information</b>					
Number of Lanes	1				
Paved Width (ft)	13				
Lane Width (ft)	13				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	95				
PCR (Pavement Condition Rating)	95				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	95				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable

**ROUTE: 0206 CAMPGROUND LOOP B**

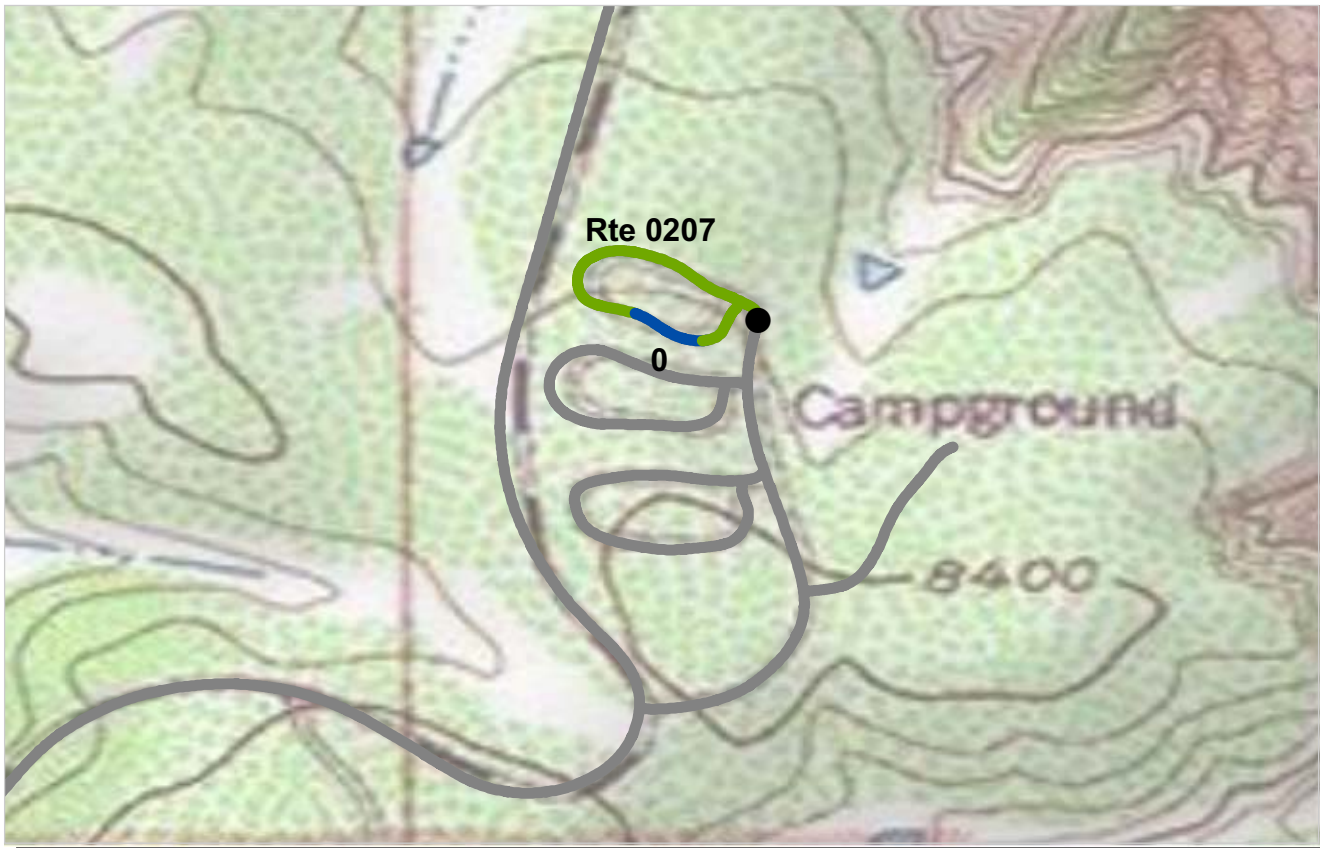

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0207 CAMPGROUND LOOP C**  
**BLCA : BLACK CANYON OF THE GUNNISON NATIONAL PARK**

**COLLECTED: 10/17/2011**  
**TOTAL LENGTH: 0.23 Miles**

**INTERMOUNTAIN REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.23				
<b>Cross Section Information</b>					
Number of Lanes	1				
Paved Width (ft)	12				
Lane Width (ft)	12				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	94				
PCR (Pavement Condition Rating)	94				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	94				
Roughness Condition Index (RCI)	NC				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0207 CAMPGROUND LOOP C**



PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0400 SOUTH RIM RESIDENCE ROAD**  
**BLCA : BLACK CANYON OF THE GUNNISON NATIONAL PARK**

**COLLECTED: 10/17/2011**  
**TOTAL LENGTH: 0.13 Miles**

**INTERMOUNTAIN REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.13				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	20				
Lane Width (ft)	10				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	94				
PCR (Pavement Condition Rating)	94				
<b>Distress Index Values</b>					
Structural Crack Index	94				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	94				
Roughness Condition Index (RCI)	NC				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0400 SOUTH RIM RESIDENCE ROAD**

**Section 6**  
**Manually Rated Paved Route**  
**Condition Rating Sheets**



**Black Canyon of the Gunnison**  
**National Park**



**Federal Lands Highway**  
**Road Inventory Program**


# BLACK CANYON OF THE GUNNISON NATIONAL PARK

## Route 0222

EAST PORTAL CAMPGROUND ACCESS ROAD  
FROM EAST PORTAL ROAD  
TO END OF PAVEMENT

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Paved Length (mi)	Paved Width (ft)
0222	PUBLIC	8/10/2011	13,944	0.24	0.14	19
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR	Surface Type
1	0	1	NO CURB AND GUTTER	NO CURB	GOOD/90	AS

\* Lane miles are based on 11' lane widths

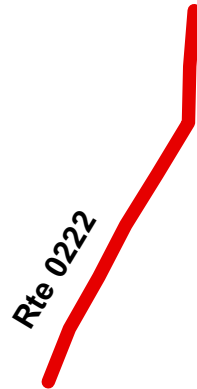

**Section 7**  
**Parking Area**  
**Condition Rating Sheets**



Black Canyon of the Gunnison  
National Park



Federal Lands Highway  
Road Inventory Program



# BLACK CANYON OF THE GUNNISON NATIONAL PARK

## Route 0900



GUNNISON POINT VISITOR CENTER PARKING

FROM ROUTE 0010 (SOUTH RIM DRIVE)

TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0900	PUBLIC	8/10/2011	29,123	0.50	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	2	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

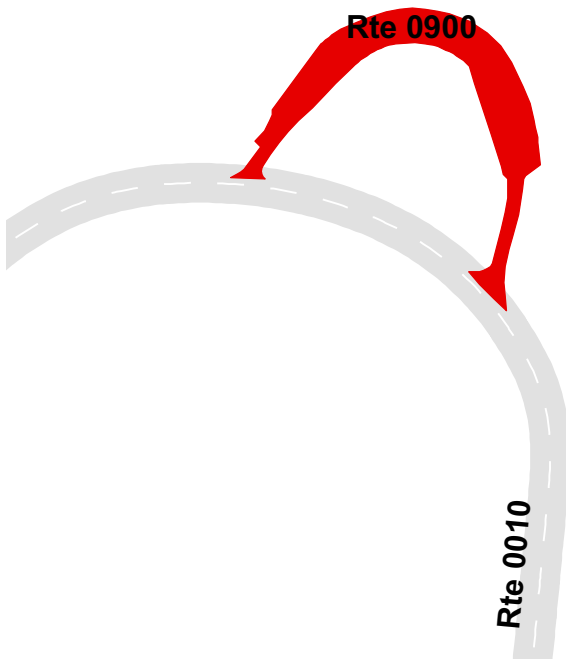

# BLACK CANYON OF THE GUNNISON NATIONAL PARK

## Route 0901

### HIGH POINT PARKING

FROM END OF ROUTE 0010 (SOUTH RIM DRIVE)  
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0901	PUBLIC	8/10/2011	16,356	0.28	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths




# BLACK CANYON OF THE GUNNISON NATIONAL PARK

## Route 0902

SUNSET VIEW PARKING  
 FROM ROUTE 0010 (SOUTH RIM DRIVE)  
 TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0902	PUBLIC	8/10/2011	7,692	0.13	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	1	0	CONCRETE CURB AND GUTTER	CONCRETE CURB	GOOD/90

\* Lane miles are based on 11' lane widths

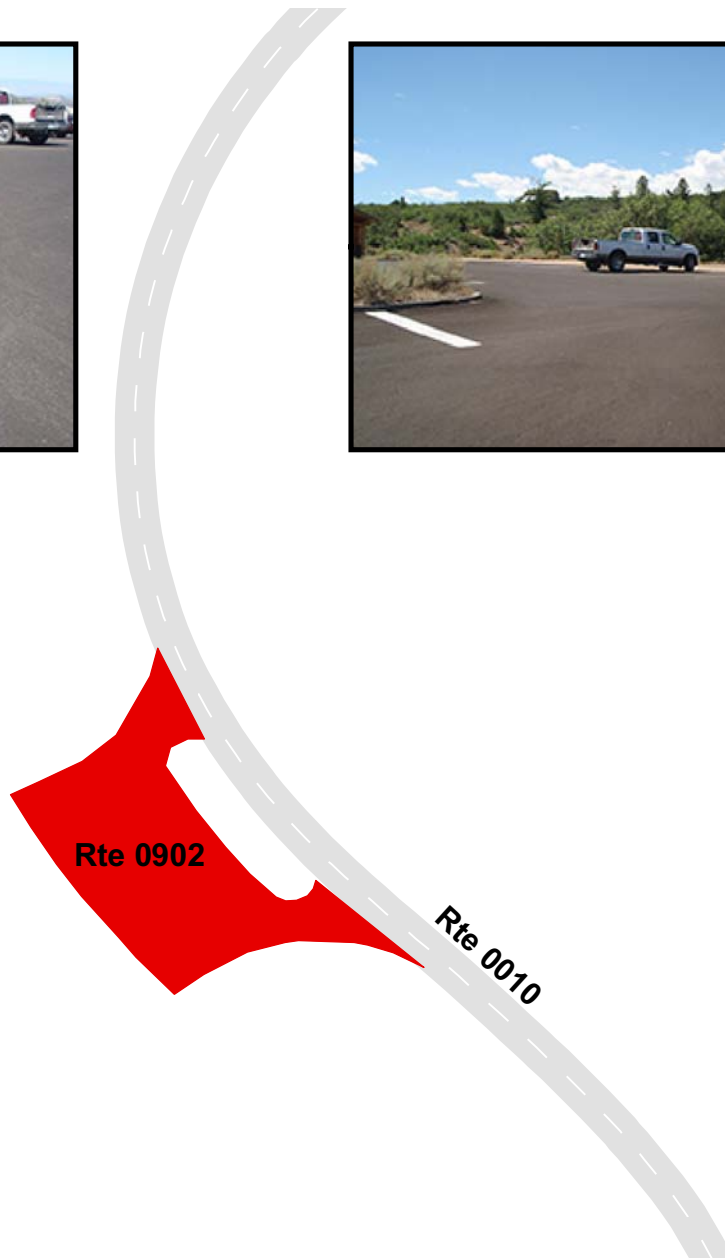

# BLACK CANYON OF THE GUNNISON NATIONAL PARK



## Route 0903

### DRAGON POINT PARKING

ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0903	PUBLIC	8/10/2011	2,221	0.04	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

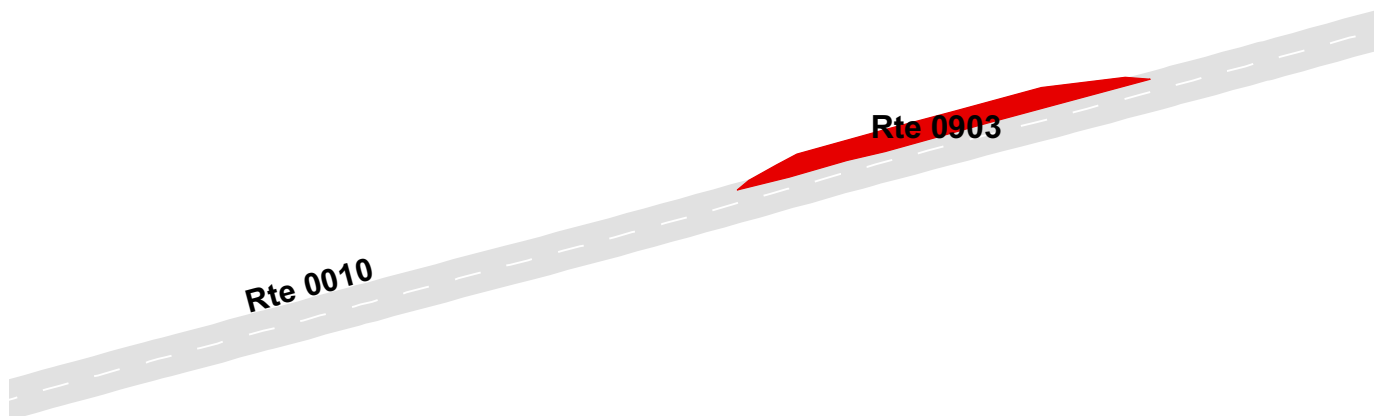

# BLACK CANYON OF THE GUNNISON NATIONAL PARK



## Route 0904

### CEDAR POINT OVERLOOK

ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0904	PUBLIC	8/10/2011	2,984	0.05	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

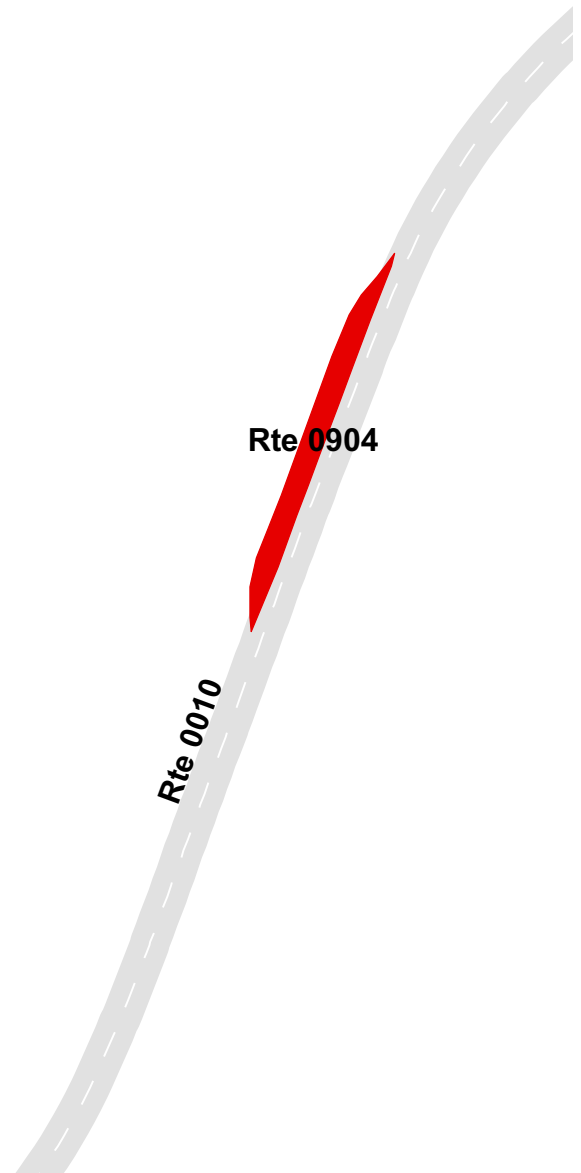


# BLACK CANYON OF THE GUNNISON NATIONAL PARK

## Route 0905

PAINTED WALL VIEW PARKING  
ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0905	PUBLIC	8/10/2011	2,344	0.04	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

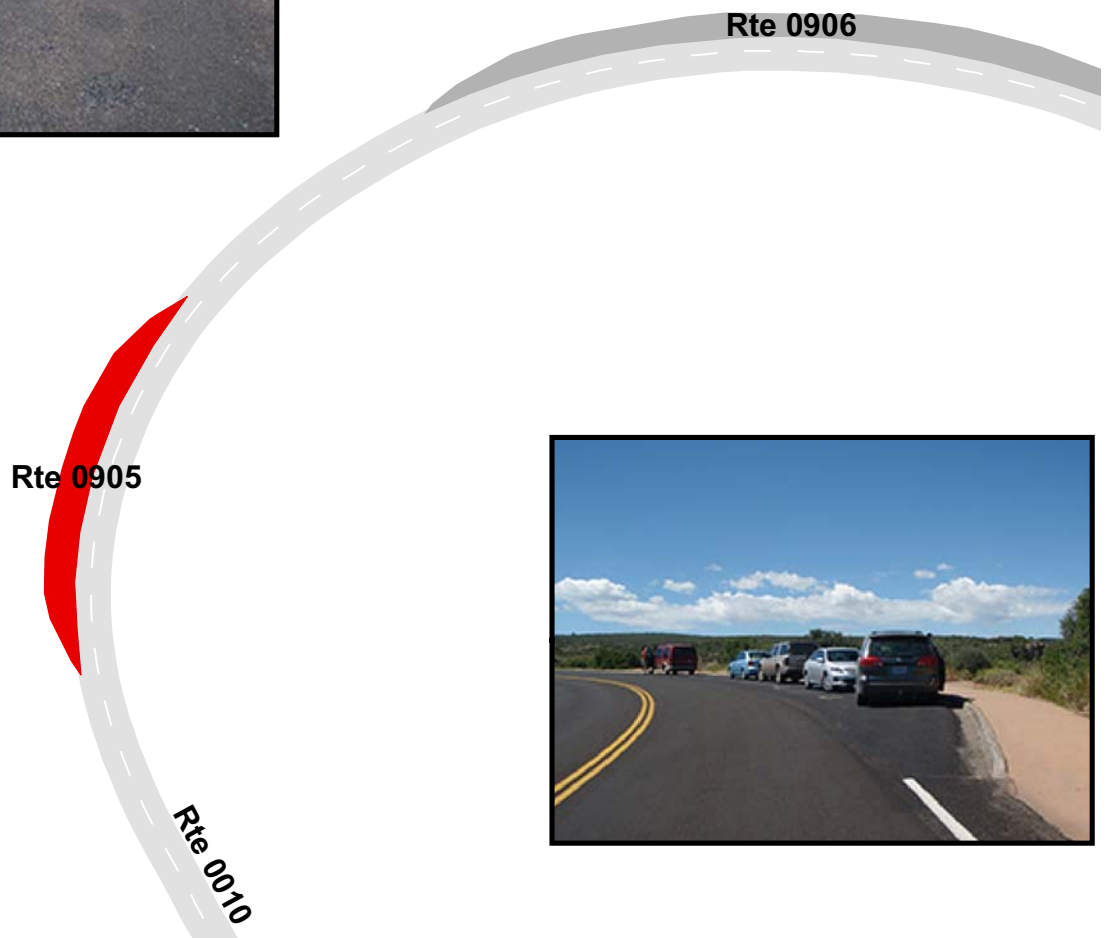

# BLACK CANYON OF THE GUNNISON NATIONAL PARK



## Route 0906

### CHASM VIEW OVERLOOK

ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0906	PUBLIC	8/10/2011	5,994	0.10	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

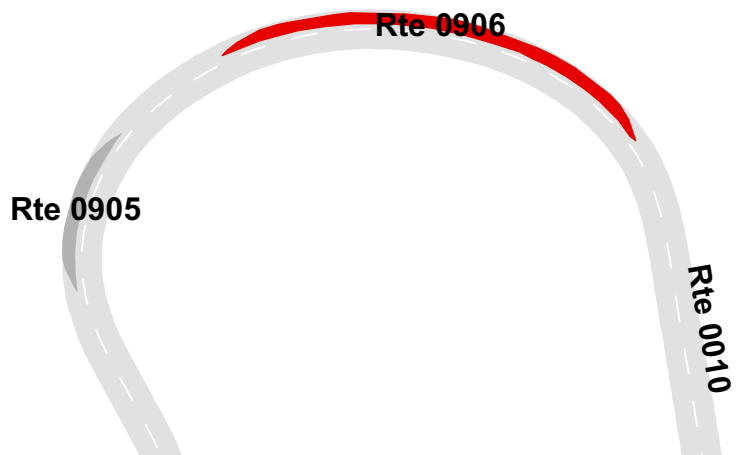

# BLACK CANYON OF THE GUNNISON NATIONAL PARK



## Route 0907

### DEVIL'S OVERLOOK

ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0907	PUBLIC	8/10/2011	2,802	0.05	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

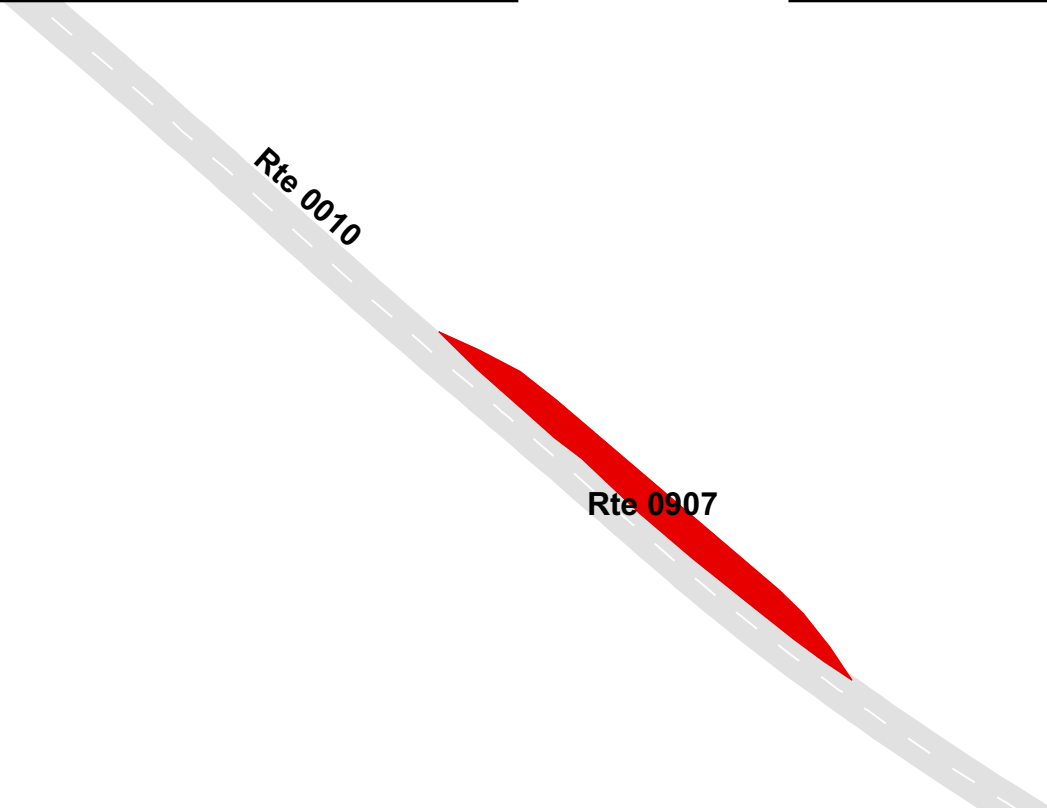



# BLACK CANYON OF THE GUNNISON NATIONAL PARK



## Route 0908

### ROCK POINT PARKING

ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0908	PUBLIC	8/10/2011	3,086	0.05	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

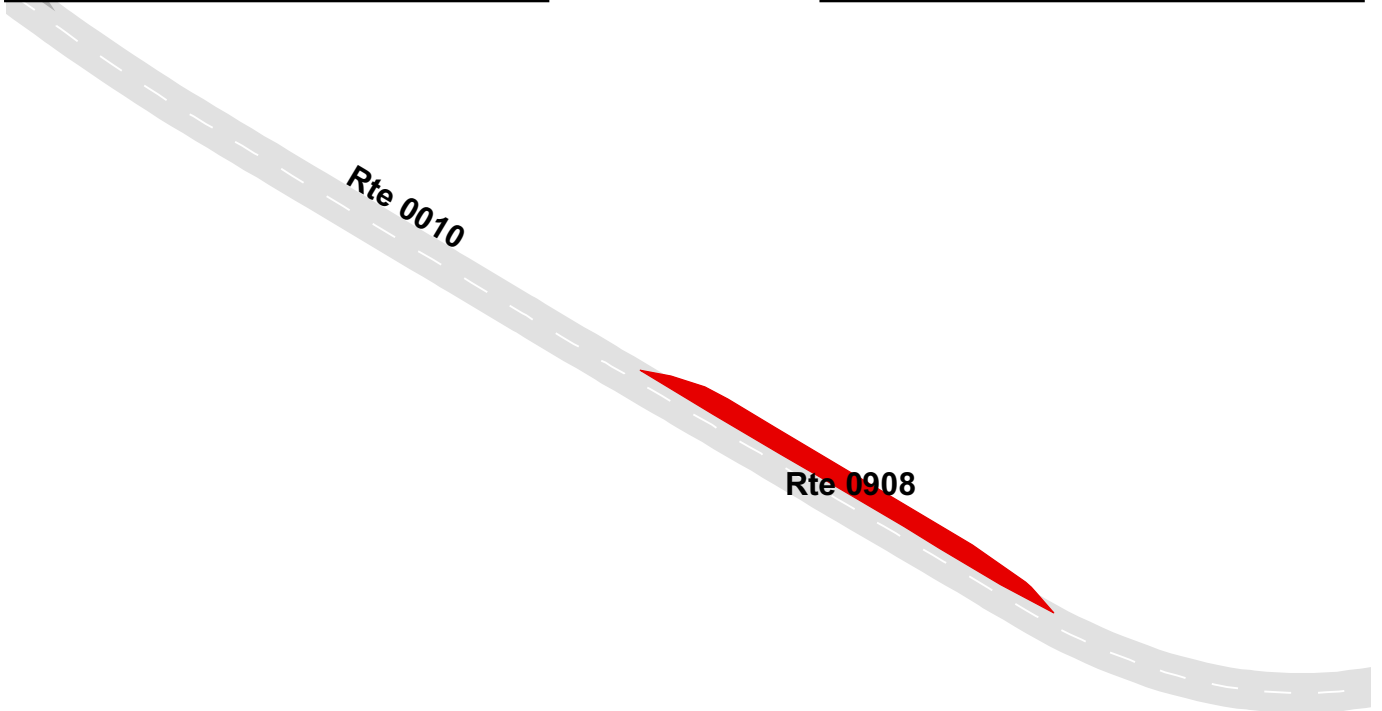


# BLACK CANYON OF THE GUNNISON NATIONAL PARK

## Route 0909

CROSS FISSURES OVERLOOK  
ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0909	PUBLIC	8/10/2011	3,264	0.06	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

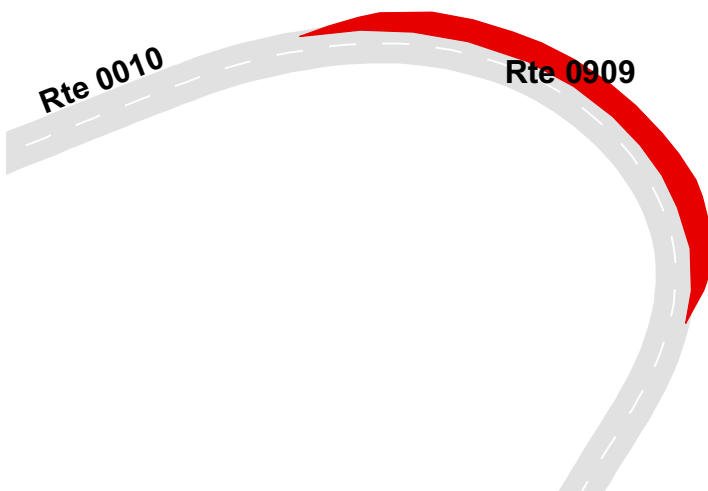

# BLACK CANYON OF THE GUNNISON NATIONAL PARK


## Route 0910

### PULPIT ROCK OVERLOOK

ADJACENT TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0910	PUBLIC	8/10/2011	3,686	0.06	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

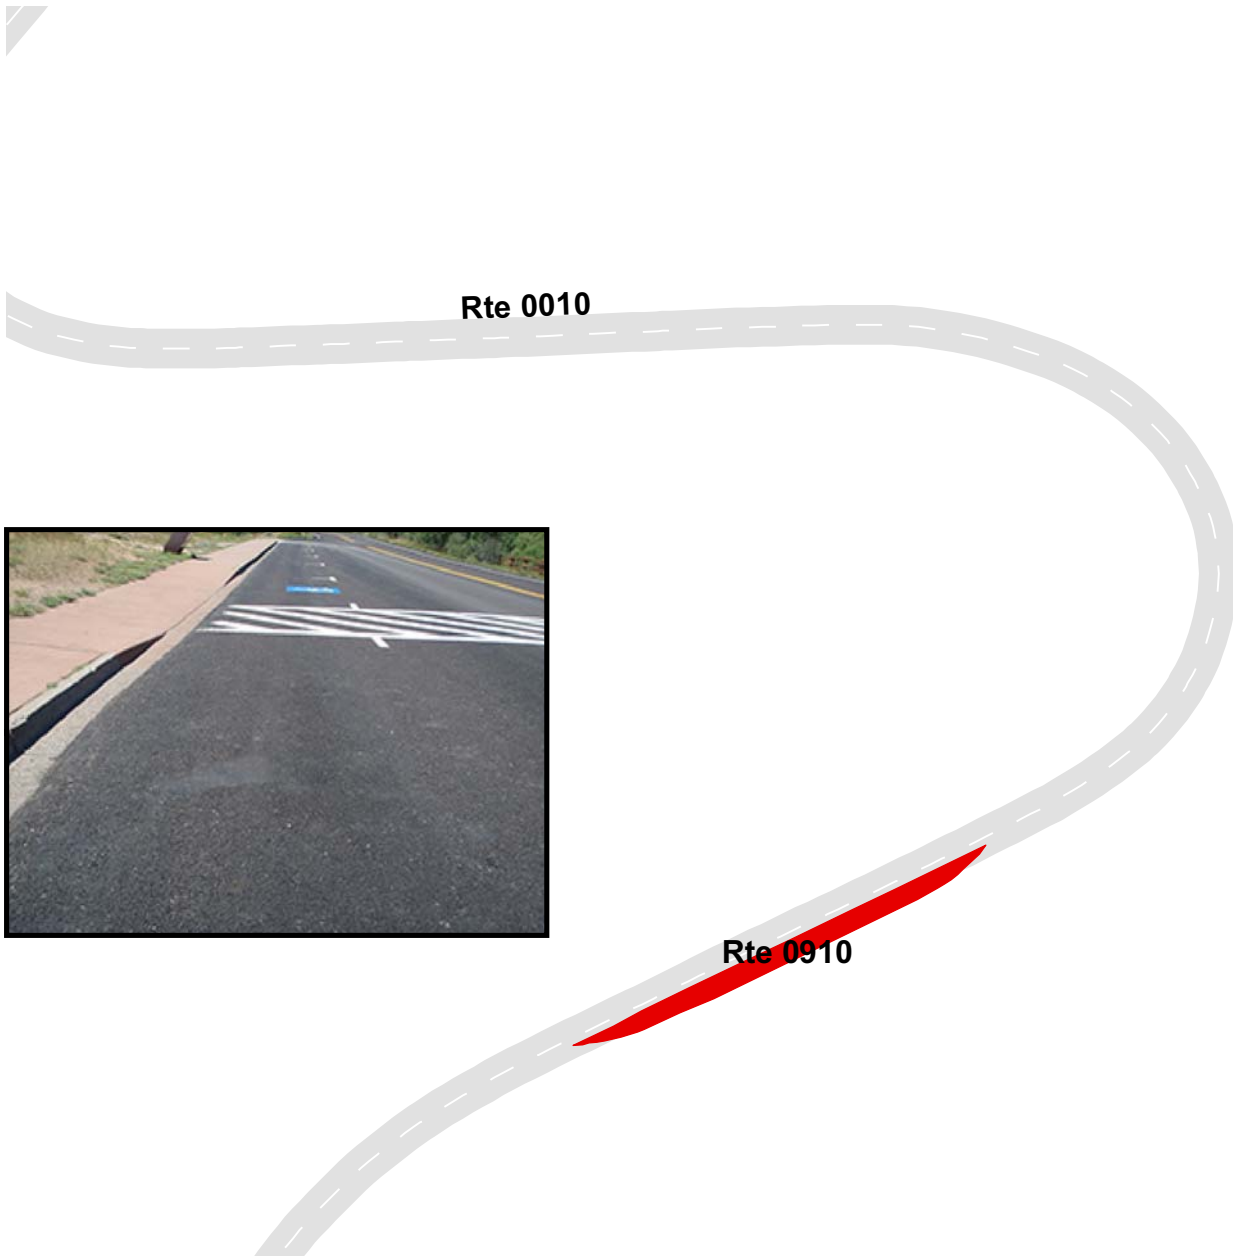



# BLACK CANYON OF THE GUNNISON NATIONAL PARK

## Route 0911

TOMICHI POINT PARKING  
 FROM ROUTE 0010 (SOUTH RIM DRIVE)  
 TO ROUTE 0010 (SOUTH RIM DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0911	PUBLIC	8/10/2011	10,467	0.18	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	CONCRETE CURB	GOOD/90

\* Lane miles are based on 11' lane widths

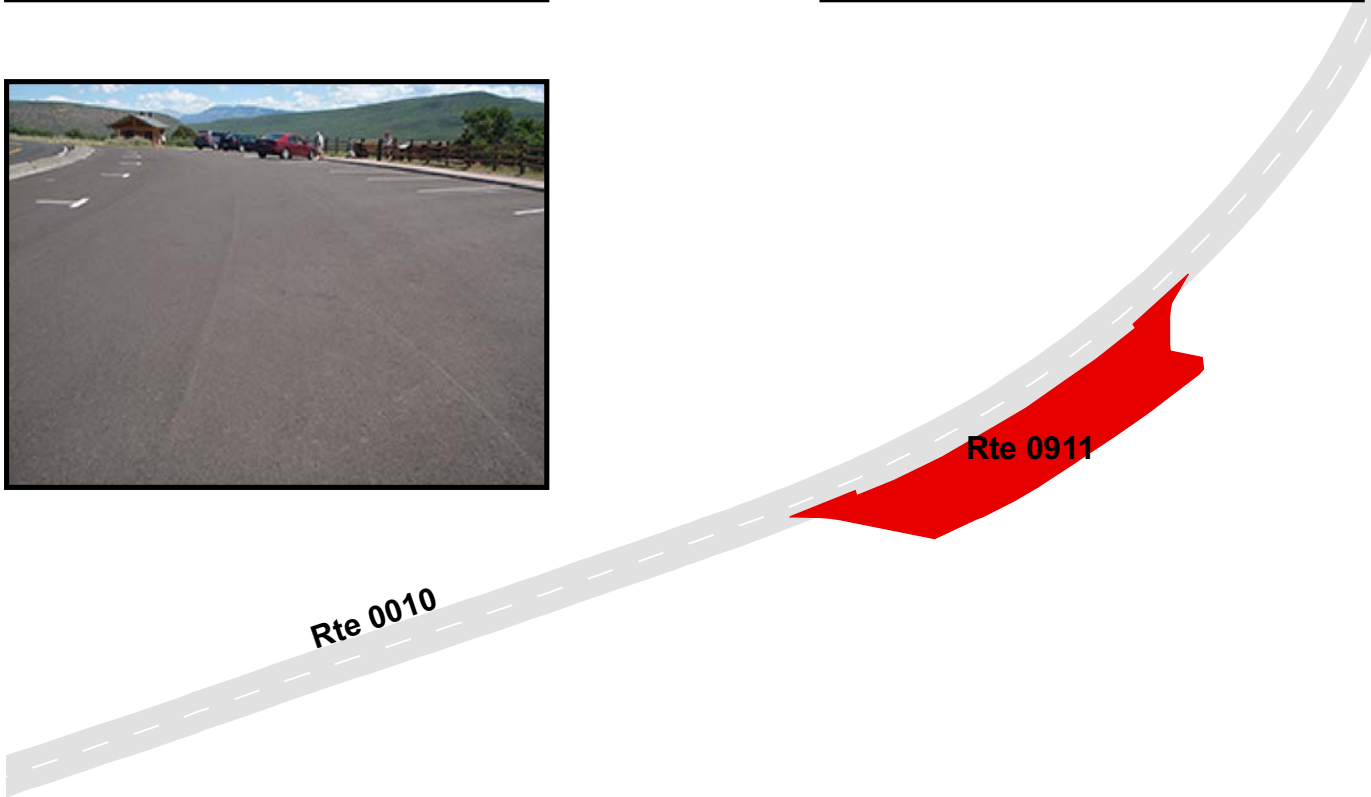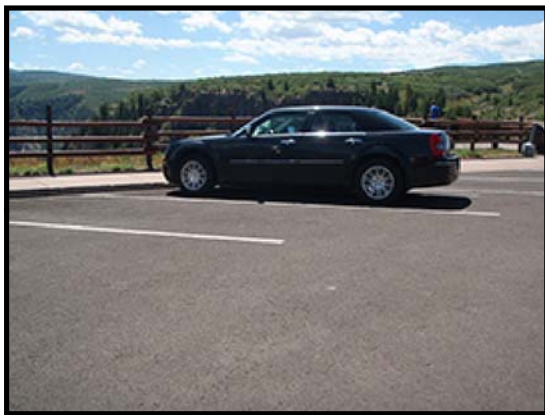


# BLACK CANYON OF THE GUNNISON NATIONAL PARK

## Route 0912

SOUTH RIM RESIDENCE AREA  
FROM ROUTE 0400 (SOUTH RIM RESIDENCE ROAD)  
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0912	PUBLIC	8/10/2011	5,958	0.10	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

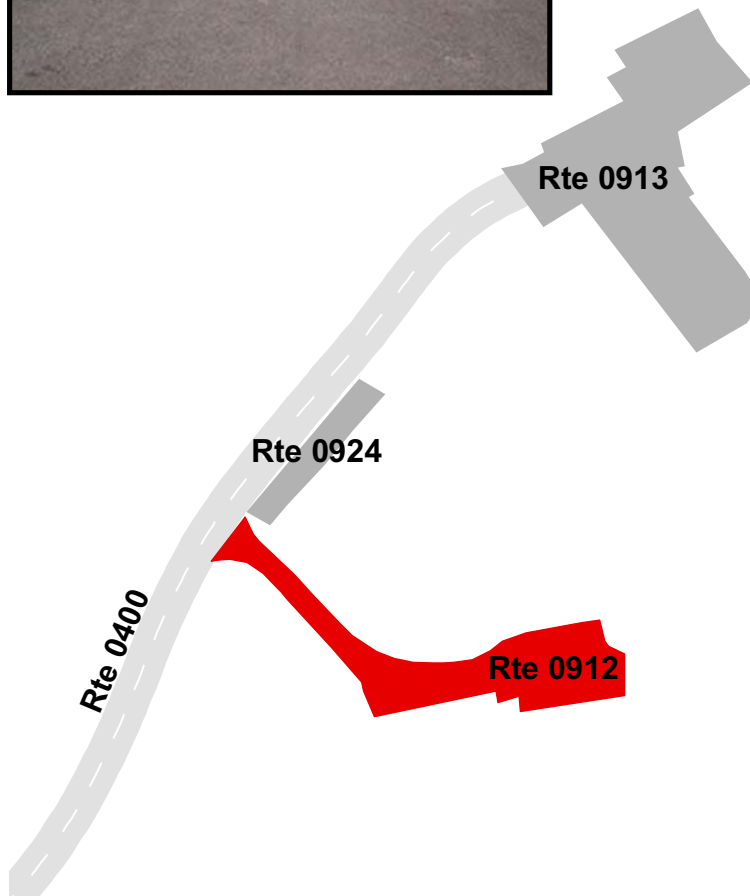

# BLACK CANYON OF THE GUNNISON NATIONAL PARK


## Route 0913

SOUTH RIM MAINTENANCE AREA

FROM END OF ROUTE 0400 (SOUTH RIM RESIDENCE ROAD)  
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0913	NONPUBLIC	8/10/2011	11,320	0.20	CO
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	1	0	NO CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

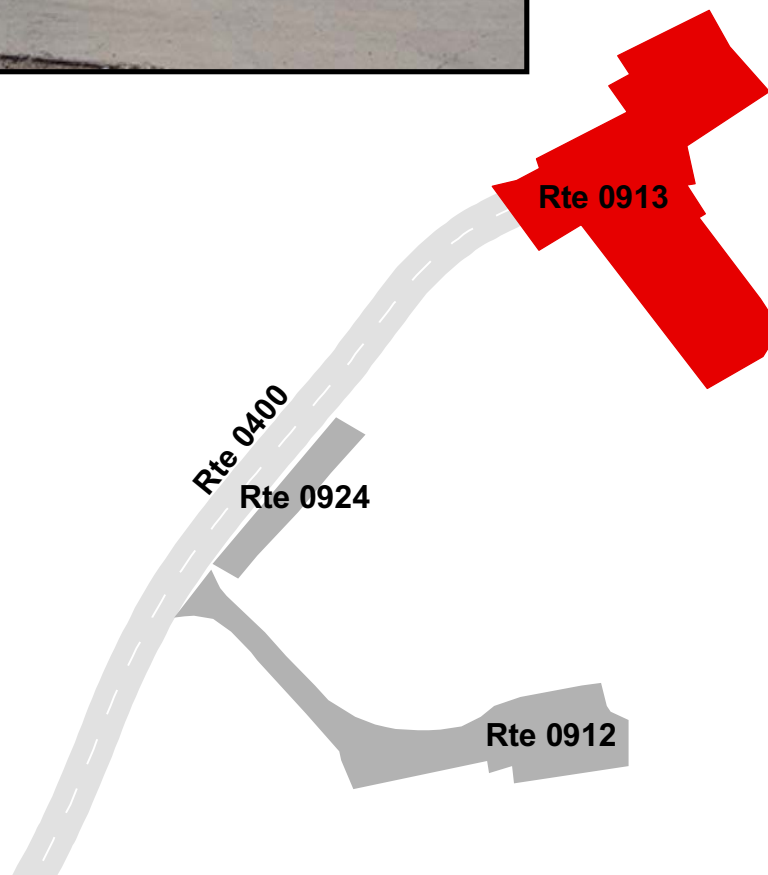

# BLACK CANYON OF THE GUNNISON NATIONAL PARK

## Route 0914

### FEE STATION PARKING

ADJACENT TO ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0914	PUBLIC	8/10/2011	5,968	0.10	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths




# BLACK CANYON OF THE GUNNISON NATIONAL PARK

## Route 0924

SOUTH RIM RESIDENCE ROAD PARKING  
 ADJACENT TO ROUTE 0400 (SOUTH RIM RESIDENCE ROAD)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0924	PUBLIC	8/10/2011	1,501	0.03	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

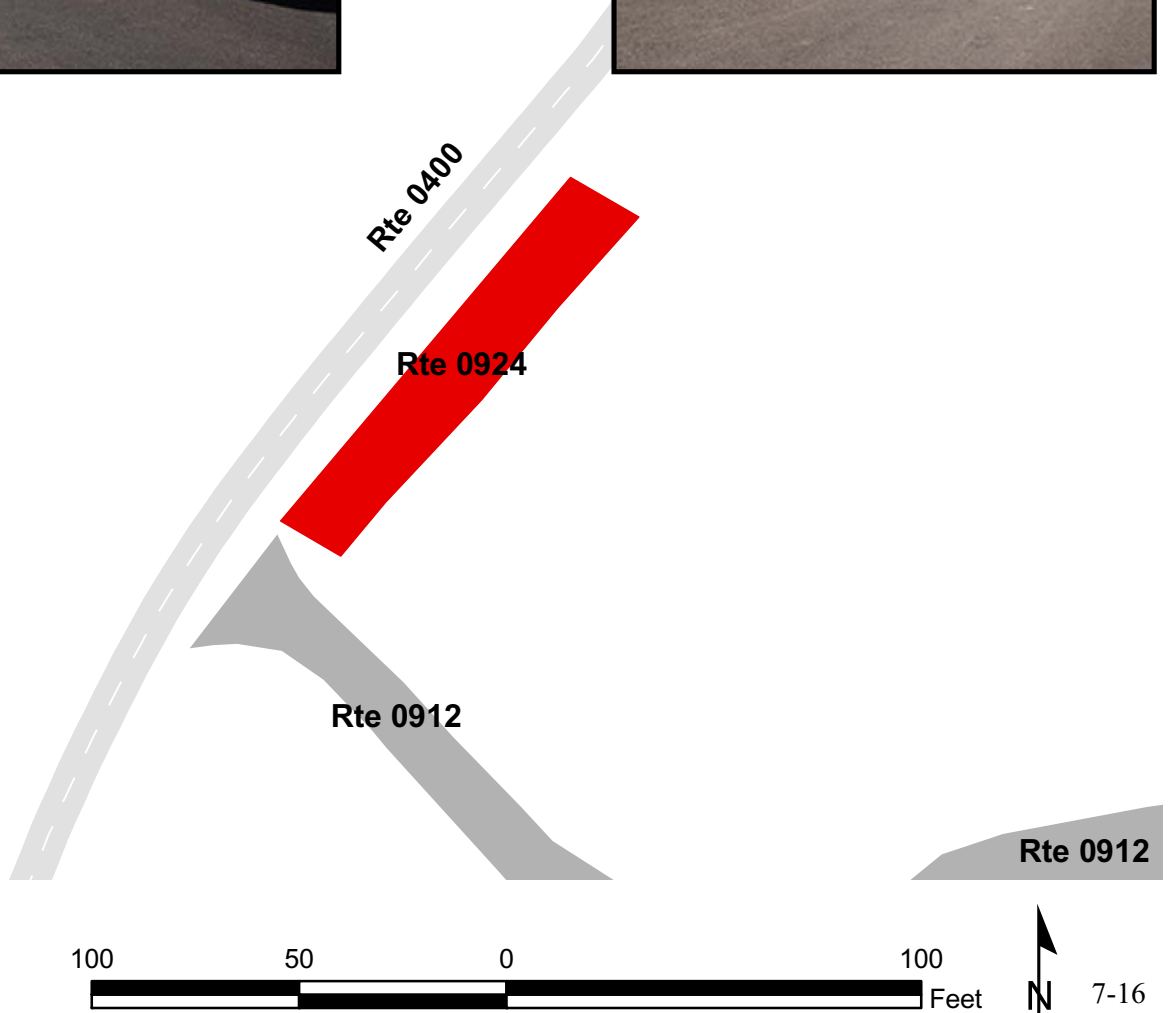



**Section 8**  
**Parkwide/Route**  
**Maintenance Features Summaries**



Black Canyon of the Gunnison  
National Park



Federal Lands Highway  
Road Inventory Program

## **BLCA: PARKWIDE MAINTENANCE FEATURES SUMMARY**

### **Includes DCV, MRL, MRP & PKG routes collected in Cycle-5**

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all DCV driven routes. Culverts, drop inlets, and gates were also collected on all Manually Rated Routes and Paved Parking areas. Those totals are reflected below.

<b>FEATURE</b>	<b>LINEAR FEET</b>	<b>COUNT</b>
BRIDGE	--	0
CATTLE GUARD	--	1
CULVERT	--	37
CURB	269	--
DROP INLET	--	28
GATE	--	3
GUARD/GUIDE RAIL	650	--
CABLE	0	--
NON-CABLE	650	--
GUARD/GUIDE WALL	26	--
BOLLARD	26	--
TEMPORARY BARRIER	0	--
NON TEMP/BOLLARD	0	--
INTERSECTION	--	47
LOW WATER CROSSING	0	0
MILE MARKER	--	0
OVERPASS	--	0
PARK BOUNDARY	--	0
PAVED DITCH	16,932	--
PULLOUT	259	2
RAILROAD CROSSING	--	0
RETAINING WALL	0	0
SIGN	--	135
STATE BOUNDARY	--	0
TRAFFIC LIGHT	--	0
TUNNEL	0	0

# BLCA: DCV ROUTE MAINTENANCE FEATURES SUMMARY

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5.

FEATURE	ROUTE 0010 SOUTH RIM DRIVE	ROUTE 0200 SOUTH RIM CAMPGROUND ROAD	ROUTE 0205 CAMPGROUND LOOP A	ROUTE 0206 CAMPGROUND LOOP B	ROUTE 0207 CAMPGROUND LOOP C	ROUTE 0400 SOUTH RIM RESIDENCE ROAD	UNIT
BRIDGE	0	0	0	0	0	0	EACH
CATTLE GUARD	1	0	0	0	0	0	EACH
CULVERT	33	0	1	1	1	0	EACH
CURB	253	0	0	16	0	0	LINEAR FEET
DROP INLET	24	0	0	0	0	0	EACH
GATE	1	0	0	0	0	1	EACH
GUARD/GUIDE RAIL	581	69	0	0	0	0	LINEAR FEET
CABLE	0	0	0	0	0	0	LINEAR FEET
NON-CABLE	581	69	0	0	0	0	LINEAR FEET
GUARD/GUIDE WALL	0	26	0	0	0	0	LINEAR FEET
BOLLARD	0	26	0	0	0	0	LINEAR FEET
TEMPORARY BARRIER	0	0	0	0	0	0	LINEAR FEET
NON TEMP/BOLLARD	0	0	0	0	0	0	LINEAR FEET
INTERSECTION	19	8	5	5	4	6	EACH
LOW WATER CROSSING	0	0	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	0	0	EACH
OVERPASS	0	0	0	0	0	0	EACH
PARK BOUNDARY	0	0	0	0	0	0	EACH
PAVED DITCH	16,932	0	0	0	0	0	LINEAR FEET
PULLOUT	1	0	0	1	0	0	EACH
PULLOUT	185	0	0	74	0	0	LINEAR FEET
RAILROAD CROSSING	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	LINEAR FEET
SIGN	97	14	5	6	3	10	EACH
STATE BOUNDARY	0	0	0	0	0	0	EACH
TRAFFIC LIGHT	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	LINEAR FEET

## **STRUCTURE LIST**

No data available for this section.

**Section 9**  
**Route Maintenance Features**  
**Road Logs**



**Black Canyon of the Gunnison  
National Park**



**Federal Lands Highway  
Road Inventory Program**

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: SOUTH RIM DRIVE

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM END OF ROUTE 5347 (STATE HIGHWAY 347) AT CATTLE GUARD/PAVEMENT CHANGE
0.000	0.000	SIGN	RIGHT	GUIDE, U.S. FEE AREA
0.000	0.000	INTERSECTION	N/A	ROUTE 5347 (STATE HIGHWAY 347)
0.004	0.004	CATTLE GUARD	N/A	N/A
0.018	0.018	SIGN	LEFT	WARNING, CATTLE GUARD
0.027	0.027	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.027	0.027	SIGN	LEFT	GUIDE, EMPLOYEES BY MONTROSE PUBLIC LAYOUT CENTER
0.049	0.049	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
0.049	0.049	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
0.072	0.072	CULVERT	N/A	N/A
0.099	0.314	PAVED DITCH	RIGHT	N/A
0.123	0.123	DROP INLET	RIGHT	N/A
0.123	0.123	SIGN	RIGHT	GUIDE, PERMIT REQUIRED FOR ALL INNER CANYON USE
0.147	0.147	SIGN	LEFT	GUIDE, THANKS FOR VISITING YOUR NATIONAL PARK
0.220	0.220	DROP INLET	RIGHT	N/A
0.221	0.256	PULLOUT	LEFT	N/A
0.264	0.264	SIGN	RIGHT	GUIDE, NATIONAL PARK SERVICE
0.264	0.264	SIGN	RIGHT	GUIDE, BLACK CANYON OF THE GUNNISON NATIONAL PARK
0.314	0.314	DROP INLET	RIGHT	N/A
0.343	0.343	DROP INLET	RIGHT	N/A
0.343	0.343	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
0.344	0.491	PAVED DITCH	RIGHT	N/A
0.390	0.390	DROP INLET	RIGHT	N/A
0.400	0.400	SIGN	RIGHT	WARNING, STOP AHEAD
0.400	0.400	SIGN	RIGHT	WARNING, 500 FEET
0.417	0.417	SIGN	LEFT	REGULATORY, SPEED LIMIT 25
0.465	0.465	DROP INLET	RIGHT	N/A
0.487	0.487	SIGN	RIGHT	GUIDE, ENTRANCE FEES
0.491	0.491	DROP INLET	RIGHT	N/A

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: SOUTH RIM DRIVE

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.495	0.495	SIGN	N/A	GUIDE, NATIONAL PARK SERVICE
0.497	0.497	SIGN	N/A	GUIDE, PASS ON TROUGH
0.498	0.498	SIGN	RIGHT	REGULATORY, STOP
0.505	0.505	INTERSECTION	RIGHT	PAVED ROUTE (EAST PORTAL ROAD / NON NPS)
0.515	0.515	DROP INLET	RIGHT	N/A
0.520	0.520	SIGN	RIGHT	GUIDE, RIM DRIVE VISITOR CENTER EAST PORTAL RIVER ACCESS
0.523	0.617	PAVED DITCH	RIGHT	N/A
0.523	0.523	DROP INLET	RIGHT	N/A
0.563	0.563	SIGN	LEFT	GUIDE, EAST PORTAL
0.599	0.599	DROP INLET	RIGHT	N/A
0.684	0.684	SIGN	RIGHT	GUIDE, VISITOR CENTER CAMPGROUND AMPHITHEATER
0.712	0.712	CULVERT	N/A	N/A
0.738	0.738	INTERSECTION	RIGHT	ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.745	0.745	SIGN	RIGHT	GUIDE, RIM DRIVE
0.750	0.750	DROP INLET	RIGHT	N/A
0.756	0.819	PAVED DITCH	LEFT	N/A
0.770	0.770	SIGN	LEFT	GUIDE, CAMPGROUND AMPHITHEATER
0.793	0.793	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.793	0.793	SIGN	LEFT	WARNING, 250 FEET
0.838	0.838	CULVERT	N/A	N/A
0.849	0.849	SIGN	RIGHT	REGULATORY, SPEED LIMIT 30
0.856	0.977	PAVED DITCH	RIGHT	N/A
0.976	0.976	CULVERT	N/A	N/A
0.998	1.225	PAVED DITCH	RIGHT	N/A
1.034	1.188	PAVED DITCH	LEFT	N/A
1.233	1.233	CULVERT	N/A	N/A
1.249	1.249	SIGN	RIGHT	WARNING, 20 M.P.H.
1.249	1.249	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
1.304	1.366	PAVED DITCH	RIGHT	N/A

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: SOUTH RIM DRIVE

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
1.388	1.388	CULVERT	N/A	N/A
1.482	1.482	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN NO TEXT
1.482	1.482	SIGN	RIGHT	GUIDE, TOMICHI POINT
1.490	1.490	CULVERT	N/A	N/A
1.504	1.504	INTERSECTION	RIGHT	ROUTE 0911 (TOMICHI POINT PARKING)
1.508	1.544	CURB	RIGHT	N/A
1.547	1.547	INTERSECTION	RIGHT	ROUTE 0911 (TOMICHI POINT PARKING)
1.596	1.596	SIGN	LEFT	REGULATORY, GRAPHIC SIGN NO TEXT
1.596	1.596	SIGN	LEFT	GUIDE, TOMICHI POINT
1.638	1.762	PAVED DITCH	LEFT	N/A
1.712	1.712	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN NO TEXT
1.712	1.712	SIGN	RIGHT	GUIDE, SOUTH RIM VISITOR CENTER
1.760	1.760	INTERSECTION	RIGHT	ROUTE 0900 (GUNNISON POINT VISITOR CENTER PARKING)
1.801	1.801	SIGN	LEFT	GUIDE, SOUTH RIM VISITOR CENTER
1.801	1.801	SIGN	LEFT	GUIDE, GRAPHIC SIGN NO TEXT
1.801	1.801	SIGN	LEFT	REGULATORY, GRAPHIC SIGN NO TEXT
1.820	1.820	INTERSECTION	RIGHT	ROUTE 0900 (GUNNISON POINT VISITOR CENTER PARKING)
1.822	1.822	SIGN	LEFT	GUIDE, RIM DRIVE OVERLOOKS PARK EXIT
1.824	1.824	GATE	N/A	N/A
1.825	1.825	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
1.825	1.825	SIGN	RIGHT	REGULATORY, NO PARKING
1.826	1.826	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
1.826	1.826	SIGN	RIGHT	REGULATORY, ROAD CLOSED
1.828	1.828	CULVERT	N/A	N/A
1.843	1.843	SIGN	RIGHT	WARNING, NEXT 1 MILE
1.843	1.843	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
1.999	1.999	DROP INLET	LEFT	N/A
2.047	2.047	CULVERT	N/A	N/A
2.211	2.211	DROP INLET	LEFT	N/A
2.395	2.413	PAVED DITCH	RIGHT	N/A



# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: SOUTH RIM DRIVE

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
2.424	2.424	DROP INLET	LEFT	N/A
2.514	2.514	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
2.552	2.552	CULVERT	N/A	N/A
2.665	2.665	CULVERT	N/A	N/A
2.787	2.787	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
2.787	2.787	SIGN	LEFT	WARNING, NEXT 1 MILE
2.788	2.788	CULVERT	N/A	N/A
2.913	2.913	CULVERT	N/A	N/A
3.040	3.040	DROP INLET	LEFT	N/A
3.058	3.109	PAVED DITCH	RIGHT	N/A
3.169	3.169	CULVERT	N/A	N/A
3.185	3.217	PAVED DITCH	RIGHT	N/A
3.200	3.493	PAVED DITCH	LEFT	N/A
3.249	3.249	DROP INLET	LEFT	N/A
3.388	3.388	DROP INLET	LEFT	N/A
3.418	3.481	PAVED DITCH	RIGHT	N/A
3.438	3.438	SIGN	RIGHT	GUIDE, APPROACHING PULPIT ROCK
3.438	3.438	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN NO TEXT
3.472	3.472	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
3.472	3.472	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
3.503	3.503	INTERSECTION	RIGHT	ROUTE 0402 (PULPIT ROCK WATER TANK ROAD)
3.572	3.599	GUARD/GUIDE RAIL	LEFT	N/A
3.580	3.580	INTERSECTION	RIGHT	ROUTE 0910 (PULPIT ROCK OVERLOOK)
3.617	3.708	PAVED DITCH	LEFT	N/A
3.658	3.658	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
3.658	3.658	SIGN	RIGHT	WARNING, 20 M.P.H.
3.676	3.676	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
3.676	3.676	SIGN	LEFT	REGULATORY, SPEED LIMIT 15
3.733	3.733	CULVERT	N/A	N/A
3.972	3.972	CULVERT	N/A	N/A

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: SOUTH RIM DRIVE

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
4.126	4.261	PAVED DITCH	LEFT	N/A
4.128	4.128	SIGN	RIGHT	GUIDE, CROSS FISSURES
4.172	4.172	INTERSECTION	RIGHT	ROUTE 0909 (CROSS FISSURES OVERLOOK)
4.222	4.222	SIGN	LEFT	GUIDE, CROSS FISSURES
4.266	4.266	CULVERT	N/A	N/A
4.285	4.285	SIGN	RIGHT	GUIDE, ROCK POINT
4.328	4.328	INTERSECTION	RIGHT	ROUTE 0908 (ROCK POINT PARKING)
4.330	4.330	SIGN	LEFT	WARNING, 20 M.P.H.
4.330	4.330	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
4.355	4.355	CULVERT	N/A	N/A
4.404	4.404	SIGN	LEFT	GUIDE, ROCK POINT
4.418	4.418	SIGN	RIGHT	GUIDE, DEVILS OVERLOOK
4.452	4.452	INTERSECTION	RIGHT	ROUTE 0907 (DEVIL'S OVERLOOK)
4.498	4.498	SIGN	LEFT	GUIDE, DEVILS OVERLOOK
4.684	4.684	SIGN	RIGHT	WARNING, 20 M.P.H.
4.684	4.684	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
4.685	4.774	PAVED DITCH	LEFT	N/A
4.755	4.792	GUARD/GUIDE RAIL	RIGHT	N/A
4.788	4.788	CULVERT	N/A	N/A
4.836	4.836	DROP INLET	LEFT	N/A
4.935	4.935	CULVERT	N/A	N/A
5.035	5.035	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
5.180	5.180	CULVERT	N/A	N/A
5.302	5.329	PAVED DITCH	LEFT	N/A
5.309	5.309	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
5.309	5.309	SIGN	RIGHT	WARNING, 20 M.P.H.
5.324	5.324	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN NO TEXT
5.324	5.324	SIGN	RIGHT	GUIDE, APPROACHING CHASM VIEW
5.328	5.348	GUARD/GUIDE RAIL	RIGHT	N/A
5.358	5.358	SIGN	RIGHT	GUIDE, CHASM VIEW

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: SOUTH RIM DRIVE

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
5.400	5.400	INTERSECTION	RIGHT	ROUTE 0906 (CHASM VIEW OVERLOOK)
5.412	5.412	DROP INLET	RIGHT	N/A
5.424	5.424	CULVERT	N/A	N/A
5.465	5.465	SIGN	RIGHT	GUIDE, PAINTED WALL
5.482	5.482	SIGN	LEFT	GUIDE, CHASM VIEW
5.500	5.500	INTERSECTION	RIGHT	ROUTE 0905 (PAINTED WALL VIEW PARKING)
5.536	5.536	CULVERT	N/A	N/A
5.549	5.549	SIGN	LEFT	WARNING, 20 M.P.H.
5.549	5.549	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
5.551	5.551	SIGN	LEFT	GUIDE, PAINTED WALL
5.690	5.690	CULVERT	N/A	N/A
5.813	5.813	DROP INLET	LEFT	N/A
5.893	5.893	SIGN	RIGHT	GUIDE, CEDAR POINT
5.920	5.920	INTERSECTION	RIGHT	ROUTE 0904 (CEDAR POINT OVERLOOK)
5.959	5.959	CULVERT	N/A	N/A
5.965	5.965	SIGN	LEFT	GUIDE, CEDAR POINT
6.018	6.079	PAVED DITCH	LEFT	N/A
6.104	6.104	CULVERT	N/A	N/A
6.131	6.276	PAVED DITCH	LEFT	N/A
6.166	6.166	INTERSECTION	RIGHT	ROUTE 0903 (DRAGON POINT PARKING)
6.184	6.210	GUARD/GUIDE RAIL	RIGHT	N/A
6.224	6.276	PAVED DITCH	RIGHT	N/A
6.298	6.298	CULVERT	N/A	N/A
6.357	6.357	CULVERT	N/A	N/A
6.396	6.396	CULVERT	N/A	N/A
6.446	6.664	PAVED DITCH	LEFT	N/A
6.585	6.585	DROP INLET	LEFT	N/A
6.655	6.655	SIGN	RIGHT	WARNING, 20 M.P.H.
6.655	6.655	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
6.665	6.665	DROP INLET	LEFT	N/A

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: SOUTH RIM DRIVE

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
6.685	6.726	PAVED DITCH	RIGHT	N/A
6.731	6.731	SIGN	RIGHT	GUIDE, PICNIC TABLES NEXT 2 OVERLOOKS
6.739	6.871	PAVED DITCH	LEFT	N/A
6.764	6.764	DROP INLET	LEFT	N/A
6.791	6.791	SIGN	RIGHT	WARNING, 250 FEET
6.791	6.791	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
6.826	6.826	SIGN	RIGHT	GUIDE, SUNSET VIEW
6.826	6.826	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN NO TEXT
6.850	6.850	INTERSECTION	RIGHT	ROUTE 0902 (SUNSET VIEW PARKING)
6.853	6.865	CURB	RIGHT	N/A
6.872	6.872	INTERSECTION	RIGHT	ROUTE 0902 (SUNSET VIEW PARKING)
6.888	6.888	CULVERT	N/A	N/A
6.916	6.916	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
6.916	6.916	SIGN	LEFT	WARNING, 250 FEET
6.929	6.929	SIGN	LEFT	REGULATORY, GRAPHIC SIGN NO TEXT
6.929	6.929	SIGN	LEFT	GUIDE, SUNSET VIEW
6.958	7.041	PAVED DITCH	LEFT	N/A
6.966	6.992	PAVED DITCH	RIGHT	N/A
7.054	7.054	CULVERT	N/A	N/A
7.108	7.147	PAVED DITCH	LEFT	N/A
7.194	7.194	CULVERT	N/A	N/A
7.215	7.215	SIGN	LEFT	WARNING, 20 M.P.H.
7.215	7.284	PAVED DITCH	RIGHT	N/A
7.215	7.215	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
7.292	7.292	DROP INLET	LEFT	N/A
7.319	7.355	PAVED DITCH	RIGHT	N/A
7.355	7.355	CULVERT	N/A	N/A
7.373	7.452	PAVED DITCH	LEFT	N/A
7.478	7.615	PAVED DITCH	LEFT	N/A
7.480	7.563	PAVED DITCH	RIGHT	N/A

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: SOUTH RIM DRIVE

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

<b>FROM MILEPOST</b>	<b>TO MILEPOST</b>	<b>FEATURE</b>	<b>SIDE</b>	<b>COMMENT</b>
7.521	7.521	SIGN	LEFT	REGULATORY, SPEED LIMIT 30
7.521	7.521	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
7.553	7.553	SIGN	RIGHT	REGULATORY, SPEED LIMIT 20
7.610	7.610	SIGN	RIGHT	GUIDE, HIGH POINT
7.646	7.646	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
7.646	7.646	SIGN	RIGHT	WARNING, 10 M.P.H.
7.657	7.657	INTERSECTION	N/A	ROUTE 0901 (HIGH POINT PARKING)
7.657	7.657	ROUTE END	N/A	TO ROUTE 0901 (HIGH POINT PARKING)

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0200: SOUTH RIM CAMPGROUND ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0010 (SOUTH RIM DRIVE)
0.000	0.000	SIGN	N/A	GUIDE, RIM DRIVE MONTROSE
0.000	0.000	INTERSECTION	LEFT	ROUTE 0010 (SOUTH RIM DRIVE)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0010 (SOUTH RIM DRIVE)
0.033	0.033	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.033	0.033	SIGN	LEFT	WARNING, STOP AHEAD
0.049	0.049	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.105	0.105	INTERSECTION	LEFT	ROUTE 0401 (SOUTH RIM CAMPGROUND WATER TANK ROAD)
0.128	0.128	INTERSECTION	RIGHT	ROUTE 0400 (SOUTH RIM RESIDENCE ROAD)
0.132	0.132	SIGN	RIGHT	GUIDE, SERVICE ROAD ONLY
0.135	0.135	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.170	0.170	INTERSECTION	RIGHT	ROUTE 0914 (FEE STATION PARKING)
0.190	0.190	SIGN	RIGHT	GUIDE, CAMP HOST SITE A33
0.202	0.202	SIGN	RIGHT	GUIDE, LOOP A SITES A1-A34
0.205	0.205	INTERSECTION	LEFT	ROUTE 0205 (CAMPGROUND LOOP A)
0.208	0.208	SIGN	LEFT	GUIDE, LOOP A SITES A1-A34
0.211	0.224	GUARD/GUIDE RAIL	RIGHT	N/A
0.223	0.223	SIGN	RIGHT	GUIDE, AMPHITHEATER
0.226	0.231	GUARD/GUIDE WALL	RIGHT	N/A
0.232	0.232	SIGN	LEFT	GUIDE, AMPHITHEATER
0.265	0.265	SIGN	RIGHT	GUIDE, LOOP B SITES B1-B23
0.268	0.268	INTERSECTION	LEFT	ROUTE 0206 (CAMPGROUND LOOP B)
0.274	0.274	SIGN	LEFT	GUIDE, LOOP B SITES B1-B23
0.283	0.283	SIGN	LEFT	REGULATORY, SPEED LIMIT 15
0.310	0.310	INTERSECTION	N/A	ROUTE 0207 (CAMPGROUND LOOP C)
0.310	0.310	ROUTE END	N/A	TO ROUTE 0207 (CAMPGROUND LOOP C)

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0205: CAMPGROUND LOOP A

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.002	0.002	CULVERT	N/A	N/A
0.006	0.006	SIGN	LEFT	REGULATORY, STOP
0.009	0.009	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
0.009	0.009	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
0.015	0.015	INTERSECTION	LEFT	ROUTE 0205 (CAMPGROUND LOOP A)
0.017	0.017	SIGN	LEFT	REGULATORY, ONE WAY
0.018	0.244	ONE-WAY	N/A	N/A
0.054	0.054	SIGN	RIGHT	GUIDE, RESTROOMS
0.244	0.244	INTERSECTION	RIGHT	ROUTE 0205 (CAMPGROUND LOOP A)
0.244	0.244	INTERSECTION	LEFT	ROUTE 0205 (CAMPGROUND LOOP A)
0.244	0.244	ROUTE END	N/A	TO END OF LOOP

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0206: CAMPGROUND LOOP B

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.002	0.002	CULVERT	N/A	N/A
0.006	0.006	SIGN	LEFT	REGULATORY, STOP
0.006	0.006	SIGN	RIGHT	GUIDE, USER FEE PROJECT
0.006	0.006	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
0.007	0.007	SIGN	RIGHT	GUIDE, PARK RESERVATIONS
0.007	0.007	SIGN	RIGHT	GUIDE, LOOP B CAMPSITES MAY BE RESERVED IN THIS LOOP
0.012	0.012	INTERSECTION	LEFT	ROUTE 0206 (CAMPGROUND LOOP B)
0.015	0.239	ONE-WAY	N/A	N/A
0.052	0.066	PULLOUT	LEFT	N/A
0.060	0.060	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.060	0.063	CURB	LEFT	N/A
0.239	0.239	INTERSECTION	LEFT	ROUTE 0206 (CAMPGROUND LOOP B)
0.239	0.239	INTERSECTION	RIGHT	ROUTE 0206 (CAMPGROUND LOOP B)
0.239	0.239	ROUTE END	N/A	TO END OF LOOP



# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0207: CAMPGROUND LOOP C

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

<b>FROM MILEPOST</b>	<b>TO MILEPOST</b>	<b>FEATURE</b>	<b>SIDE</b>	<b>COMMENT</b>
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.000	0.000	INTERSECTION	N/A	ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.004	0.004	CULVERT	N/A	N/A
0.004	0.004	SIGN	RIGHT	GUIDE, LOOP C SITES C1-C32
0.017	0.017	INTERSECTION	LEFT	ROUTE 0207 (CAMPGROUND LOOP C)
0.019	0.229	ONE-WAY	N/A	N/A
0.057	0.057	SIGN	LEFT	GUIDE, RESTROOMS
0.225	0.225	SIGN	RIGHT	REGULATORY, STOP
0.229	0.229	INTERSECTION	LEFT	ROUTE 0207 (CAMPGROUND LOOP C)
0.229	0.229	INTERSECTION	RIGHT	ROUTE 0207 (CAMPGROUND LOOP C)
0.229	0.229	ROUTE END	N/A	TO END OF LOOP

# BLCA: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0400: SOUTH RIM RESIDENCE ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0200 (SOUTH RIM CAMPGROUND ROAD)
0.004	0.004	SIGN	LEFT	REGULATORY, STOP
0.006	0.006	GATE	N/A	N/A
0.007	0.007	SIGN	LEFT	REGULATORY, GRAPHIC SIGN NO TEXT
0.007	0.007	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN NO TEXT
0.008	0.008	SIGN	LEFT	REGULATORY, GRAPHIC SIGN NO TEXT
0.008	0.008	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN NO TEXT
0.009	0.009	SIGN	LEFT	REGULATORY, GRAPHIC SIGN NO TEXT
0.009	0.009	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN NO TEXT
0.027	0.027	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.068	0.068	INTERSECTION	LEFT	UNPAVED PARKING
0.069	0.069	SIGN	RIGHT	GUIDE, ADMINISTRATIVE OFFICES
0.069	0.069	SIGN	RIGHT	GUIDE, MAINTENANCE SHOP
0.078	0.078	INTERSECTION	RIGHT	ROUTE 0912 (SOUTH RIM RESIDENCE AREA)
0.095	0.095	INTERSECTION	RIGHT	ROUTE 0924 (SOUTH RIM RESIDENCE ROAD PARKING)
0.129	0.129	INTERSECTION	N/A	ROUTE 0913 (SOUTH RIM MAINTENANCE AREA)
0.129	0.129	ROUTE END	N/A	TO ROUTE 0913 (SOUTH RIM MAINTENANCE AREA)

# Section 10 Appendix



## Black Canyon of the Gunnison National Park



Federal Lands Highway  
Road Inventory Program

## **Explanation of Changes to the RIP Index Equations and Determination of PCR**

---

In 2005, the FHWA began implementing the use of a Pavement Management System to assist the National Park Service in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Region, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA as well.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions vis a vis the distresses and indexes that comprise the Pavement Condition Rating (PCR), an extensive study was completed throughout 2010 that has resulted in changes to the Road Inventory Program condition reporting method and specifically, the calculation of PCR. It was determined that a better representation of PCR could be achieved by modifying the relative impact certain distresses would have on the overall rating.

Through the use of HPMA data, it was noted that false failure indicators existed with the existing PCR model, and that it would be necessary to reduce their impact. The distresses affected in this way were Rutting and Roughness. Conversely, experience showed that roadways with extensive cracking present were often shown to have a high PCR. Therefore, the crack index models were adjusted to be more sensitive to changes in crack severity or quantity. It was also determined that these issues were not due to a problem with data acquisition (i.e. the RIP “van”), but with the way the collected data was processed. The final change was to provide guidance on when to use the Roughness Condition Index (RCI) in the PCR calculation. Roughness data is of little value to determining overall condition on routes that, due to their length or geometrics, have lower vehicle operating speeds. Therefore, in Cycle 5, only routes that have lengths of one half mile or greater and posted speed limits of 25 mph or greater will have RCI reported and included in the PCR calculations.

The changes that were implemented were endorsed by management at both the FHWA and NPS. In order to show the effectiveness of these changes, several sites were ground truth tested to ensure that an improvement was achieved between the relationship of PCR and the actual Maintenance and Rehabilitation needs that were represented. The changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection.

# Explanation of the Excellent, Good, Fair and Poor Condition Descriptions


---

In addition to the RIP Index changes that will be implemented in Cycle 5, we will also aim to provide greater assistance in translating good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 60 or below. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.

## Condition Categories and Treatments

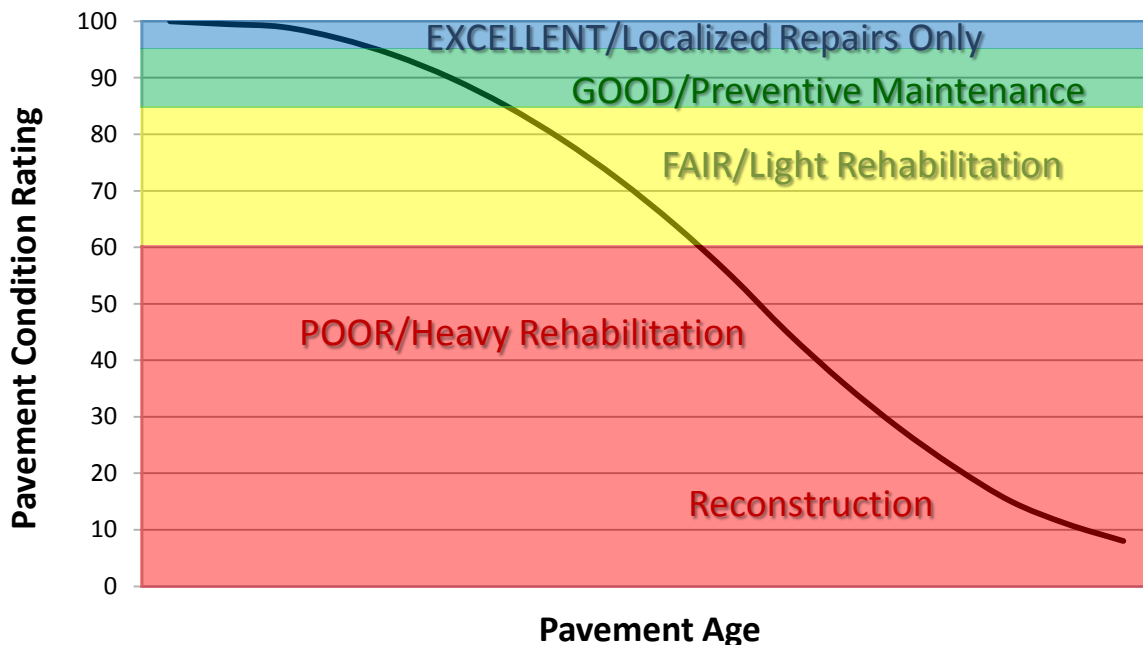

## DESCRIPTION OF RATING SYSTEM

---

The Federal Highway Administration (FHWA), Road Inventory Program (RIP) for the National Park Service (NPS), collects roadway condition data on paved surfaces (asphalt, concrete, brick, and cobblestone) on roads, parkways, and parking areas in national parks nationwide. The road surface condition data is collected using an automated Data Collection Vehicle (DCV). Roads having brick or cobblestone surfacing are not normally surveyed with the DCV, but are manually rated for condition rating.

The FHWA RIP is implemented based on the premise that an accurate pavement surface condition assessment can be accomplished using automated crack detection technology as applied to digital images. Various methods of pavement condition assessment have been developed over the years with varying degrees of accuracy and acceptance. The use of digital photography to record pavement images and subsequent crack detection and classification has undergone continuous improvements over the past decade. Digital cameras with increasingly superior resolution and high definition have become more affordable, and the proprietary programming code and algorithms have been improved in crack detection software.

With the use of quality digital photography and automated crack detection software, FHWA RIP is tasked with executing a pavement condition assessment on about 5000 miles of National Park Service roads and parkways. Foremost in setting up the basis of pavement distress identification is employing the distress identification protocols used by FHWA. There is no single distress identification system that is universal among entities conducting a program of distress identification. For the purpose of the NPS RIP, FHWA employs distress identification protocols that are specific to this program.

FHWA has referenced the “*Distress Identification Manual for the Long-Term Pavement Performance Program*”, Publication No. FHWA-RD 03-031, June 2003, as the point-of-reference for distress types on NPS pavement. In truth, the FHWA RIP distress types are similar to those described in the LTPP manual with some modifications. This document, “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013*” was developed using the “*Distress Identification Manual for the Long-Term Pavement Performance Program*” as a guideline. Definitions of severity levels based on crack width contained in this document adhere to the LTPP Distress ID Manual. Modifications have been made to the definition of Alligator and Longitudinal Cracking and determination of Alligator Cracking severity. This manual also addresses Rutting and Roughness and its application to RIP.

In 2010, FHWA RIP began the fifth cycle of data collection in national parks. For Cycle 5, data will be collected in approximately 81 large parks (10 or more paved route miles) on Functional Class 1, 2, and 7 routes plus any new routes or parking areas previously not collected, totaling an estimated 4,459 paved route miles. Additionally, 168 small parks will be collected comprising approximately 529 paved route miles and associated paved parking areas. The data is used to support the National Park Service road maintenance program and Pavement Management System (PMS) developed and maintained by FHWA.

This “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013*” will be used as a reference resource in crack detection and classification, determination of distress severity and extent, and in the calculation of distress index values for the FHWA RIP Cycle 5.

# **SURFACE DISTRESSES**

---

## **Surface Condition Rating - SCR**

Surface distresses are measured in the primary lane only. In the classification and measurement of all paved surface condition data, results will be reported in the database in record intervals of 0.02 miles (105.6 feet) (smallest granularity) along the route.

### **Surface distresses determined from digital images**

- Transverse Cracks
- Longitudinal Cracks
- Alligator Cracks
- Patching/Potholes

### **Surface distress measured by DCV (Data Collection Vehicle) LRMS (Laser Rut Measuring System)**

- Rutting

### **Each of the five surface distresses is assigned a computed surface distress index**

- Transverse Crack Index
- Longitudinal Crack Index
- Alligator Crack Index
- Patching/Pothole Index
- Rutting Index

Surface distress data are classified as listed above, measured for severity, and quantified for extent. Classification, severity, and extent of these five surface distresses comprise the three main elements for calculation of SCR (Surface Condition Rating).

In addition to the five surface distresses, a **Structural Crack Index** is computed, which is a combination of the Longitudinal Crack Index and the Alligator Crack Index. The Structural Crack Index is then used in lieu of the LC and AC indices to compute SCR.

## **Roughness Condition Index - RCI**

### **Additional condition data measured by DCV (lasers and accelerometers)**

- Roughness (IRI)

Roughness is measured by FHWA's DCV and reported as International Roughness Index (IRI) in inches/mile. Using IRI, the Roughness Condition Index (RCI) is computed.



## **Pavement Condition Rating - PCR**

Using the SCR (computed from the five surface distresses) and the RCI, an overall Pavement Condition Rating (PCR) is computed. The formula for PCR is:

$$\text{Asphalt PCR} = (0.60 * \text{SCR}) + (0.40 * \text{RCI})$$

$$\text{Concrete PCR} = \text{RCI}$$

A detailed description of each distress index formula, roughness index formula, SCR and PCR is provided in this document beginning on page 23.

Each classified surface distress will fall into one or more *severity*...LOW, MEDIUM, or HIGH based on criteria listed. For each severity, an *extent* is established based on the measured quantity of the distress within that severity. Within each *severity* individual distresses are assigned a *Maximum Allowable Extent* (MAE). For example, LOW severity transverse cracking may be allowed up to 21.1 cracks within a 0.02 interval before it reaches MAE and fails.

The index formulas are based on a scale of 0-100. A PCR index value of 100 would indicate a “new” road with no measurable distresses or rough ride. A PCR value of 60 is determined to be *terminable serviceability* and the road is considered failed. The range of index values with condition descriptors is:

POOR (<=60), FAIR (61 - 84), GOOD (85 - 94), EXCELLENT (95 - 100)

Index values are generally computed based on cumulative deducts of the measured severities. As shown in the index formulas below, as any single severity reaches or exceeds MAE, the index computes to a value of 60 or less, and the road fails for that 0.02 interval.

**Note:** As a result of a unique combination of measured surface distresses and IRI, index values occasionally compute to less than 0 or greater than 100. In this instance, an index value < 0 defaults to 0. Index values > 100 default to 100. For all indices, a higher value indicates a better road condition, and a lower value indicates a poorer road condition.

On the following page, Table 1 summarizes the different types of distresses measured.

**TABLE 1: Distress Summary**

<b>ASPHALT-SURFACED PAVEMENT DISTRESS TYPES with RUTTING and ROUGHNESS</b>				
<b>DISTRESS TYPE</b>	<b>UNIT OF MEASURE...</b>	<b>...CONVERTED TO</b>	<b>DEFINED SEVERITY LEVELS?</b>	<b>MEASURED BY</b>
<b>Alligator Cracking</b>	<b>Square Feet</b>	<b>Percent of Lane Per 0.02 Mile</b>	<b>Yes</b>	<b>Digital Image Crack Detection Software</b>
<b>Transverse Cracking</b>	<b>Linear Feet</b>	<b>Number of Cracks Per 0.02 Mile</b>	<b>Yes</b>	<b>Digital Image Crack Detection Software</b>
<b>Longitudinal Cracking</b>	<b>Linear feet</b>	<b>Percent of Lane Length Per 0.02 Mile</b>	<b>Yes</b>	<b>Digital Image Crack Detection Software</b>
<b>Patching/Potholes</b>	<b>Square Feet</b>	<b>Percent of Lane Per 0.02 Mile</b>	<b>No</b>	<b>Digital Image Crack Detection Software</b>
<b>Rutting</b>	<b>Inches</b>	<b>Rut Depth Per 0.02 Mile</b>	<b>Yes</b>	<b>DCV – Laser Rut Measuring System (LRMS)</b>
<b>Roughness</b>	<b>IRI</b>	<b>*RCI Per 0.02 Mile</b>	<b>No</b>	<b>DCV – Lasers /Accelerometers</b>

**\*Note: Roughness is measured on concrete roadways, but surface distresses and rutting are not measured. For concrete, PCR = RCI**

# **ALLIGATOR CRACKING**

## **Description**

Alligator cracking is considered a combination of fatigue and block cracking. It is a series of interconnected cracks in various stages of development. Alligator cracking develops into a many-sided pattern that resembles chicken wire or alligator skin. It can occur anywhere in the road lane. Alligator cracking must have a quantifiable area.

## **Severity Levels**

### **LOW**

An area of cracks with no or very few interconnecting cracks and the cracks are not spalled. Cracks are  $\leq 0.25$  in (6mm) in mean width. Cracks in the pattern are no further apart than 1 foot (0.328 m). May be sealed cracks with sealant in good condition and a crack width that cannot be determined.

### **MEDIUM**

An area of interconnected cracks that form a complete pattern. Cracks may be slightly spalled. Cracks are  $>0.25$  in. (6 mm) and  $\leq 0.75$  in. (19 mm) or any crack with a mean width  $\leq 19$  mm and adjacent low severity cracking. Cracks in the pattern are no further apart than 6 in. (150 mm).

### **HIGH**

An area of interconnected cracks forming a complete pattern. Cracks are moderately or severely spalled. Cracks are  $>0.75$  in (19mm) or any crack with a mean width  $\leq 0.75$  in (19mm) and adjacent medium to high severity random cracking.

A combination of observed crack width and crack pattern is used to determine overall severity of alligator cracking. Based on above description of each severity, the highest level of crack width and crack pattern determines overall severity. Table 2 illustrates this.

**TABLE 2: Alligator Crack Severity Levels**

<b>ALLIGATOR CRACKING SEVERITY LEVELS</b>		<b>Crack Pattern</b>		
		<b>LOW</b>	<b>MED</b>	<b>HIGH</b>
<b>Crack Width</b>	<b>LOW</b>	L	M	H
	<b>MED</b>	M	M	H
	<b>HI</b>	H	H	H

## **LONGITUDINAL CRACKING**

### **Description**

Longitudinal cracking occurs predominantly parallel to the pavement centerline. It can occur anywhere within the lane. Longitudinal cracks occurring in the wheelpath may be noteworthy.

### **Severity Levels**

#### **LOW**

Cracks with a mean width of  $< 0.25$  in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

#### **MED**

Cracks with a mean width  $> 0.25$  in. (6 mm) and  $\leq 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random low severity cracking.

#### **HIGH**

Cracks with a mean width  $> 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random medium to high severity cracking.

## **TRANSVERSE CRACKING**

### **Description**

Transverse cracking occurs predominantly perpendicular to the pavement centerline. It can occur anywhere within the lane.

### **Severity Levels**

#### **LOW**

Cracks with a mean width of  $< 0.25$  in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

#### **MED**

Cracks with a mean width  $> 0.25$  in. (6 mm) and  $\leq 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random low severity cracking.

#### **HIGH**

Cracks with a mean width  $> 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random medium to high severity cracking.

## **PATCHING AND POTHOLES**

### **Description**

Patching is an area of pavement surface that has been removed and replaced with patching material or an area of pavement surface that has had additional patching material applied. Patching may encompass partial lane or full lane width. On full lane width patching; the total, contiguous length of patch may not exceed 0.30 mi. (0.48 km). (Any full-lane patch exceeding 0.30 mi. in length is considered a pavement change). Patching must have a quantifiable area.

Potholes are bowl-shaped holes of various sizes occurring in the pavement surface.

### **Severity Levels**

There are no stratified severities for Patching/Potholes. They either are present or they are not.

## **RUTTING**

### **Description**

Rutting is a longitudinal surface depression in the wheelpath.

### **Severity Levels**

#### **LOW**

Ruts with a measured depth  $\geq 0.20''$  and  $\leq 0.49''$

#### **MED**

Ruts with a measured depth  $\geq 0.50''$  and  $\leq 0.99''$

#### **HIGH**

Ruts with a measured depth  $\geq 1.00''$

Ruts  $< 0.20''$  are not included in the distress calculations.

## **ROUGHNESS**

### **Description**

Roughness is the measurement of the unevenness of the pavement in the direction of travel. It is measured in units of IRI (International Roughness Index), inches per mile, and is indicative of ride comfort.

### **Severity Levels**

There are no stratified severity levels for roughness. The roughness (or smoothness) of a road surface can be defined by IRI in the following table.

**TABLE 3: IRI**

<b>IRI Descriptions</b>	
<b>Type of Road</b>	<b>Typical IRI ( in/mile )</b>
New Road, no noticeable roughness	<90
Small level of roughness	90 – 126
Road of average roughness	126 – 190
Road with above average roughness	190 – 253
Road with severe roughness	253 – 380
Nearly impassable	>380

## INDEX FORMULAS

---

Note: All index formulas listed below contain MAE applicable to 0.02 mile (105.6 feet) interval.

### Alligator Crack Index

$$AC\_INDEX = 100 - 40 * [(\%LOW / 35) + (\%MED / 15) + (\%HI / 5)]$$

Where:

The values *%LOW*, *%MED* and *%HI* report the percentage of the observed pavement (0.02 mile, primary lane) that contains alligator cracking within the respective severities. These values range from 0 to 100.

*%LOW* = Percent of total area (primary lane, 0.02 in length), low severity

*%MED* = Percent of total area (primary lane, 0.02 in length), medium severity

*%HI* = Percent of total area (primary lane, 0.02 in length), high severity

Percent of total area is computed as:

$$\frac{\text{square foot area of alligator crack severity}}{0.02 \text{ mile} * \text{lane width}}$$

In AC\_INDEX, the denominators 35, 15, and 5 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 35% of low severity alligator cracking for a 0.02 interval before failure, 15% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

### Longitudinal Crack Index

$$LC\_INDEX = 100 - 40 * [(\%LOW / 175) + (\%MED / 75) + (\%HI / 25)]$$

Where:

The values *%LOW*, *%MED*, and *%HI* report the length of longitudinal cracking within each severity as a percent of the section length (0.02 mile, primary lane).

These values are  $\geq 0$  and can exceed 100.

*%LOW* = Percent of interval length (primary lane, 0.02 in length), low severity

*%MED* = Percent of interval length (primary lane, 0.02 in length), medium severity

*%HI* = Percent of interval length (primary lane, 0.02 in length), high severity

Percent of interval length is computed as:

$$\frac{\text{length of respective longitudinal cracking}}{0.02 \text{ mile (105.6 feet)}}$$

In LC\_INDEX, the denominators 175, 75, and 25 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 175% of low severity alligator cracking for a 0.02 interval before failure, 75% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

### **Structural Crack Index**

$$SC\_INDEX = [100 - ((100 - AC\_INDEX) + (100 - LC\_INDEX))]$$

**Structural Crack Index** is a combination of Alligator Cracking and Longitudinal Cracking, and is used in the SCR formula in lieu of AC and LC separately.

### **Transverse Crack Index**

$$TC\_INDEX = 100 - 40 * [(LOW / 21.1) + (MED / 4.4) + (HI / 2.6)]$$

Where:

The values *LOW*, *MED* and *HI* report a count of the total number of transverse cracks (reported to three decimals) within each severity level, where one transverse crack is equal to the lane width. These values are  $\geq 0$ .

LOW = Number of cracks in interval (primary lane, 0.02 in length), low severity

MED = Number of cracks in interval (primary lane, 0.02 in length), medium severity

HI = Number of cracks in interval (primary lane, 0.02 in length), high severity

Number of cracks is computed as:

$$\frac{\text{Total length of transverse cracks}}{\text{Lane width}}$$

In TC\_INDEX, the denominators 21.1, 4.4, and 2.6 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 21.1 low severity transverse cracks for a 0.02 interval before failure, 4.4 cracks for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.



## **Patching Index**

$$\text{PATCH\_INDEX} = 100 - 40 * (\% \text{PATCHING} / 80)$$

Where:

The value *%PATCHING* reports the percentage of the observed pavement (0.02 mile, primary lane) that contains patching/potholes. This value ranges from 0 to 100.

*%PATCHING* = Percent of total area (primary lane, 0.02 in length)

Percent of total area is computed as:

$$\frac{\text{square foot area of patching/potholes}}{0.02 \text{ mile} * \text{lane width}}$$

There are no severity levels for patching. It either exists or does not.

In *PATCH\_INDEX*, the denominator 80 is the Maximum Allowable Extent (MAE) for each severity. In other words, we will allow up to 80% patching for a 0.02 interval before failure. As you can see, if patching/potholes reaches MAE the resulting index value is 60, or failure.

## **Rutting Index**

$$\text{RUT\_INDEX} = 100 - 40 * [(\% \text{LOW} / 535) + (\% \text{MED} / 205) + (\% \text{HI} / 40)]$$

Where:

20 rut depth measurements are taken per 0.02 interval for each of 2 wheel paths (left and right), resulting in a total of 40 measurements taken for both wheel paths. *Each wheelpath is analyzed independently for rut severities.* The values *%LOW*, *%MED* and *%HI* are a *total percentage* of left wheelpath percentage and right wheelpath percentage added together for the respective severity. These values range from 0 to 200.

*%LOW* = Percent of LOW ruts in left wheelpath based on 20 ruts, plus percent of LOW ruts in right wheelpath based on 20 ruts.

*%MED* = Percent of MED ruts in left wheelpath based on 20 ruts, plus percent of MED ruts in right wheelpath based on 20 ruts.

*%HI* = Percent of HI ruts in left wheelpath based on 20 ruts, plus percent of HI ruts in right wheelpath based on 20 ruts.

Percent of rut measurements within each severity can also be computed as:

$$\frac{\text{total number of ruts within each severity in both wheelpaths}}{20} * 100$$

In *RUT\_INDEX*, the denominators 535, 205, and 40 are the Maximum Allowable Extents for each severity. In other words, the formula allows up to 535% low severity

ruts for a 0.02 interval before. However, since 200 is the highest measurable percentage allowed, 535% is unattainable and therefore, no amount of LOW severity rutting will cause the RUT\_INDEX to fail a road. Similarly, since the MAE for MED severity rutting is 205, no amount of MED severity rutting will cause the RUT\_INDEX to reach 60 and fail the road. As you can see, LOW severity rutting reaches MAE the resulting index value is 60, or failure. This formula was intentionally designed to minimize the impact of LOW and MED severity rutting on RUT\_INDEX.

### **Roughness Condition Index (Asphalt)**

$$RCI = 32 * [5 * (2.718282 ^ {(-0.0041 * AVG IRI)})]$$

Where:

The value *AVG IRI* reports the average value of the Left IRI and Right IRI measurements for the interval (0.02 mile, primary lane). This value can range from approximately 40 to 999.0.

Average IRI is computed as:

$$\frac{\text{Left wheelpath IRI} + \text{Right wheelpath IRI}}{2}$$

There is no applicable threshold for failure for this index.

### **Roughness Condition Index (Concrete)**

$$RCI = -0.0012(IRI^2) + 0.0499(IRI) + 99.542$$

For concrete, PCR = RCI

### **Surface Condition Rating Index**

**SCR** = *Lowest* Index Value Of: [SC\_INDEX, TC\_INDEX, PATCH\_INDEX, RUT\_INDEX]

*Note: The modified SCR equation above combines AC\_INDEX and LC\_INDEX, and considers that a single AC/LC index value of the Structural Crack Index (SC\_INDEX). The lowest of the four computed index values (SC\_INDEX, TC\_INDEX, PATCH\_INDEX, or RUT\_INDEX) becomes the SCR.*

Where:

See above for determinations of SC\_INDEX, TC\_INDEX, PATCH\_INDEX and RUT\_INDEX.

The threshold for failure for this index is SCR = 60.

## Data Collection Vehicle Subsystems

---

Data on paved roads in Cycle 5 is collected by FHWA using a Pathway Services Inc. Data Collection Vehicle (DCV), called PathRunner. The DCV is driven in the primary-direction lane at posted speed limits and less.

### CAMERAS

Forward-facing and rear-facing video is collected as .jpg digital imagery at a frequency of 26.4 feet.

Two forward-facing cameras are mounted above the vehicle cab, one pointed straight ahead and the other to the right shoulder providing seamless 120 degree viewing.

<b>CAMERA SPECIFICATIONS</b>	
<b>Two Forward/ One Rear Facing</b>	
Camera lens/type	FUJINON CCTV LENS H16x10B-Y41
Focal length	10 mm – 160 mm
Image size	8.8 mm x 6.6mm
Image format	*.jpg
Image resolution	HD 2000 X 1200
Image pixel size	depends on distance
Zoom ratio	16x
Max Relative Aperture	1:2.5
Iris range	F25-T800 (Equivalent to F800)

Pavement images are created using a Laser Scan Imaging System. This system is composed of a single high resolution line-scan camera and two lasers configured to image an approximate 11-foot wide lane with 1 mm resolution.

<b>CAMERA SPECIFICATIONS</b>	
<b>Pavement Line Scan</b>	
Image size	4280 pixels/line
Image width	4 meters (3950 mm nominal)
Laser class	3B
Power	250W
Vehicle speed limitations	62 mph
Environment	Dry pavement, day or night
Sensor size (approx)	300 mm(H) x 375 mm(L) x 200 mm(D)
Image frame length	26.4 feet

### **DMI (Distance Measuring Instrument)**

The DMI (Distance Measuring Instrument) obtains road length measurements that are accurate to 0.1% for speeds up to 60 mph. The DMI is connected to the hub of the rear wheel on the driver's side, and is calibrated to the revolutions of the rear vehicle axle on a regular basis.

### **ROUGHNESS (IRI)**

The collection system includes a South Dakota type laser profiler manufactured based on active Class 1 ASTM E950 standards. The dynamic profile of the pavement surface is collected from which the IRI roughness data is computed. The sensors include one accelerometer on each wheelpath, one height sensor (laser) on each wheelpath, and a distance transducer.

<b>IRI SPECIFICATIONS</b>	
Reported IRI units	Inches/mile
Vehicle speed limitations	12-62 mph
IRI equipment certification	Texas Transportation Institute (TTI)
Wavelengths accommodated	6 in. – 300 feet
IRI computed & reported	World Bank Technical Paper Number 46
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E950-98 (2004), ASTM E 1926-08, AASHTO MP 11-08, AASHTO PP 49-08

### **RUTTING**

Rutting depths are measured using an INO Laser Rut Measurement System (LRMS). This system is a transverse profiling device that detects and characterizes pavement rutting. The LRMS can acquire full 4 meter width profiles of a pavement lane at normal traffic speeds and uses two laser profilers that digitize transverse sections of the pavement.

<b>RUTTING SPECIFICATIONS</b>	
Reported rut depth units	Inches
Vehicle speed limitations	Up to 62 mph
Sampling rate	30-150 profiles/second
Transverse resolution	1280 points/profile
Transverse field-of-view	4 m
Depth accuracy (nominal)	+/- 1 mm
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E1703M-95 (reapproved 2005)

## **GPS & INERTIAL SYSTEMS**

GPS is collected by an onboard system employing Omnistar real time correction and a gyroscope Inertial Measuring Unit (IMU) to provide accurate positioning data in instances of satellite obstruction. All GPS coordinates are tied to image and linear distance measurements.

<b>GPS SPECIFICATIONS</b>	
Static accuracy	Sub-meter
Dynamic accuracy	2-3 meters
Receiver	12 satellite tracking
Coordinate system	Lat Lon WGS 84
Environment	Day or night
Cross-slope	+ - 0.1 degrees
Grade	+ - 0.1 degrees

### GPS on Manually Rated Roads (MRR)

Parking areas, some roads, and other paved areas that are not fully drivable with the DCV are collected manually by field technicians. GPS is collected for these routes using portable Trimble GPS backpack units.

## Geodatabase – Background and Metadata

---

In addition to this park report, a *geodatabase* containing both tabular and spatial data specific to this park has been provided. All data disseminated in the preceding report has been obtained from the tables and fields within said geodatabase. The geodatabase can be referenced for tabular data via Microsoft Access or for both tabular and spatial data via ESRI's ArcGIS Suite of software which consists of; ArcMap, ArcCatalog and ArcExplorer. Consolidating the RIP data into one database creates a seamless relationship of tables and geographic data. It will allow RIP to facilitate easier updates and enhancements in the future.

A geodatabase can be thought of as simply a database containing spatial data. Many different tables are contained with the park's geodatabase. A complete and thorough description of the tables and fields contained within this geodatabase can be found in the *metadata*. The metadata is attached directly within the geodatabase and can be accessed via ESRI's ArcCatalog.

## **GLOSSARY OF TERMS AND ABBREVIATIONS**

<b><u>TERM OR ABBREVIATION</u></b>	<b><u>DESCRIPTION OR DEFINITION</u></b>
AC	Alligator Cracking
CRS	Condition Rating Sheets (Section 5)
DCV	Data Collection Vehicle
Excellent	Excellent rating with an index value of 95 to 100
Fair	Fair rating with an index value from 61 to 84
FUNCT_CLASS	Functional Classification (see Route ID, Section 2)
Good	Good rating with an index value from 85 to 94
IRI	International Roughness Index
Lane Width	Width from road centerline to fogline, or from centerline to edge-of-pavement when no fogline exists
LC	Longitudinal Cracking
MRR	Manually Rated Route
MRL	Manually Rated Line
MRP	Manually Rated Polygon
N/A	Not Applicable
NC	Not Collected
PATCH	Patching and Potholes
Paved Width	Width from edge-of-pavement to edge-of-pavement
PCR	Pavement Condition Rating
PKG	Parking Area
Poor	Poor rating with an index value of 0 to 60
RCI	Roughness Condition Index
SC	Structural Cracking
SCR	Surface Condition Rating
TC	Transverse Cracking