



Federal Lands Highway Road Inventory Program

Road Inventory and Condition Assessment




Lewis and Clark National Historical Park
LEWI - 9420

Cycle 5 Report

Prepared By: Federal Highway Administration
Road Inventory Program (RIP)
Data Collection Date: 08/2010
Report Date: 02/2012

Lewis and Clark National Historical Park in Washington and Oregon

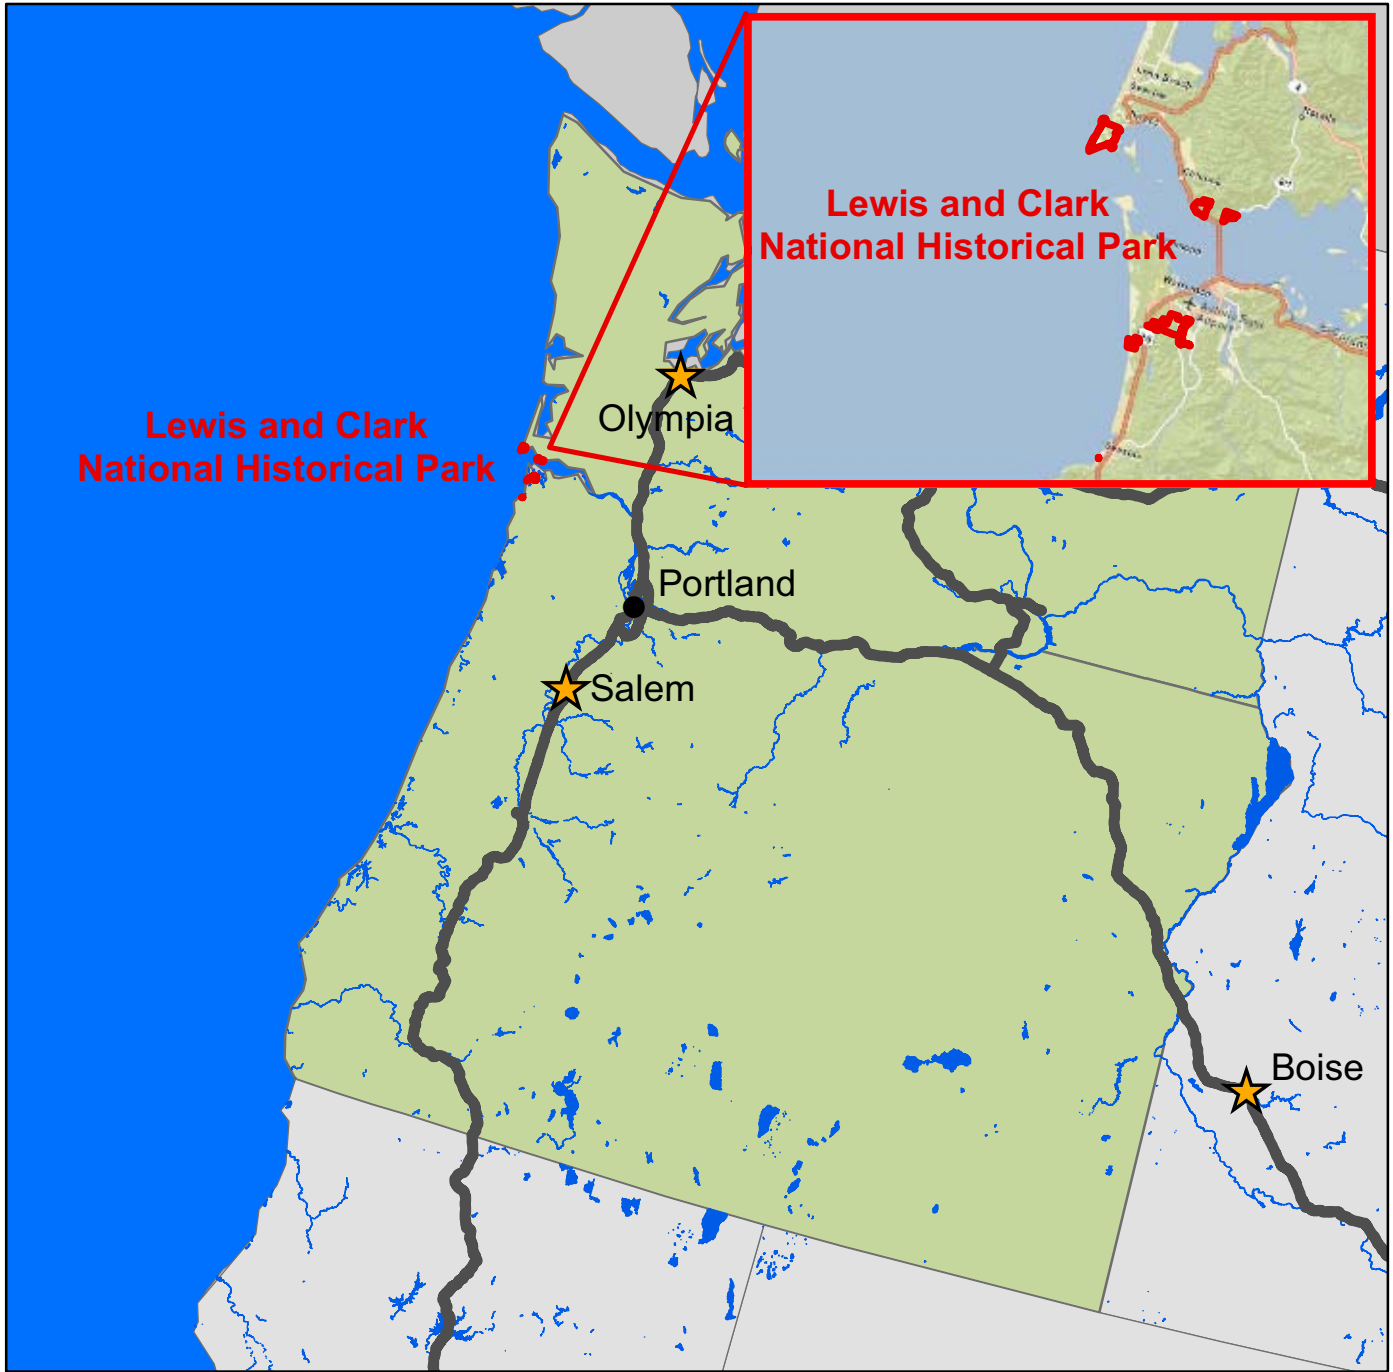



DCV = Data Collection Vehicle

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1. INTRODUCTION	1 - 1
2. PARK ROUTE INVENTORY Route IDs, Subcomponents & Changes Report (As Applicable)	2 - 1
3. PARK SUMMARY INFORMATION Paved Route Miles and Percentages by Functional Class and PCR DCV Road Condition Summary Parkwide DCV Condition Summary	3 - 1 3 - 3 3 - 5
4. PARK ROUTE LOCATION MAPS Route Location Key Map Route Location Area Map Route Condition Key Map – PCR Mile by Mile Route Condition Area Map – PCR Mile by Mile	4 - 1 4 - 2 4 - 5 4 - 6
5. PAVED ROUTE CONDITION RATING SHEETS CRS Pages	5 - 1
6. MANUALLY RATED PAVED ROUTE CONDITION RATING SHEETS MRR Pages	6 - 1
7. PARKING AREA CONDITION RATING SHEETS Paved Parking Area Pages	7 - 1
8. PARKWIDE / ROUTE MAINTENANCE FEATURES SUMMARIES Parkwide Maintenance Features Summary DCV Route Maintenance Features Summary Structure List	8 - 1 8 - 2 8 - 3
9. ROUTE MAINTENANCE FEATURES ROAD LOGS Route Maintenance Features Road Logs	9 - 1
10. APPENDIX Explanation of Changes to the RIP Index Equations and Determination of PCR Explanation of the Excellent, Good, Fair and Poor Condition Descriptions Description of Rating System Surface Distresses Index Formulas Data Collection Vehicle Subsystems Geodatabase – Background and Metadata Glossary of Terms and Abbreviations	10 - 1 10 - 2 10 - 3 10 - 5 10 - 12 10 - 16 10 - 19 10 - 20

Section 1 Introduction



Lewis and Clark National Historical Park



Federal Lands Highway
Road Inventory Program

INTRODUCTION

The Federal Highway Administration, (FHWA), in the mid 1970s, was charged with the task of identifying surface condition deficiencies and corrective priorities on National Park Service (NPS) roads and parkways. Additionally, FHWA was tasked with establishing an integrated maintenance features inventory, locating features such as culverts, guardrails, and signs, among others, along NPS roads and parkways. As a result, in 1976 the NPS and FHWA entered into an MOA (Memorandum Of Agreement) which established the RIP (Road Inventory Program). This MOA was terminated and revised in 1980 to establish a new MOA aiming to update RIP data and develop a long-range program to improve and maintain NPS roads to designated condition standards and establish a maintenance management program.

The FHWA completed this initial phase of the RIP in the early 1980s. As a result of this effort, each NPS site included in the study received a RIP Report known as the “Brown Book” which included the information collected during this first RIP phase.

In the 1990s, the effort was again renewed to update and maintain the RIP data. By this time the computer age was upon us and a process was employed that relied heavily on electronic data collection and computer technology. A cyclical program was developed and the RIP completed two cycles of data collection from 1994 to 2001. Cycle 1, starting in 1994, was conducted in 44 “large parks” (parks containing 10 or more paved route miles). Cycle 2 began in 1997 and comprised 79 large parks and 5 small parks totaling 4,874 paved route miles. Each of these parks received a RIP Report known as the “Blue Book”. Cycle 3, from 2001 to 2004, was conducted in all parks, large and small, that contained any paved routes, including parking areas and, again, each park received a RIP Report and associated electronic files.

Cycle 4 was initiated in the spring of 2006 covering 86 large parks and several associated small parks consisting of 5,553 paved route miles and 6,232 paved parking areas. Data collection has been completed for Cycle 4 and all data has been delivered to the NPS.

In 2005, the FHWA began implementing the use of a Pavement Management System (PMS) to assist the NPS in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Regional, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions, an extensive study was completed throughout 2010 that has resulted in changes to the RIP condition reporting method, specifically the distresses and indexes that comprise the Pavement Condition Rating (PCR). It was determined that a better representation of PCR could

be achieved by modifying the relative impact certain distresses would have on the overall rating. The changes that were implemented were endorsed by management at both the FHWA and NPS in October 2010. These changes will allow greater use of RIP and HPM data for not simply condition data reporting, but also as a reliable tool for project identification and selection. Because of these changes, the PCR Condition ratings reported in Cycle 5 do not directly relate to the condition ratings reported in previous cycle RIP Reports. For more detailed information about the changes, see Section 3 and Section 10 in this RIP Report.

Cycle 5 has launched in the summer of 2010 and will again comprise all parks, large and small, that are served by paved roads and/or parking areas. For Cycle 5, the decision was made to collect condition data in large parks on Functional Class 1, 2, and 7 paved routes only, as well as any new routes that were previously not collected. In small parks, all paved routes and parking areas will be collected. As a result, this will include 81 large parks with 4,459 paved route miles and 168 small parks with 529 paved route miles and associated paved parking areas.

Since 1984, the Road Inventory Program has been funded through the Federal Lands Highway Park Roads and Parkways (PRP) Program. Currently, coordination of the RIP with FLH is under the NPS Washington Headquarters Park Facility Management Division. The FLH Washington office coordinates policy and prepares national reports and needs assessment studies for Congress.

In 1998, the Transportation Equity Act for the 21st Century (TEA-21) amended Title 23 U.S.C., and inserted Section 204(a)(6) requiring the FHWA and NPS, to develop by rule, a Pavement Management System (PMS) applied to park roads and parkways serving the National Park System.

FLH is responsible for the accuracy of all data presented in this report. Any questions or comments concerning the contents of this report should be directed to the national RIP Coordinator located in Sterling, Virginia.

Respectfully,

FHWA RIP Team

FHWA/Eastern Federal Lands
21400 Ridgetop Circle
Sterling, VA 20166
(703) 404-6371

FHWA/Central Federal Lands
12300 West Dakota Ave
Lakewood, CO 80228
(720) 963-3560

Section 2

Park Route Inventory



Lewis and Clark National Historical Park



Federal Lands Highway
Road Inventory Program

Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 02/02/2012

(Numerical By Route #)

Page 1 of 4

Shading Color Key:

Red text denotes
approx. mileage

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

** DCV - Data Collection Vehicle NC - Not Collected

LEWI

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description		Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
					From	To								
0010	5	106396		VISITOR CENTER ACCESS ROAD	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))	TO ROUTE 0903 (VISITOR CENTER PARKING)	FORT CLATSOP	0.18	0.00	0.18	1	0	AS	2
0011	5	23699		PARK ENTRANCE ROAD (OLD COUNTY ROAD)	FROM EAST PARK BOUNDARY	TO SOUTH PARK BOUNDARY NEAR NETUL ENTRANCE	FORT CLATSOP	1.80	0.00	1.80	1	0	AS	2
0020	5	231739		STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GRAY DRIVE	FROM INTERSECTION WITH ROUTE 0120 (NORTH HEAD LIGHTHOUSE ROAD) AND STATE ROUTE 100 NORTH HEAD ROAD (NON NPS) AT MP 2.25	TO MP 4.02 AT KLAHANEE DRIVE	CAMP DISAPPOINTMENT	1.78	0.00	1.78	1	0	AS	1
0021	5	231741		STATE ROUTE 100 SPUR / FORT CANBY ROAD	FROM ROUTE 0020 (STATE ROUTE 100 NORTH HEAD ROAD/CAPTAIN ROBERT GRAY DRIVE)	TO LEWIS AND CLARK INTERPRETIVE CENTER PARKING (NON NPS)	CAMP DISAPPOINTMENT	0.94	0.00	0.94	1	0	AS	1
0120	5	231740		NORTH HEAD LIGHTHOUSE ROAD	FROM INTERSECTION WITH STATE ROUTE 100 NORTH HEAD ROAD (NON NPS) AND ROUTE 0020 (STATE ROUTE 100 NORTH HEAD ROAD/CAPTAIN ROBERT GRAY DRIVE)	TO DEAD END	CAMP DISAPPOINTMENT	0.48	0.00	0.48	2	0	AS	1
0201	NC	106395		ALDER CREEK ROAD	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))	TO BOUNDARY	FORT CLATSOP	0.00	0.06	0.06	5	0	GR	
0400	5	28137		BURN ROAD	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))	TO DEAD END	FORT CLATSOP	0.18	0.14	0.32	5	0	AS	2
0401	NC	231744		DRAINFIELD ROAD	FROM ROUTE 0400 (BURN ROAD)	TO END	FORT CLATSOP	0.00	0.04	0.04	5	0	GR	
0402	NC	231253		STAGECOACH ROAD	FROM PERKINS ROAD (COUNTY SECTION) AT LOCKED GATE	TO JUNCTION WITH FORT TO SEA TRAIL NEAR OVERLOOK	FORT CLATSOP	0.00	0.00	0.00	5	0	GR	
0403	NC	231254		LOWER SKIPANON ROAD	FROM PERKINS ROAD (COUNTY SECTION) AT LOCKED GATE	TO JUNCTION WITH FORT TO SEA TRAIL NEAR TAG PROPERTY	FORT CLATSOP	0.00	0.00	0.00	5	0	GR	
0404	NC	231743		DISMAL NITCH ROADS	FROM STATE ROUTE 401	TO END	DISMAL NITCH	0.00	0.00	0.00		0	GR	

Cycle 5 NPS/RIP Route ID Report

Shading Color Key:
 Red text denotes
 approx. mileage

White = Paved Routes, DCV Driven
 Grey = Paved Routes, DCV not Driven

Yellow = Unpaved Routes, DCV not Driven
 Black = State, Local or Private non-NPS Routes

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

■ = Concession Route Flag ON

*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

** DCV - Data Collection Vehicle NC - Not Collected

LEWI

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description From To	Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
0900	5	106382		BUILDING 1 ADMINISTRATIVE SITE	FROM ROUTE 0010 (VISITOR CENTER ACCESS ROAD) TO PARKING	FORT CLATSOP	0.00	0.00	0.00		4,626	AS	2
0901	5	106397		V.C. EMPLOYEE PARKING	FROM ROUTE 0900 (BUILDING 1 ADMINISTRATIVE SITE) TO PARKING	FORT CLATSOP	0.00	0.00	0.00		6,938	AS	2
0902ZZ	5	231273		VISITOR CENTER OVERFLOW AND RV PARKING AREAS	FROM ROUTE 0010 (VISITOR CENTER ACCESS ROAD) TO PARKING	FORT CLATSOP	0.00	0.00	0.00		27,307	AS	2
0903	5	106381		VISITOR CENTER PARKING	FROM END OF ROUTE 0010 (VISITOR CENTER ACCESS ROAD) TO PARKING	FORT CLATSOP	0.00	0.00	0.00		18,177	AS	2
0904ZZ	5	106380		MAINTENANCE PARKING AREAS	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD)) TO PARKING	FORT CLATSOP	0.00	0.00	0.00		11,205	AS	2
0909ZZ	5	88811		NETUL LANDING PARKING AREAS	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD)) TO PARKING	FORT CLATSOP	0.00	0.00	0.00		94,093	AS	2
0910	5	228259		FORT TO SEA TRAIL PARKING LOT	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD)) TO PARKING	FORT CLATSOP	0.00	0.00	0.00		5,320	AS	2
0911	5	231774		SUNSET BEACH TRAILHEAD PARKING	FROM SUNSET BEACH ROAD TO PARKING	SUNSET BEACH	0.00	0.00	0.00		18,103	AS	2
5000	5			STATE ROUTE 101	FROM EAST PARK BOUNDARY TO WEST PARK BOUNDARY	STATION CAMP	1.08	0.00	1.08		0	AS	3

Cycle 5 NPS/RIP Route ID Report

Shading Color Key:
Red text denotes approx. mileage

White = Paved Routes, DCV Driven
Grey = Paved Routes, DCV not Driven

Yellow = Unpaved Routes, DCV not Driven
Black = State, Local or Private non-NPS Routes

Blue = All Paved Parking Areas
■ = Concession Route Flag ON

Green = All Unpaved Parking Areas

*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

** DCV - Data Collection Vehicle NC - Not Collected

CYCLE 5 SUMMARY TOTALS FOR LEWIS AND CLARK NATIONAL HISTORICAL PARK

CYCLE 5 ROUTE TOTALS

DCV Driven Route Miles	5.36
Manually Rated Route Miles	0.00
TOTAL PARK ROUTE MILES COLLECTED IN CYCLE 5	5.36
Manually Rated Routes (SQFT)	0
TOTAL UNPAVED PARK ROUTE MILES	0.24

CYCLE 5 CONCESSION TOTALS

Concession Paved Route Miles	0.00
Concession Unpaved Route Miles	0.00
TOTAL CONCESSION ROUTE MILES	0.00
Concession Paved Parking Area SQFT	0
Concession Unpaved Parking Area SQFT	0
TOTAL CONCESSION PARKING AREA SQFT	0
Concession Manually Rated Rotes SQFT	0

* CYCLE 5 PARKING AREA TOTALS

Paved Parking (SQFT)	185,769
Unpaved Parking (SQFT)	0
TOTAL PARKING (SQFT)	185,769

CYCLE 5 WEIGHTED AVERAGE PARK VALUES

DCV Driven PCR	88
**Manually Rated Routes PCR	N/A
**Parking PCR	88
***Total Equivalent Lane Miles	14.12

* - The Parking Area Totals SQFT value represents all parking areas collected in Cycle 5, both park and concessionaire.

** - Parking and Manually Rated Routes are assigned the following PCR values based on their observed condition: Construction=-1, Excellent=97, Good=90, Fair=73, and Poor=45.

*** - Equivalent Lane Miles are calculated by route using the following equations : DCV and Manually Rated Lines Routes=(PAVE_WIDTHxPAVED_MI)/11 foot lane. Parking Areas=SQ_FEET/5280/11. Manually Rated Polygons=SQ_FEET/5280/11.

Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 02/02/2012

(Numerical By Route #)

Page 4 of 4

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

= Concession Route Flag ON

*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

** DCV - Data Collection Vehicle NC - Not Collected

General Park Road Functional Classification Table

- Class 1** Principal Park Road/Rural Parkway (Public Roads) Roads which constitute the main access route, circulatory tour, or thoroughfare for park visitors. Route Numbers 1 - 99. Note: Rural parkways (e.g. Natchez Trace) are numbered 1 - 9. State Routes Inventoried for Park. Route Numbers 5000-5999
- Class 2** Connector Park Road (Public Roads) - Roads which provide access within a park to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, etc. Route Numbers 100-199.
- Class 3** Special Purpose Park Road (Public Roads) - Roads which provide circulation within public areas, such as campgrounds, picnic areas, visitor center complexes, concessionaire facilities, etc. These roads generally serve low-speed traffic and are often designed for one-way circulation. Route Numbers 200-299.
- Class 4** Primitive Park Roads (Public Roads) - Roads which provide circulation through remote areas and/or access to primitive campgrounds and undeveloped areas. These roads frequently have no minimum design standards and their use may be limited to specially equipped vehicles. Route Numbers 200-299. Note: Functional Classes 3 and 4 have the same route numbers because, historically, they were numbered similarly.
- Class 5** Administrative Access Road (Administrative Roads) - All public roads intended for access to administrative developments or structures such as park offices, employee quarters, or utility areas. Route Numbers 400-499.
- Class 6** Restricted Road (Administrative Roads) - All roads normally closed to the public, including patrol roads, truck trails, and other similar roads. Route Numbers 400-499. Note: Functional Classes 5 and 6 have the same route numbers because historically they were numbered similarly and often there is little distinction between these routes. For example, because utility areas and employee housing are often closed to the public, this restriction would result in classification of FC 6 rather than FC 5.
- Class 7** Urban Parkway (Urban Parkways and City Streets) - These facilities serve high volumes of park and non-park related traffic and are restricted, limited-access facilities in an urban area. This category of roads primarily encompasses the major parkways which serve as gateways to our nation's capital. Other major park roads or portions thereof, however, may be included in this category. Route Numbers 1-9.
- Class 8** City Streets (Urban Parkways and City Streets) - City streets are usually extensions of the adjoining street system that are owned and maintained by the National Park Service. The construction and/or reconstruction should conform with accepted local engineering practice and local conditions. Route Numbers 600-699.

A park road system contains those roads within or giving access to a park or other unit of the NPS which are administered by the NPS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a park road is not based on traffic volumes or design speed, but on the intended use or function of that road or route.

The historic route numbering system also included a 300 number series for interpretive roads, and a 500 series for one-way roads. There are approximately 250 roads nationwide which are designated by the 300 and 500 series. The numbers for these roads will be maintained for reporting consistency. However, since these interpretive and one-way routes are not as clearly tied to a specific functional class, the 300 and 500 series will be discontinued for future use.

5000 route numbers are assigned to Non-NPS Routes that are State, County or City owned which border, traverse, or provide access to Park Facilities or Assets. 5000 Routes are driven for GPS and Video Log only.

Surface Type Abbreviations:

- AS - Asphaltic Concrete Pavement**
- CO - Portland Cement Concrete Pavement**
- BR - Brick or Pavers Road Bed**
- CB - Cobble Stone Road Bed**
- GR - Gravel Road Bed**
- SA - Sand Road Bed**
- NV - Native or Dirt Material Road Bed**
- OT - Other Materials Road Bed**

NPS/RIP Subcomponent Details for LEWI

Road Inventory Program 01/22/2012

(Numerical By Subcomponent #)

Page 1 of 2

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

LEWI

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Asset Entered in FMSS System

Rte. No.	FMSS No.	Cycle Collected	Route Name	From	To	Concess Route	Func. Class	Paved Miles	Un-Paved Miles	Total Route Length	Manual Rated SQ/FT
0902ZZ	231273	5	VISITOR CENTER OVERFLOW AND RV PARKING AREAS	FROM ROUTE 0010 (VISITOR CENTER ACCESS ROAD)	TO PARKING			0.00	0.00	0.00	27,307
0904ZZ	106380	5	MAINTENANCE PARKING AREAS	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))	TO PARKING			0.00	0.00	0.00	11,205
0909ZZ	88811	5	NETUL LANDING PARKING AREAS	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))	TO PARKING			0.00	0.00	0.00	94,093

Asset LEWI-0902ZZ Subcomponent Breakdown

Rte. No.	FMSS No.	Cycle Collected	Route Name	From	To	Concess Route	Func. Class	Paved Miles	Un-Paved Miles	Total Route Length	Manual Rated SQ/FT
0902Z	231273	5	OVERFLOW PARKING	FROM ROUTE 0010 (VISITOR CENTER ACCESS ROAD)	TO ROUTE 0010 (VISITOR CENTER ACCESS ROAD)			0.00	0.00	0.00	22,517
0908Z	231273	5	BUS AND RV PARKING	ADJACENT TO ROUTE 0010 (VISITOR CENTER ACCESS ROAD)				0.00	0.00	0.00	4,790

Asset LEWI-0904ZZ Subcomponent Breakdown

Rte. No.	FMSS No.	Cycle Collected	Route Name	From	To	Concess Route	Func. Class	Paved Miles	Un-Paved Miles	Total Route Length	Manual Rated SQ/FT
0904Z	106380	5	MAINTENANCE SHOP PARKING	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))	TO PARKING			0.00	0.00	0.00	9,334
0905Z	106380	5	RESIDENCE PARKING	FROM ROUTE 0904Z (MAINTENANCE SHOP PARKING)	TO PARKING			0.00	0.00	0.00	1,871

NPS/RIP Subcomponent Details for LEWI

Road Inventory Program 01/22/2012

(Numerical By Subcomponent #)

Page 2 of 2

Shading Color Key:

Red text denotes approx. mileage

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

LEWI

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Asset LEWI-0909ZZ Subcomponent Breakdown

Rte. No.	FMSS No.	Cycle Collected	Route Name	Route Description		Concess Route	Func. Class	Paved Miles	Un-Paved Miles	Total Route Length	Manual Rated SQ/FT
				From	To						
0909AZ	88811	5	NETUL LANDING VISITOR AND RV PARKING	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))	TO PARKING			0.00	0.00	0.00	72,218
0909BZ	88811	5	NETUL LANDING BUS LOOP	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))	TO PARKING			0.00	0.00	0.00	21,875

ROUTE IDENTIFICATION CHANGES TO PAVED ROUTES FROM PREVIOUS CYCLE - LEWI

ROUTES ADDED FROM PREVIOUS INVENTORY:			
Route #	Route Name	Reason for Addition	Comments
0020	STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GRAY DRIVE	OTHER	ADDED IN CYCLE 5.
0021	STATE ROUTE 100 SPUR / FORT CANBY ROAD	OTHER	ADDED IN CYCLE 5.
0120	NORTH HEAD LIGHTHOUSE ROAD	OTHER	ADDED IN CYCLE 5.
0909ZZ	NETUL LANDING PARKING AREAS	RECENTLY CONSTRUCTED ROUTE	ADDED IN CYCLE 5.
0910	FORT TO SEA TRAIL PARKING LOT	RECENTLY CONSTRUCTED ROUTE	ADDED IN CYCLE 5.
0911	SUNSET BEACH TRAILHEAD PARKING	RECENTLY CONSTRUCTED ROUTE	ADDED IN CYCLE 5.
5000	STATE ROUTE 101	OTHER	ADDED IN CYCLE 5.
ROUTES MODIFIED FROM PREVIOUS INVENTORY:			
Route #	Route Name	Type of Modification	Comments
0011	PARK ENTRANCE ROAD (OLD COUNTY ROAD)	LENGTH CHANGE	THE START AND END LOCATIONS WERE EXTENDED IN CYCLE 5 TO REACH THE PARK BOUNDARIES.

ROUTE IDENTIFICATION CHANGES TO PAVED ROUTES FROM PREVIOUS CYCLE - LEWI

OTHER CHANGES FROM PREVIOUS INVENTORY:			
Route #	Route Name	Type of Change	Comments
0902ZZ	VISITOR CENTER OVERFLOW AND RV PARKING AREAS	ROUTES COMBINED	CYCLE 3 ROUTES 0902 AND 0908 WERE COMBINED TO MAKE ROUTE 0902ZZ IN CYCLE 5.
0904ZZ	MAINTENANCE PARKING AREAS	ROUTES COMBINED	CYCLE 3 ROUTES 0904 AND 0905 WERE COMBINED TO MAKE ROUTE 0904ZZ IN CYCLE 5.

Section 3

Park Summary Information



Lewis and Clark National Historical Park



Federal Lands Highway
Road Inventory Program

LEWI: PAVED ROUTE MILES AND PERCENTAGES BY FUNCTIONAL CLASS AND PCR

F.C.	Pavement Condition Rating (PCR)								TOTAL MILES
	Poor (0-60)		Fair (61-84)		Good (85-94)		Excellent (95-100)		
	MILES	%	MILES	%	MILES	%	MILES	%	
1	0.14	2.61%	1.80	33.58%	0.82	15.30%	1.94	36.19%	4.70
2	0.02	0.37%					0.46	8.58%	0.48
3									
4									
5	0.18	3.36%							0.18
6									
7									
8									
Totals	0.34	6.34%	1.80	33.58%	0.82	15.30%	2.40	44.78%	5.36

Note: The information in this table is derived from the PMS_20 table in the Park database, which only contains processed data from routes collected with the Data Collection Vehicle (DCV). Information for Manually Rated Routes (MRR) and Parking Areas is not reported in this table. Only Functional Class 1, 2, & 7 routes, and any new routes not previously collected by RIP, are collected in Large Parks.


Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that have been implemented in Cycle 5, we will also aim to provide greater assistance in translating excellent/good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 0-60. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.


Condition Categories and Treatments

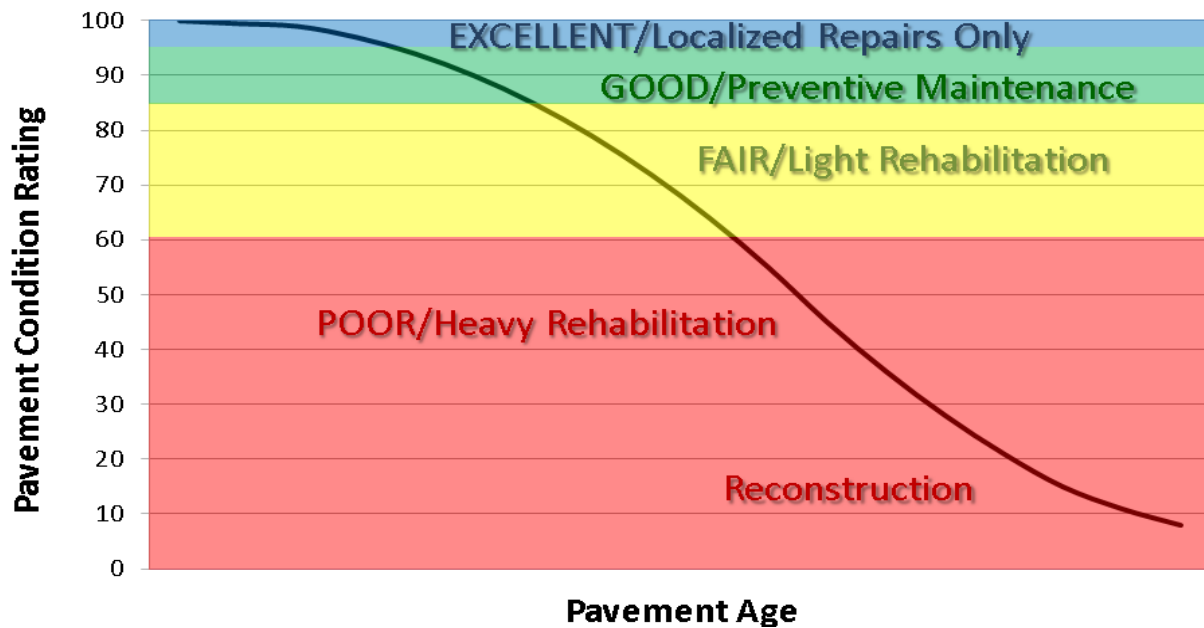

LEWI: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle


ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	ROUTE LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0010	VISITOR CENTER ACCESS ROAD	1	0.18	ASPHALT	96	96
0011	PARK ENTRANCE ROAD (OLD COUNTY ROAD)	1	1.80	ASPHALT	99	99
0020	STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GRAY DRIVE	1	1.78	ASPHALT	94	77
0021	STATE ROUTE 100 SPUR / FORT CANBY ROAD	1	0.94	ASPHALT	95	84
0120	NORTH HEAD LIGHTHOUSE ROAD	2	0.48	ASPHALT	93	93

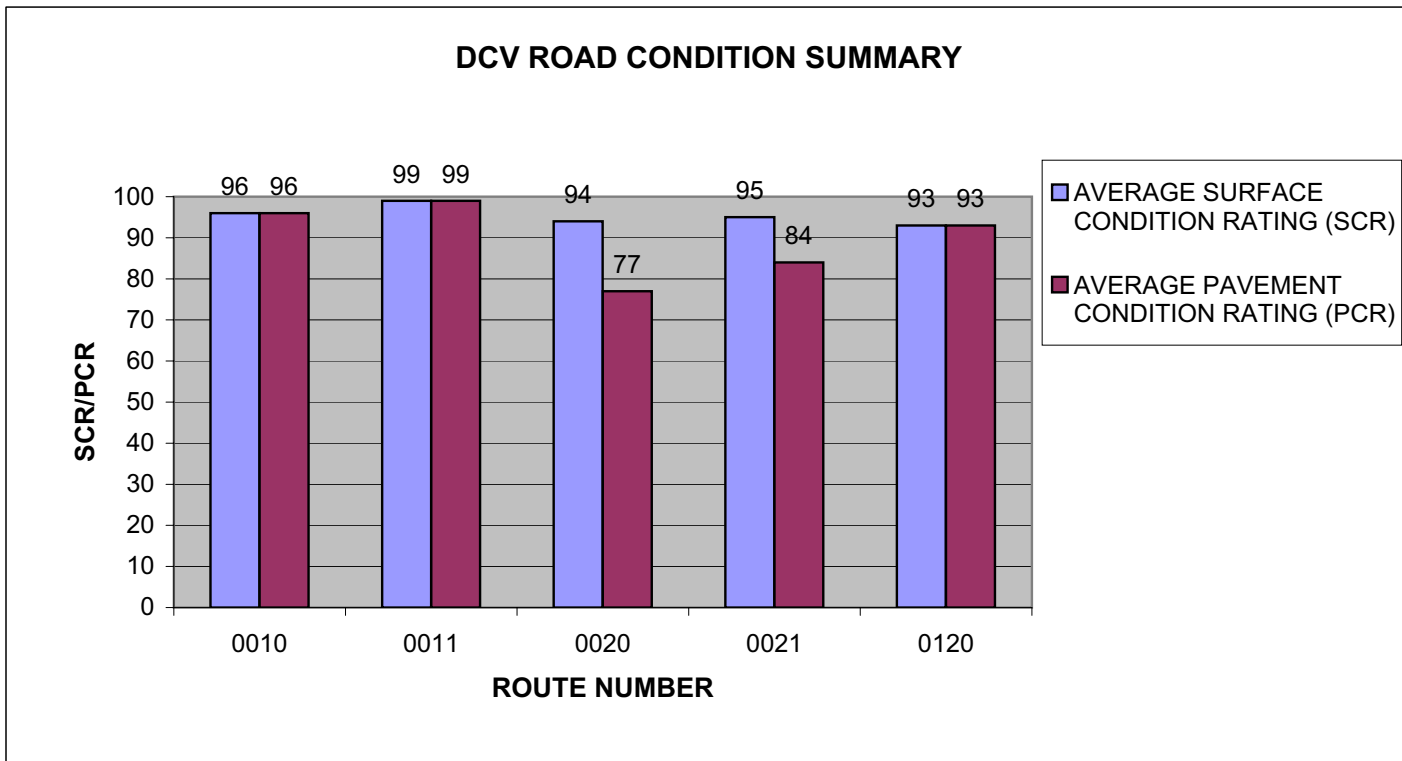

LEWI: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle

ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	ROUTE LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0400	BURN ROAD	5	0.32	ASPHALT	N/A	N/A

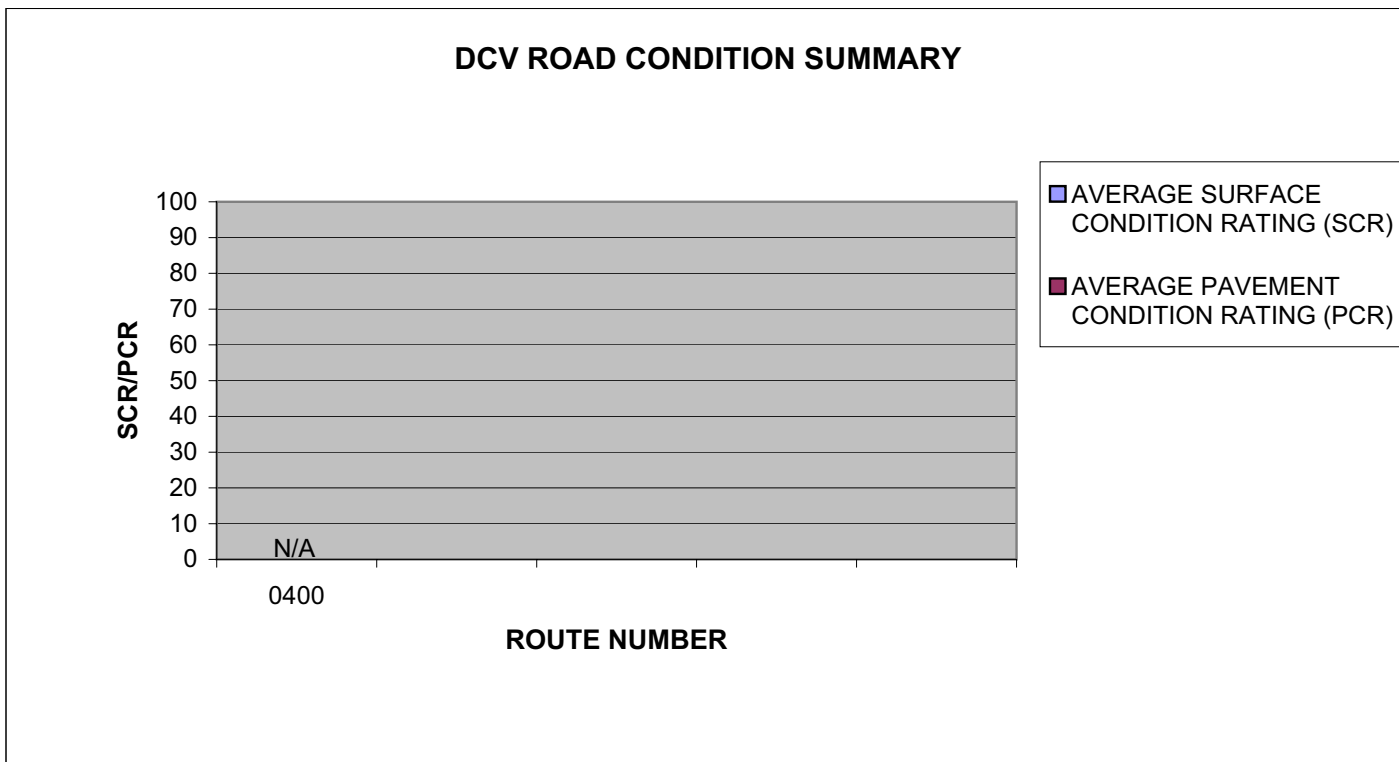


NOTE: Condition data cannot be reported in Cycle 5 for Route 0400 "Burn Road" due to the presence of debris / moisture on the road that obscures the surface of the road.

LEWI: PARKWIDE DCV CONDITION SUMMARY

AVERAGE PAVEMENT CONDITION RATING (PCR)	AVERAGE ROUGHNESS CONDITION INDEX (RCI)	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE RUT INDEX	AVERAGE ALLIGATOR CRACKING INDEX	AVERAGE LONGITUDINAL CRACKING INDEX	AVERAGE TRANSVERSE CRACKING INDEX	AVERAGE PATCHING INDEX
88	74	96	97	99	98	100	99

All Index values are based on Data Collection Vehicle (DCV) driven roads that were collected in Cycle-5.

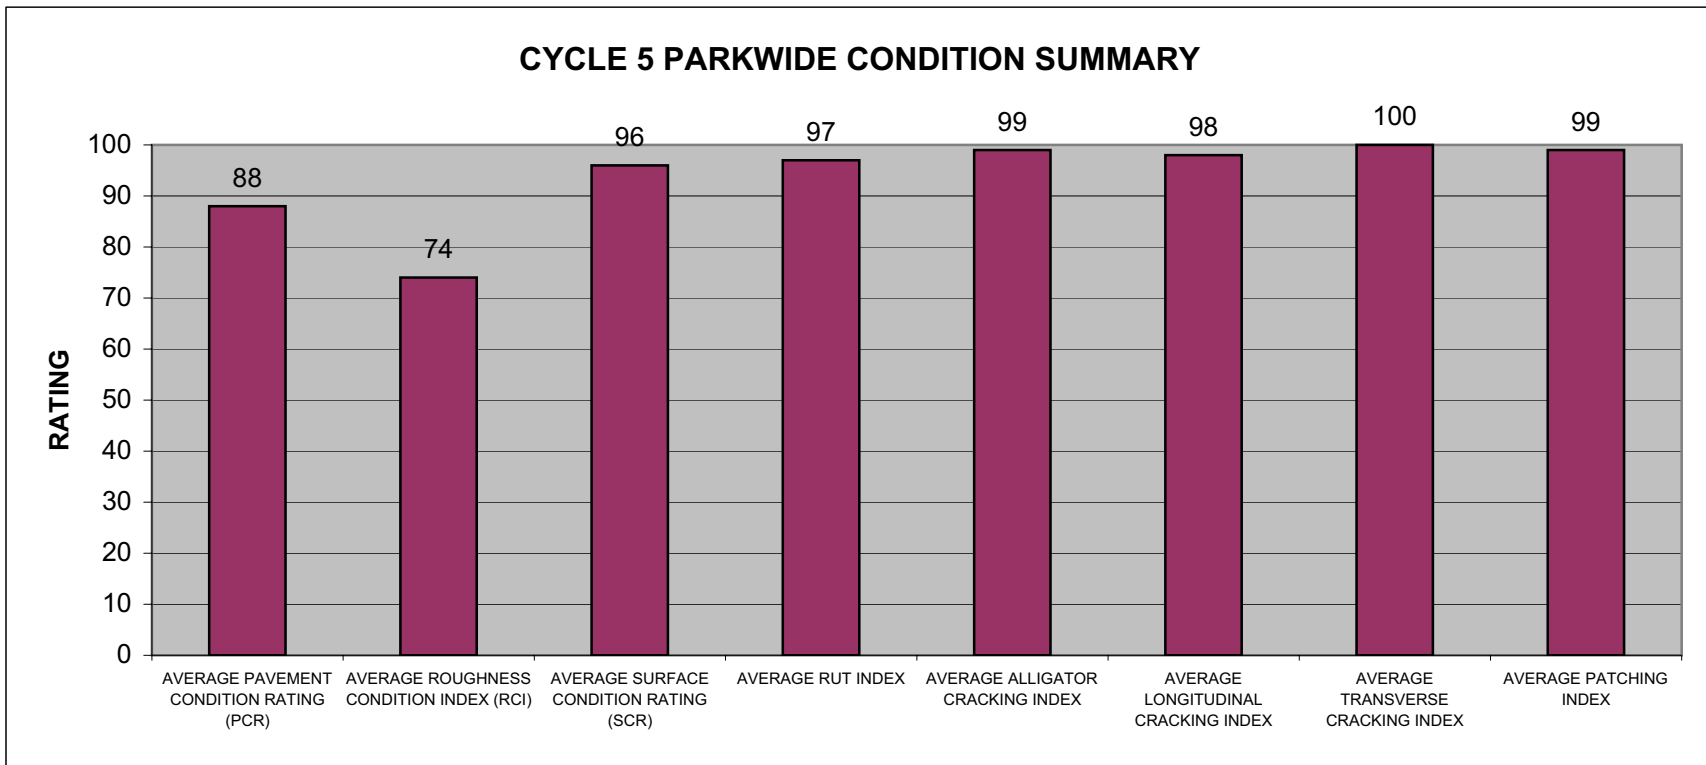

Section 4

Park Route Location Maps





Lewis and Clark National Historical Park



Federal Lands Highway
Road Inventory Program

Lewis and Clark National Historical Park Route Location Map Key Map

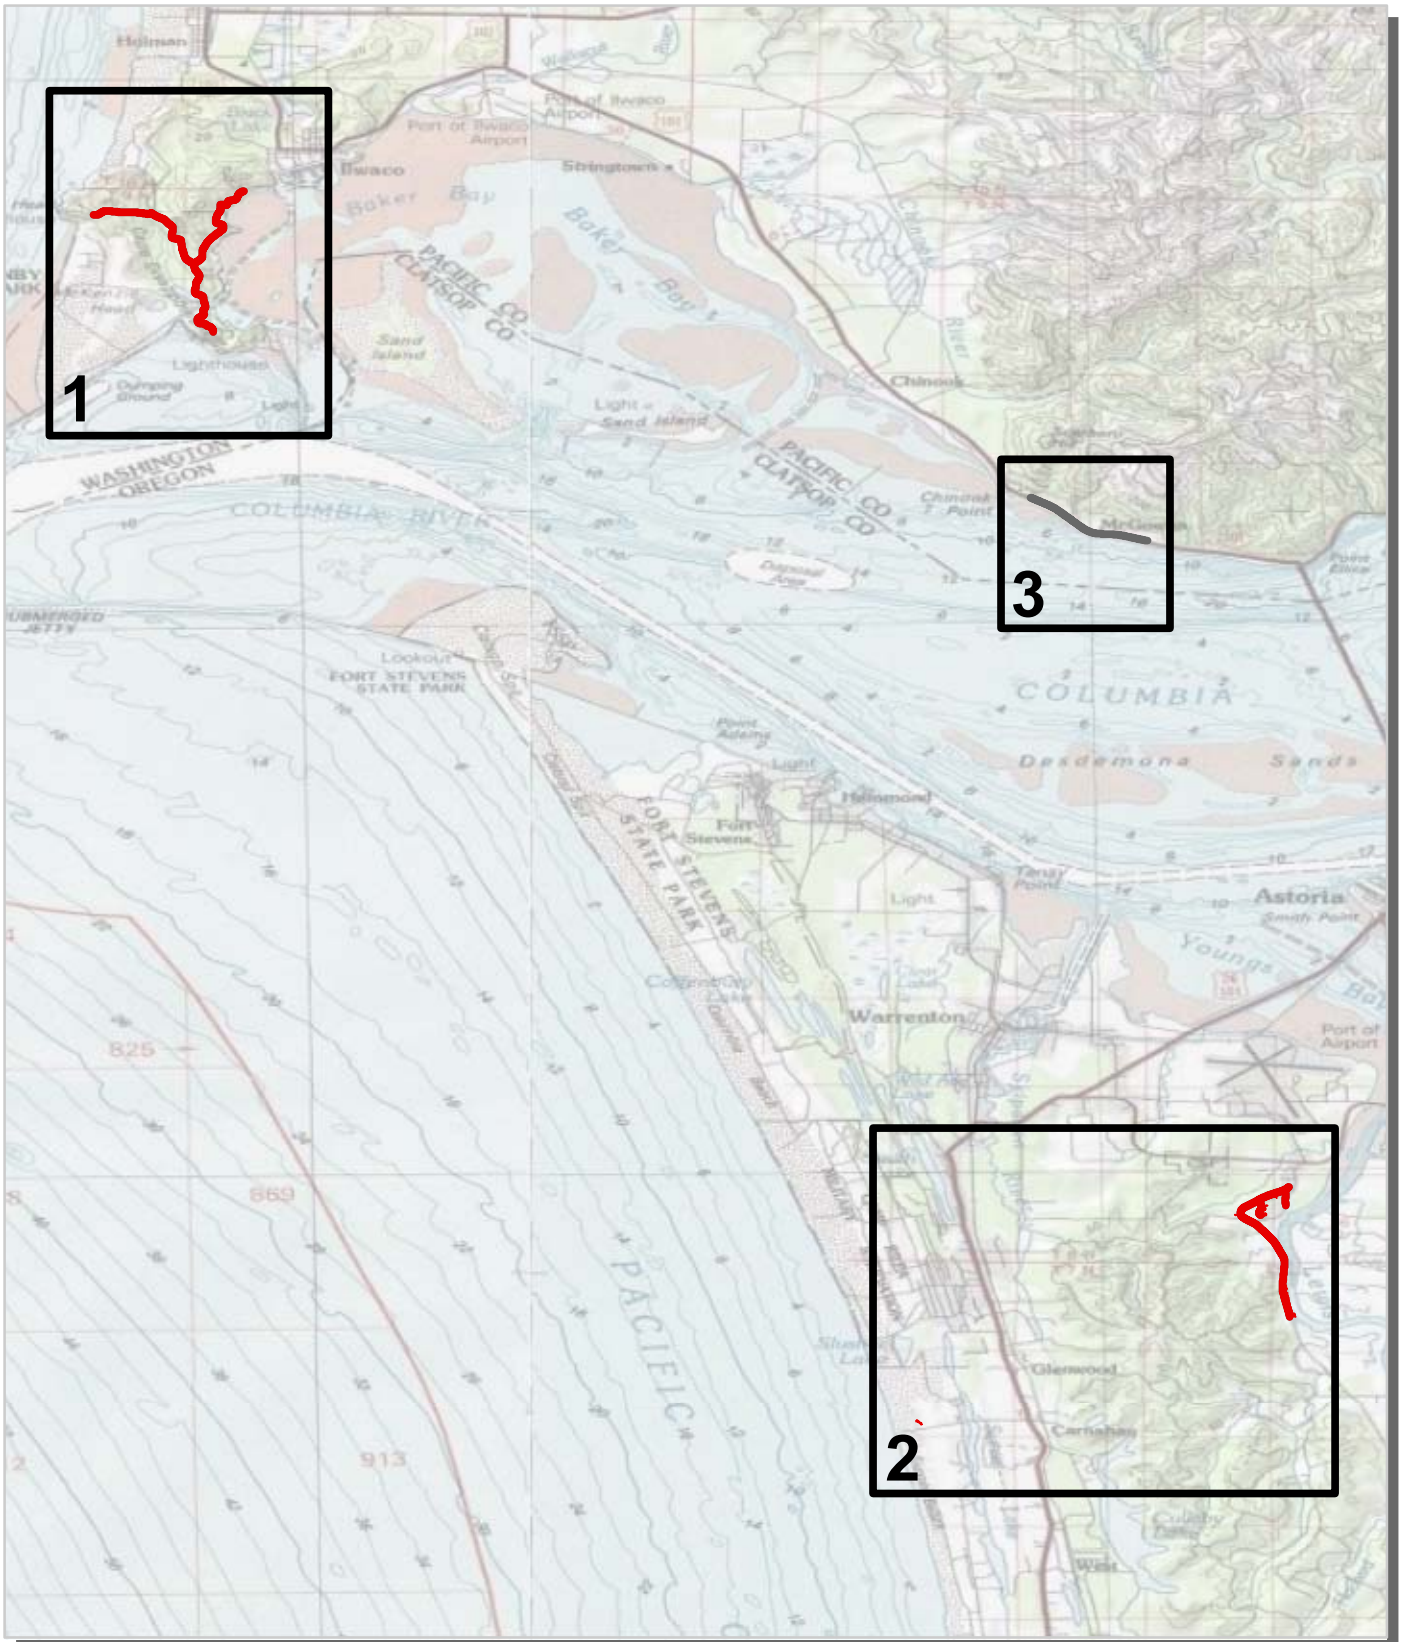


 Cycle 5 Collected Routes




Lewis and Clark National Historical Park Route Location Map Area 1




Unique colors used to differentiate routes




Lewis and Clark National Historical Park Route Location Map Area 2

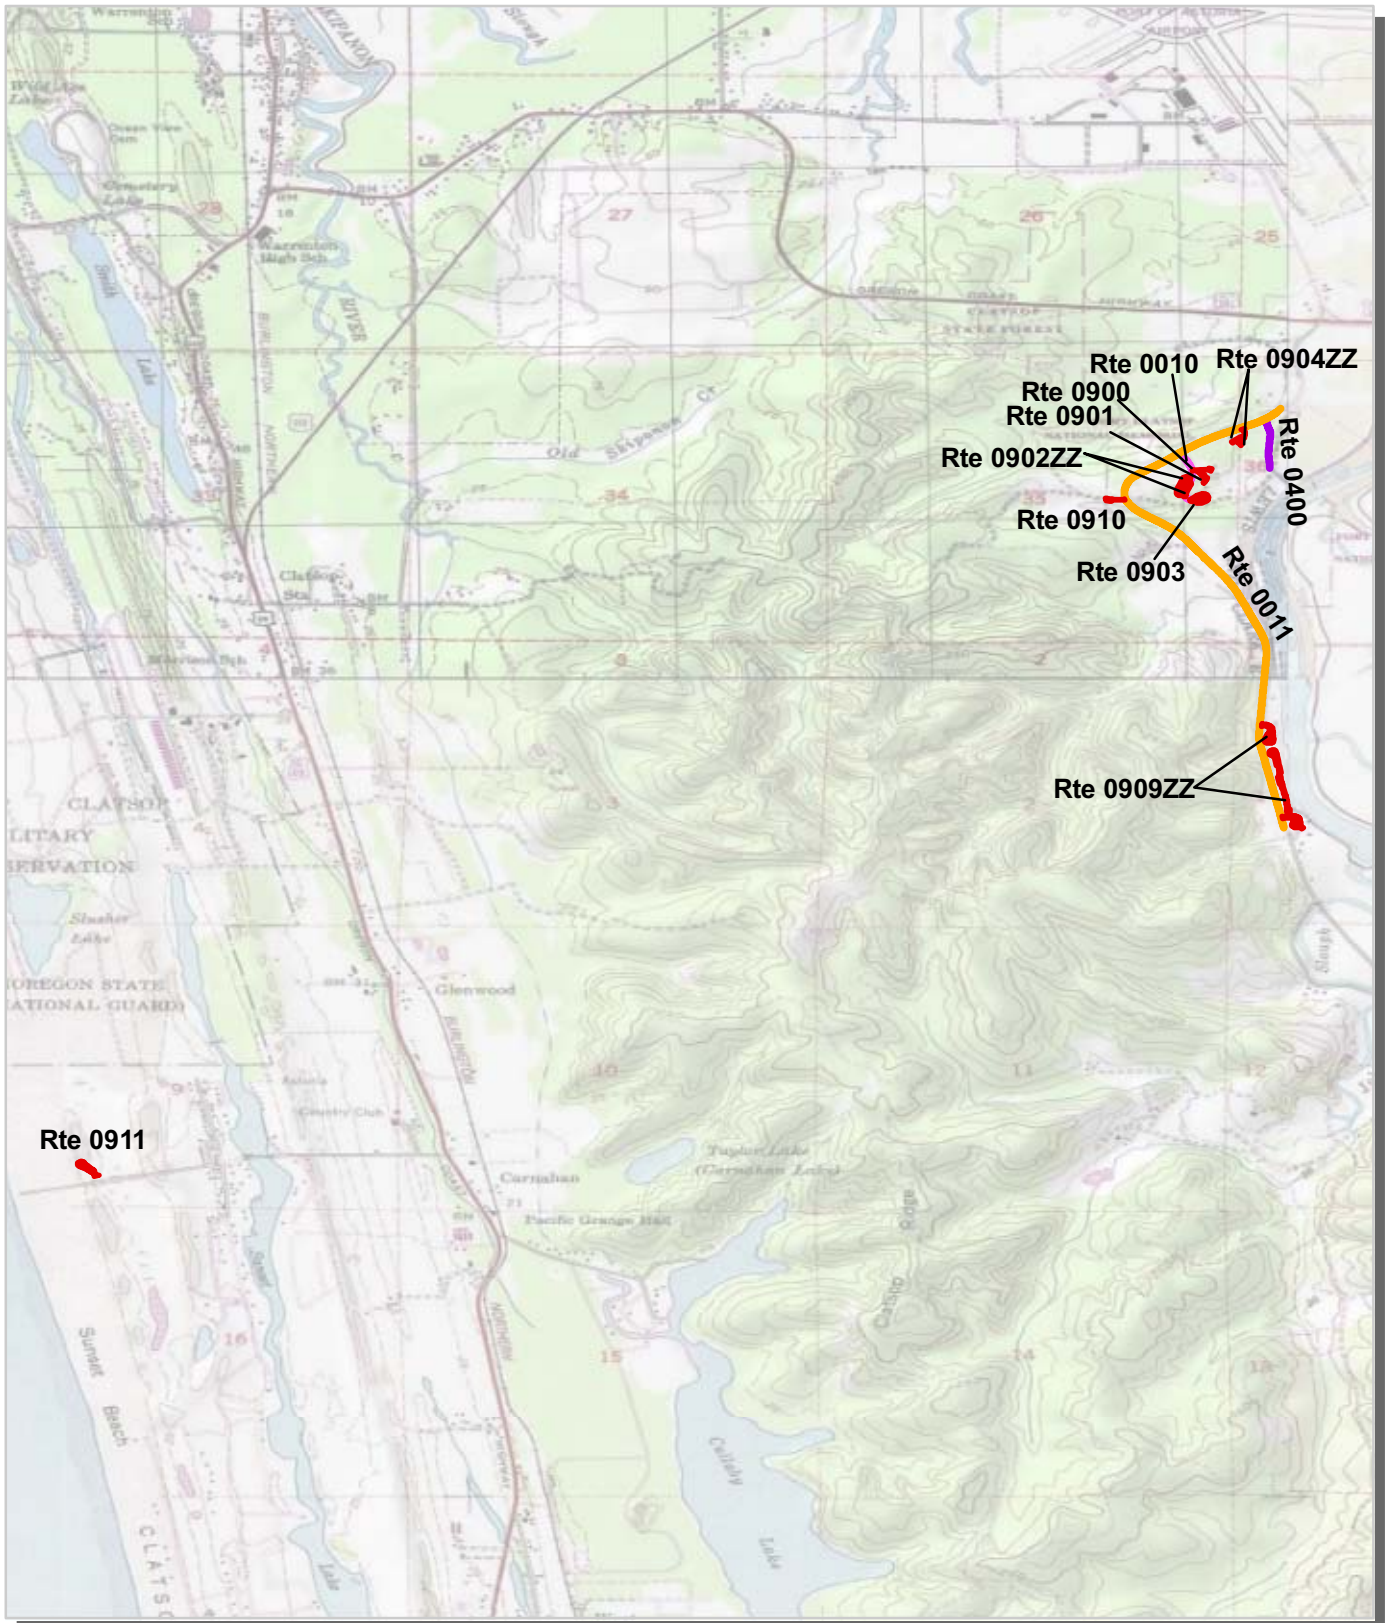


Unique colors used to differentiate routes




Lewis and Clark National Historical Park
Route Location Map
Area 3

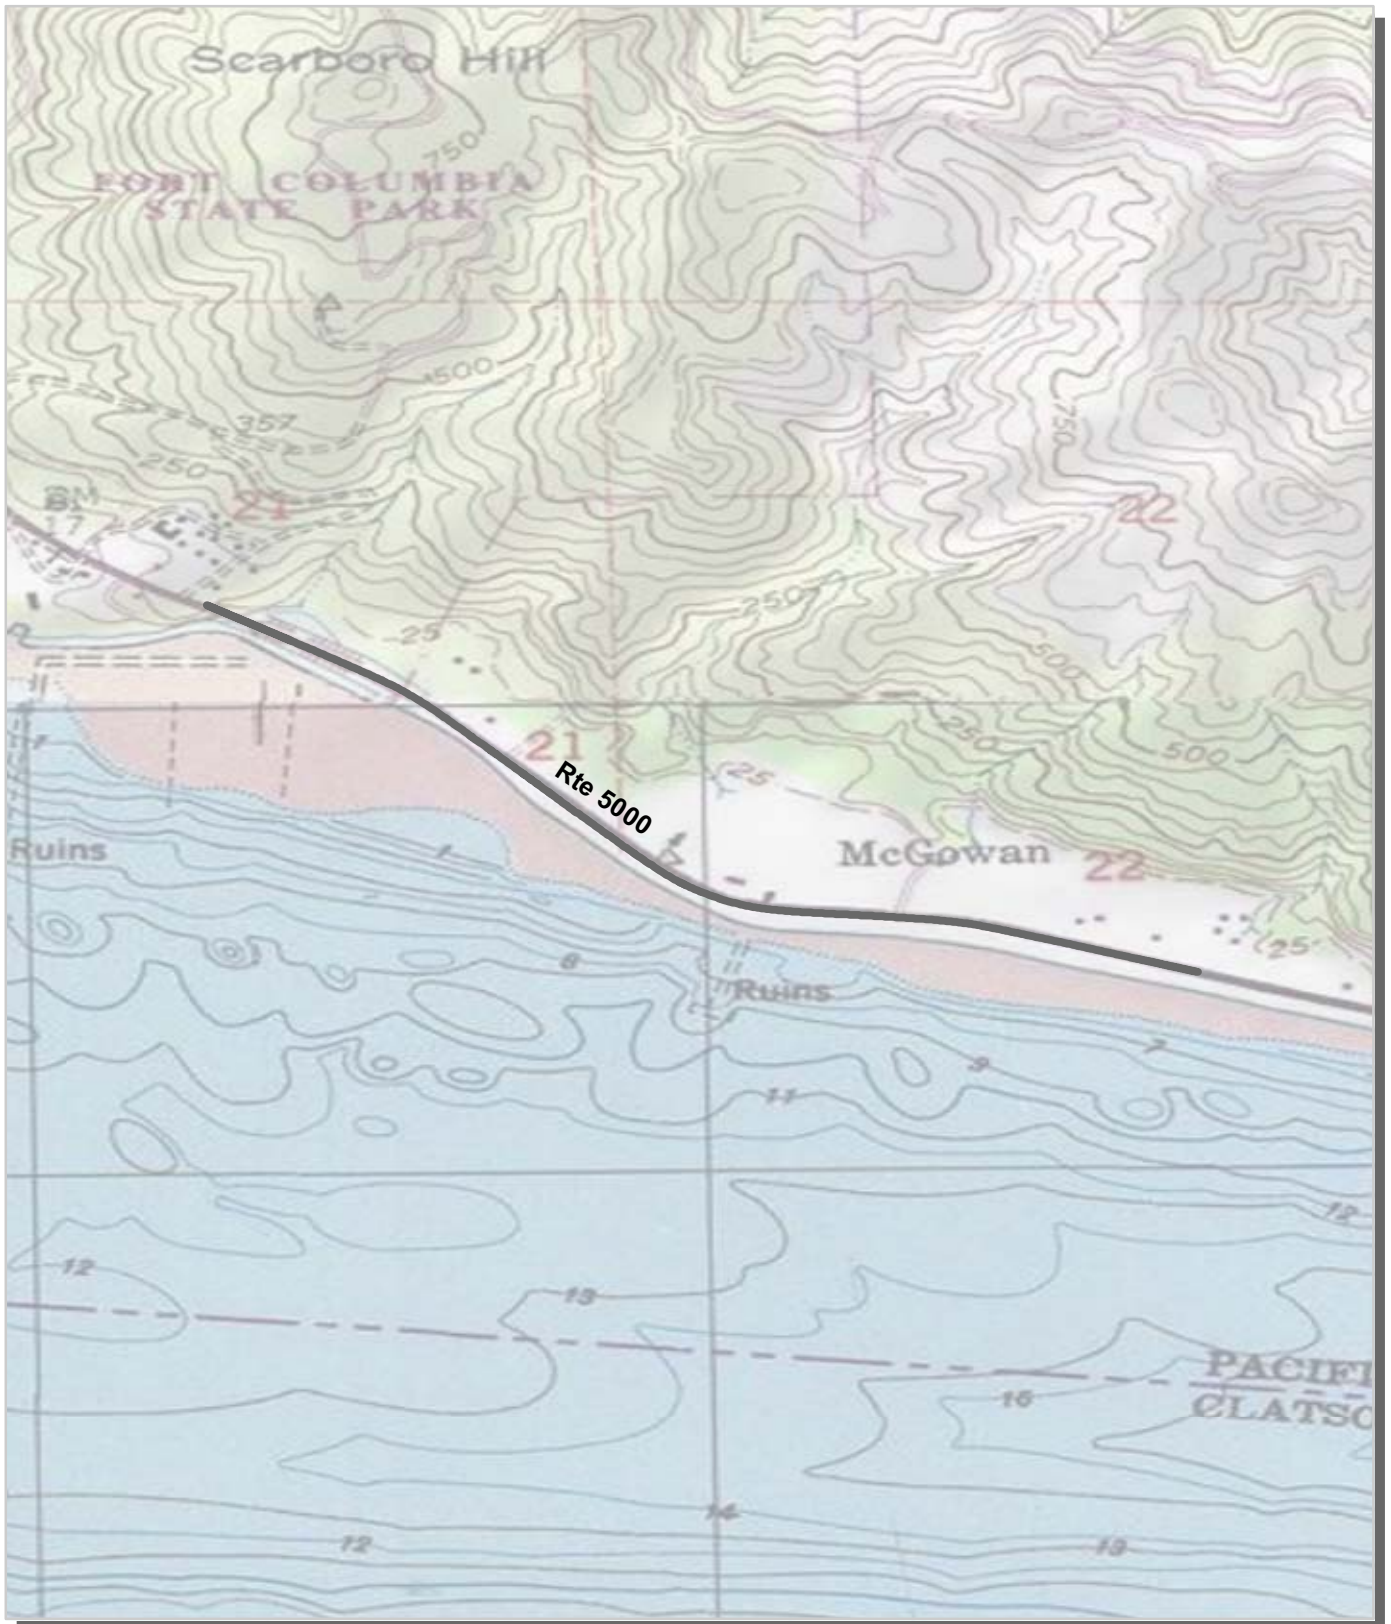

Unique colors used to differentiate routes





Lewis and Clark National Historical Park Route Condition Map PCR - Mile by Mile Key Map

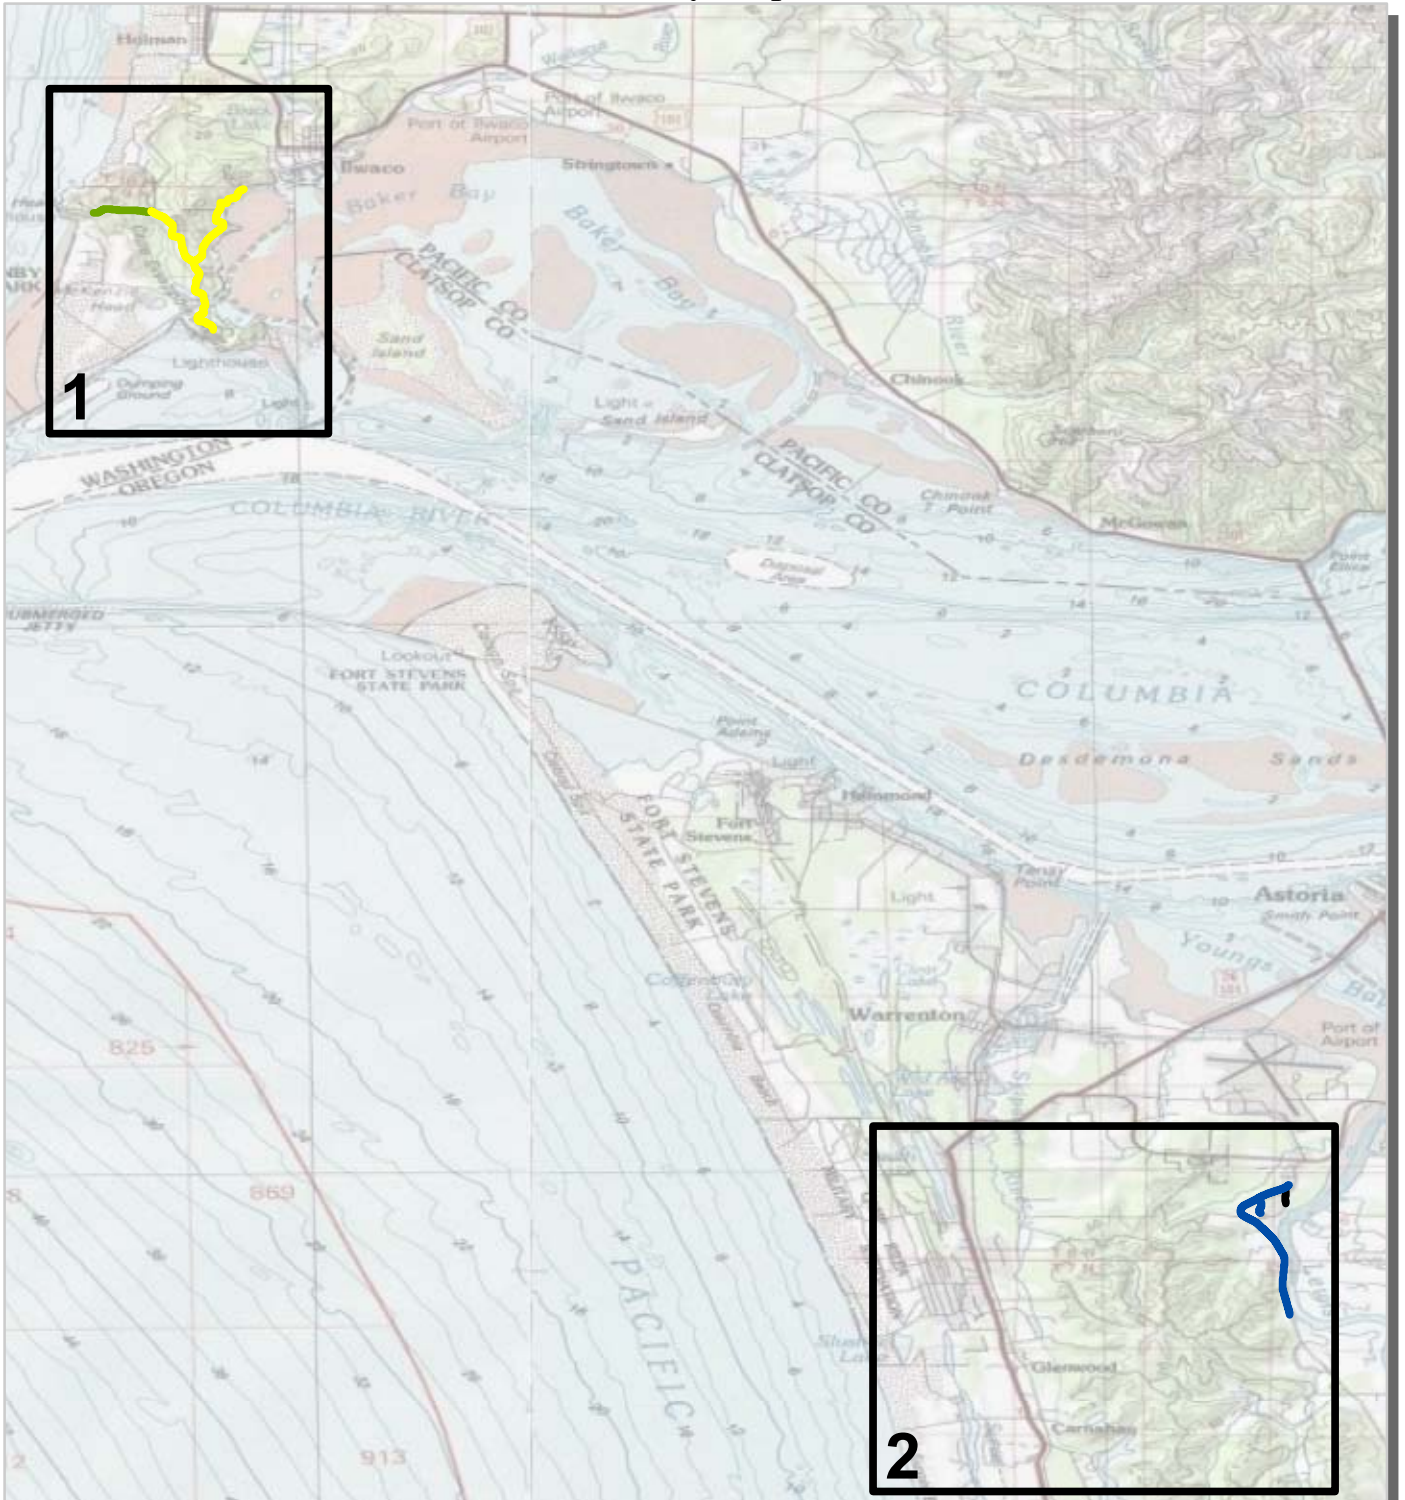

PCR	Poor	Fair	Good	Excellent	No Data
	█	█	█	█	█
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

Note: Only routes collected by the DCV in Cycle-5 are displayed.




Lewis and Clark National Historical Park Route Condition Map PCR - Mile by Mile Area 1



PCR	Poor	Fair	Good	Excellent	No Data
	■	■	■	■	■
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.




Lewis and Clark National Historical Park


Route Condition Map

PCR - Mile by Mile

Area 2

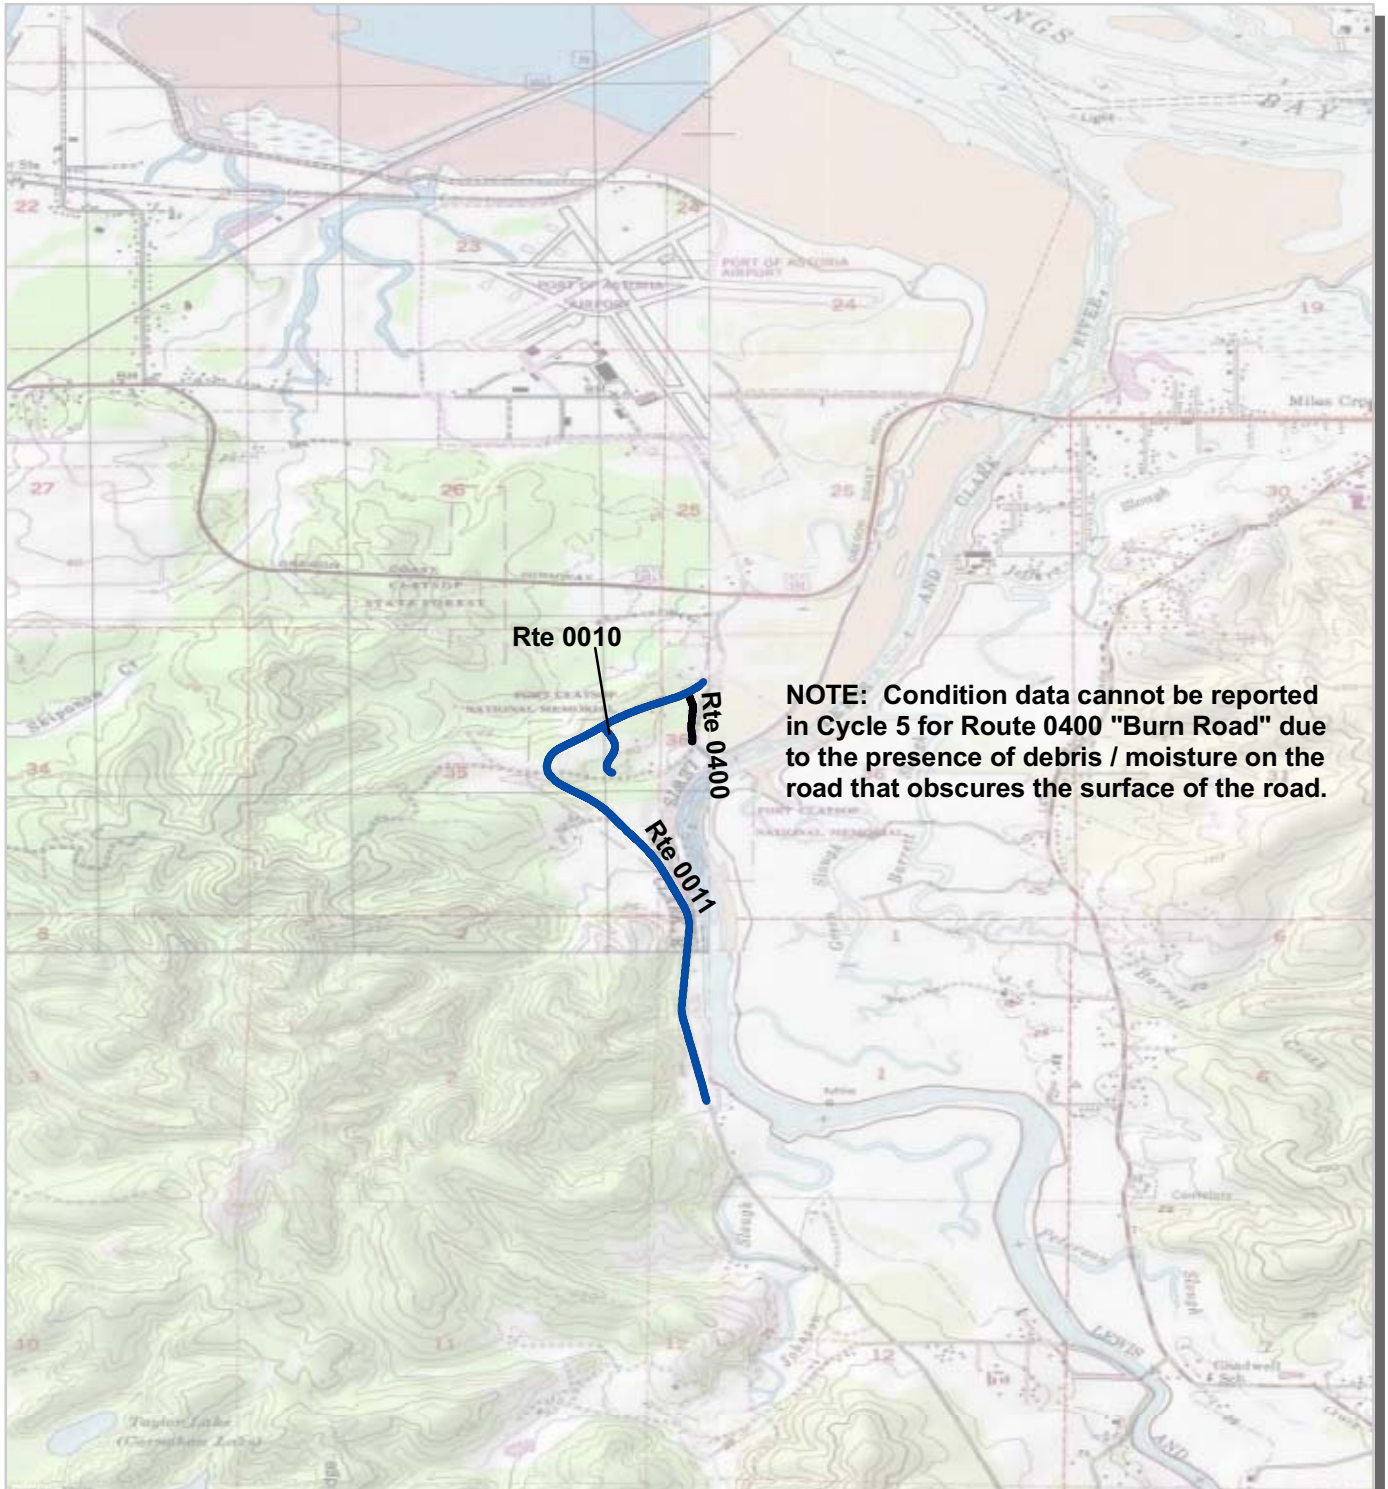

NOTE: Condition data cannot be reported in Cycle 5 for Route 0400 "Burn Road" due to the presence of debris / moisture on the road that obscures the surface of the road.

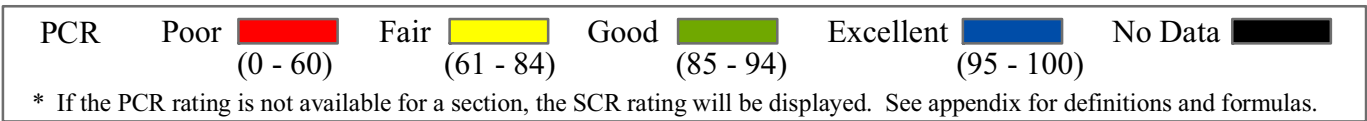

Section 5 Paved Route Condition Rating Sheets



Lewis and Clark National Historical Park



Federal Lands Highway
Road Inventory Program



PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (0 - 60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0010 VISITOR CENTER ACCESS ROAD
LEWI : LEWIS AND CLARK NATIONAL HISTORICAL PARK

COLLECTED: 8/10/2010
TOTAL LENGTH: 0.18 Miles

PACIFIC WEST REGION

Section Number	0				
Section Length (mi)	0.18				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	23				
Lane Width (ft)	11				
Roadway Condition Information					
SCR (Surface Condition Rating)	96				
PCR (Pavement Condition Rating)	96				
Distress Index Values					
Structural Crack Index	98				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	96				
Roughness Condition Index (RCI)	NC				

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Non Applicable



ROUTE: 0010 VISITOR CENTER ACCESS ROAD



PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (0 - 60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0011 PARK ENTRANCE ROAD (OLD COUNTY ROAD)
LEWI : LEWIS AND CLARK NATIONAL HISTORICAL PARK

COLLECTED: 8/10/2010
TOTAL LENGTH: 1.80 Miles

PACIFIC WEST REGION

<i>Section Number</i>	0	1			
<i>Section Length (mi)</i>	1.00	0.80			
<i>Cross Section Information</i>					
Number of Lanes	2	2			
Paved Width (ft)	28	28			
Lane Width (ft)	11	10			
<i>Roadway Condition Information</i>					
SCR (Surface Condition Rating)	98	100			
PCR (Pavement Condition Rating)	98	100			
<i>Distress Index Values</i>					
Structural Crack Index	99	100			
Transverse Cracking Index	100	100			
Patching Index	100	100			
Rutting Index	98	100			
Roughness Condition Index (RCI)	97	100			


NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Non Applicable



ROUTE: 0011 PARK ENTRANCE ROAD (OLD COUNTY ROAD)

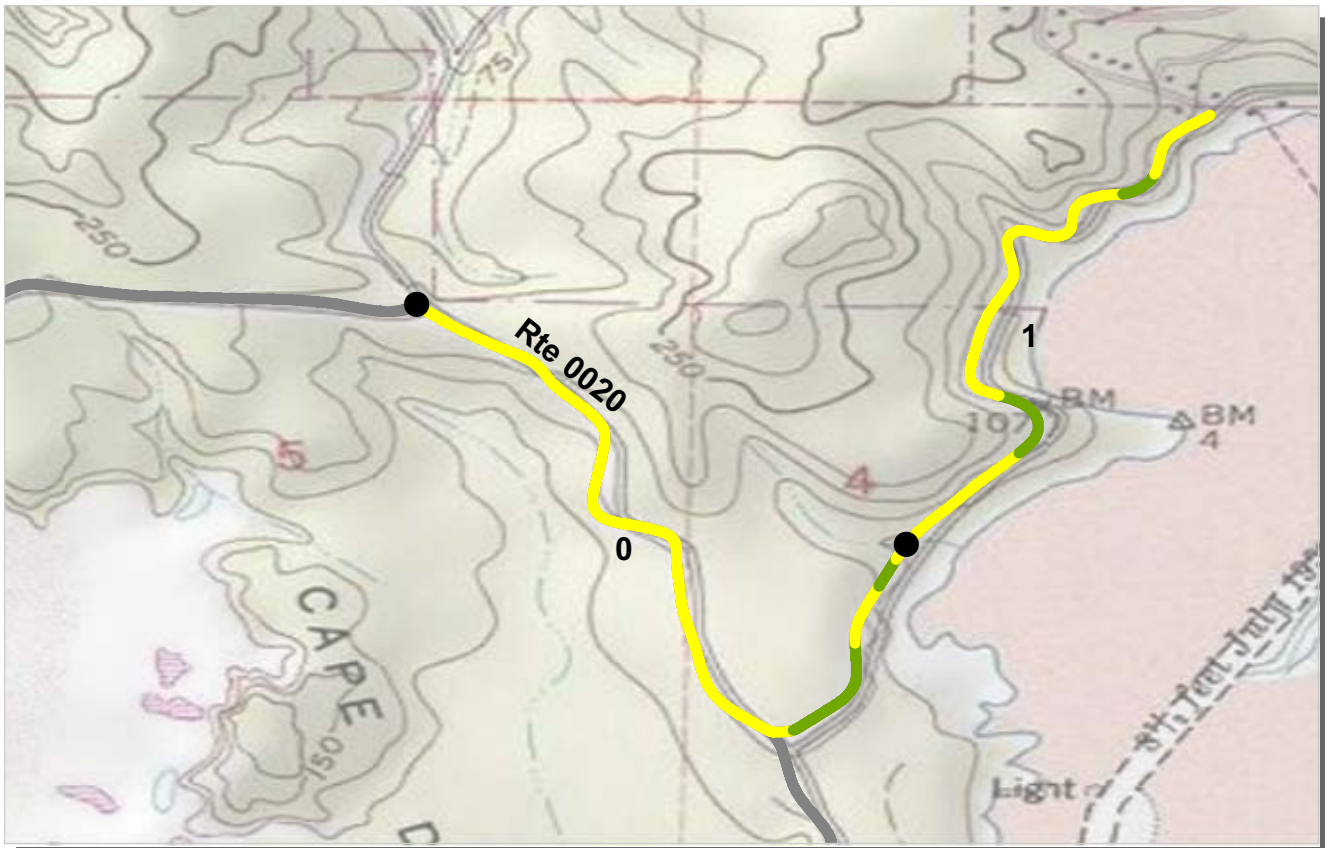

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (0 - 60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0020 STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GRAY DRIVE
LEWI : LEWIS AND CLARK NATIONAL HISTORICAL PARK

COLLECTED: 8/10/2010
TOTAL LENGTH: 1.78 Miles

PACIFIC WEST REGION


Section Number	2.25	3.25			
Section Length (mi)	1.00	0.78			
Cross Section Information					
Number of Lanes	2	2			
Paved Width (ft)	20	21			
Lane Width (ft)	9	10			
Roadway Condition Information					
SCR (Surface Condition Rating)	94	94			
PCR (Pavement Condition Rating)	78	76			
Distress Index Values					
Structural Crack Index	95	96			
Transverse Cracking Index	100	100			
Patching Index	94	98			
Rutting Index	96	94			
Roughness Condition Index (RCI)	55	50			

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Non Applicable

ROUTE: 0020 STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GRAY DRIVE

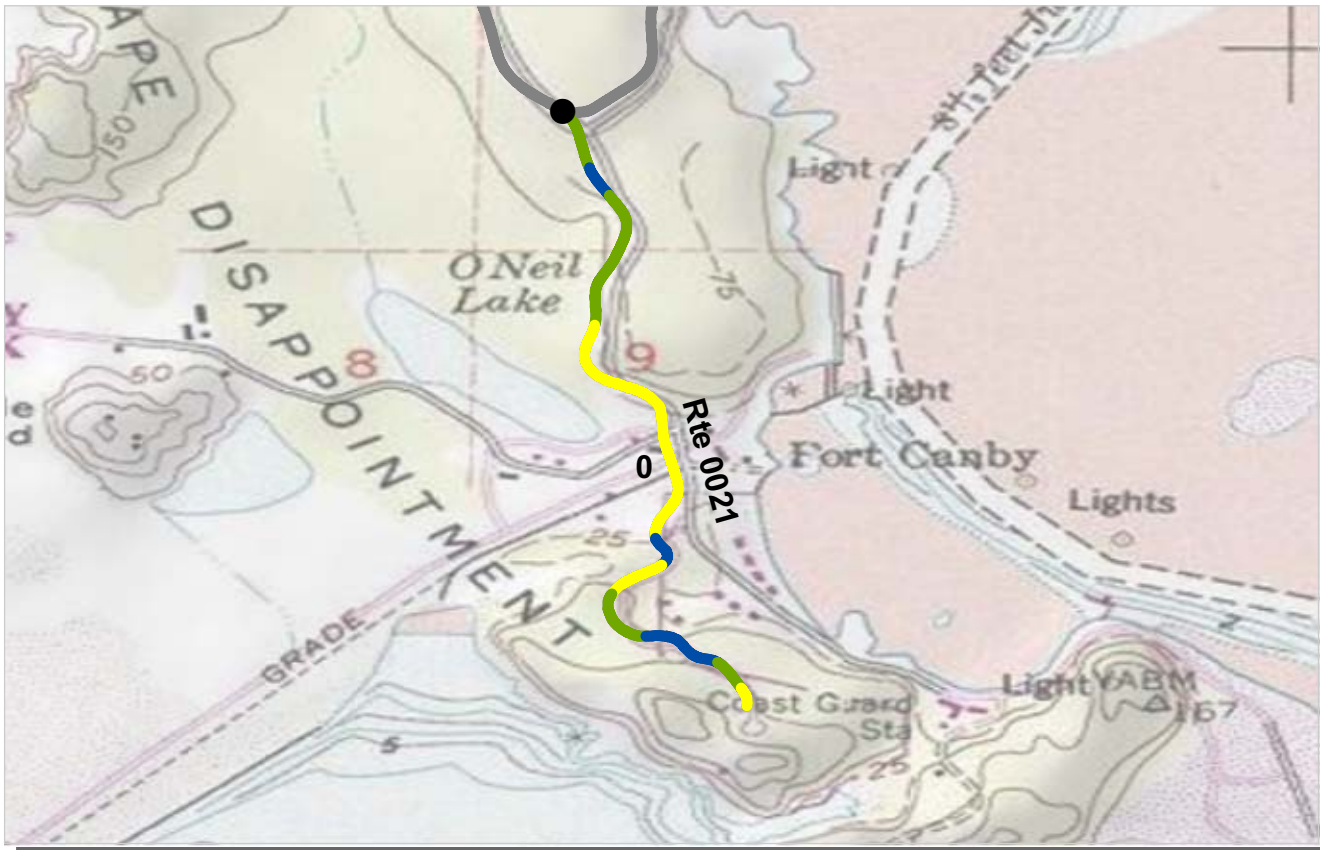

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (0 - 60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0021 STATE ROUTE 100 SPUR / FORT CANBY ROAD
LEWI : LEWIS AND CLARK NATIONAL HISTORICAL PARK

COLLECTED: 8/10/2010
TOTAL LENGTH: 0.94 Miles

PACIFIC WEST REGION

Section Number	0				
Section Length (mi)	0.94				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	21				
Lane Width (ft)	10				
Roadway Condition Information					
SCR (Surface Condition Rating)	95				
PCR (Pavement Condition Rating)	84				
Distress Index Values					
Structural Crack Index	97				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	95				
Roughness Condition Index (RCI)	67				

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Non Applicable

ROUTE: 0021 STATE ROUTE 100 SPUR / FORT CANBY ROAD



PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (0 - 60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0120 NORTH HEAD LIGHTHOUSE ROAD
LEWI : LEWIS AND CLARK NATIONAL HISTORICAL PARK

COLLECTED: 8/10/2010
TOTAL LENGTH: 0.48 Miles

PACIFIC WEST REGION


Section Number	0				
Section Length (mi)	0.48				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	18				
Lane Width (ft)	10				
Roadway Condition Information					
SCR (Surface Condition Rating)	93				
PCR (Pavement Condition Rating)	93				
Distress Index Values					
Structural Crack Index	93				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	99				
Roughness Condition Index (RCI)	NC				

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.
 NC - Not Collected N/A - Non Applicable



ROUTE: 0120 NORTH HEAD LIGHTHOUSE ROAD

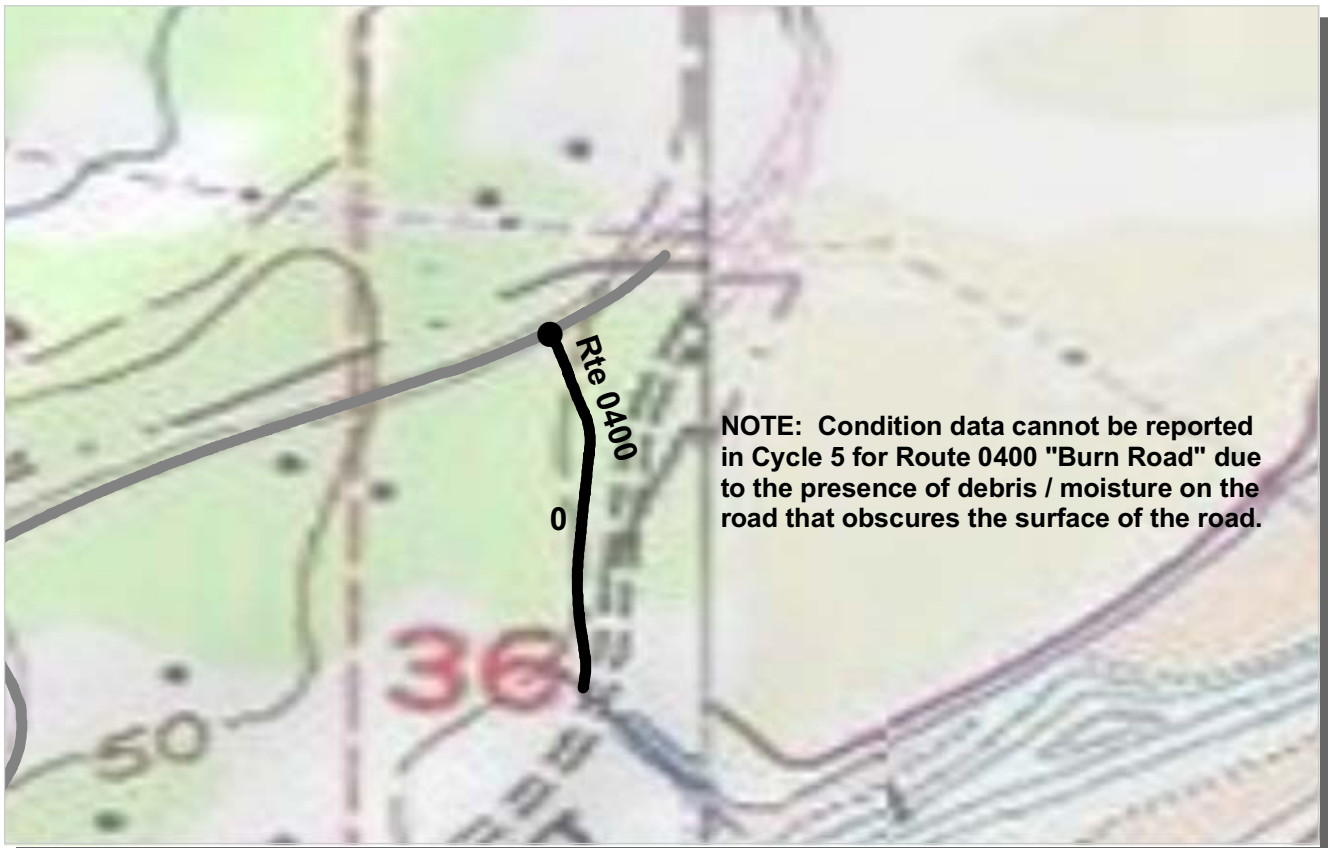

PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (0 - 60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0400 BURN ROAD

LEWI : LEWIS AND CLARK NATIONAL HISTORICAL PARK

COLLECTED: 8/10/2010

PACIFIC WEST REGION

TOTAL LENGTH: 0.18 Miles

Section Number	0				
Section Length (mi)	0.18				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	10				
Lane Width (ft)	10				
Roadway Condition Information					
SCR (Surface Condition Rating)	NC				
PCR (Pavement Condition Rating)	NC				
Distress Index Values					
Structural Crack Index	NC				
Transverse Cracking Index	NC				
Patching Index	NC				
Rutting Index	NC				
Roughness Condition Index (RCI)	NC				

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Non Applicable

ROUTE: 0400 BURN ROAD

Section 6
Manually Rated Paved Route
Condition Rating Sheets



Lewis and Clark National Historical Park



MANUALLY RATED ROUTE CONDITION RATING SHEETS

No data available for this section.

Section 7

Parking Area

Condition Rating Sheets



Lewis and Clark National Historical Park



LEWIS AND CLARK NATIONAL HISTORICAL PARK

Route 0900

BUILDING 1 ADMINISTRATIVE SITE
FROM ROUTE 0010 (VISITOR CENTER ACCESS ROAD)
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0900	NONPUBLIC	6/15/2010	4,626	0.08	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
1	0	0	NO CURB AND GUTTER	NO CURB	FAIR/73

* Lane miles are based on 11' lane widths



LEWIS AND CLARK NATIONAL HISTORICAL PARK



Route 0901

V.C. EMPLOYEE PARKING

FROM ROUTE 0900 (BUILDING 1 ADMINISTRATIVE SITE)
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0901	NONPUBLIC	6/15/2010	6,938	0.12	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	FAIR/73

* Lane miles are based on 11' lane widths

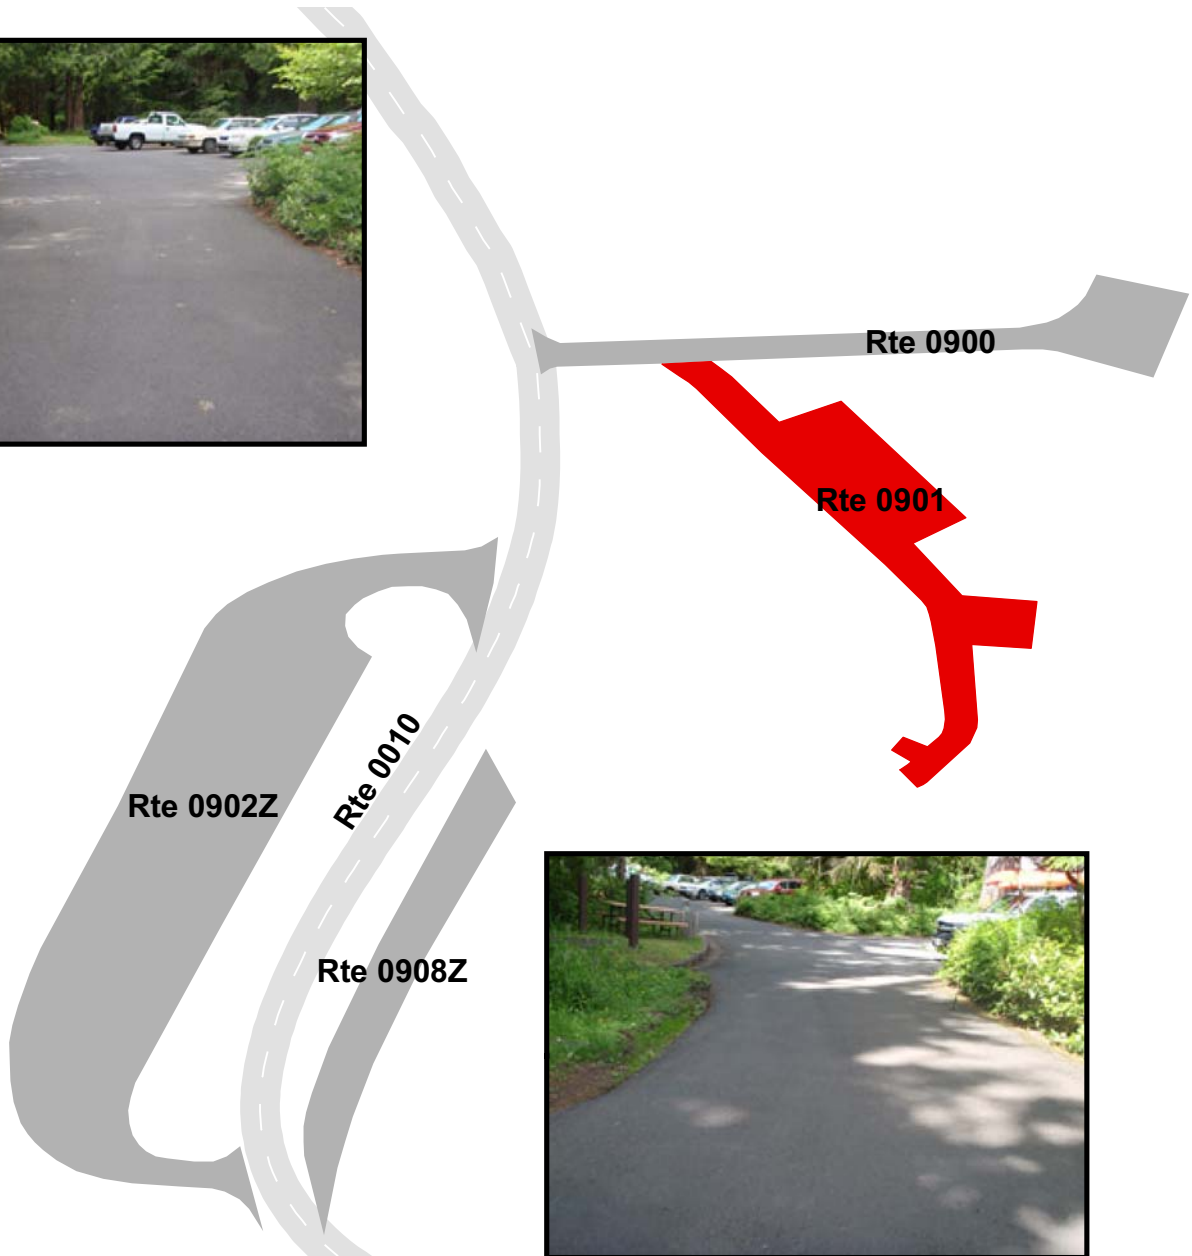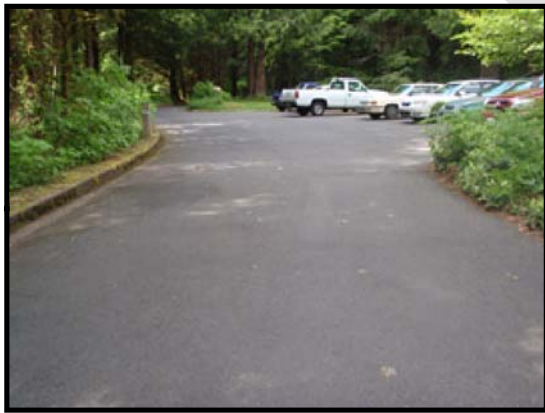

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Route 0902ZZ

VISITOR CENTER OVERFLOW AND RV PARKING AREAS



FROM ROUTE 0010 (VISITOR CENTER ACCESS ROAD)

TO PARKING

Summary Record

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0902ZZ	PUBLIC	6/15/2010	27,307	0.47	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	2	0	CONCRETE CURB AND GUTTER	CONCRETE CURB	SUMMARY/90

* Lane miles are based on 11' lane widths

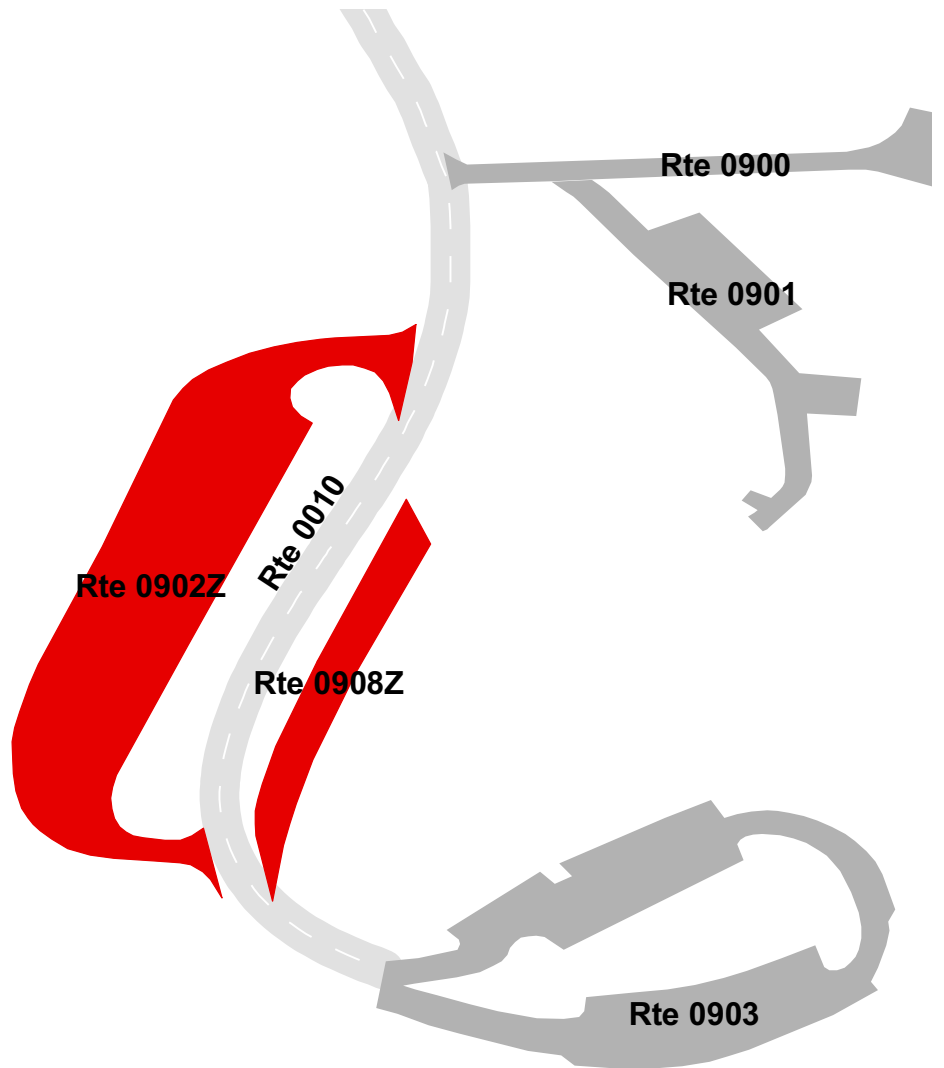

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Route 0902Z

OVERFLOW PARKING



FROM ROUTE 0010 (VISITOR CENTER ACCESS ROAD)

TO ROUTE 0010 (VISITOR CENTER ACCESS ROAD)

Subcomponent Record

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0902Z	PUBLIC	6/15/2010	22,517	0.39	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	2	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths

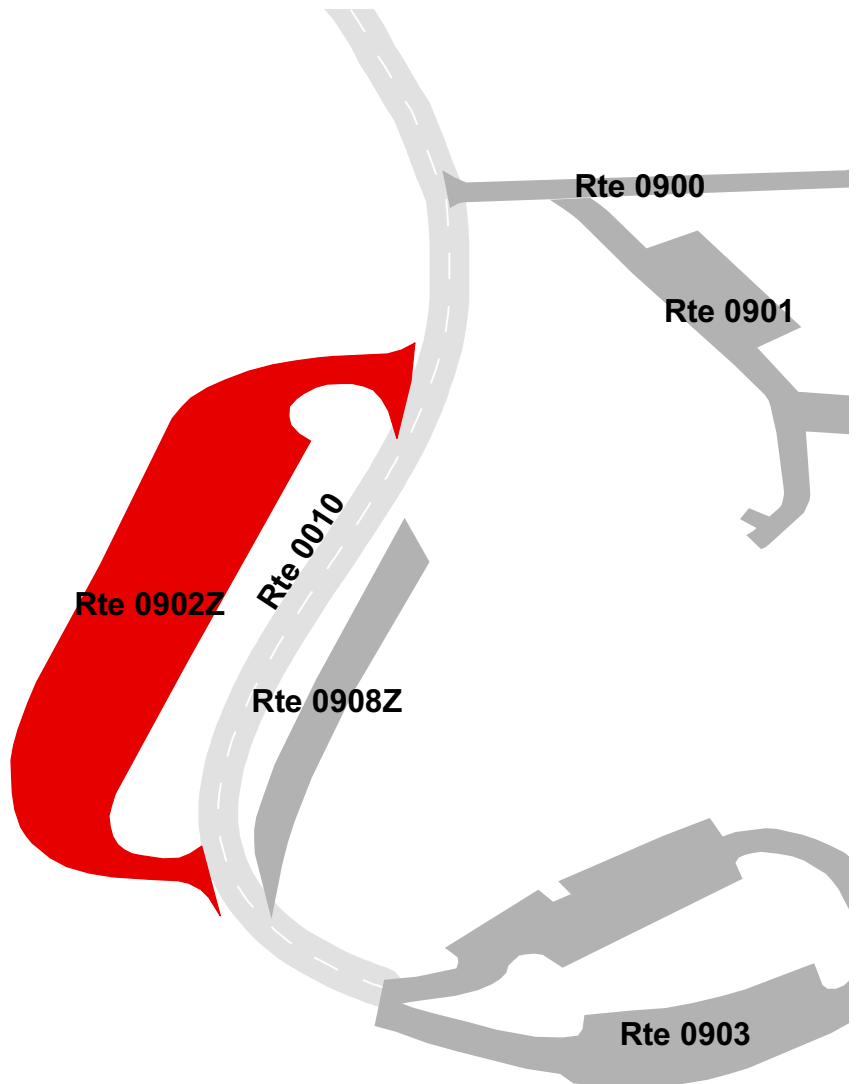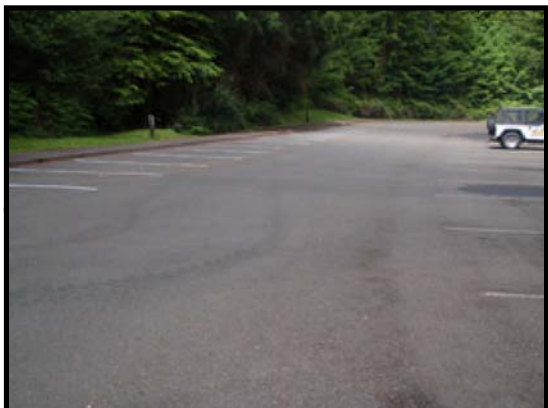

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Route 0908Z



BUS AND RV PARKING

ADJACENT TO ROUTE 0010 (VISITOR CENTER ACCESS ROAD)

Subcomponent Record

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0908Z	PUBLIC	6/15/2010	4,790	0.08	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	NO CURB AND GUTTER	CONCRETE CURB	GOOD/90

* Lane miles are based on 11' lane widths

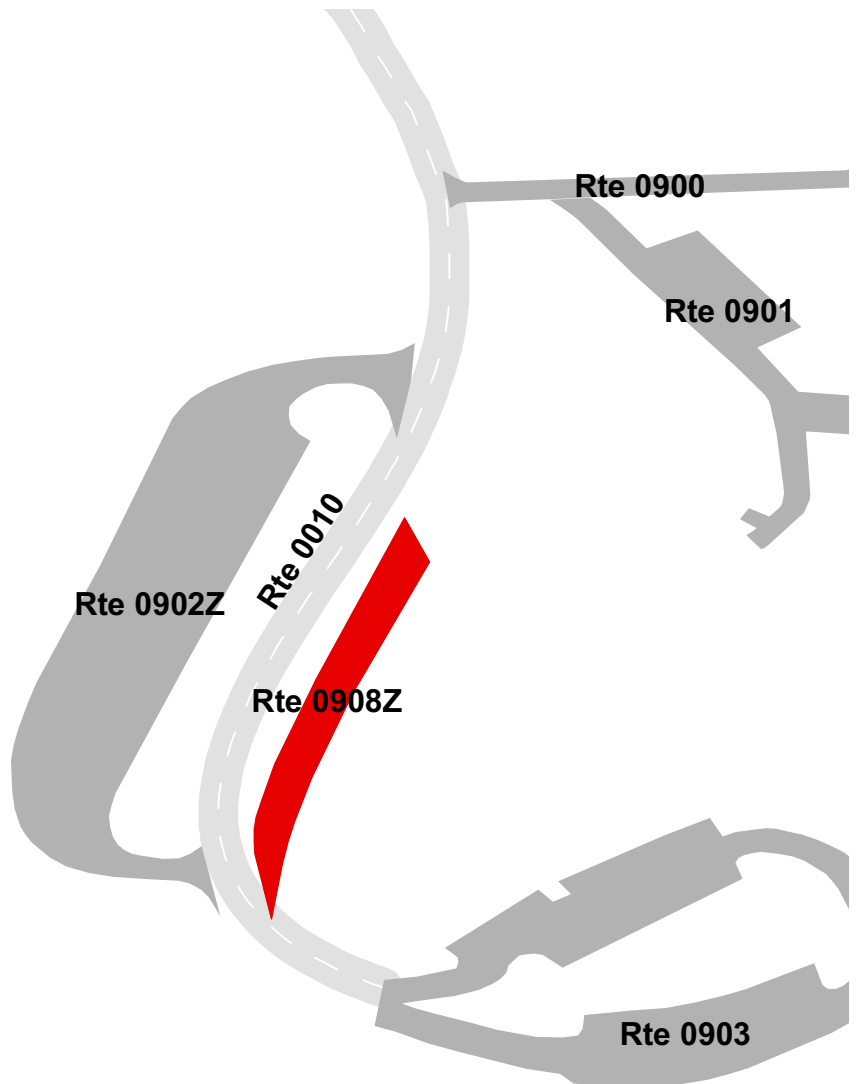

LEWIS AND CLARK NATIONAL HISTORICAL PARK



Route 0903

VISITOR CENTER PARKING

FROM END OF ROUTE 0010 (VISITOR CENTER ACCESS ROAD)
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0903	PUBLIC	6/15/2010	18,177	0.31	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	3	0	CONCRETE CURB AND GUTTER	CONCRETE CURB	GOOD/90

* Lane miles are based on 11' lane widths

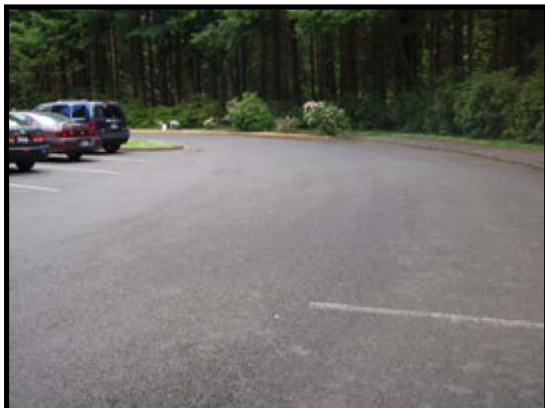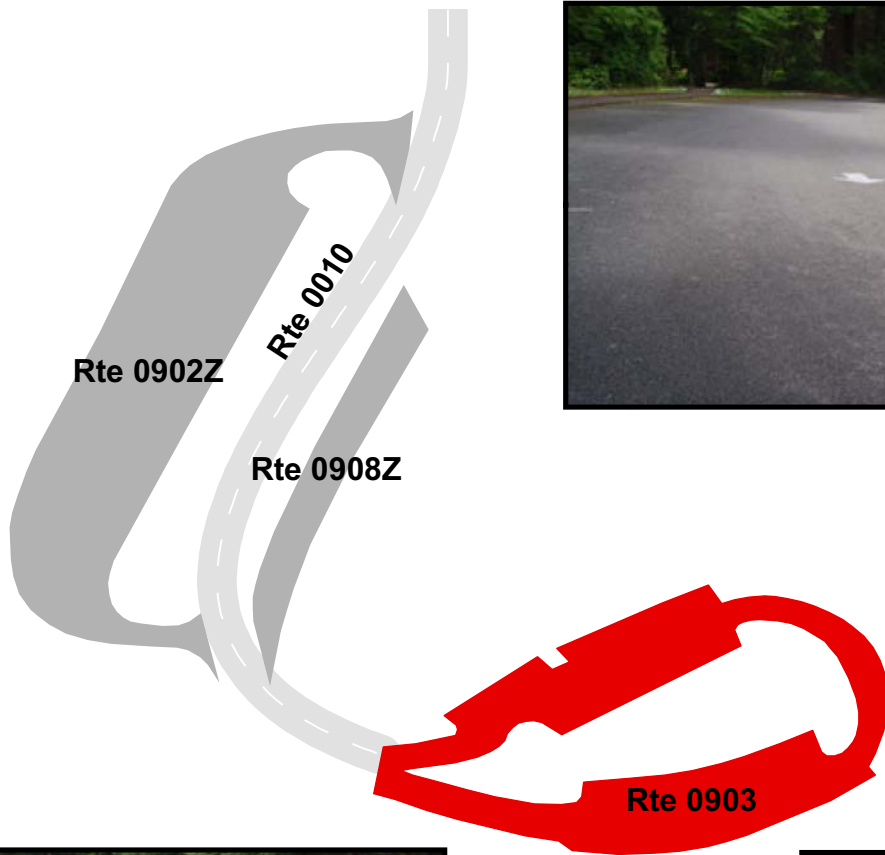

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Route 0904ZZ

MAINTENANCE PARKING AREAS



FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))

TO PARKING

Summary Record

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0904ZZ	NONPUBLIC	6/15/2010	11,205	0.19	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
1	1	0	NO CURB AND GUTTER	NO CURB	SUMMARY/73

* Lane miles are based on 11' lane widths

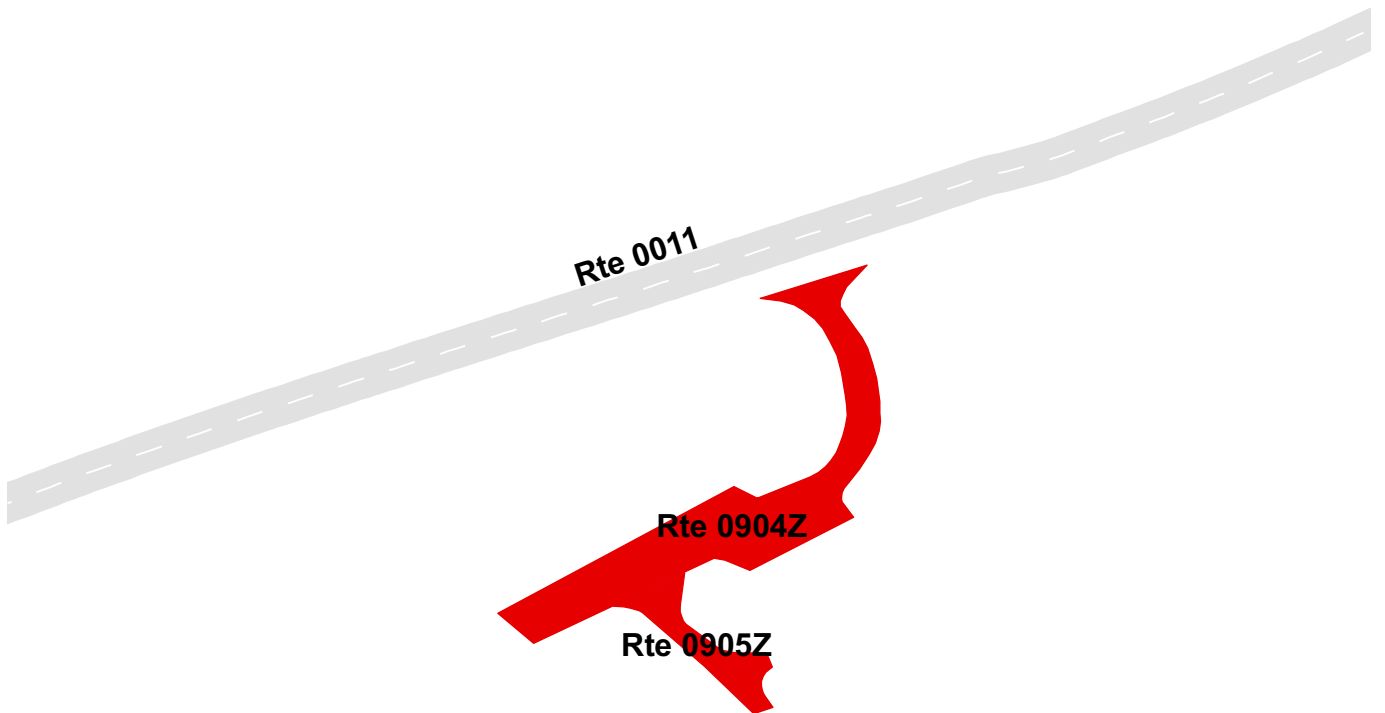

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Route 0904Z

MAINTENANCE SHOP PARKING



FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))

TO PARKING

Subcomponent Record

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0904Z	NONPUBLIC	6/15/2010	9,334	0.16	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
1	1	0	NO CURB AND GUTTER	NO CURB	FAIR/73

* Lane miles are based on 11' lane widths

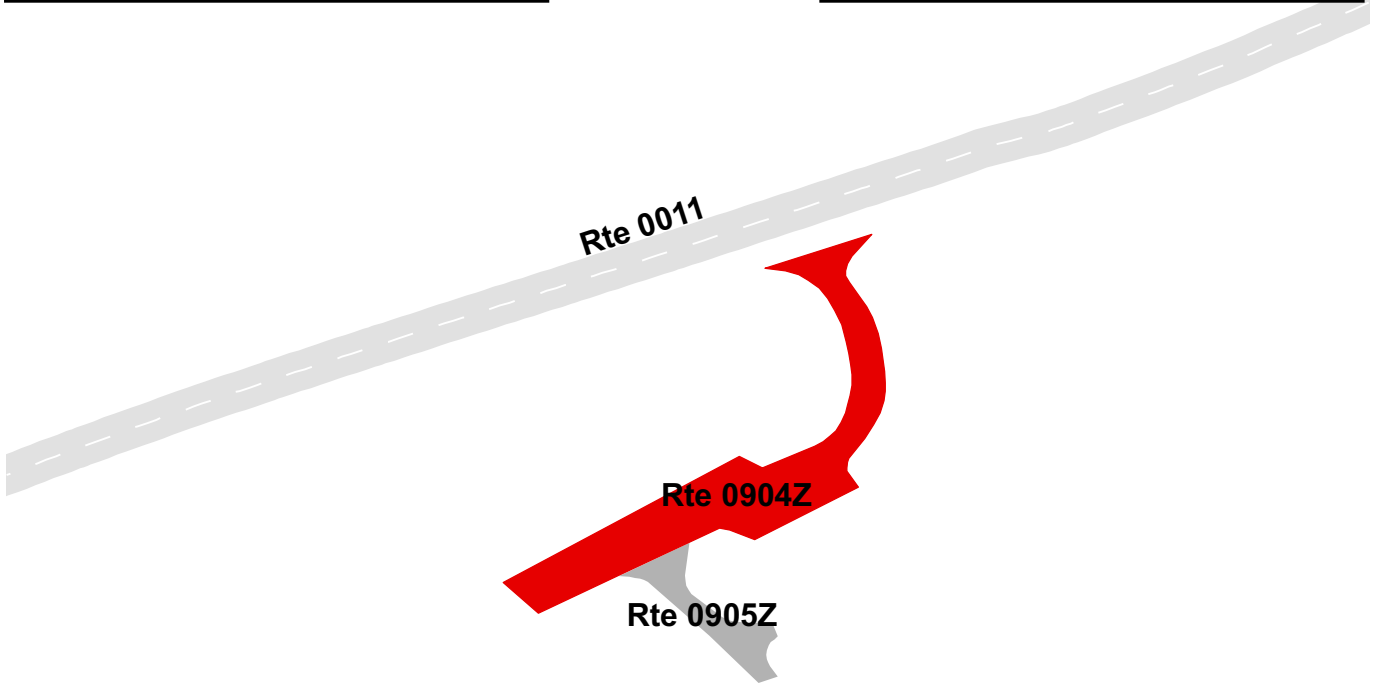

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Route 0905Z

RESIDENCE PARKING



FROM ROUTE 0904Z (MAINTENANCE SHOP PARKING)

TO PARKING

Subcomponent Record

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0905Z	NONPUBLIC	6/15/2010	1,871	0.03	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	NO CURB AND GUTTER	NO CURB	FAIR/73

* Lane miles are based on 11' lane widths

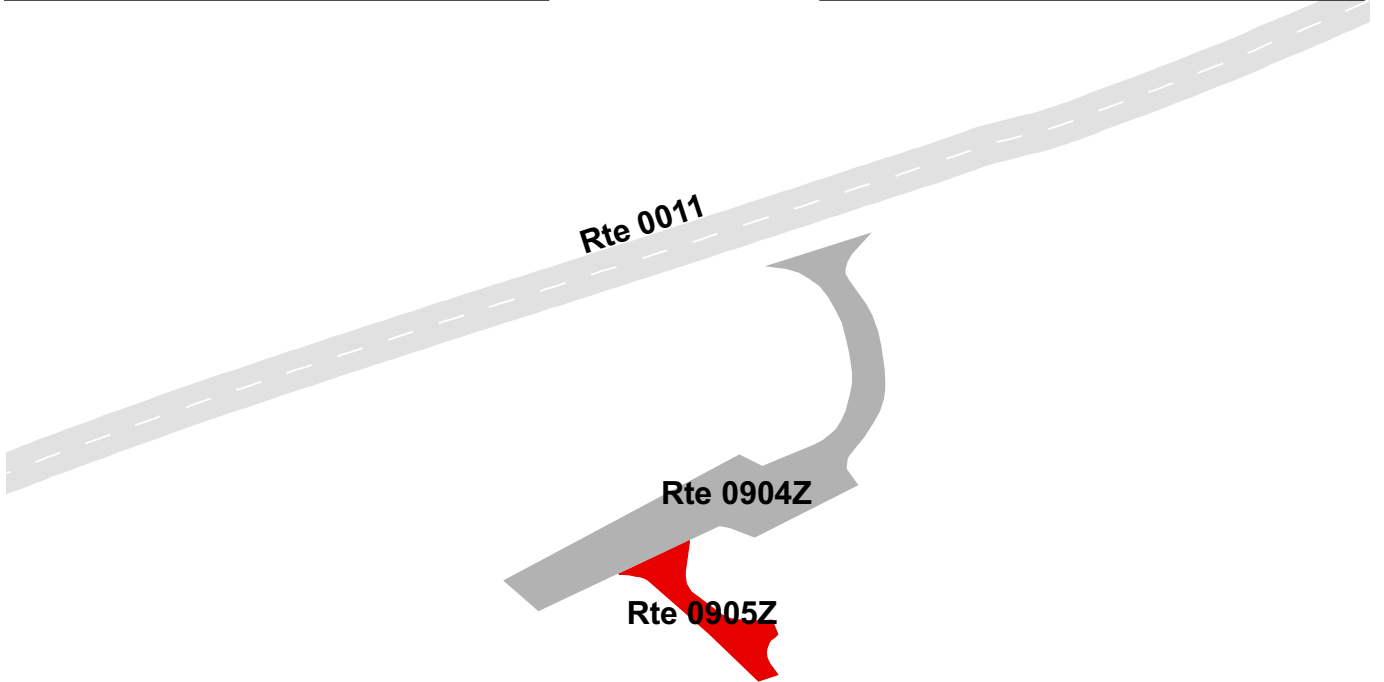

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Route 0909ZZ

NETUL LANDING PARKING AREAS


FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))

TO PARKING

Summary Record

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0909ZZ	PUBLIC	6/15/2010	94,093	1.62	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
2	0	2	NO CURB AND GUTTER	CONCRETE CURB	SUMMARY/90

* Lane miles are based on 11' lane widths



LEWIS AND CLARK NATIONAL HISTORICAL PARK



Route 0909AZ

NETUL LANDING VISITOR AND RV PARKING
 FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))
 TO PARKING

Subcomponent Record

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0909AZ	PUBLIC	6/15/2010	72,218	1.24	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
2	0	1	NO CURB AND GUTTER	CONCRETE CURB	GOOD/90

* Lane miles are based on 11' lane widths

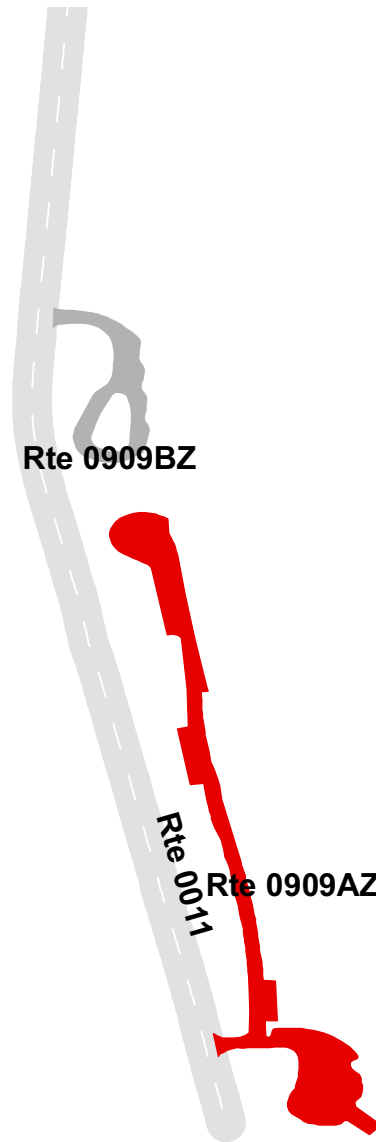

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Route 0909BZ

NETUL LANDING BUS LOOP


FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))

TO PARKING

Subcomponent Record

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0909BZ	PUBLIC	6/15/2010	21,875	0.38	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	1	NO CURB AND GUTTER	CONCRETE CURB	GOOD/90

* Lane miles are based on 11' lane widths



LEWIS AND CLARK NATIONAL HISTORICAL PARK



Route 0910

FORT TO SEA TRAIL PARKING LOT

FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0910	PUBLIC	6/15/2010	5,320	0.09	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	2	NO CURB AND GUTTER	CONCRETE CURB	GOOD/90

* Lane miles are based on 11' lane widths

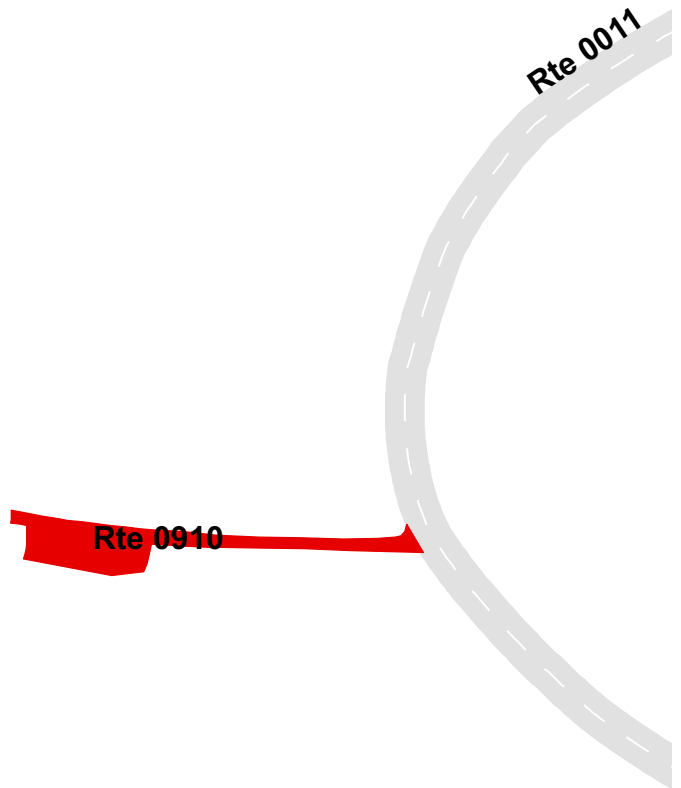

LEWIS AND CLARK NATIONAL HISTORICAL PARK

Route 0911

SUNSET BEACH TRAILHEAD PARKING
FROM SUNSET BEACH ROAD
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0911	PUBLIC	6/15/2010	18,103	0.31	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	1	NO CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths



Section 8
Parkwide/Route
Maintenance Features Summaries



Lewis and Clark National Historical Park



LEWI: PARKWIDE MAINTENANCE FEATURES SUMMARY
Includes DCV, MRL, MRP & PKG routes collected in Cycle-5

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all DCV driven routes. Culverts and drop inlets were also collected on all Manually Rated Routes and Paved Parking areas. These totals are reflected below.

FEATURE	LINEAR FEET	COUNT
BARRIER	978	--
BOLLARD	227	--
BRIDGE	--	1
CABLE	0	--
CATTLE GUARD	--	0
CULVERT	--	26
CURB	756	--
DROP INLET	--	6
GATE	--	8
GUARD/GUIDE RAIL	751	--
GUARD/GUIDE WALL	227	--
INTERSECTION	--	42
LOW WATER CROSSING	0	0
MILE MARKER	--	0
OVERPASS	--	0
OVERHEAD SIGN	--	0
PARK BOUNDARY	--	2
PAVED DITCH	1,225	--
PULLOUT	137	1
RAILROAD CROSSING	--	0
RETAINING WALL	0	0
SIGN	--	130
STATE BOUNDARY	--	0
TEMPORARY BARRIER	0	--
TRAFFIC LIGHT	--	0
TUNNEL	0	0

LEWI: DCV ROUTE MAINTENANCE FEATURES SUMMARY

FEATURE	ROUTE 0010 VISITOR CENTER ACCESS ROAD	ROUTE 0011 PARK ENTRANCE ROAD (OLD COUNTY ROAD)	ROUTE 0020 STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GRAY DRIVE	ROUTE 0021 STATE ROUTE 100 SPUR / FORT CANBY ROAD	ROUTE 0120 NORTH HEAD LIGHTHOUSE ROAD	ROUTE 0400 BURN ROAD	UNIT
BARRIER	0	439	312	227	0	0	LINEAR FEET
BOLLARD	0	0	0	227	0	0	LINEAR FEET
BRIDGE	0	1	0	0	0	0	EACH
CABLE	0	0	0	0	0	0	LINEAR FEET
CATTLE GUARD	0	0	0	0	0	0	EACH
CULVERT	0	0	19	3	0	0	EACH
CURB	212	444	0	100	0	0	LINEAR FEET
DROP INLET	0	0	0	0	0	0	EACH
GATE	1	0	0	1	0	1	EACH
GUARD/GUIDE RAIL	0	439	312	0	0	0	LINEAR FEET
GUARD/GUIDE WALL	0	0	0	227	0	0	LINEAR FEET
INTERSECTION	7	10	7	9	5	4	EACH
LOW WATER CROSSING	0	0	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	0	0	EACH
OVERHEAD SIGN	0	0	0	0	0	0	EACH
OVERPASS	0	0	0	0	0	0	EACH
PARK BOUNDARY	0	2	0	0	0	0	EACH
PAVED DITCH	0	1,225	0	0	0	0	LINEAR FEET
PULLOUT	0	1	0	0	0	0	EACH
PULLOUT	0	137	0	0	0	0	LINEAR FEET
RAILROAD CROSSING	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	LINEAR FEET
SIGN	11	40	29	28	21	1	EACH
STATE BOUNDARY	0	0	0	0	0	0	EACH
TEMPORARY BARRIER	0	0	0	0	0	0	LINEAR FEET
TRAFFIC LIGHT	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	LINEAR FEET

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5.

LEWI: STRUCTURE LIST

ROUTE NUMBER	FUNCTIONAL CLASS	MILEPOST START	MILEPOST END	FEATURE	STRUCTURE NUMBER
0011	1	0.973	0.992	BRIDGE	9420-001

Section 9

Route Maintenance Features

Road Logs



Lewis and Clark National Historical Park



LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010: VISITOR CENTER ACCESS ROAD

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))
0.000	0.000	SIGN	N/A	GUIDE, ADDITIONAL VISITOR PARKING 2 MILE
0.000	0.000	SIGN	N/A	GUIDE, HIGHWAY 101 NETUL LANDING
0.000	0.000	INTERSECTION	LEFT	ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))
0.006	0.006	SIGN	LEFT	REGULATORY, STOP
0.015	0.015	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.059	0.059	INTERSECTION	LEFT	ROUTE 0900 (BUILDING 1 ADMINISTRATIVE SITE)
0.072	0.072	GATE	N/A	N/A
0.072	0.072	SIGN	RIGHT	GUIDE, GATE OPEN 9 AM LOCKED 6 PM DAY USE ONLY
0.077	0.086	CURB-AND-GUTTER	RIGHT	N/A
0.085	0.085	SIGN	RIGHT	GUIDE, RV PARKING
0.090	0.090	INTERSECTION	RIGHT	ROUTE 0902Z (OVERFLOW PARKING)
0.097	0.102	CURB-AND-GUTTER	RIGHT	N/A
0.103	0.103	SIGN	RIGHT	GUIDE, ENTRANCE FEES INDIVIDUAL \$3 PLEASE PAY AT VISITOR CENTER
0.103	0.103	SIGN	RIGHT	GUIDE, U.S.FEE AREA
0.130	0.130	INTERSECTION	LEFT	ROUTE 0908Z (BUS AND RV PARKING)
0.139	0.139	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.150	0.154	CURB-AND-GUTTER	RIGHT	N/A
0.152	0.152	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
0.158	0.158	INTERSECTION	RIGHT	ROUTE 0902Z (OVERFLOW PARKING)
0.161	0.181	CURB-AND-GUTTER	LEFT	N/A
0.163	0.165	CURB-AND-GUTTER	RIGHT	N/A
0.174	0.174	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.181	0.181	INTERSECTION	N/A	ROUTE 0903 (VISITOR CENTER PARKING)
0.181	0.181	ROUTE END	N/A	TO ROUTE 0903 (VISITOR CENTER PARKING)

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0011: PARK ENTRANCE ROAD (OLD COUNTY ROAD)

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM EAST PARK BOUNDARY
0.000	0.000	PARK BOUNDARY	N/A	N/A
0.000	0.000	INTERSECTION	N/A	PAVED ROUTE (FORT CLATSOP ROAD / NON NPS)
0.000	0.000	SIGN	LEFT	REGULATORY, RIGHT LANE ONLY
0.005	0.005	SIGN	LEFT	GUIDE, LEAVING LEWIS & CLARK NHP
0.005	0.005	SIGN	LEFT	GUIDE, THANK YOU FOR VISITING
0.030	0.030	SIGN	RIGHT	WARNING, CONGESTION
0.051	0.077	PULLOUT	RIGHT	N/A
0.053	0.053	INTERSECTION	LEFT	ROUTE 0400 (BURN ROAD)
0.062	0.062	SIGN	LEFT	GUIDE, GRAPHIC SIGN NO TEXT
0.078	0.078	SIGN	RIGHT	GUIDE, FORT CLATSOP LEWIS AND CLARK NATIONAL HISTORICAL PARK FORT SITE EXHIBITS TRAILS 1/4 MI AHEAD
0.114	0.114	INTERSECTION	LEFT	ROUTE 0904Z (MAINTENANCE SHOP PARKING)
0.117	0.117	SIGN	LEFT	GUIDE, SERVICE ROAD ONLY
0.151	0.151	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
0.151	0.151	SIGN	RIGHT	GUIDE, NETUL LANDING
0.190	0.190	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.195	0.279	CURB	LEFT	N/A
0.246	0.246	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
0.293	0.293	INTERSECTION	LEFT	ROUTE 0010 (VISITOR CENTER ACCESS ROAD)
0.294	0.294	SIGN	RIGHT	GUIDE, FORT CLATSOP
0.311	0.311	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.400	0.400	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.458	0.605	PAVED DITCH	LEFT	N/A
0.476	0.512	PAVED DITCH	RIGHT	N/A
0.516	0.516	SIGN	RIGHT	GUIDE, GATE OPEN 9 AM LOCKED 6 PM DAY USE ONLY
0.516	0.516	SIGN	RIGHT	GUIDE, TRAILERS BUSES RV'S PROHIBITED BEYOND THIS POINT
0.517	0.517	INTERSECTION	RIGHT	ROUTE 0910 (FORT TO SEA TRAIL PARKING LOT)
0.520	0.569	PAVED DITCH	RIGHT	N/A
0.742	0.742	INTERSECTION	RIGHT	ROUTE 0201 (ALDER CREEK ROAD)

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0011: PARK ENTRANCE ROAD (OLD COUNTY ROAD)

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.748	0.748	SIGN	RIGHT	WARNING, UNABLE TO READ FROM VIDEO
0.808	0.808	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
0.825	0.825	SIGN	LEFT	GUIDE, GRAPHIC SIGN NO TEXT
0.954	0.954	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.954	1.003	GUARD/GUIDE RAIL	LEFT	N/A
0.964	0.964	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.964	0.998	GUARD/GUIDE RAIL	RIGHT	N/A
0.973	0.992	BRIDGE	N/A	9420-001 (FORT CLATSOP ROAD BRIDGE)
0.995	0.995	SIGN	LEFT	REGULATORY, SPEED 35
0.998	0.998	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
1.003	1.003	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
1.037	1.037	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
1.065	1.065	SIGN	LEFT	REGULATORY, REDUCED SPEED AHEAD
1.119	1.119	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
1.384	1.384	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
1.412	1.412	INTERSECTION	RIGHT	UNPAVED ROUTE
1.425	1.425	INTERSECTION	LEFT	ROUTE 0909BZ (NETUL LANDING BUS LOOP)
1.432	1.432	SIGN	LEFT	REGULATORY, DO NOT ENTER
1.432	1.432	SIGN	LEFT	REGULATORY, BUSES ONLY
1.739	1.739	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
1.739	1.739	SIGN	RIGHT	GUIDE, NETUL LANDING
1.739	1.739	SIGN	RIGHT	GUIDE, P
1.757	1.757	INTERSECTION	LEFT	ROUTE 0909AZ (NETUL LANDING VISITOR AND RV PARKING)
1.761	1.761	SIGN	RIGHT	GUIDE, FORT CLAPSTOP HIGHWAY 101
1.765	1.765	SIGN	LEFT	GUIDE, FORT CLATSOP LEWIS AND CLARK NATIONAL HISTORICAL PARK
1.783	1.783	SIGN	RIGHT	WARNING, UNABLE TO READ FROM VIDEO
1.783	1.783	SIGN	RIGHT	WARNING, UNABLE TO READ FROM VIDEO
1.783	1.783	SIGN	RIGHT	WARNING, UNABLE TO READ FROM VIDEO
1.796	1.796	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0011: PARK ENTRANCE ROAD (OLD COUNTY ROAD)

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
1.796	1.796	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
1.796	1.796	INTERSECTION	N/A	PAVED ROUTE (FORT CLATSOP ROAD / NON NPS)
1.796	1.796	PARK BOUNDARY	N/A	N/A
1.796	1.796	ROUTE END	N/A	TO SOUTH PARK BOUNDARY NEAR NETUL ENTRANCE

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0020: STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GR

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
2.250	2.250	ROUTE BEGIN	N/A	FROM INTERSECTION WITH ROUTE 0120 (NORTH HEAD LIGHTHOUSE ROAD) AND STATE ROUTE 100 NORTH HEAD ROAD (NON NPS) AT MP 2.25
2.250	2.250	INTERSECTION	N/A	PAVED ROUTE (STATE ROUTE 100 NORTH HEAD ROAD / NON NPS)
2.250	2.250	INTERSECTION	RIGHT	ROUTE 0120 (NORTH HEAD LIGHTHOUSE ROAD)
2.254	2.254	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
2.254	2.254	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
2.255	2.255	SIGN	RIGHT	GUIDE, LEWIS-CLARK TRAIL
2.255	2.255	SIGN	RIGHT	REGULATORY, LOOP 100
2.276	2.276	SIGN	LEFT	GUIDE, NO RV'S
2.276	2.276	SIGN	LEFT	GUIDE, NORTH HEAD LIGHTHOUSE NEXT LEFT
2.396	2.396	CULVERT	N/A	N/A
2.453	2.453	CULVERT	N/A	N/A
2.488	2.488	CULVERT	N/A	N/A
2.530	2.530	SIGN	RIGHT	WARNING, NARROW ROAD
2.543	2.543	CULVERT	N/A	N/A
2.615	2.615	SIGN	LEFT	WARNING, NARROW ROAD
2.684	2.684	CULVERT	N/A	N/A
2.765	2.765	CULVERT	N/A	N/A
2.829	2.829	CULVERT	N/A	N/A
2.854	2.854	SIGN	RIGHT	WARNING, SPEED LIMIT 25
2.903	2.903	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
2.905	2.905	SIGN	RIGHT	GUIDE, LEWIS AND CLARK INTERPRETIVE CTR PARK OFFICE KEEP RIGHT
2.905	2.905	SIGN	RIGHT	GUIDE, LEWIS-CLARK TRAIL
2.905	2.905	SIGN	RIGHT	REGULATORY, LOOP 100
2.933	2.933	SIGN	LEFT	REGULATORY, DO NOT PASS
2.933	2.933	SIGN	LEFT	WARNING, ROAD NARROWS
2.936	2.936	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
2.941	2.941	SIGN	LEFT	REGULATORY, SPEED LIMIT 35

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0020: STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GR

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
2.948	2.948	SIGN	LEFT	REGULATORY, STOP
2.957	2.957	INTERSECTION	RIGHT	ROUTE 0021 (STATE ROUTE 100 SPUR / FORT CANBY ROAD)
2.961	2.961	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
2.964	2.964	SIGN	RIGHT	REGULATORY, STOP
2.971	2.971	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
2.973	2.973	INTERSECTION	RIGHT	PAVED SPUR
2.987	2.987	SIGN	LEFT	REGULATORY, LOOP 100
2.990	2.990	SIGN	RIGHT	REGULATORY, LOOP 100
3.002	3.002	CULVERT	N/A	N/A
3.043	3.043	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
3.048	3.100	GUARD/GUIDE RAIL	RIGHT	N/A
3.065	3.065	SIGN	LEFT	GUIDE, LEWIS AND CLARK INTERPRETIVE CTR PARK OFFICE KEEP LEFT
3.229	3.229	CULVERT	N/A	N/A
3.344	3.344	CULVERT	N/A	N/A
3.528	3.528	INTERSECTION	LEFT	UNPAVED ROUTE
3.543	3.543	CULVERT	N/A	N/A
3.590	3.590	CULVERT	N/A	N/A
3.630	3.630	CULVERT	N/A	N/A
3.637	3.637	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
3.654	3.654	CULVERT	N/A	N/A
3.741	3.741	CULVERT	N/A	N/A
3.938	3.938	CULVERT	N/A	N/A
3.981	3.981	CULVERT	N/A	N/A
3.995	3.995	SIGN	LEFT	REGULATORY, SPEED LIMIT 25
3.996	3.996	CULVERT	N/A	N/A
4.017	4.017	CULVERT	N/A	N/A
4.021	4.028	GUARD/GUIDE RAIL	RIGHT	N/A
4.021	4.021	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
4.028	4.028	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0020: STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GR

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
4.028	4.028	INTERSECTION	N/A	PAVED ROUTE (STATE ROUTE 100 CAPTAIN ROBERT GRAY DRIVE / NON NPS)
4.028	4.028	INTERSECTION	LEFT	PAVED ROUTE (KLAHANEE DRIVE / NON NPS)
4.028	4.028	ROUTE END	N/A	TO MP 4.02 AT KLAHANEE DRIVE

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0021: STATE ROUTE 100 SPUR / FORT CANBY ROAD

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0020 (STATE ROUTE 100 NORTH HEAD ROAD/CAPTAIN ROBERT GRAY DRIVE)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0020 (STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GRAY DRIVE)
0.000	0.000	INTERSECTION	N/A	ROUTE 0020 (STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GRAY DRIVE)
0.018	0.018	INTERSECTION	LEFT	PAVED SPUR
0.031	0.031	SIGN	RIGHT	GUIDE, STATE PARK INTERPRETIVE CENTER CAPE DISAPPOINTMENT LIGHTHOUSE
0.039	0.039	CULVERT	N/A	N/A
0.043	0.043	SIGN	RIGHT	GUIDE, U.S. COAST GUARD STATION CAPE "D" N.M.L.B. SCHOOL
0.049	0.049	SIGN	RIGHT	REGULATORY, DO NOT PASS
0.049	0.049	SIGN	RIGHT	WARNING, ROAD NARROWS
0.060	0.060	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
0.220	0.220	CULVERT	N/A	N/A
0.413	0.413	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.441	0.441	SIGN	LEFT	REGULATORY, SPEED LIMIT 25
0.449	0.478	GUARD/GUIDE WALL	RIGHT	N/A
0.463	0.463	SIGN	LEFT	REGULATORY, DO NOT PASS
0.463	0.463	SIGN	LEFT	WARNING, ROAD NARROWS
0.463	0.463	SIGN	RIGHT	GUIDE, HOOK-UP AREA FULL
0.463	0.463	SIGN	RIGHT	GUIDE, PARK OFFICE CAMPGROUND LEWIS AND CLARK INTERPRETIVE CENTER SHUTTLE PARKING BOAT LAUNCH
0.475	0.475	SIGN	LEFT	GUIDE, EVACUATION ROUTE
0.475	0.475	SIGN	LEFT	GUIDE, GRAPHIC SIGN NO TEXT
0.478	0.478	SIGN	RIGHT	GUIDE, WELCOME TO CAPE DISAPPOINTMENT STATE PARK LEWIS AND CLARK NATIONAL PARK
0.484	0.484	INTERSECTION	LEFT	PAVED ROUTE (JETTY ROAD / NON NPS)
0.485	0.485	INTERSECTION	RIGHT	PAVED ROUTE (JETTY ROAD / NON NPS)
0.493	0.507	GUARD/GUIDE WALL	RIGHT	N/A
0.497	0.497	INTERSECTION	LEFT	UNPAVED PARKING
0.500	0.500	SIGN	RIGHT	REGULATORY, NO RV'S BEYOND THIS POINT

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0021: STATE ROUTE 100 SPUR / FORT CANBY ROAD

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.507	0.507	SIGN	RIGHT	GUIDE, U.S FEE AREA
0.508	0.508	CULVERT	N/A	N/A
0.576	0.595	CURB	LEFT	N/A
0.595	0.595	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.595	0.595	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.602	0.602	INTERSECTION	LEFT	PAVED ROUTE (COAST GUARD ROAD / NON NPS)
0.607	0.607	SIGN	LEFT	REGULATORY, STOP
0.609	0.609	SIGN	LEFT	GUIDE, LEWIS AND CLARK INTERPRETIVE CENTER
0.610	0.610	GATE	N/A	N/A
0.611	0.611	SIGN	RIGHT	REGULATORY, DO NOT ENTER
0.695	0.695	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.704	0.704	SIGN	RIGHT	GUIDE, LEWIS & CLARK INTERPRETIVE CENTER ADMISSION FEE REQUIRED
0.722	0.722	INTERSECTION	RIGHT	PAVED ROUTE
0.727	0.727	SIGN	RIGHT	WARNING, SLOW
0.727	0.727	SIGN	RIGHT	GUIDE, AREA HOURS 8:00AM-DUSK VEHICLES PARKED AFTER CLOSE WILL BE IMPOUNDED
0.727	0.727	SIGN	RIGHT	GUIDE, PARKING DISABILITY ACCESS DISABLED PARKING PERMIT REQUIRED NO R.V.'S NO TURNAROUND
0.901	0.901	SIGN	LEFT	REGULATORY, SPEED LIMIT 15
0.935	0.935	SIGN	RIGHT	REGULATORY, NO PARKING ANY TIME
0.944	0.944	INTERSECTION	N/A	PAVED PARKING (LEWIS AND CLARK INTERPRETIVE CENTER PARKING / NON NPS)
0.944	0.944	ROUTE END	N/A	TO LEWIS AND CLARK INTERPRETIVE CENTER PARKING (NON NPS)

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0120: NORTH HEAD LIGHTHOUSE ROAD

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM INTERSECTION WITH STATE ROUTE 100 NORTH HEAD ROAD (NON NPS) AND ROUTE 0020 (STATE ROUTE 100 NORTH HEAD ROAD/CAPTAIN ROBERT GRAY DRIVE)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0020 (STATE ROUTE 100 NORTH HEAD ROAD / CAPTAIN ROBERT GRAY DRIVE)
0.000	0.000	INTERSECTION	RIGHT	PAVED ROUTE (STATE ROUTE 100 NORTH HEAD ROAD / NON NPS)
0.000	0.000	SIGN	N/A	GUIDE, ILWACO
0.000	0.000	SIGN	N/A	GUIDE, PARK OFFICES & INTERPRETIVE CENTER
0.005	0.005	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.005	0.005	SIGN	LEFT	REGULATORY, STOP
0.011	0.011	SIGN	RIGHT	REGULATORY, NO RV'S BEYOND THIS POINT
0.028	0.028	SIGN	RIGHT	WARNING, ABRUPT EDGE
0.081	0.081	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
0.146	0.146	SIGN	RIGHT	GUIDE, WELCOME TO NORTH HEAD LIGHTHOUSE AT CAPE DISAPPOINTMENT STATE PARK
0.154	0.154	SIGN	RIGHT	GUIDE, PARK HOURS 8:00 AM-DUSK
0.371	0.371	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.377	0.377	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.426	0.426	SIGN	LEFT	REGULATORY, NO PARKING
0.427	0.427	SIGN	RIGHT	REGULATORY, NO PARKING
0.428	0.428	SIGN	LEFT	REGULATORY, SPEED LIMIT 25
0.428	0.428	SIGN	LEFT	WARNING, ABRUPT EDGE
0.451	0.451	INTERSECTION	RIGHT	PAVED ROUTE (BELLVIEW PARK ROAD)
0.460	0.460	SIGN	RIGHT	WARNING, UNABLE TO READ FROM VIDEO
0.460	0.460	INTERSECTION	LEFT	UNPAVED PARKING
0.460	0.460	SIGN	RIGHT	REGULATORY, LOCK CAR PLACE VALUABLES IN TRUNK
0.474	0.474	SIGN	RIGHT	REGULATORY, NO PARKING ANYTIME
0.476	0.476	SIGN	RIGHT	GUIDE, RESTROOM
0.477	0.477	SIGN	LEFT	REGULATORY, AUTHORIZED VEHICLES ONLY
0.478	0.478	SIGN	RIGHT	GUIDE, RESTROOM
0.484	0.484	INTERSECTION	N/A	UNPAVED ROUTE (SERVICE ROAD)

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0120: NORTH HEAD LIGHTHOUSE ROAD

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.484	0.484	ROUTE END	N/A	TO DEAD END

LEWI: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0400: BURN ROAD

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))
0.000	0.000	INTERSECTION	LEFT	ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0011 (PARK ENTRANCE ROAD (OLD COUNTY ROAD))
0.004	0.004	GATE	N/A	N/A
0.007	0.175	DEBRIS ON ROAD	N/A	N/A
0.055	0.055	SIGN	LEFT	REGULATORY, DUMP CLOSED
0.109	0.109	INTERSECTION	RIGHT	ROUTE 0401 (DRAINFIELD ROAD)
0.175	0.175	INTERSECTION	N/A	DEAD END
0.175	0.175	ROUTE END	N/A	TO DEAD END

Section 10 Appendix



Lewis and Clark National Historical Park



Federal Lands Highway
Road Inventory Program

Explanation of Changes to the RIP Index Equations and Determination of PCR

In 2005, the FHWA began implementing the use of a Pavement Management System to assist the National Park Service in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Region, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA as well.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions vis a vis the distresses and indexes that comprise the Pavement Condition Rating (PCR), an extensive study was completed throughout 2010 that has resulted in changes to the Road Inventory Program condition reporting method and specifically, the calculation of PCR. It was determined that a better representation of PCR could be achieved by modifying the relative impact certain distresses would have on the overall rating.

Through the use of HPMA data, it was noted that false failure indicators existed with the existing PCR model, and that it would be necessary to reduce their impact. The distresses affected in this way were Rutting and Roughness. Conversely, experience showed that roadways with extensive cracking present were often shown to have a high PCR. Therefore, the crack index models were adjusted to be more sensitive to changes in crack severity or quantity. It was also determined that these issues were not due to a problem with data acquisition (i.e. the RIP “van”), but with the way the collected data was processed. The final change was to provide guidance on when to use the Roughness Condition Index (RCI) in the PCR calculation. Roughness data is of little value to determining overall condition on routes that, due to their length or geometrics, have lower vehicle operating speeds. Therefore, in Cycle 5, only routes that have lengths of one half mile or greater and posted speed limits of 25 mph or greater will have RCI reported and included in the PCR calculations.

The changes that were implemented were endorsed by management at both the FHWA and NPS. In order to show the effectiveness of these changes, several sites were ground truth tested to ensure that an improvement was achieved between the relationship of PCR and the actual Maintenance and Rehabilitation needs that were represented. The changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection.


Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that will be implemented in Cycle 5, we will also aim to provide greater assistance in translating good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 60 or below. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System’s data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.

Condition Categories and Treatments

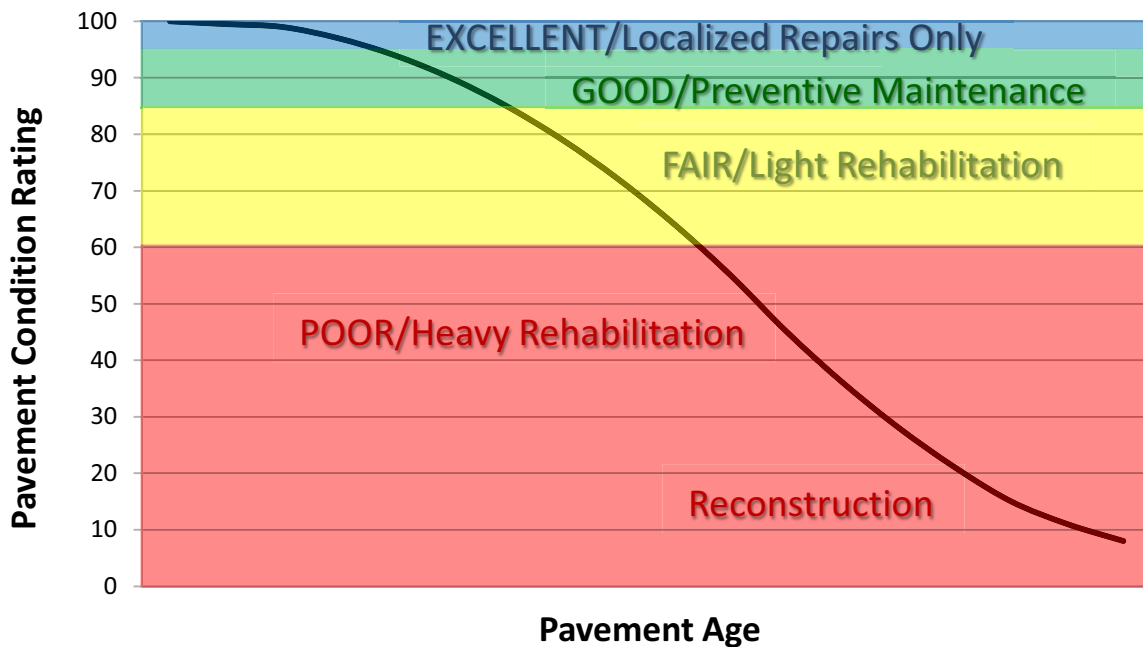

DESCRIPTION OF RATING SYSTEM

The Federal Highway Administration (FHWA), Road Inventory Program (RIP) for the National Park Service (NPS), collects roadway condition data on paved surfaces (asphalt, concrete, brick, and cobblestone) on roads, parkways, and parking areas in national parks nationwide. The road surface condition data is collected using an automated Data Collection Vehicle (DCV). Roads having brick or cobblestone surfacing are not normally surveyed with the DCV, but are manually rated for condition rating.

The FHWA RIP is implemented based on the premise that an accurate pavement surface condition assessment can be accomplished using automated crack detection technology as applied to digital images. Various methods of pavement condition assessment have been developed over the years with varying degrees of accuracy and acceptance. The use of digital photography to record pavement images and subsequent crack detection and classification has undergone continuous improvements over the past decade. Digital cameras with increasingly superior resolution and high definition have become more affordable, and the proprietary programming code and algorithms have been improved in crack detection software.

With the use of quality digital photography and automated crack detection software, FHWA RIP is tasked with executing a pavement condition assessment on about 5000 miles of National Park Service roads and parkways. Foremost in setting up the basis of pavement distress identification is employing the distress identification protocols used by FHWA. There is no single distress identification system that is universal among entities conducting a program of distress identification. For the purpose of the NPS RIP, FHWA employs distress identification protocols that are specific to this program.

FHWA has referenced the “*Distress Identification Manual for the Long-Term Pavement Performance Program*”, Publication No. FHWA-RD 03-031, June 2003, as the point-of-reference for distress types on NPS pavement. In truth, the FHWA RIP distress types are similar to those described in the LTPP manual with some modifications. This document, “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013*” was developed using the “*Distress Identification Manual for the Long-Term Pavement Performance Program*” as a guideline. Definitions of severity levels based on crack width contained in this document adhere to the LTPP Distress ID Manual. Modifications have been made to the definition of Alligator and Longitudinal Cracking and determination of Alligator Cracking severity. This manual also addresses Rutting and Roughness and its application to RIP.

In 2010, FHWA RIP began the fifth cycle of data collection in national parks. For Cycle 5, data will be collected in approximately 81 large parks (10 or more paved route miles) on Functional Class 1, 2, and 7 routes plus any new routes or parking areas previously not collected, totaling an estimated 4,459 paved route miles. Additionally, 168 small parks will be collected comprising approximately 529 paved route miles and associated paved parking areas. The data is used to support the National Park Service road maintenance program and Pavement Management System (PMS) developed and maintained by FHWA.

This “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013*” will be used as a reference resource in crack detection and classification, determination of distress severity and extent, and in the calculation of distress index values for the FHWA RIP Cycle 5.

SURFACE DISTRESSES

Surface Condition Rating - SCR

Surface distresses are measured in the primary lane only. In the classification and measurement of all paved surface condition data, results will be reported in the database in record intervals of 0.02 miles (105.6 feet) (smallest granularity) along the route.

Surface distresses determined from digital images

- Transverse Cracks
- Longitudinal Cracks
- Alligator Cracks
- Patching/Potholes

Surface distress measured by DCV (Data Collection Vehicle) LRMS (Laser Rut Measuring System)

- Rutting

Each of the five surface distresses is assigned a computed surface distress index

- Transverse Crack Index
- Longitudinal Crack Index
- Alligator Crack Index
- Patching/Pothole Index
- Rutting Index

Surface distress data are classified as listed above, measured for severity, and quantified for extent. Classification, severity, and extent of these five surface distresses comprise the three main elements for calculation of SCR (Surface Condition Rating).

In addition to the five surface distresses, a **Structural Crack Index** is computed, which is a combination of the Longitudinal Crack Index and the Alligator Crack Index. The Structural Crack Index is then used in lieu of the LC and AC indices to compute SCR.

Roughness Condition Index - RCI

Additional condition data measured by DCV (lasers and accelerometers)

- Roughness (IRI)

Roughness is measured by FHWA's DCV and reported as International Roughness Index (IRI) in inches/mile. Using IRI, the Roughness Condition Index (RCI) is computed.

Pavement Condition Rating - PCR

Using the SCR (computed from the five surface distresses) and the RCI, an overall Pavement Condition Rating (PCR) is computed. The formula for PCR is:

$$\text{Asphalt PCR} = (0.60 * \text{SCR}) + (0.40 * \text{RCI})$$

$$\text{Concrete PCR} = \text{RCI}$$

A detailed description of each distress index formula, roughness index formula, SCR and PCR is provided in this document beginning on page 23.

Each classified surface distress will fall into one or more *severity*...LOW, MEDIUM, or HIGH based on criteria listed. For each severity, an *extent* is established based on the measured quantity of the distress within that severity. Within each *severity* individual distresses are assigned a *Maximum Allowable Extent* (MAE). For example, LOW severity transverse cracking may be allowed up to 21.1 cracks within a 0.02 interval before it reaches MAE and fails.

The index formulas are based on a scale of 0-100. A PCR index value of 100 would indicate a “new” road with no measurable distresses or rough ride. A PCR value of 60 is determined to be *terminable serviceability* and the road is considered failed. The range of index values with condition descriptors is:

POOR (<=60), FAIR (61 - 84), GOOD (85 - 94), EXCELLENT (95 - 100)

Index values are generally computed based on cumulative deducts of the measured severities. As shown in the index formulas below, as any single severity reaches or exceeds MAE, the index computes to a value of 60 or less, and the road fails for that 0.02 interval.

Note: As a result of a unique combination of measured surface distresses and IRI, index values occasionally compute to less than 0 or greater than 100. In this instance, an index value < 0 defaults to 0. Index values > 100 default to 100. For all indices, a higher value indicates a better road condition, and a lower value indicates a poorer road condition.

On the following page, Table 1 summarizes the different types of distresses measured.

TABLE 1: Distress Summary

ASPHALT-SURFACED PAVEMENT DISTRESS TYPES with RUTTING and ROUGHNESS				
DISTRESS TYPE	UNIT OF MEASURE...	...CONVERTED TO	DEFINED SEVERITY LEVELS?	MEASURED BY
Alligator Cracking	Square Feet	Percent of Lane Per 0.02 Mile	Yes	Digital Image Crack Detection Software
Transverse Cracking	Linear Feet	Number of Cracks Per 0.02 Mile	Yes	Digital Image Crack Detection Software
Longitudinal Cracking	Linear feet	Percent of Lane Length Per 0.02 Mile	Yes	Digital Image Crack Detection Software
Patching/Potholes	Square Feet	Percent of Lane Per 0.02 Mile	No	Digital Image Crack Detection Software
Rutting	Inches	Rut Depth Per 0.02 Mile	Yes	DCV – Laser Rut Measuring System (LRMS)
Roughness	IRI	*RCI Per 0.02 Mile	No	DCV – Lasers /Accelerometers

***Note: Roughness is measured on concrete roadways, but surface distresses and rutting are not measured. For concrete, PCR = RCI**

ALLIGATOR CRACKING

Description

Alligator cracking is considered a combination of fatigue and block cracking. It is a series of interconnected cracks in various stages of development. Alligator cracking develops into a many-sided pattern that resembles chicken wire or alligator skin. It can occur anywhere in the road lane. Alligator cracking must have a quantifiable area.

Severity Levels

LOW

An area of cracks with no or very few interconnecting cracks and the cracks are not spalled. Cracks are ≤ 0.25 in (6mm) in mean width. Cracks in the pattern are no further apart than 1 foot (0.328 m). May be sealed cracks with sealant in good condition and a crack width that cannot be determined.

MEDIUM

An area of interconnected cracks that form a complete pattern. Cracks may be slightly spalled. Cracks are >0.25 in. (6 mm) and ≤ 0.75 in. (19 mm) or any crack with a mean width ≤ 19 mm and adjacent low severity cracking. Cracks in the pattern are no further apart than 6 in. (150 mm).

HIGH

An area of interconnected cracks forming a complete pattern. Cracks are moderately or severely spalled. Cracks are >0.75 in (19mm) or any crack with a mean width ≤ 0.75 in (19mm) and adjacent medium to high severity random cracking.

A combination of observed crack width and crack pattern is used to determine overall severity of alligator cracking. Based on above description of each severity, the highest level of crack width and crack pattern determines overall severity. Table 2 illustrates this.

TABLE 2: Alligator Crack Severity Levels

ALLIGATOR CRACKING SEVERITY LEVELS		Crack Pattern		
		LOW	MED	HIGH
Crack Width	LOW	L	M	H
	MED	M	M	H
	HI	H	H	H

LONGITUDINAL CRACKING

Description

Longitudinal cracking occurs predominantly parallel to the pavement centerline. It can occur anywhere within the lane. Longitudinal cracks occurring in the wheelpath may be noteworthy.

Severity Levels

LOW

Cracks with a mean width of < 0.25 in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

MED

Cracks with a mean width > 0.25 in. (6 mm) and ≤ 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random low severity cracking.

HIGH

Cracks with a mean width > 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random medium to high severity cracking.

TRANSVERSE CRACKING

Description

Transverse cracking occurs predominantly perpendicular to the pavement centerline. It can occur anywhere within the lane.

Severity Levels

LOW

Cracks with a mean width of < 0.25 in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

MED

Cracks with a mean width > 0.25 in. (6 mm) and ≤ 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random low severity cracking.

HIGH

Cracks with a mean width > 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random medium to high severity cracking.

PATCHING AND POTHOLES

Description

Patching is an area of pavement surface that has been removed and replaced with patching material or an area of pavement surface that has had additional patching material applied. Patching may encompass partial lane or full lane width. On full lane width patching; the total, contiguous length of patch may not exceed 0.30 mi. (0.48 km). (Any full-lane patch exceeding 0.30 mi. in length is considered a pavement change). Patching must have a quantifiable area.

Potholes are bowl-shaped holes of various sizes occurring in the pavement surface.

Severity Levels

There are no stratified severities for Patching/Potholes. They either are present or they are not.

RUTTING

Description

Rutting is a longitudinal surface depression in the wheelpath.

Severity Levels

LOW

Ruts with a measured depth $\geq 0.20''$ and $\leq 0.49''$

MED

Ruts with a measured depth $\geq 0.50''$ and $\leq 0.99''$

HIGH

Ruts with a measured depth $\geq 1.00''$

Ruts $< 0.20''$ are not included in the distress calculations.

ROUGHNESS

Description

Roughness is the measurement of the unevenness of the pavement in the direction of travel. It is measured in units of IRI (International Roughness Index), inches per mile, and is indicative of ride comfort.

Severity Levels

There are no stratified severity levels for roughness. The roughness (or smoothness) of a road surface can be defined by IRI in the following table.

TABLE 3: IRI

IRI Descriptions	
Type of Road	Typical IRI (in/mile)
New Road, no noticeable roughness	<90
Small level of roughness	90 – 126
Road of average roughness	126 – 190
Road with above average roughness	190 – 253
Road with severe roughness	253 – 380
Nearly impassable	>380

INDEX FORMULAS

Note: All index formulas listed below contain MAE applicable to 0.02 mile (105.6 feet) interval.

Alligator Crack Index

$$AC_INDEX = 100 - 40 * [(\%LOW / 35) + (\%MED / 15) + (\%HI / 5)]$$

Where:

The values *%LOW*, *%MED* and *%HI* report the percentage of the observed pavement (0.02 mile, primary lane) that contains alligator cracking within the respective severities. These values range from 0 to 100.

%LOW = Percent of total area (primary lane, 0.02 in length), low severity

%MED = Percent of total area (primary lane, 0.02 in length), medium severity

%HI = Percent of total area (primary lane, 0.02 in length), high severity

Percent of total area is computed as:

$$\frac{\text{square foot area of alligator crack severity}}{0.02 \text{ mile} * \text{lane width}}$$

In AC_INDEX, the denominators 35, 15, and 5 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 35% of low severity alligator cracking for a 0.02 interval before failure, 15% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Longitudinal Crack Index

$$LC_INDEX = 100 - 40 * [(\%LOW / 175) + (\%MED / 75) + (\%HI / 25)]$$

Where:

The values *%LOW*, *%MED*, and *%HI* report the length of longitudinal cracking within each severity as a percent of the section length (0.02 mile, primary lane).

These values are ≥ 0 and can exceed 100.

%LOW = Percent of interval length (primary lane, 0.02 in length), low severity

%MED = Percent of interval length (primary lane, 0.02 in length), medium severity

%HI = Percent of interval length (primary lane, 0.02 in length), high severity

Percent of interval length is computed as:

$$\frac{\text{length of respective longitudinal cracking}}{0.02 \text{ mile (105.6 feet)}}$$

In LC_INDEX, the denominators 175, 75, and 25 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 175% of low severity alligator cracking for a 0.02 interval before failure, 75% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Structural Crack Index

$$SC_INDEX = [100 - ((100 - AC_INDEX) + (100 - LC_INDEX))]$$

Structural Crack Index is a combination of Alligator Cracking and Longitudinal Cracking, and is used in the SCR formula in lieu of AC and LC separately.

Transverse Crack Index

$$TC_INDEX = 100 - 40 * [(LOW / 21.1) + (MED / 4.4) + (HI / 2.6)]$$

Where:

The values *LOW*, *MED* and *HI* report a count of the total number of transverse cracks (reported to three decimals) within each severity level, where one transverse crack is equal to the lane width. These values are ≥ 0 .

LOW = Number of cracks in interval (primary lane, 0.02 in length), low severity

MED = Number of cracks in interval (primary lane, 0.02 in length), medium severity

HI = Number of cracks in interval (primary lane, 0.02 in length), high severity

Number of cracks is computed as:

$$\frac{\text{Total length of transverse cracks}}{\text{Lane width}}$$

In TC_INDEX, the denominators 21.1, 4.4, and 2.6 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 21.1 low severity transverse cracks for a 0.02 interval before failure, 4.4 cracks for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Patching Index

$$\text{PATCH_INDEX} = 100 - 40 * (\% \text{PATCHING} / 80)$$

Where:

The value *%PATCHING* reports the percentage of the observed pavement (0.02 mile, primary lane) that contains patching/potholes. This value ranges from 0 to 100.

%PATCHING = Percent of total area (primary lane, 0.02 in length)

Percent of total area is computed as:

$$\frac{\text{square foot area of patching/potholes}}{0.02 \text{ mile} * \text{lane width}}$$

There are no severity levels for patching. It either exists or does not.

In *PATCH_INDEX*, the denominator 80 is the Maximum Allowable Extent (MAE) for each severity. In other words, we will allow up to 80% patching for a 0.02 interval before failure. As you can see, if patching/potholes reaches MAE the resulting index value is 60, or failure.

Rutting Index

$$\text{RUT_INDEX} = 100 - 40 * [(\% \text{LOW} / 535) + (\% \text{MED} / 205) + (\% \text{HI} / 40)]$$

Where:

20 rut depth measurements are taken per 0.02 interval for each of 2 wheel paths (left and right), resulting in a total of 40 measurements taken for both wheel paths. *Each wheelpath is analyzed independently for rut severities.* The values *%LOW*, *%MED* and *%HI* are a *total percentage* of left wheelpath percentage and right wheelpath percentage added together for the respective severity. These values range from 0 to 200.

%LOW = Percent of LOW ruts in left wheelpath based on 20 ruts, plus percent of LOW ruts in right wheelpath based on 20 ruts.

%MED = Percent of MED ruts in left wheelpath based on 20 ruts, plus percent of MED ruts in right wheelpath based on 20 ruts.

%HI = Percent of HI ruts in left wheelpath based on 20 ruts, plus percent of HI ruts in right wheelpath based on 20 ruts.

Percent of rut measurements within each severity can also be computed as:

$$\frac{\text{total number of ruts within each severity in both wheelpaths}}{20} * 100$$

In *RUT_INDEX*, the denominators 535, 205, and 40 are the Maximum Allowable Extents for each severity. In other words, the formula allows up to 535% low severity

ruts for a 0.02 interval before. However, since 200 is the highest measurable percentage allowed, 535% is unattainable and therefore, no amount of LOW severity rutting will cause the RUT_INDEX to fail a road. Similarly, since the MAE for MED severity rutting is 205, no amount of MED severity rutting will cause the RUT_INDEX to reach 60 and fail the road. As you can see, LOW severity rutting reaches MAE the resulting index value is 60, or failure. This formula was intentionally designed to minimize the impact of LOW and MED severity rutting on RUT_INDEX.

Roughness Condition Index (Asphalt)

$$RCI = 32 * [5 * (2.718282 ^ {(-0.0041 * AVG IRI)})]$$

Where:

The value *AVG IRI* reports the average value of the Left IRI and Right IRI measurements for the interval (0.02 mile, primary lane). This value can range from approximately 40 to 999.0.

Average IRI is computed as:

$$\frac{\text{Left wheelpath IRI} + \text{Right wheelpath IRI}}{2}$$

There is no applicable threshold for failure for this index.

Roughness Condition Index (Concrete)

$$RCI = -0.0012(IRI^2) + 0.0499(IRI) + 99.542$$

For concrete, PCR = RCI

Surface Condition Rating Index

SCR = *Lowest* Index Value Of: [SC_INDEX, TC_INDEX, PATCH_INDEX, RUT_INDEX]

Note: The modified SCR equation above combines AC_INDEX and LC_INDEX, and considers that a single AC/LC index value of the Structural Crack Index (SC_INDEX). The lowest of the four computed index values (SC_INDEX, TC_INDEX, PATCH_INDEX, or RUT_INDEX) becomes the SCR.

Where:

See above for determinations of SC_INDEX, TC_INDEX, PATCH_INDEX and RUT_INDEX.

The threshold for failure for this index is SCR = 60.

Data Collection Vehicle Subsystems

Data on paved roads in Cycle 5 is collected by FHWA using a Pathway Services Inc. Data Collection Vehicle (DCV), called PathRunner. The DCV is driven in the primary-direction lane at posted speed limits and less.

CAMERAS

Forward-facing and rear-facing video is collected as .jpg digital imagery at a frequency of 26.4 feet.

Two forward-facing cameras are mounted above the vehicle cab, one pointed straight ahead and the other to the right shoulder providing seamless 120 degree viewing.

CAMERA SPECIFICATIONS	
Two Forward/ One Rear Facing	
Camera lens/type	FUJINON CCTV LENS H16x10B-Y41
Focal length	10 mm – 160 mm
Image size	8.8 mm x 6.6mm
Image format	*.jpg
Image resolution	HD 2000 X 1200
Image pixel size	depends on distance
Zoom ratio	16x
Max Relative Aperture	1:2.5
Iris range	F25-T800 (Equivalent to F800)

Pavement images are created using a Laser Scan Imaging System. This system is composed of a single high resolution line-scan camera and two lasers configured to image an approximate 11-foot wide lane with 1 mm resolution.

CAMERA SPECIFICATIONS	
Pavement Line Scan	
Image size	4280 pixels/line
Image width	4 meters (3950 mm nominal)
Laser class	3B
Power	250W
Vehicle speed limitations	62 mph
Environment	Dry pavement, day or night
Sensor size (approx)	300 mm(H) x 375 mm(L) x 200 mm(D)
Image frame length	26.4 feet

DMI (Distance Measuring Instrument)

The DMI (Distance Measuring Instrument) obtains road length measurements that are accurate to 0.1% for speeds up to 60 mph. The DMI is connected to the hub of the rear wheel on the driver's side, and is calibrated to the revolutions of the rear vehicle axle on a regular basis.

ROUGHNESS (IRI)

The collection system includes a South Dakota type laser profiler manufactured based on active Class 1 ASTM E950 standards. The dynamic profile of the pavement surface is collected from which the IRI roughness data is computed. The sensors include one accelerometer on each wheelpath, one height sensor (laser) on each wheelpath, and a distance transducer.

IRI SPECIFICATIONS	
Reported IRI units	Inches/mile
Vehicle speed limitations	12-62 mph
IRI equipment certification	Texas Transportation Institute (TTI)
Wavelengths accommodated	6 in. – 300 feet
IRI computed & reported	World Bank Technical Paper Number 46
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E950-98 (2004), ASTM E 1926-08, AASHTO MP 11-08, AASHTO PP 49-08

RUTTING

Rutting depths are measured using an INO Laser Rut Measurement System (LRMS). This system is a transverse profiling device that detects and characterizes pavement rutting. The LRMS can acquire full 4 meter width profiles of a pavement lane at normal traffic speeds and uses two laser profilers that digitize transverse sections of the pavement.

RUTTING SPECIFICATIONS	
Reported rut depth units	Inches
Vehicle speed limitations	Up to 62 mph
Sampling rate	30-150 profiles/second
Transverse resolution	1280 points/profile
Transverse field-of-view	4 m
Depth accuracy (nominal)	+/- 1 mm
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E1703M-95 (reapproved 2005)

GPS & INERTIAL SYSTEMS

GPS is collected by an onboard system employing Omnistar real time correction and a gyroscope Inertial Measuring Unit (IMU) to provide accurate positioning data in instances of satellite obstruction. All GPS coordinates are tied to image and linear distance measurements.

GPS SPECIFICATIONS	
Static accuracy	Sub-meter
Dynamic accuracy	2-3 meters
Receiver	12 satellite tracking
Coordinate system	Lat Lon WGS 84
Environment	Day or night
Cross-slope	+ - 0.1 degrees
Grade	+ - 0.1 degrees

GPS on Manually Rated Roads (MRR)

Parking areas, some roads, and other paved areas that are not fully drivable with the DCV are collected manually by field technicians. GPS is collected for these routes using portable Trimble GPS backpack units.

Geodatabase – Background and Metadata

In addition to this park report, a *geodatabase* containing both tabular and spatial data specific to this park has been provided. All data disseminated in the preceding report has been obtained from the tables and fields within said geodatabase. The geodatabase can be referenced for tabular data via Microsoft Access or for both tabular and spatial data via ESRI's ArcGIS Suite of software which consists of; ArcMap, ArcCatalog and ArcExplorer. Consolidating the RIP data into one database creates a seamless relationship of tables and geographic data. It will allow RIP to facilitate easier updates and enhancements in the future.

A geodatabase can be thought of as simply a database containing spatial data. Many different tables are contained with the park's geodatabase. A complete and thorough description of the tables and fields contained within this geodatabase can be found in the *metadata*. The metadata is attached directly within the geodatabase and can be accessed via ESRI's ArcCatalog.

GLOSSARY OF TERMS AND ABBREVIATIONS

<u>TERM OR ABBREVIATION</u>	<u>DESCRIPTION OR DEFINITION</u>
AC	Alligator Cracking
CRS	Condition Rating Sheets (Section 5)
DCV	Data Collection Vehicle
Excellent	Excellent rating with an index value of 95 to 100
Fair	Fair rating with an index value from 61 to 84
FUNCT_CLASS	Functional Classification (see Route ID, Section 2)
Good	Good rating with an index value from 85 to 94
IRI	International Roughness Index
Lane Width	Width from road centerline to fogline, or from centerline to edge-of-pavement when no fogline exists
LC	Longitudinal Cracking
MRR	Manually Rated Route
MRL	Manually Rated Line
MRP	Manually Rated Polygon
N/A	Not Applicable
NC	Not Collected
PATCH	Patching and Potholes
Paved Width	Width from edge-of-pavement to edge-of-pavement
PCR	Pavement Condition Rating
PKG	Parking Area
Poor	Poor rating with an index value of 0 to 60
RCI	Roughness Condition Index
SC	Structural Cracking
SCR	Surface Condition Rating
TC	Transverse Cracking