



# Federal Lands Highway Road Inventory Program

Road Inventory and Condition Assessment




**Vicksburg National Military Park**  
**VICK - 5600**

**Cycle 5 Report**

**Prepared By: Federal Highway Administration**  
**Road Inventory Program (RIP)**  
**Data Collected: 01/2012**  
**Report Date: 10/2012**

# Vicksburg National Military Park in Mississippi

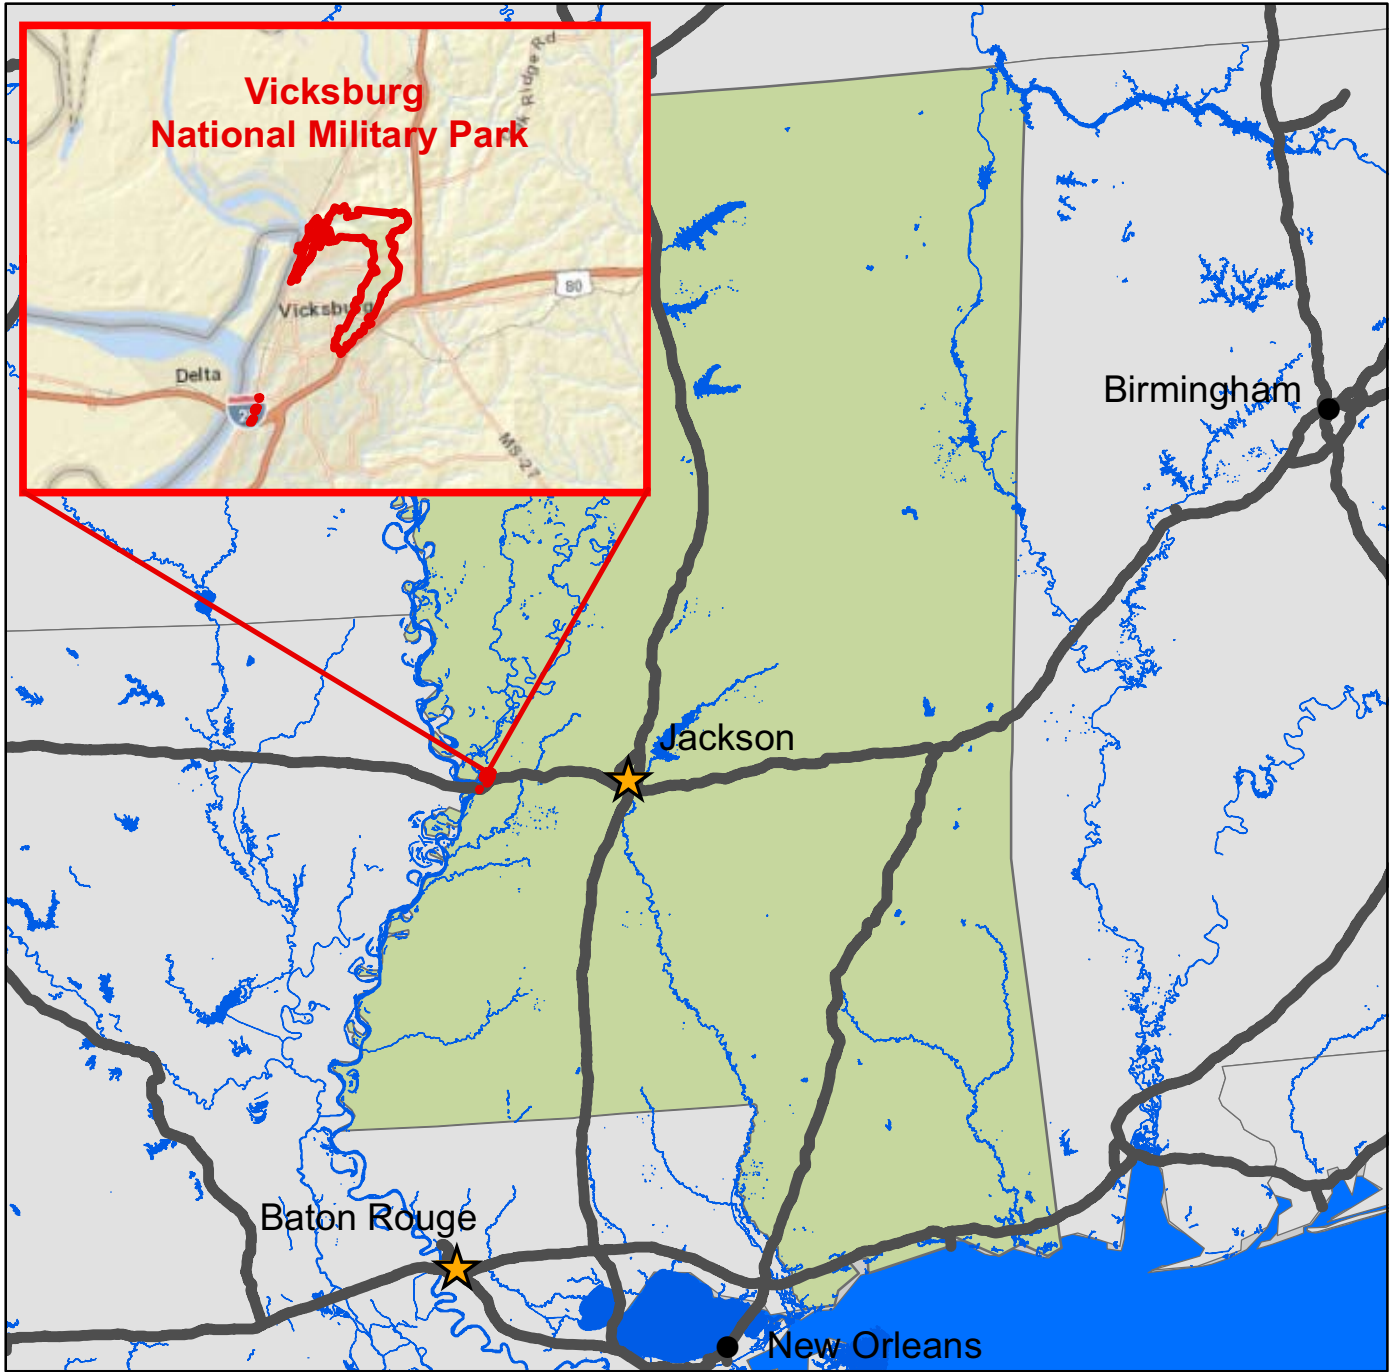




DCV = Data Collection Vehicle

## TABLE OF CONTENTS

<b><u>SECTION</u></b>	<b><u>PAGE</u></b>
<b>1. INTRODUCTION</b>	<b>1 - 1</b>
<b>2. PARK ROUTE INVENTORY</b> Route IDs, Subcomponents & Changes Report (As Applicable)	<b>2 - 1</b>
<b>3. PARK SUMMARY INFORMATION</b> Paved Route Miles and Percentages by Functional Class and PCR DCV Road Condition Summary	<b>3 - 1</b> <b>3 - 3</b>
<b>4. PARK ROUTE LOCATION MAPS</b> Route Location Key Map Route Location Area Map Route Condition Key Map – PCR Mile by Mile Route Condition Area Map – PCR Mile by Mile	<b>4 - 1</b> <b>4 - 2</b> <b>4 - 4</b> <b>4 - 5</b>
<b>5. PAVED ROUTE CONDITION RATING SHEETS</b> CRS Pages	<b>5 - 1</b>
<b>6. MANUALLY RATED PAVED ROUTE CONDITION RATING SHEETS</b> MRR Pages	<b>6 - 1</b>
<b>7. PARKING AREA CONDITION RATING SHEETS</b> Paved Parking Area Pages	<b>7 - 1</b>
<b>8. ROUTE MAINTENANCE FEATURES SUMMARIES</b> DCV Route Maintenance Features Summary Structure List	<b>8 - 1</b> <b>8 - 2</b>
<b>9. ROUTE MAINTENANCE FEATURES ROAD LOGS</b> Route Maintenance Features Road Logs	<b>9 - 1</b>
<b>10. APPENDIX</b> Explanation of Changes to the RIP Index Equations and Determination of PCR Explanation of the Excellent, Good, Fair and Poor Condition Descriptions Description of Rating System Surface Distresses Index Formulas Data Collection Vehicle Subsystems Geodatabase – Background and Metadata Glossary of Terms and Abbreviations	<b>10 - 1</b> <b>10 - 2</b> <b>10 - 3</b> <b>10 - 5</b> <b>10 - 12</b> <b>10 - 16</b> <b>10 - 19</b> <b>10 - 20</b>

# Section 1 Introduction

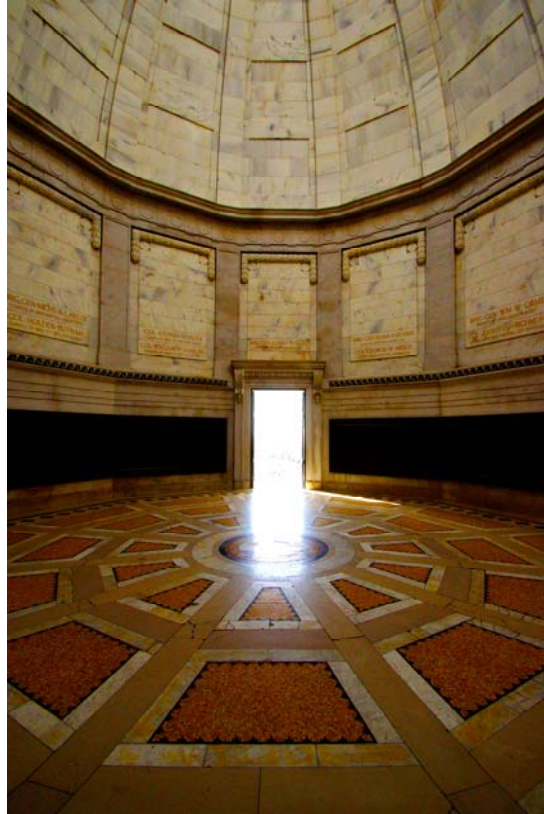

Vicksburg National Military Park



Federal Lands Highway  
Road Inventory Program

## INTRODUCTION

The Federal Highway Administration, (FHWA), in the mid 1970s, was charged with the task of identifying surface condition deficiencies and corrective priorities on National Park Service (NPS) roads and parkways. Additionally, FHWA was tasked with establishing an integrated maintenance features inventory, locating features such as culverts, guardrails, and signs, among others, along NPS roads and parkways. As a result, in 1976 the NPS and FHWA entered into an MOA (Memorandum Of Agreement) which established the RIP (Road Inventory Program). This MOA was terminated and revised in 1980 to establish a new MOA aiming to update RIP data and develop a long-range program to improve and maintain NPS roads to designated condition standards and establish a maintenance management program.

The FHWA completed this initial phase of the RIP in the early 1980s. As a result of this effort, each NPS site included in the study received a RIP Report known as the “Brown Book” which included the information collected during this first RIP phase.

In the 1990s, the effort was again renewed to update and maintain the RIP data. By this time the computer age was upon us and a process was employed that relied heavily on electronic data collection and computer technology. A cyclical program was developed and the RIP completed two cycles of data collection from 1994 to 2001. Cycle 1, starting in 1994, was conducted in 44 “large parks” (parks containing 10 or more paved route miles). Cycle 2 began in 1997 and comprised 79 large parks and 5 small parks totaling 4,874 paved route miles. Each of these parks received a RIP Report known as the “Blue Book”. Cycle 3, from 2001 to 2004, was conducted in all parks, large and small, that contained any paved routes, including parking areas and, again, each park received a RIP Report and associated electronic files.

Cycle 4 was initiated in the spring of 2006 covering 86 large parks and several associated small parks consisting of 5,553 paved route miles and 6,232 paved parking areas. Data collection has been completed for Cycle 4 and all data has been delivered to the NPS.

In 2005, the FHWA began implementing the use of a Pavement Management System (PMS) to assist the NPS in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Regional, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions, an extensive study was completed throughout 2010 that has resulted in changes to the RIP condition reporting method, specifically the distresses and indexes that comprise the Pavement Condition Rating (PCR). It was determined that a better representation of PCR could

be achieved by modifying the relative impact certain distresses would have on the overall rating. The changes that were implemented were endorsed by management at both the FHWA and NPS in October 2010. These changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection. Because of these changes, the PCR Condition ratings reported in Cycle 5 do not directly relate to the condition ratings reported in previous cycle RIP Reports. For more detailed information about the changes, see Section 3 and Section 10 in this RIP Report.

Cycle 5 has launched in the summer of 2010 and will again comprise all parks, large and small, that are served by paved roads and/or parking areas. For Cycle 5, the decision was made to collect condition data in large parks on Functional Class 1, 2, and 7 paved routes only, as well as any new routes that were previously not collected. In small parks, all paved routes and parking areas will be collected. As a result, this will include 81 large parks with 4,459 paved route miles and 168 small parks with 529 paved route miles and associated paved parking areas.

Since 1984, the Road Inventory Program has been funded through the Federal Lands Highway Park Roads and Parkways (PRP) Program. Currently, coordination of the RIP with FLH is under the NPS Washington Headquarters Park Facility Management Division. The FLH Washington office coordinates policy and prepares national reports and needs assessment studies for Congress.

In 1998, the Transportation Equity Act for the 21<sup>st</sup> Century (TEA-21) amended Title 23 U.S.C., and inserted Section 204(a)(6) requiring the FHWA and NPS, to develop by rule, a Pavement Management System (PMS) applied to park roads and parkways serving the National Park System.

FLH is responsible for the accuracy of all data presented in this report. Any questions or comments concerning the contents of this report should be directed to the national RIP Coordinator located in Sterling, Virginia.

Respectfully,

FHWA RIP Team

FHWA/Eastern Federal Lands  
21400 Ridgetop Circle  
Sterling, VA 20166  
(703) 404-6371

FHWA/Central Federal Lands  
12300 West Dakota Ave  
Lakewood, CO 80228  
(720) 963-3560

# Section 2 Park Route Inventory



Vicksburg National Military Park



# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 09/22/2012

(Numerical By Route #)

Page 1 of 6

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle

\*\*\* Only Functional Class 1, 2, & 7 routes, and previously uncollected routes were collected in Cycle 5

## VICK

### VICKSBURG NATIONAL MILITARY PARK

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description		Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
					From	To								
0010	5	75032		CONNECTING AVENUE	FROM ROUTE 0909 (CAIRO MUSEUM PARKING AREA)	TO INTERSECTION OF ROUTE 0011 (FORT HILL DRIVE) AND ROUTE 0012 (CONFEDERATE AVENUE)	N/A	0.52	0.00	0.52	1		AS	1
0011	5	74995		FORT HILL DRIVE	FROM INTERSECTION OF ROUTE 0010 (CONNECTING AVENUE) AND ROUTE 0012 (CONFEDERATE AVENUE), SOUTH	TO SOUTH PARK BOUNDARY ON CONFEDERATE AVENUE	N/A	0.07	0.00	0.07	1		AS	1
0012	5	74970		CONFEDERATE AVENUE	FROM INTERSECTION OF ROUTE 0010 (CONNECTING AVENUE) AND ROUTE 0011 (FORT HILL DRIVE)	TO ROUTE 0020 (UNION AVENUE)	N/A	4.08	0.00	4.08	1		CO	1
0014	5	74998		PEMBERTON AVENUE	FROM ROUTE 0020 (UNION AVENUE) AT MP 1.01	TO ROUTE 0012 (CONFEDERATE AVENUE) AT MP 2.68	N/A	0.27	0.00	0.27	1		CO	1
0015	5	75274		SHIRLEY CIRCLE	FROM ROUTE 0020 (UNION AVENUE) AT MP 1.65, WESTBOUND	TO END OF LOOP	N/A	0.24	0.00	0.24	1		AS	1
0016	5	75004		OLD GRAVEYARD ROAD	FROM ROUTE 0020 (UNION AVENUE) AT MP 3.36	TO ROUTE 0012 (CONFEDERATE AVENUE) AT MP 1.74	N/A	0.33	0.00	0.33	1		AS	1
0017	5	75008		GRANT AVENUE	FROM ROUTE 0020 (UNION AVENUE) AT MP 3.58	TO END OF LOOP	N/A	0.91	0.00	0.91	1		AS	1
0018	5	75023		SHERMAN'S CIRCLE	FROM ROUTE 0017 (GRANT AVENUE) AT MP 0.03	TO END OF LOOP	N/A	0.27	0.00	0.27	1		AS	1
0019	5	75034		SOUTH LOOP	FROM ROUTE 0012 (CONFEDERATE AVENUE) AT MP 3.92	TO END OF LOOP	N/A	2.58	0.00	2.58	1		AS	1
0020	5	75052		UNION AVENUE	FROM ROUTE 5006 (CLAY STREET / U.S. HIGHWAY 80)	TO ROUTE 0909 (CAIRO MUSEUM PARKING AREA)	N/A	5.77	0.00	5.77	1		AS	1
0021	5	75425		LOUISIANA CIRCLE	FROM SOUTH WASHINGTON STREET AT NORTH END	TO SOUTH WASHINGTON STREET (OUTSIDE OF PARK)	N/A	0.08	0.00	0.08	1		CO	2



# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 09/22/2012

(Numerical By Route #)

Page 2 of 6

Shading Color Key:  
Red text denotes approx. mileage

White = Paved Routes, DCV Driven  
Grey = Paved Routes, DCV not Driven

Yellow = Unpaved Routes, DCV not Driven  
Black = State, Local or Private non-NPS Routes

Blue = All Paved Parking Areas  
= Concession Route Flag ON

Green = All Unpaved Parking Areas

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle

\*\*\* Only Functional Class 1, 2, & 7 routes, and previously uncollected routes were collected in Cycle 5

## VICK

### VICKSBURG NATIONAL MILITARY PARK

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description From To	Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
0022	5	75439		NAVY CIRCLE	FROM SOUTH WASHINGTON STREET AT SOUTH END TO SOUTH WASHINGTON STREET (OUTSIDE OF PARK)	N/A	0.11	0.00	0.11	1		CO	2
0023	5	74975		TENNESSEE CIRCLE	FROM ROUTE 0012 (CONFEDERATE AVENUE) AT MP 0.59 ON LEFT TO ROUTE 0012 (CONFEDERATE AVENUE) AT MP 0.63 ON LEFT	N/A	0.07	0.00	0.07	1		AS	1
0024	5	74980		PEMBERTON CIRCLE	FROM ROUTE 0012 (CONFEDERATE AVENUE) AT MP 3.29 ON RIGHT TO ROUTE 0012 (CONFEDERATE AVENUE) AT MP 3.32 ON RIGHT	N/A	0.05	0.00	0.05	1		AS	1
0200	5	75416		SOUTH CEMETERY ROAD (TINDLE ROAD)	FROM ROUTE 0010 (CONNECTING AVENUE) TO END OF LOOP	N/A	0.72	0.00	0.72	1		AS	1
0400	4	74944		HEADQUARTERS ACCESS ROAD	FROM ROUTE 0900 (MAINTENANCE SHOP AREA) TO ROUTE 0012 (CONFEDERATE AVENUE) AT MP 3.96	N/A	0.21	0.00	0.21	6		AS	1
0401	4	103963		CAIRO RESTORATION ROAD	FROM ROUTE 0910 (CAIRO RESTORATION PARKING) / GIVENS ROAD TO END OF PAVEMENT	N/A	0.00	0.00	0.00	6	7,168	AS	1
0402	4	74955		MAINTENANCE ACCESS ROAD	FROM ROUTE 0020 (UNION AVENUE) AT MP 0.11 TO ROUTE 0900 (MAINTENANCE SHOP AREA)	N/A	0.13	0.00	0.13	6		AS	1
0403	NC	75288		OLD JACKSON ROAD	FROM ROUTE 0902 (THIRD LOUISIANA REDAN PARKING AREA) TO ROUTE 0012 (CONFEDERATE AVENUE)	N/A	0.00	0.05	0.05	6		GR	
0404	4	75418		CEMETERY MAINTENANCE ROAD	FROM ROUTE 0200 (SOUTH CEMETERY ROAD (TINDLE ROAD)) AT MP 0.26 TO CEMETERY MAINTENANCE SHOP	N/A	0.00	0.00	0.00	6	11,403	AS	1
0405	4	74983		OLD ADMINISTRATION SERVICE ROAD	FROM ROUTE 0014 (PEMBERTON AVENUE) AT MP 0.15 TO RANGER STATION ON RIGHT	N/A	0.00	0.00	0.00	6	7,066	AS	1
0900	4	74957		MAINTENANCE SHOP AREA	FROM END OF ROUTE 0402 (MAINTENANCE ACCESS ROAD) AND BEGINNING OF ROUTE 0400 (HEADQUARTERS ACCESS ROAD) TO PARKING	N/A	0.00	0.00	0.00		17,817	CO	1
0901	4	75284		ILLINOIS PARKING AREA	ADJACENT TO ROUTE 0015 (SHIRLEY CIRCLE) AT MP 0.04 ON RIGHT	N/A	0.00	0.00	0.00		4,199	AS	1

# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 09/22/2012

(Numerical By Route #)

Page 3 of 6

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle

\*\*\* Only Functional Class 1, 2, & 7 routes, and previously uncollected routes were collected in Cycle 5

## VICK

### VICKSBURG NATIONAL MILITARY PARK

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description From To	Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
0902	4	75281		THIRD LOUISIANA REDAN PARKING AREA	ADJACENT TO ROUTE 0015 (SHIRLEY CIRCLE) AT MP 0.21 ON LEFT	N/A	0.00	0.00	0.00		1,227	AS	1
<b>0909</b>	<b>5</b>	<b>75335</b>		<b>CAIRO MUSEUM PARKING AREA</b>	<b>FROM END OF ROUTE 0020 (UNION AVENUE) AND BEGINNING OF ROUTE 0010 (CONNECTING AVENUE)</b>	<b>TO PARKING</b>	<b>N/A</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>	<b>42,886</b>	<b>AS</b>	<b>1</b>
0910	4	75336		CAIRO RESTORATION PARKING	FROM ROUTE 0401 (CAIRO RESTORATION ROAD)	TO MAINTENANCE SHOP	N/A	0.00	0.00	0.00	17,886	AS	1
0911	4	74972		FORT HILL PARKING AREA	FROM ROUTE 0012 (CONFEDERATE AVENUE) AT MP 0.13 ON LEFT	TO ROUTE 0012 (CONFEDERATE AVENUE) AT MP 0.18 ON LEFT	N/A	0.00	0.00	0.00	6,000	AS	1
0913	4	74976		LOUISIANA PARKING AREA	ADJACENT TO ROUTE 0012 (CONFEDERATE AVENUE) AT MP 2.80 ON RIGHT		N/A	0.00	0.00	0.00	4,584	AS	1
0915	4	74990		JEFFERSON DAVIS/PICNIC PARKING A	ADJACENT TO ROUTE 0012 (CONFEDERATE AVENUE) AT MP 3.66 ON RIGHT		N/A	0.00	0.00	0.00	7,494	AS	1
<b>0916</b>	<b>5</b>	<b>75037</b>		<b>TEXAS PARKING AREA</b>	<b>FROM ROUTE 0019 (SOUTH LOOP) AT MP 0.48 ON RIGHT</b>	<b>TO ROUTE 0019 (SOUTH LOOP)</b>	<b>N/A</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>	<b>5,391</b>	<b>AS</b>	<b>1</b>
0919	4	74940		VISITOR CENTER PARKING AREA	FROM ROUTE 0020 (UNION AVENUE)	TO ROUTE 0012 (CONFEDERATE AVENUE)	N/A	0.00	0.00	0.00	36,465	AS	1
0920	4	74946		HEADQUARTERS PARKING AREA	ADJACENT TO ROUTE 0400 (HEADQUARTERS ACCESS ROAD) ON RIGHT NEXT TO VISITOR CENTER		N/A	0.00	0.00	0.00	4,117	AS	1
0923	4	75446		GRANT'S CANAL	ADJACENT TO OLD HIGHWAY 80 EAST ON LEFT (OUTSIDE OF PARK)		N/A	0.00	0.00	0.00	2,566	AS	2
0924	4	231635		AFRICAN AMERICAN MONUMENT PARKING	ADJACENT TO ROUTE 0017 (GRANT AVENUE)		N/A	0.00	0.00	0.00	2,024	AS	1
<b>0925</b>	<b>5</b>	<b>236654</b>		<b>SHIRLEY HOUSE PARKING AREA</b>	<b>FROM ROUTE 0020 (UNION AVENUE)</b>	<b>TO PARKING</b>	<b>N/A</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>	<b>4,139</b>	<b>AS</b>	<b>1</b>
<b>0926</b>	<b>5</b>	<b>75002</b>		<b>OLD ADMINISTRATION LOOP PARKING AREA</b>	<b>FROM ROUTE 0014 (PEMBERTON AVENUE) AT MP 0.17</b>	<b>TO ROUTE 0014 (PEMBERTON AVENUE) AT MP 0.18</b>	<b>N/A</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>	<b>8,131</b>	<b>CO</b>	<b>1</b>
5000	4			MISSION 66	FROM BALDWIN FERRY ROAD AND MISSION 66	TO ROYAL STREET ON RIGHT AND BEGINNING OF ROUTE 5001 (SOUTH CONFEDERATE AVENUE)	N/A	0.78	0.00	0.78		CO	1

# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 09/22/2012

(Numerical By Route #)

Page 4 of 6

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle

\*\*\* Only Functional Class 1, 2, & 7 routes, and previously uncollected routes were collected in Cycle 5

## VICK

### VICKSBURG NATIONAL MILITARY PARK

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description From	To	Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
5001	4			SOUTH CONFEDERATE AVENUE	FROM END OF ROUTE 5000 (MISSION 66) AND ROYAL STREET ON RIGHT	TO BEGINNING OF ROUTE 5005 (FRONTAGE ROAD) ON RIGHT AND INTERSTATE 20 FRONTAGE ROAD/OLD U.S. HIGHWAY 80	N/A	1.90	0.00	1.90			AS	1,2
5002	4			WISCONSIN AVENUE	FROM ROUTE 5001 (SOUTH CONFEDERATE AVENUE) AT MP 0.31 ON LEFT	TO NORTH SIDE OF BRIDGE OVER INTERSTATE 20	N/A	0.66	0.00	0.66			AS	2
5003	4			HALLS FERRY ROAD	FROM NORTH SIDE OF UNDERPASS AT ROUTE 5001 (SOUTH CONFEDERATE AVENUE)	TO NORTH SIDE OF BRIDGE OVER INTERSTATE 20	N/A	0.70	0.00	0.70			AS	2
5004	4			IOWA AVENUE	FROM ROUTE 5005 (FRONTAGE ROAD)	TO SOUTH SIDE OF UNDERPASS AT INTERSTATE 20	N/A	0.74	0.00	0.74			AS	2
5005	4			FRONTAGE ROAD	FROM END OF ROUTE 5001 (SOUTH CONFEDERATE AVENUE) ON RIGHT	TO SOUTH WASHINGTON STREET / OLD U.S. HIGHWAY 61	N/A	0.51	0.00	0.51			AS	2
5006	5			CLAY STREET / U.S. HIGHWAY 80	FROM CLAY STREET (UNDERNEATH INTERSTATE 20 OVERPASS)	TO INTERSECTION WITH HOPE STREET (ON LEFT) AND BALDWIN FERRY ROAD (ON RIGHT)	N/A	0.91	0.00	0.91			AS	1
5007	5			RODENBAUGH DRIVE	FROM NORTH FRONTAGE ROAD	TO DEAD END	N/A	0.19	0.00	0.19			AS	1

# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 09/22/2012

(Numerical By Route #)

Page 5 of 6

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle

\*\*\* Only Functional Class 1, 2, & 7 routes, and previously uncollected routes were collected in Cycle 5

## CYCLE 5 COLLECTED SUMMARY TOTALS FOR VICKSBURG NATIONAL MILITARY PARK

<b>CYCLE 5 COLLECTED ROUTE TOTALS</b>	
DCV Driven Route Miles	16.07
Manually Rated Route Miles	0.00
<b>TOTAL PARK ROUTE MILES COLLECTED IN CYCLE 5</b>	<b>16.07</b>
Manually Rated Routes (SQFT)	0

<b>CYCLE 5 COLLECTED CONCESSION TOTALS</b>	
Concession Paved Route Miles	0.00
Concession Paved Parking Area SQFT	0
Concession Manually Rated Rotes SQFT	0

<b>* CYCLE 5 COLLECTED PARKING AREA TOTALS</b>	
Paved Parking (SQFT)	60,547

<b>CYCLE 5 COLLECTED WEIGHTED AVERAGE PARK VALUES</b>	
DCV Driven PCR	77
**Manually Rated Routes PCR	N/A
**Parking PCR	84
***Total Equivalent Lane Miles	27.34

## TOTAL PARK SUMMARY FOR VICKSBURG NATIONAL MILITARY PARK

<b>ROUTE TOTALS</b>	
<b>TOTAL PAVED PARK ROUTE MILES</b>	<b>16.41</b>
<b>TOTAL PAVED PARKING (SQFT)</b>	<b>164,926</b>

\* - The Parking Area Totals SQFT value represents all parking areas collected in Cycle 5, both park and concessionaire.

\*\* - Parking and Manually Rated Routes are assigned the following PCR values based on their observed condition: Construction=-1, Excellent=97, Good=90, Fair=73, and Poor=45.

\*\*\* - Equivalent Lane Miles are calculated by route using the following equations : DCV and Manually Rated Lines Routes=(PAVE\_WIDTHxPAVED\_MI)/11 foot lane. Parking Areas=SQ\_FEET/5280/11. Manually Rated Polygons=SQ\_FEET/5280/11.

# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 09/22/2012

(Numerical By Route #)

Page 6 of 6

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle

\*\*\* Only Functional Class 1, 2, & 7 routes, and previously uncollected routes were collected in Cycle 5

## General Park Road Functional Classification Table

- Class 1** Principal Park Road/Rural Parkway (Public Roads) Roads which constitute the main access route, circulatory tour, or thoroughfare for park visitors. Route Numbers 1 - 99. Note: Rural parkways (e.g. Natchez Trace) are numbered 1 - 9. State Routes Inventoried for Park. Route Numbers 5000-5999
- Class 2** Connector Park Road (Public Roads) - Roads which provide access within a park to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, etc. Route Numbers 100-199.
- Class 3** Special Purpose Park Road (Public Roads) - Roads which provide circulation within public areas, such as campgrounds, picnic areas, visitor center complexes, concessionaire facilities, etc. These roads generally serve low-speed traffic and are often designed for one-way circulation. Route Numbers 200-299.
- Class 4** Primitive Park Roads (Public Roads) - Roads which provide circulation through remote areas and/or access to primitive campgrounds and undeveloped areas. These roads frequently have no minimum design standards and their use may be limited to specially equipped vehicles. Route Numbers 200-299. Note: Functional Classes 3 and 4 have the same route numbers because, historically, they were numbered similarly.
- Class 5** Administrative Access Road (Administrative Roads) - All public roads intended for access to administrative developments or structures such as park offices, employee quarters, or utility areas. Route Numbers 400-499.
- Class 6** Restricted Road (Administrative Roads) - All roads normally closed to the public, including patrol roads, truck trails, and other similar roads. Route Numbers 400-499. Note: Functional Classes 5 and 6 have the same route numbers because historically they were numbered similarly and often there is little distinction between these routes. For example, because utility areas and employee housing are often closed to the public, this restriction would result in classification of FC 6 rather than FC 5.
- Class 7** Urban Parkway (Urban Parkways and City Streets) - These facilities serve high volumes of park and non-park related traffic and are restricted, limited-access facilities in an urban area. This category of roads primarily encompasses the major parkways which serve as gateways to our nation's capital. Other major park roads or portions thereof, however, may be included in this category. Route Numbers 1-9.
- Class 8** City Streets (Urban Parkways and City Streets) - City streets are usually extensions of the adjoining street system that are owned and maintained by the National Park Service. The construction and/or reconstruction should conform with accepted local engineering practice and local conditions. Route Numbers 600-699.

\*\*\*\*\*

A park road system contains those roads within or giving access to a park or other unit of the NPS which are administered by the NPS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a park road is not based on traffic volumes or design speed, but on the intended use or function of that road or route.

The historic route numbering system also included a 300 number series for interpretive roads, and a 500 series for one-way roads. There are approximately 250 roads nationwide which are designated by the 300 and 500 series. The numbers for these roads will be maintained for reporting consistency. However, since these interpretive and one-way routes are not as clearly tied to a specific functional class, the 300 and 500 series will be discontinued for future use.

5000 route numbers are assigned to Non-NPS Routes that are State, County or City owned which border, traverse, or provide access to Park Facilities or Assets. 5000 Routes are driven for GPS and Video Log only.

## Surface Type Abbreviations:

- AS - Asphaltic Concrete Pavement**  
**CO - Portland Cement Concrete Pavement**  
**BR - Brick or Pavers Road Bed**  
**CB - Cobble Stone Road Bed**  
**GR - Gravel Road Bed**  
**SA - Sand Road Bed**  
**NV - Native or Dirt Material Road Bed**  
**OT - Other Materials Road Bed**

**ROUTE IDENTIFICATION CHANGES TO PAVED ROUTES FROM PREVIOUS CYCLE - VICK**

**ROUTES ADDED FROM PREVIOUS INVENTORY:**

Route #	Route Name	Reason for Addition	Comments
0925	SHIRLEY HOUSE PARKING AREA	RECENTLY CONSTRUCTED ROUTE	ROUTE ADDED TO INVENTORY IN CYCLE 5.
5006	CLAY STREET / U.S. HIGHWAY 80	OTHER	ROUTE ADDED TO INVENTORY IN CYCLE 5.
5007	RODENBAUGH DRIVE	OTHER	ROUTE ADDED TO INVENTORY IN CYCLE 5.

**ROUTES MODIFIED FROM PREVIOUS INVENTORY:**

Route #	Route Name	Type of Modification	Comments
0012	CONFEDERATE AVENUE	ROUTES COMBINED	THE END OF ROUTE 0012 WAS EXTENDED 200FT IN CYCLE 5 TO INCLUDE A PORTION OF ROAD THAT WAS COLLECTED AS ROUTE 0013 IN CYCLE 4. (THE ROUTE NUMBER 0013 HAS BEEN REMOVED).
0020	UNION AVENUE	ROUTES COMBINED	THE BEGINNING OF ROUTE 0020 WAS EXTENDED BY 500FT TO INCLUDE THE PORTION OF ROAD THAT WAS PART OF ROUTE 0013 IN CYCLE 4 (THE ROUTE NUMBER 0013 HAS BEEN REMOVED).
0022	NAVY CIRCLE	LENGTH CHANGE	THIS ROUTE WAS MANUALLY RATED IN CYCLE 4 BUT WAS COLLECTED WITH THE DATA COLLECTION VEHICLE IN CYCLE 5. ROUTE WAS EXTENDED 130FT TO WASHINGTON ST. PER THE PARK'S REQUEST.
0916	TEXAS PARKING AREA	RECONSTRUCTED	SHAPE CHANGED SINCE CYCLE 4 COLLECTION. THE ISLAND WAS REMOVED.
0926	OLD ADMINISTRATION LOOP PARKING AREA	OTHER	ROUTE CHANGED FROM A ROAD (ROUTE 0100) IN CYCLE 4 TO A PARKING AREA (ROUTE 0926) IN CYCLE 5. (THE ROUTE NUMBER 0100 HAS BEEN REMOVED).

**ROUTE IDENTIFICATION CHANGES TO PAVED ROUTES FROM PREVIOUS CYCLE - VICK**

OTHER CHANGES FROM PREVIOUS INVENTORY:			
Route #	Route Name	Type of Change	Comments
0021	LOUISIANA CIRCLE	COLLECTION METHOD CHANGE	THIS ROUTE WAS MANUALLY RATED IN CYCLE 4 BUT WAS COLLECTED WITH THE DATA COLLECTION VEHICLE IN CYCLE 5.
0023	TENNESSEE CIRCLE	COLLECTION METHOD CHANGE	THIS ROUTE WAS MANUALLY RATED IN CYCLE 4 BUT WAS COLLECTED WITH THE DATA COLLECTION VEHICLE IN CYCLE 5.
0024	PEMBERTON CIRCLE	COLLECTION METHOD CHANGE	THIS ROUTE WAS MANUALLY RATED IN CYCLE 4 BUT WAS COLLECTED WITH THE DATA COLLECTION VEHICLE IN CYCLE 5.
0913	LOUISIANA PARKING AREA	OTHER	NAME CHANGED FROM "GREAT REDOUBT PARKING AREA" IN CYCLE 4 TO "LOUISIANA PARKING AREA" IN CYCLE 5.

# Section 3

## Park Summary Information



Vicksburg National Military Park



Federal Lands Highway  
Road Inventory Program



## VICK: PAVED ROUTE MILES AND PERCENTAGES BY FUNCTIONAL CLASS AND PCR

F.C.	Pavement Condition Rating (PCR)								TOTAL MILES
	Poor (0-60)		Fair (61-84)		Good (85-94)		Excellent (95-100)		
	MILES	%	MILES	%	MILES	%	MILES	%	
1	3.01	18.80%	3.78	23.61%	3.83	23.92%	5.39	33.67%	16.01
2									
3									
4									
5									
6									
7									
8									
<b>Totals</b>	<b>3.01</b>	<b>18.80%</b>	<b>3.78</b>	<b>23.61%</b>	<b>3.83</b>	<b>23.92%</b>	<b>5.39</b>	<b>33.67%</b>	<b>16.01</b>

**Note:** The information in this table is derived from the PMS\_20 table in the Park database, which only contains processed data from routes collected with the Data Collection Vehicle (DCV). Information for Manually Rated Routes (MRR) and Parking Areas is not reported in this table. Only Functional Class 1, 2, & 7 routes, and any new routes not previously collected by RIP, are collected in Large Parks.


### Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that have been implemented in Cycle 5, we will also aim to provide greater assistance in translating excellent/good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 0-60. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.


### Condition Categories and Treatments

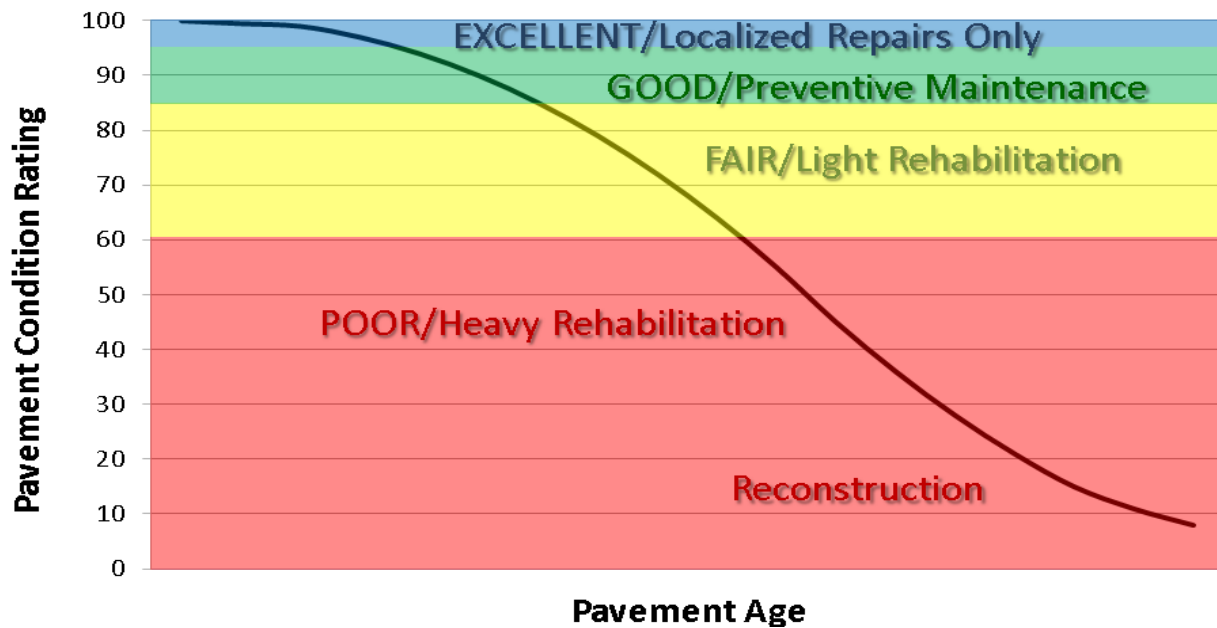

# VICK: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle


ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	PAVED LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0010	CONNECTING AVENUE	1	0.52	ASPHALT	97	93
0011	FORT HILL DRIVE	1	0.07	ASPHALT	77	77
0012	CONFEDERATE AVENUE	1	4.08	CONCRETE	96	46
0014	PEMBERTON AVENUE	1	0.27	CONCRETE	NA	NA
0015	SHIRLEY CIRCLE	1	0.24	ASPHALT	70	70

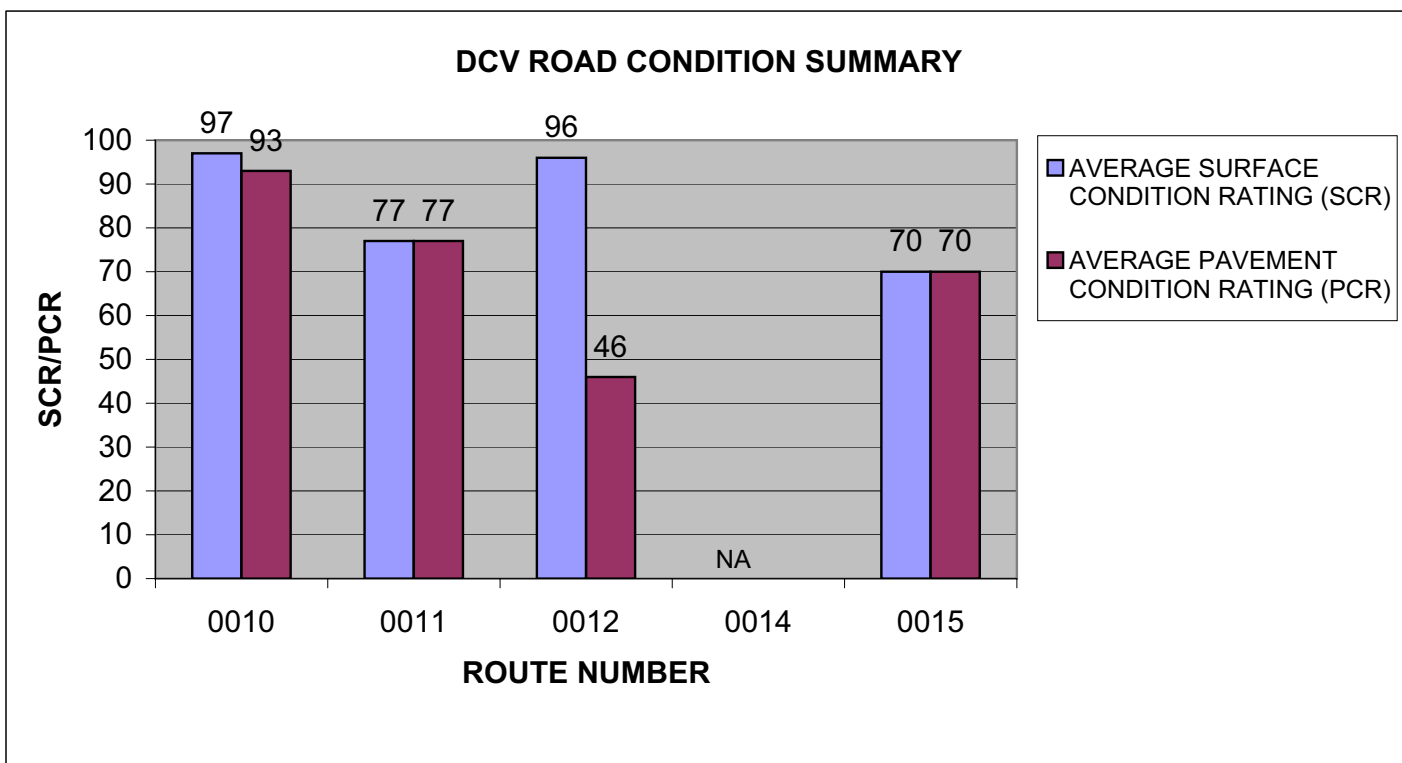

# VICK: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle


ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	PAVED LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0016	OLD GRAVEYARD ROAD	1	0.33	ASPHALT	94	94
0017	GRANT AVENUE	1	0.91	ASPHALT	97	97
0018	SHERMAN'S CIRCLE	1	0.27	ASPHALT	96	96
0019	SOUTH LOOP	1	2.58	ASPHALT	99	92
0020	UNION AVENUE	1	5.77	ASPHALT	86	82

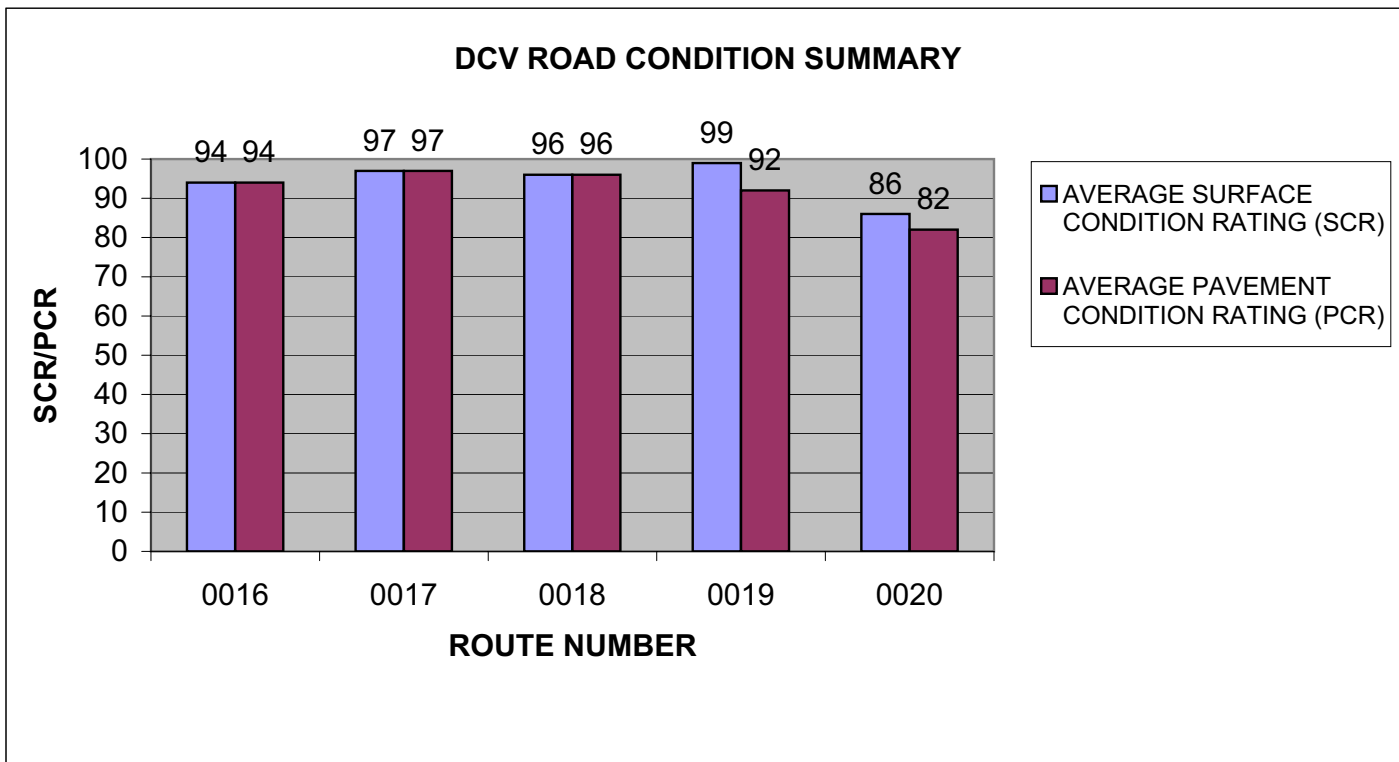

# VICK: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle

ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	PAVED LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0021	LOUISIANA CIRCLE	1	0.08	CONCRETE	NA	NA
0022	NAVY CIRCLE	1	0.11	CONCRETE	NA	NA
0023	TENNESSEE CIRCLE	1	0.07	ASPHALT	98	98
0024	PEMBERTON CIRCLE	1	0.05	ASPHALT	91	91
0200	SOUTH CEMETERY ROAD (TINDLE ROAD)	1	0.72	ASPHALT	99	99

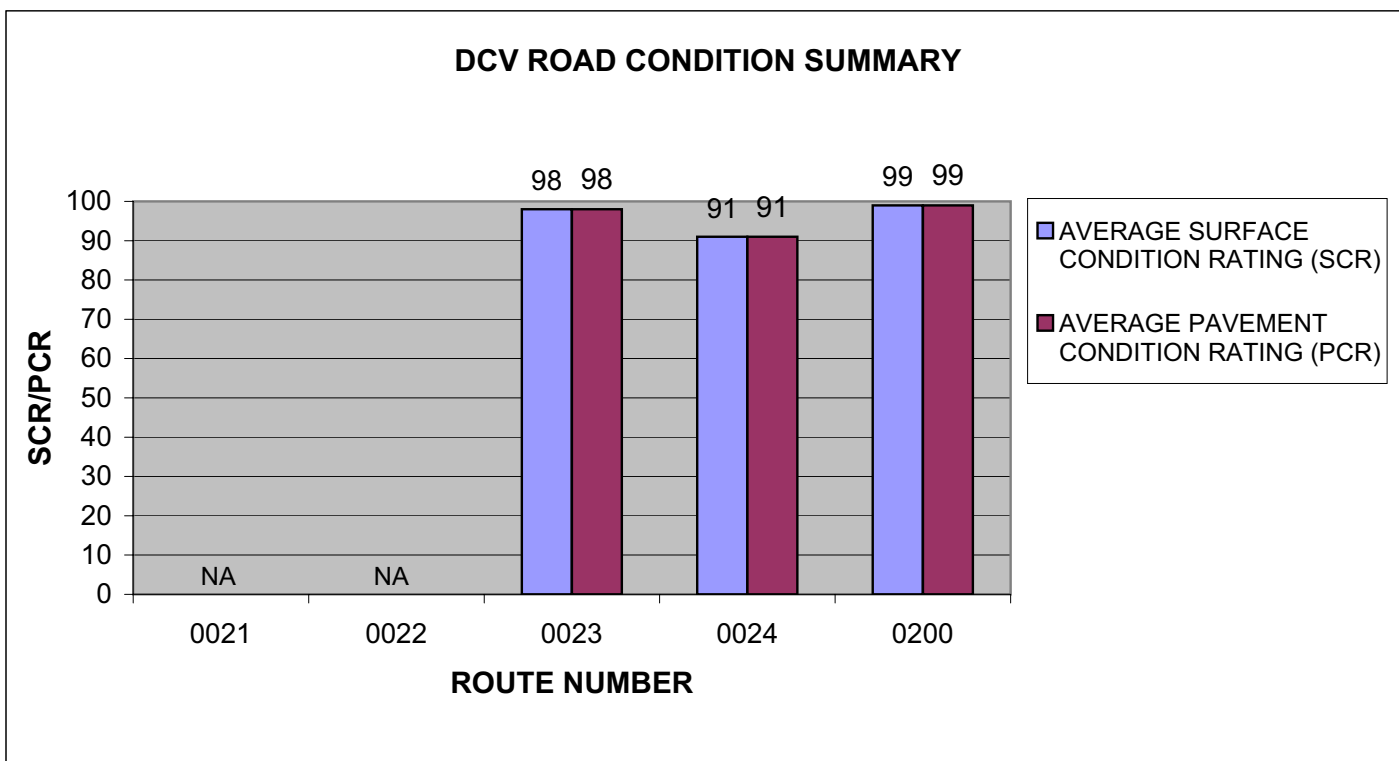

# Section 4


## Park Route Location Maps



Vicksburg National Military Park




# Vicksburg National Military Park Route Location Map Key Map

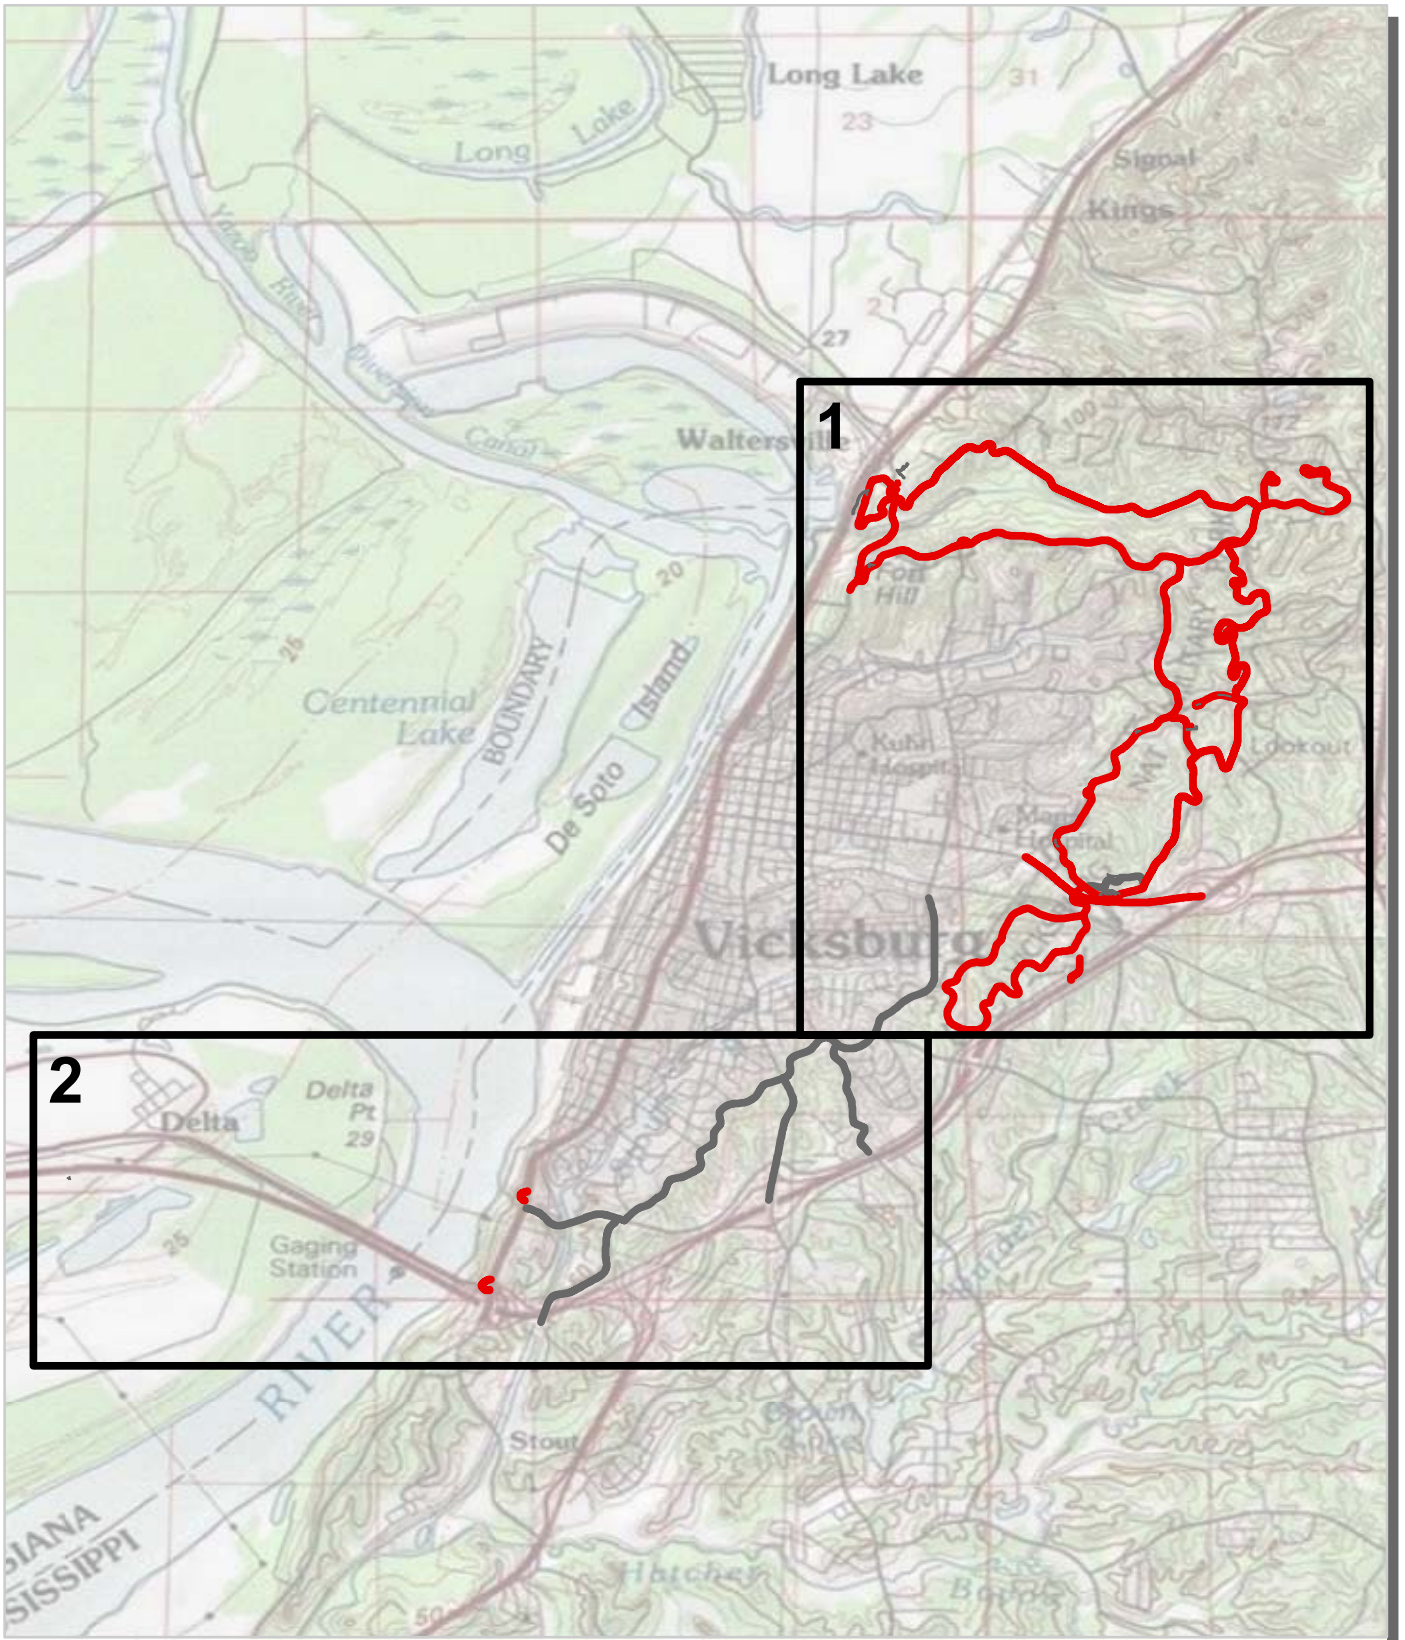


Unique colors used to differentiate routes

— Routes Collected in Previous Cycle



# Vicksburg National Military Park Route Location Map Area 1

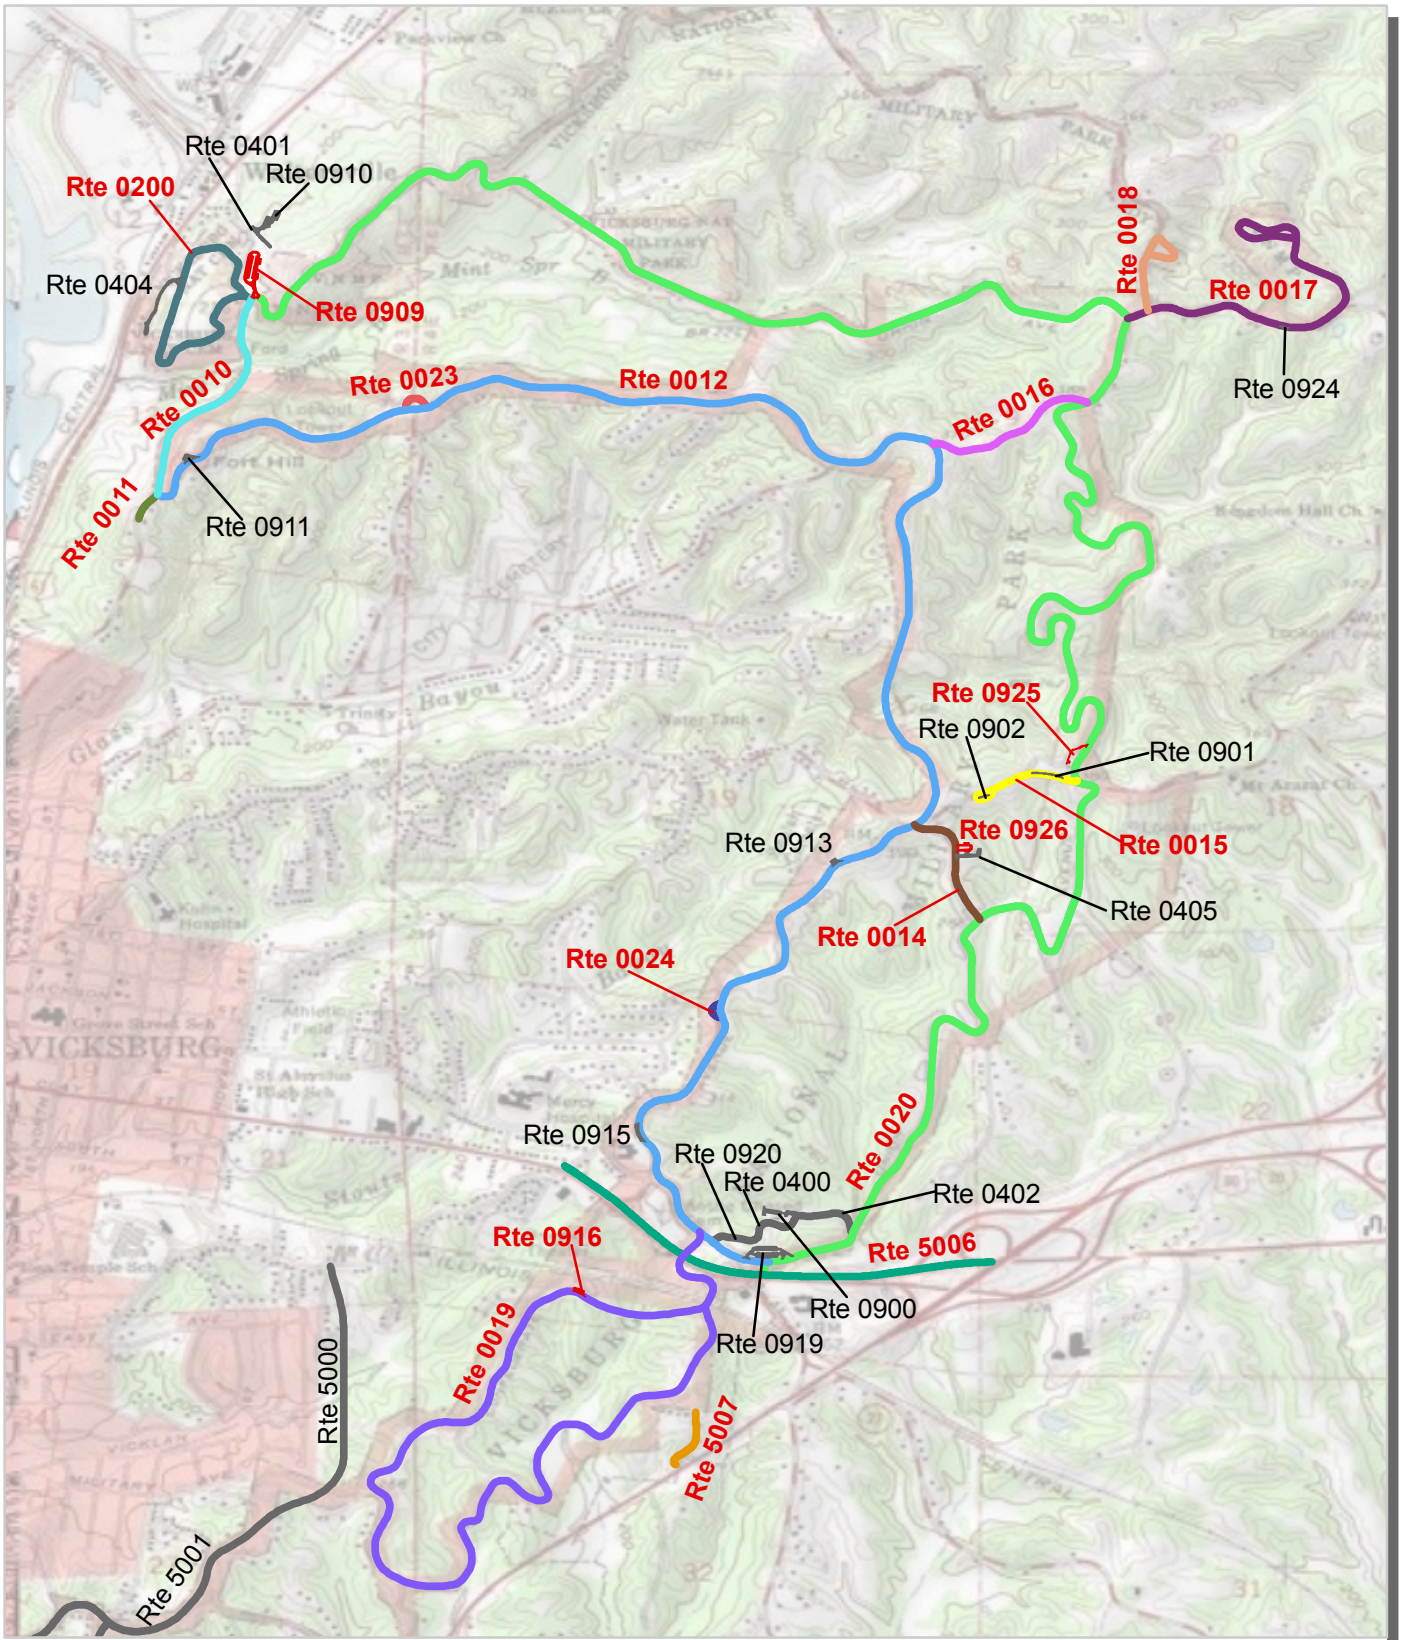


Unique colors used to differentiate routes

— Routes Collected in Previous Cycle





# Vicksburg National Military Park Route Location Map Area 2


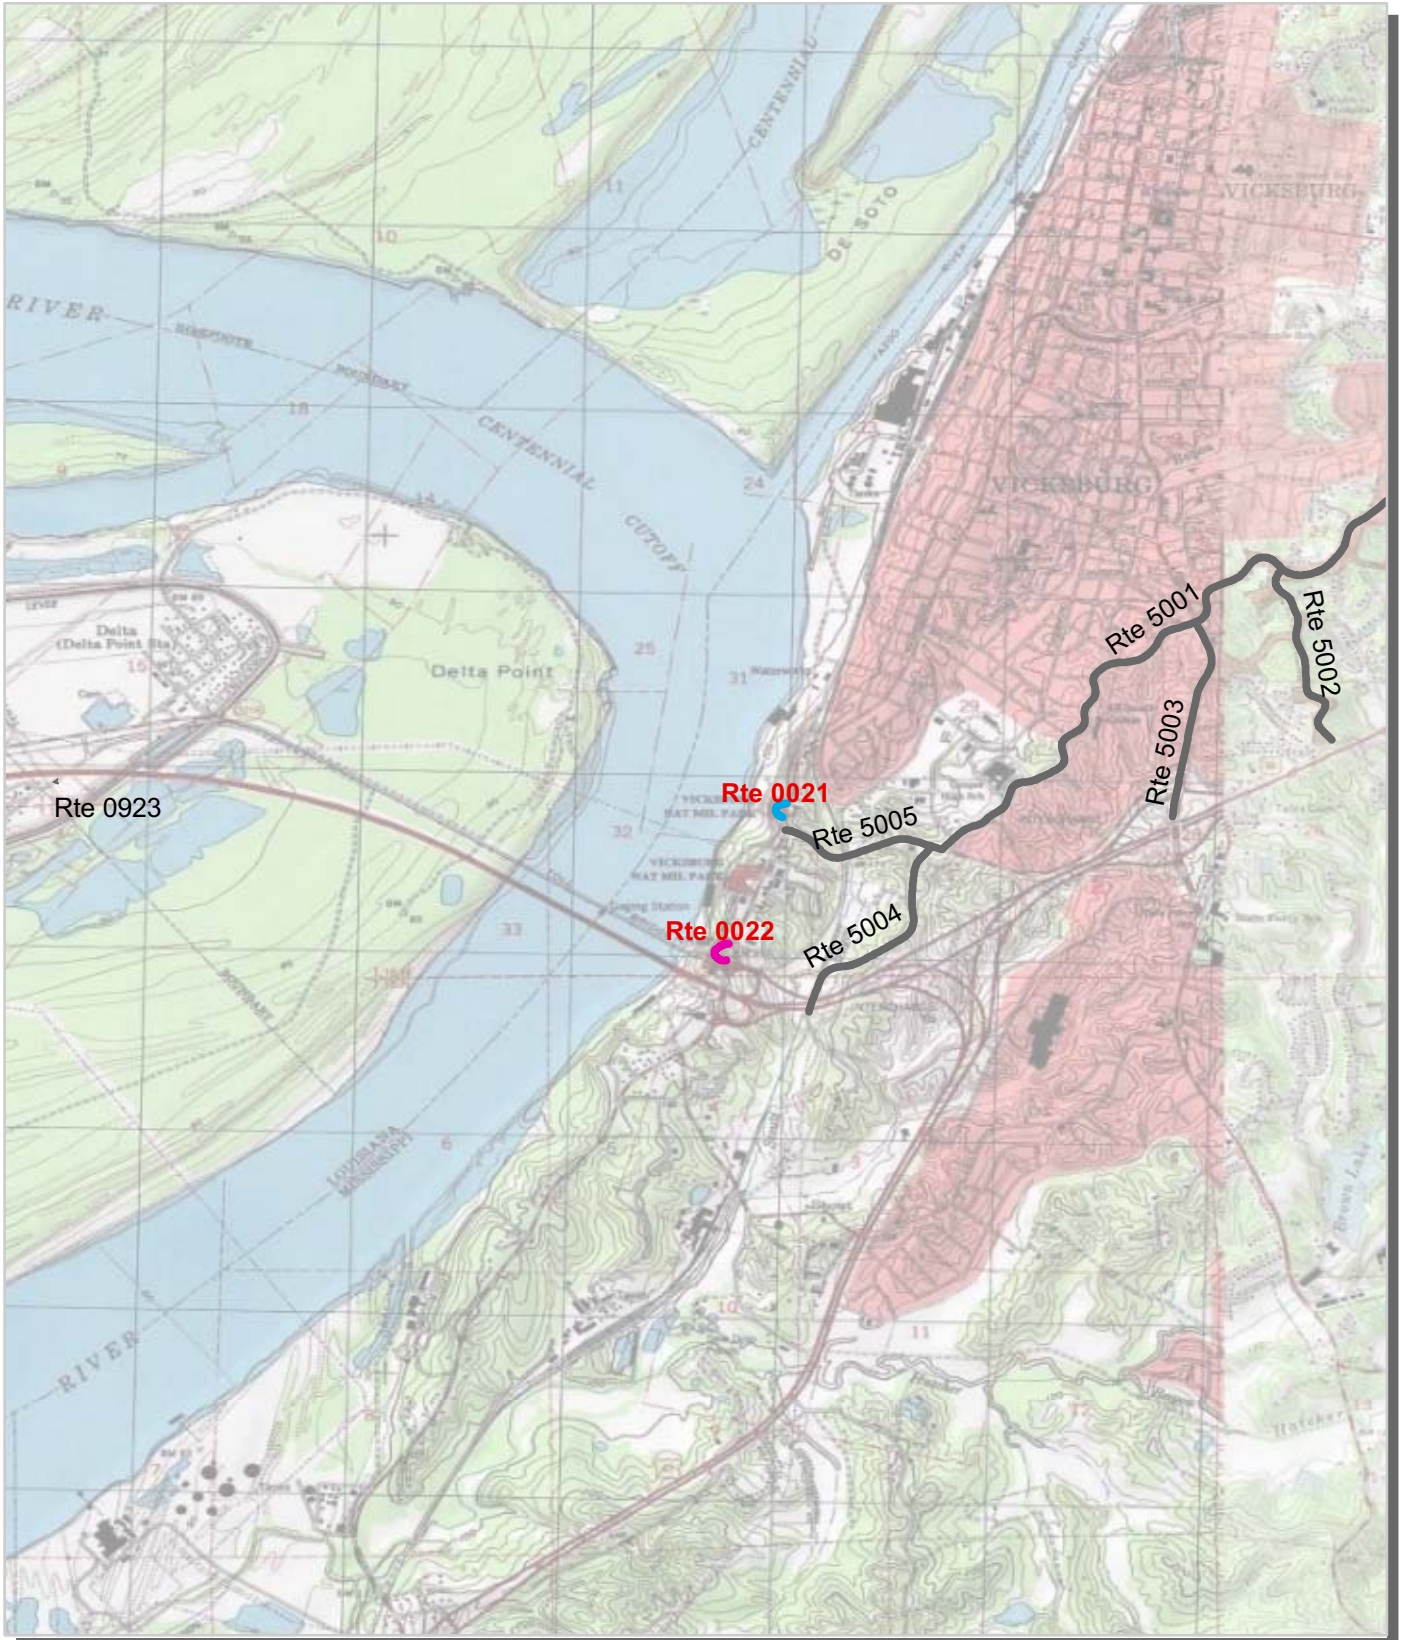


Unique colors used to differentiate routes


— Routes Collected in Previous Cycle




# Vicksburg National Military Park Route Condition Map PCR - Mile by Mile Key Map

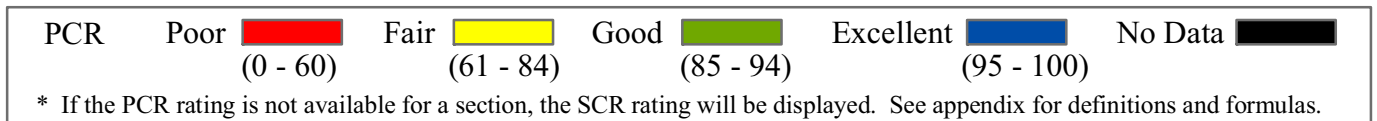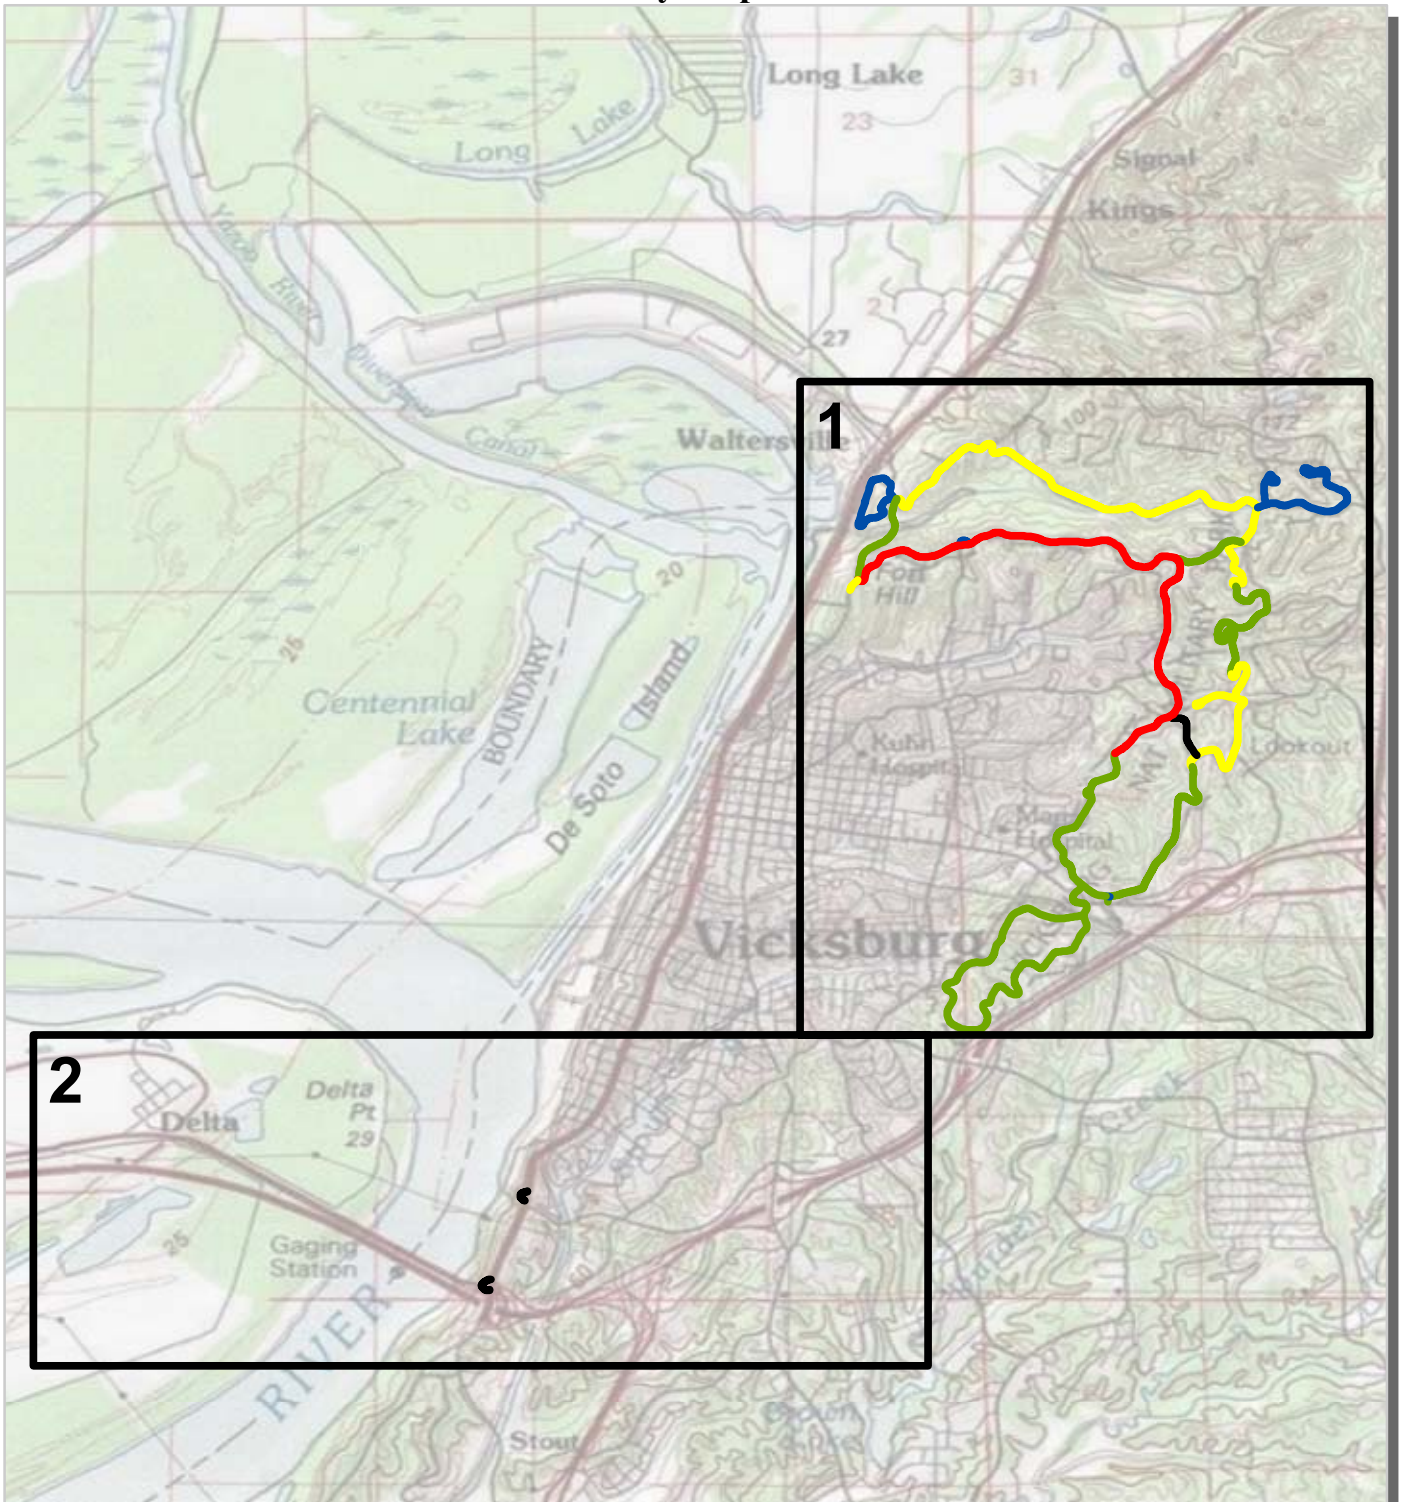

Note: Only routes collected by the DCV in Cycle-5 are displayed.




# Vicksburg National Military Park Route Condition Map PCR - Mile by Mile Area 1

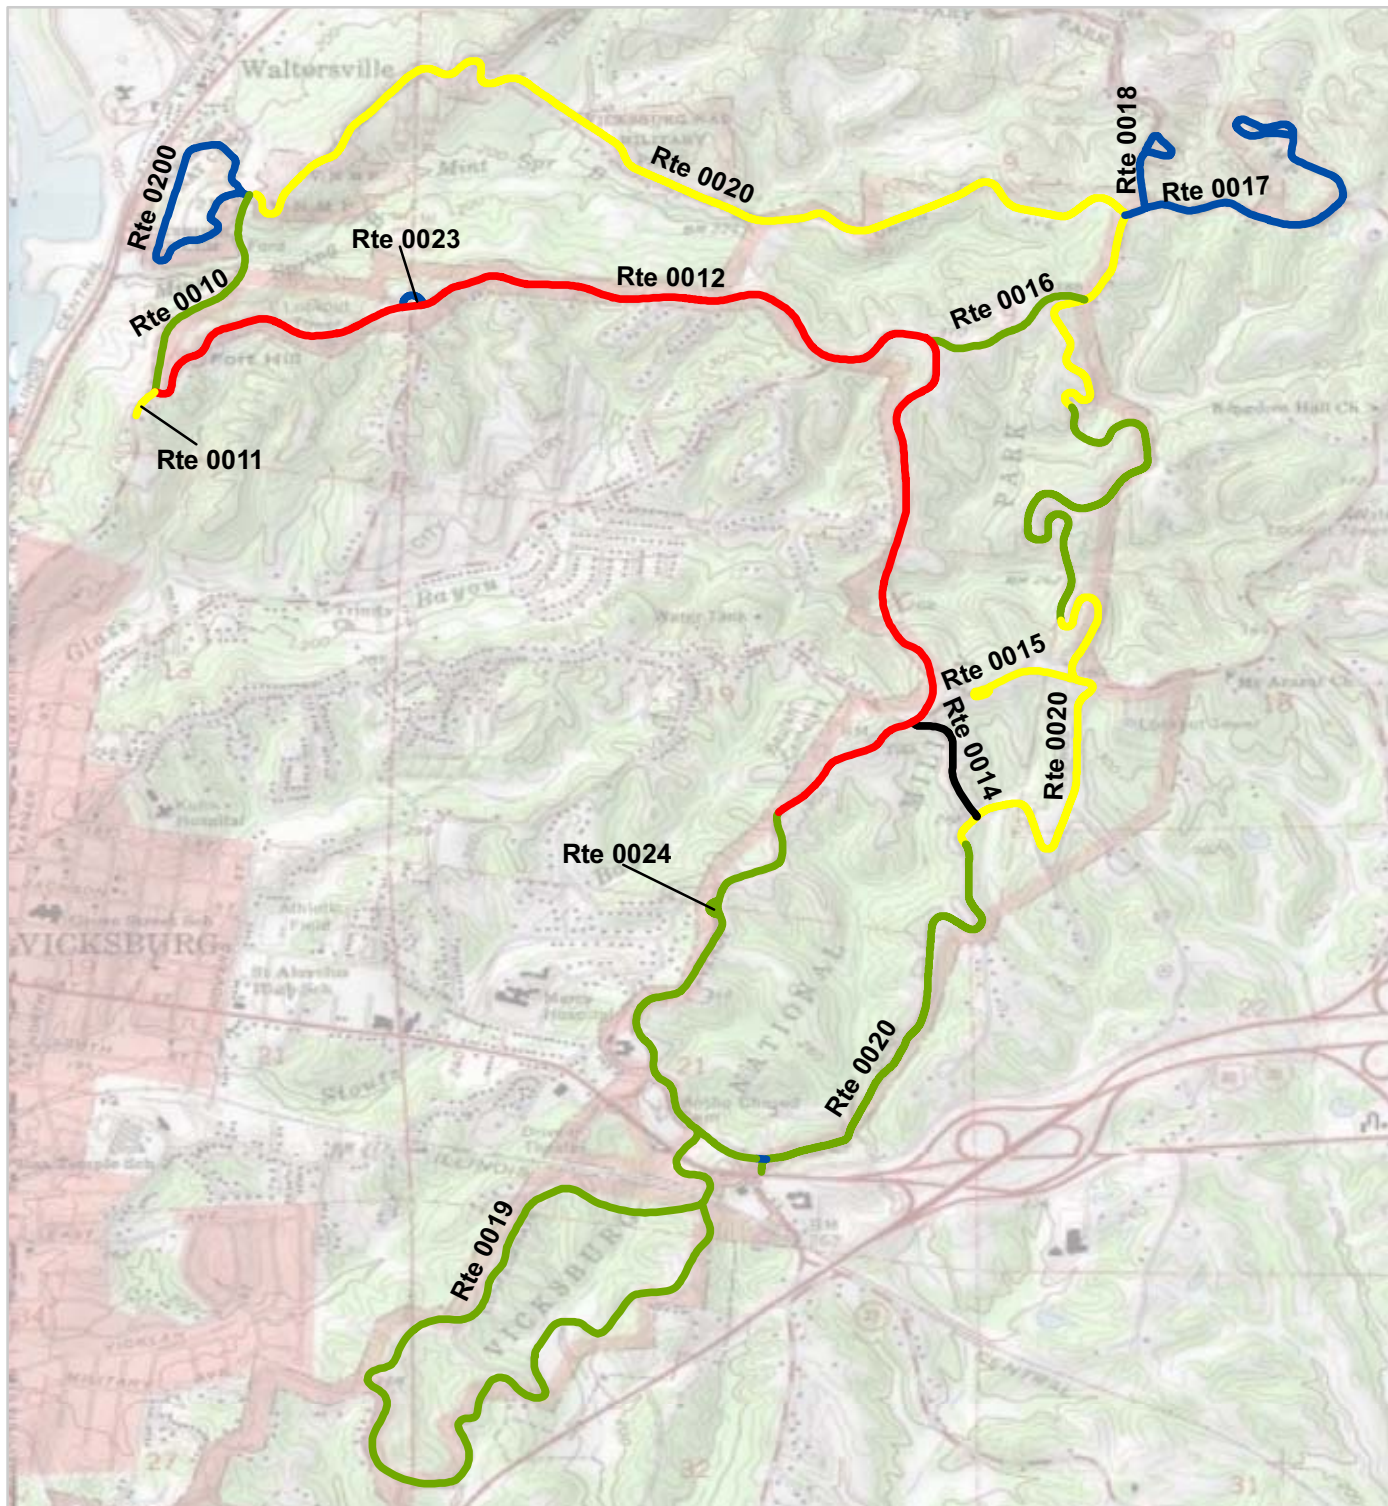


PCR	Poor	<span style="color: red;">■</span>	Fair	<span style="color: yellow;">■</span>	Good	<span style="color: green;">■</span>	Excellent	<span style="color: blue;">■</span>	No Data	<span style="color: black;">■</span>
	(0 - 60)		(61 - 84)	(85 - 94)	(95 - 100)					

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.




# Vicksburg National Military Park Route Condition Map PCR - Mile by Mile Area 2

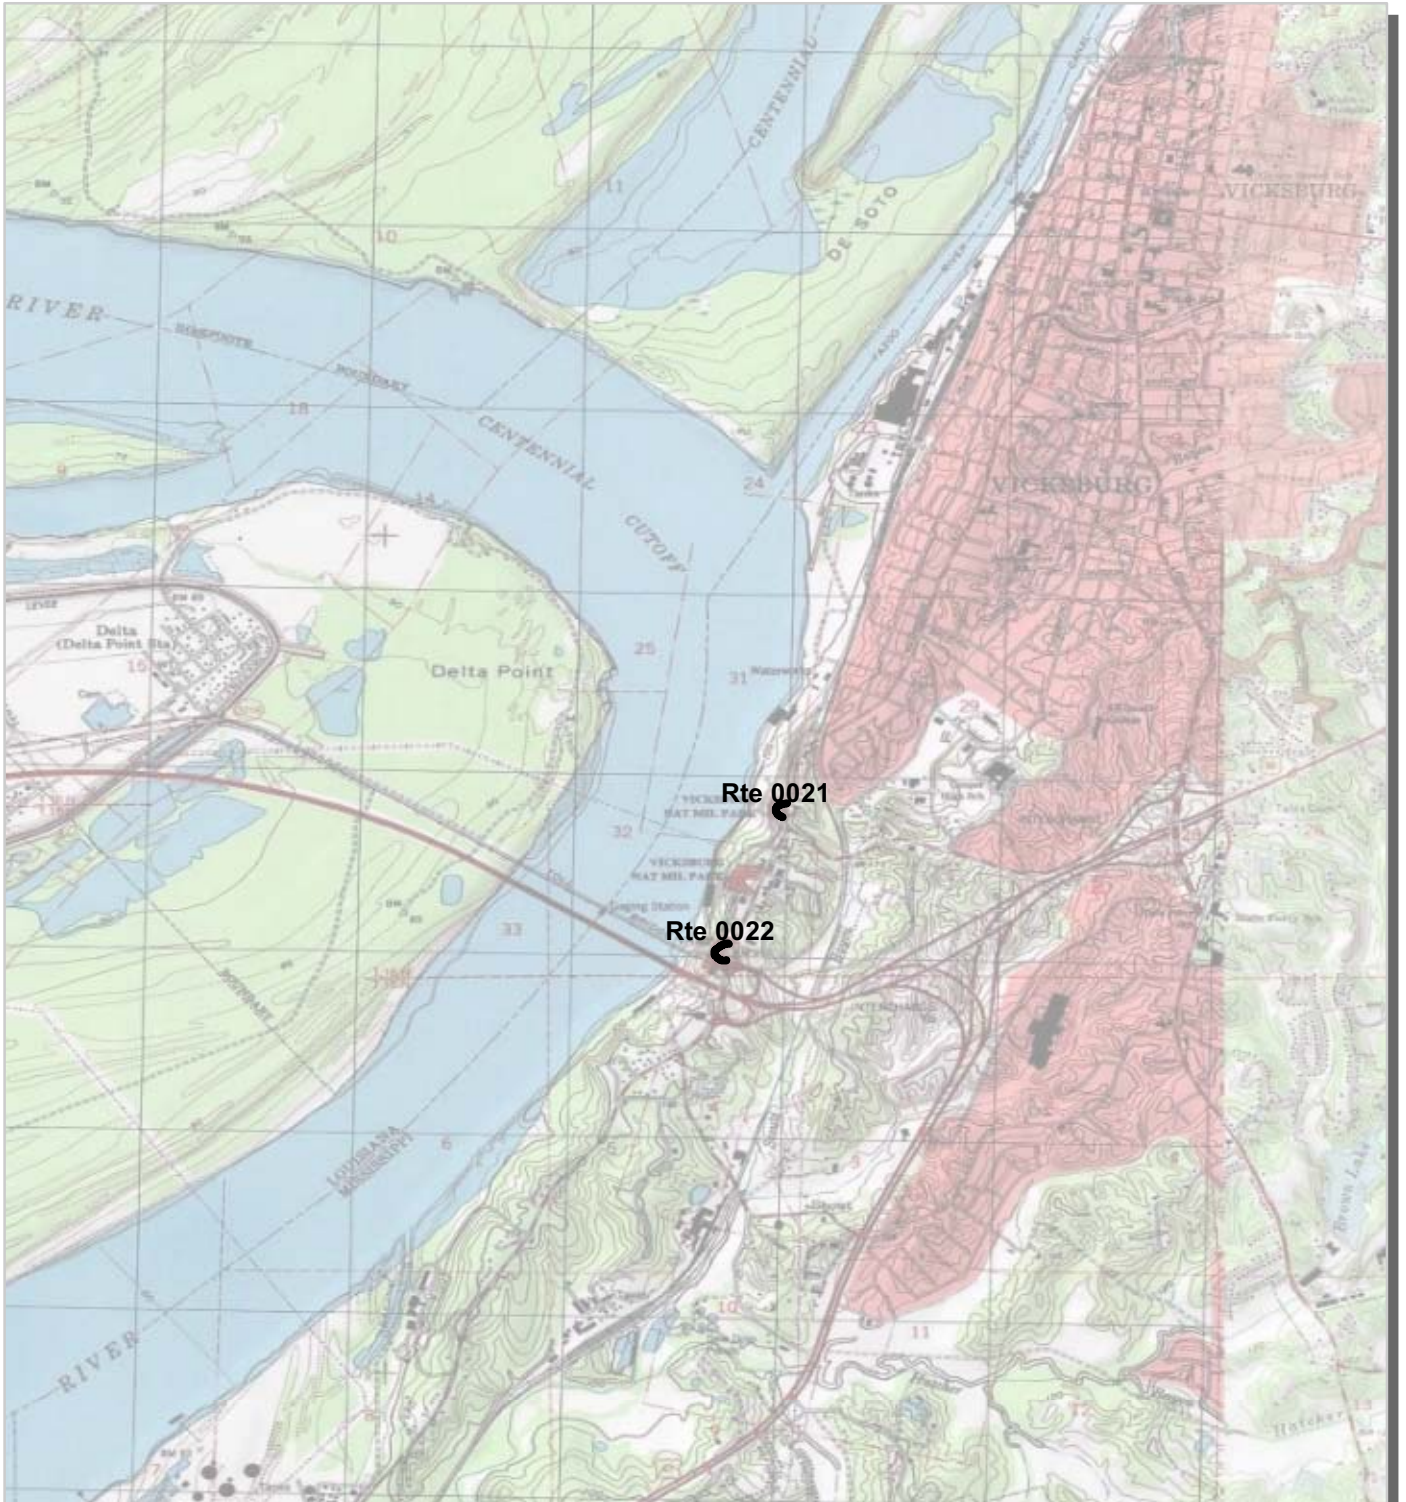


PCR	Poor	<span style="display: inline-block; width: 20px; height: 10px; background-color: red; border: 1px solid black;"></span>	Fair	<span style="display: inline-block; width: 20px; height: 10px; background-color: yellow; border: 1px solid black;"></span>	Good	<span style="display: inline-block; width: 20px; height: 10px; background-color: green; border: 1px solid black;"></span>	Excellent	<span style="display: inline-block; width: 20px; height: 10px; background-color: blue; border: 1px solid black;"></span>	No Data	<span style="display: inline-block; width: 20px; height: 10px; background-color: black; border: 1px solid black;"></span>
	(0 - 60)		(61 - 84)	(85 - 94)		(95 - 100)				

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.



**Section 5**  
**Paved Route**  
**Condition Rating Sheets**

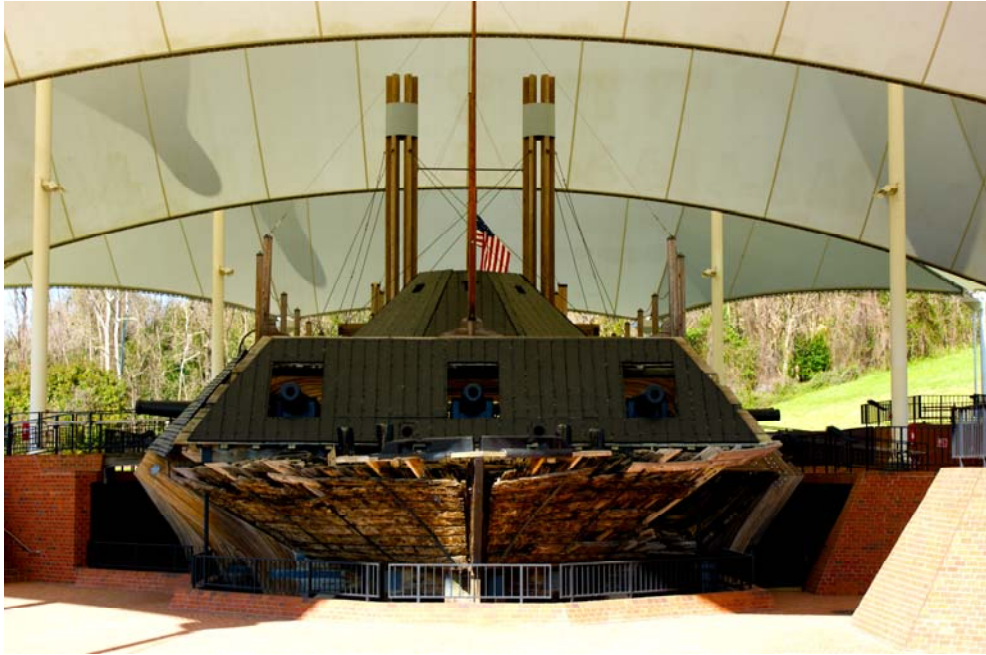

Vicksburg National Military Park



Federal Lands Highway  
Road Inventory Program



PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0010 CONNECTING AVENUE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.52 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.52				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	21				
Lane Width (ft)	10				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	97				
PCR (Pavement Condition Rating)	93				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	97				
Roughness Condition Index (RCI)	86				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



ROUTE: 0010 CONNECTING AVENUE



PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0011 FORT HILL DRIVE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.07 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.07				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	20				
Lane Width (ft)	10				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	77				
PCR (Pavement Condition Rating)	77				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	77				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable



**ROUTE: 0011 FORT HILL DRIVE**

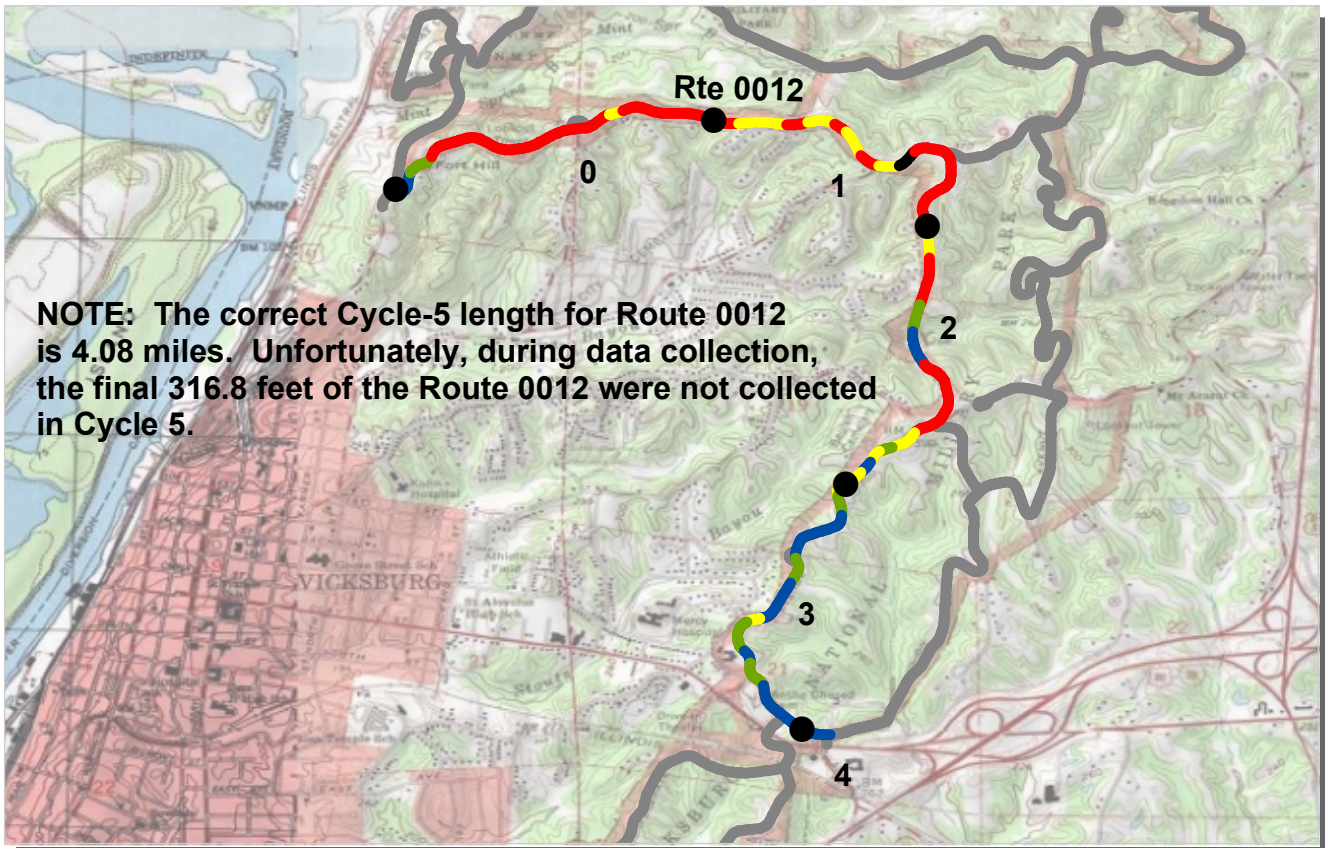

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
                   (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0012 CONFEDERATE AVENUE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 4.02 Miles**

**SOUTHEAST REGION**

<i>Section Number</i>	0	1	2	3	4
<i>Section Length (mi)</i>	1.00	1.00	1.00	1.00	0.02
<i>Cross Section Information</i>					
Number of Lanes	1	1	1	1	1
Paved Width (ft)	20	20	19	19	21
Lane Width (ft)	19	20	19	18	21
<i>Roadway Condition Information</i>					
SCR (Surface Condition Rating)	NC	NC	NC	96	100
PCR (Pavement Condition Rating)	22	34	34	94	100
<i>Distress Index Values</i>					
Structural Crack Index	NC	NC	NC	96	100
Transverse Cracking Index	NC	NC	NC	96	100
Patching Index	NC	NC	NC	100	100
Rutting Index	NC	NC	NC	100	100
Roughness Condition Index (RCI)	22	34	34	91	100

**NOTES:**


Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable

**ROUTE: 0012 CONFEDERATE AVENUE**



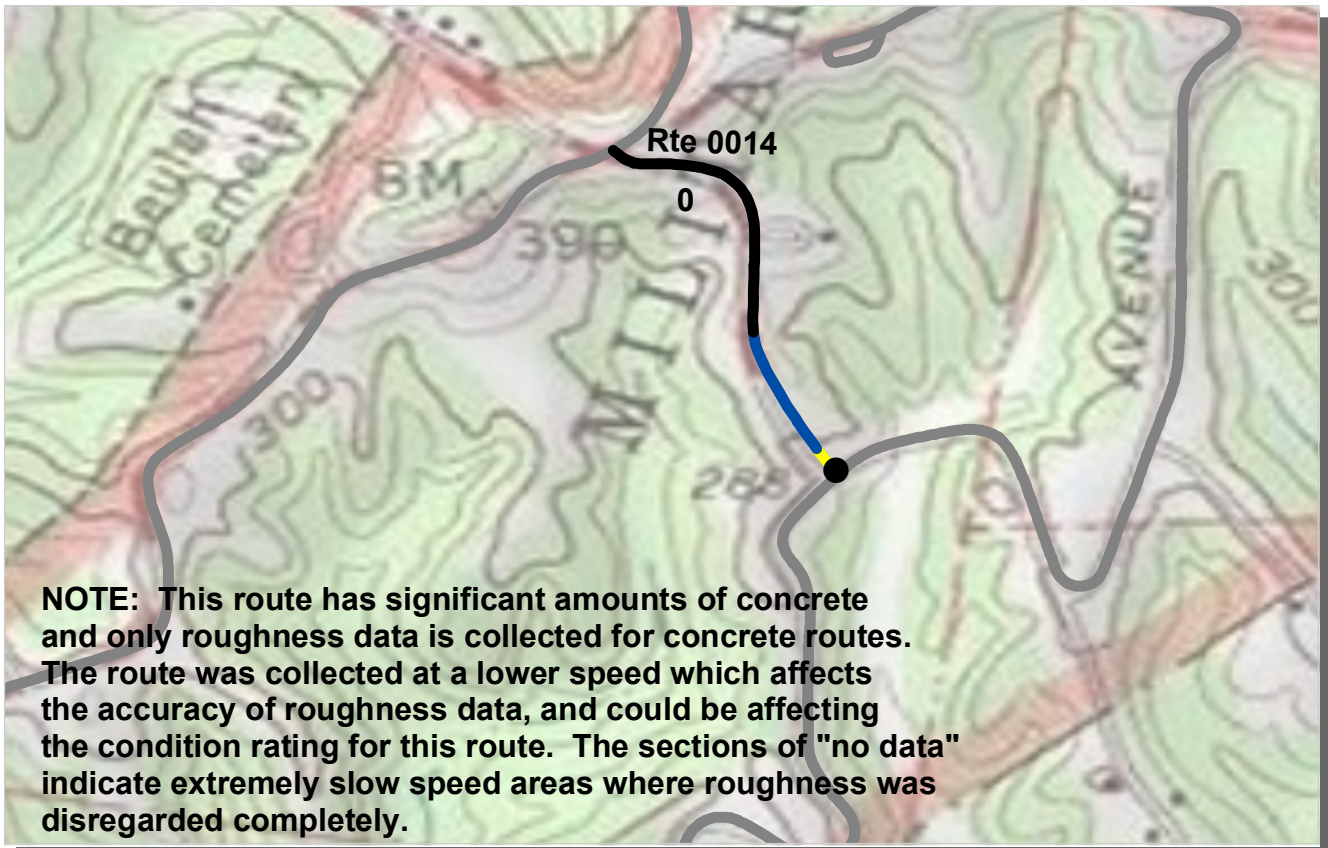

**NOTE: This route has significant amounts of concrete and only roughness data is collected for concrete routes. The route was collected at a lower speed which affects the accuracy of roughness data, and could be affecting the condition rating for this route. The sections of "no data" indicate extremely slow speed areas where roughness was disregarded completely.**

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0014 PEMBERTON AVENUE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.27 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.27				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	18				
Lane Width (ft)	9				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	NC				
PCR (Pavement Condition Rating)	NC				
<b>Distress Index Values</b>					
Structural Crack Index	NC				
Transverse Cracking Index	NC				
Patching Index	NC				
Rutting Index	NC				
Roughness Condition Index (RCI)	NC				

**NOTES:**


Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0014 PEMBERTON AVENUE**

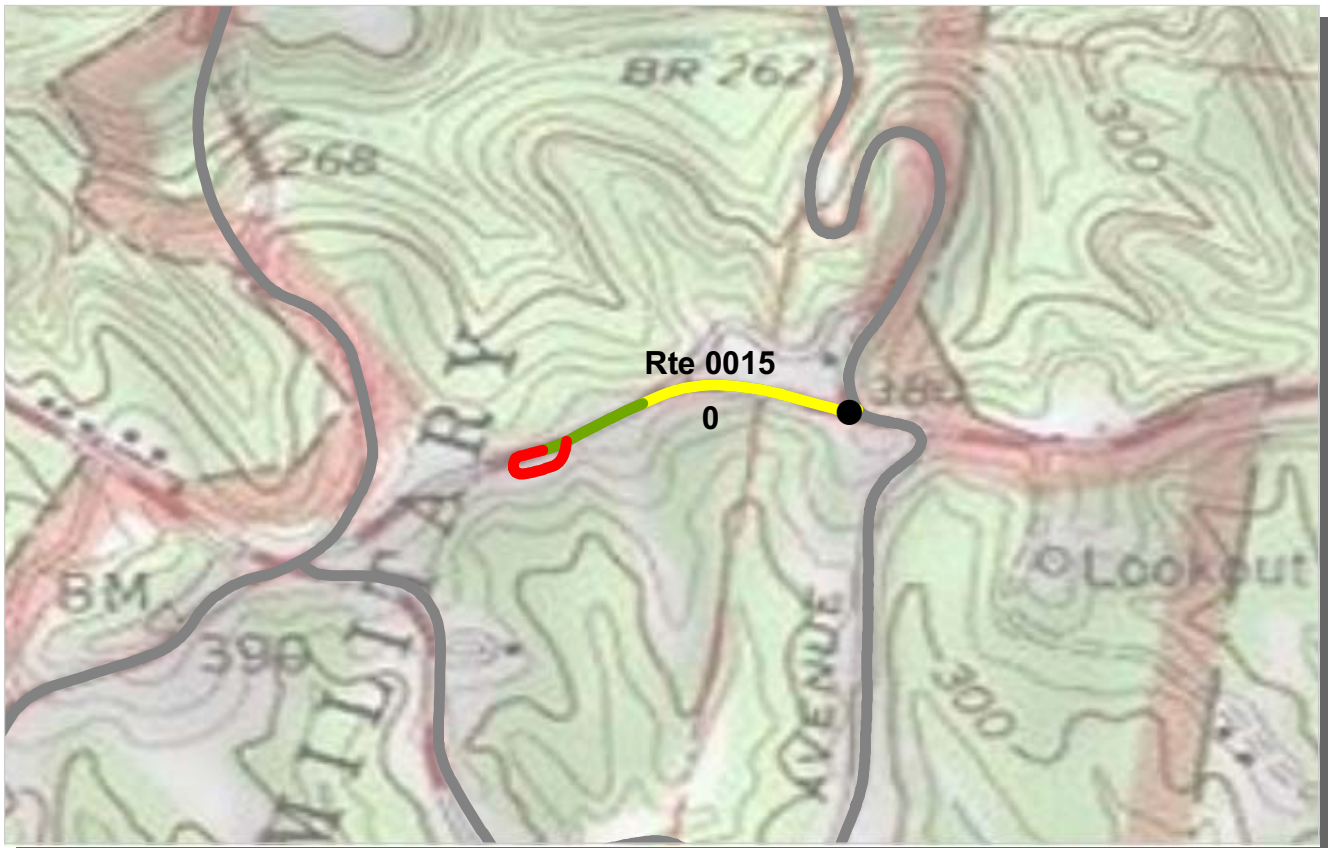

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0015 SHIRLEY CIRCLE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.24 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.24				
<b>Cross Section Information</b>					
Number of Lanes	1				
Paved Width (ft)	15				
Lane Width (ft)	13				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	70				
PCR (Pavement Condition Rating)	70				
<b>Distress Index Values</b>					
Structural Crack Index	70				
Transverse Cracking Index	86				
Patching Index	100				
Rutting Index	97				
Roughness Condition Index (RCI)	NC				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0015 SHIRLEY CIRCLE**



PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0016 OLD GRAVEYARD ROAD**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.33 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.33				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	19				
Lane Width (ft)	9				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	94				
PCR (Pavement Condition Rating)	94				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	94				
Roughness Condition Index (RCI)	NC				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



ROUTE: 0016 OLD GRAVEYARD ROAD



PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0017 GRANT AVENUE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/23/2012**  
**TOTAL LENGTH: 0.91 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.91				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	19				
Lane Width (ft)	11				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	97				
PCR (Pavement Condition Rating)	97				
<b>Distress Index Values</b>					
Structural Crack Index	99				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	97				
Roughness Condition Index (RCI)	NC				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0017 GRANT AVENUE**



PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0018 SHERMAN'S CIRCLE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.27 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.27				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	13				
Lane Width (ft)	9				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	96				
PCR (Pavement Condition Rating)	96				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	96				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0018 SHERMAN'S CIRCLE**

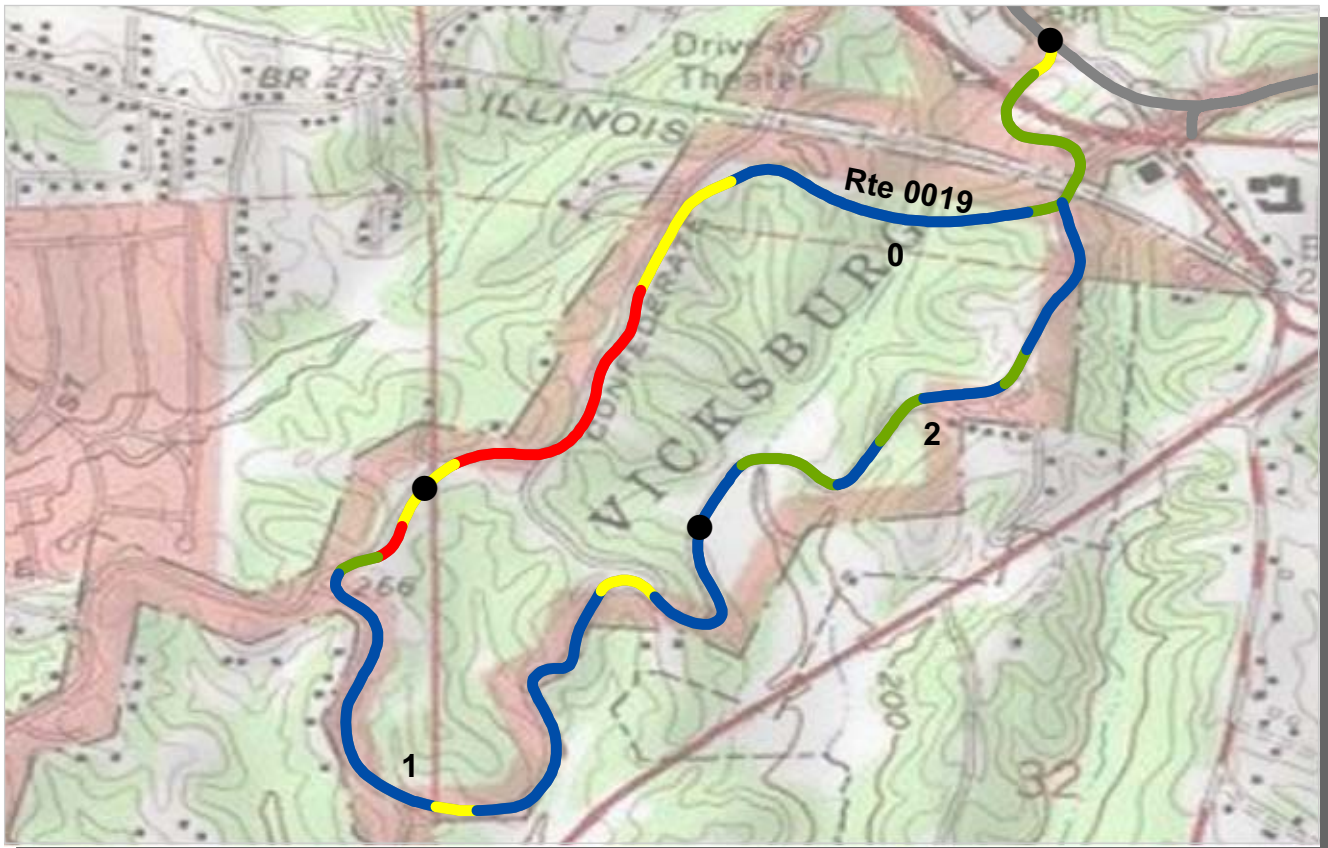

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0019 SOUTH LOOP**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 2.58 Miles**

**SOUTHEAST REGION**

<i>Section Number</i>	0	1	2		
<i>Section Length (mi)</i>	1.00	1.00	0.58		
<i>Cross Section Information</i>					
Number of Lanes	1	1	1		
Paved Width (ft)	19	17	16		
Lane Width (ft)	15	13	13		
<i>Roadway Condition Information</i>					
SCR (Surface Condition Rating)	100	98	100		
PCR (Pavement Condition Rating)	90	94	94		
<i>Distress Index Values</i>					
Structural Crack Index	100	100	100		
Transverse Cracking Index	100	100	100		
Patching Index	100	100	100		
Rutting Index	100	98	100		
Roughness Condition Index (RCI)	75	88	85		


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0019 SOUTH LOOP**

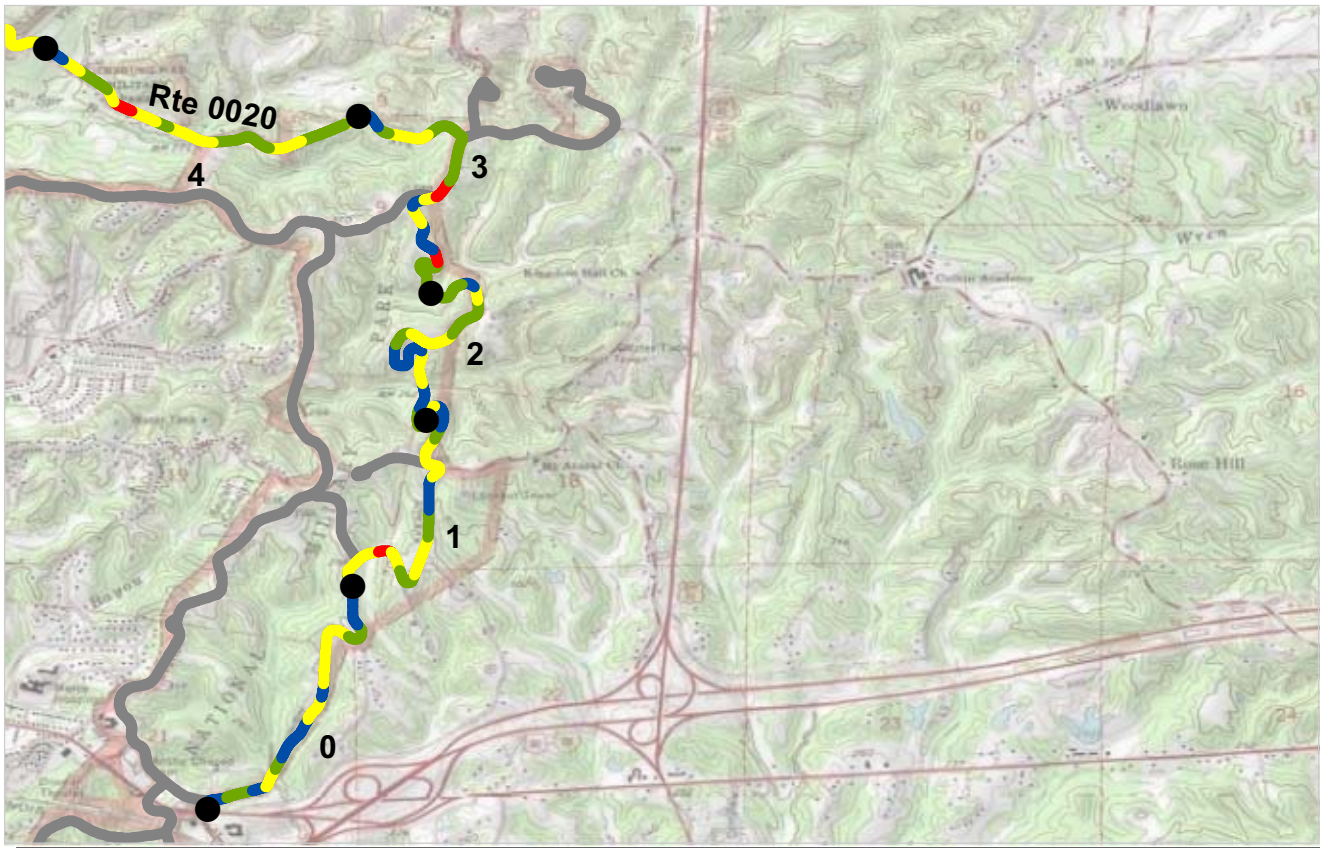

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0020 UNION AVENUE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 5.77 Miles**

**SOUTHEAST REGION**

<i>Section Number</i>	0	1	2	3	4
<i>Section Length (mi)</i>	1.00	1.00	1.00	1.00	1.00
<i>Cross Section Information</i>					
Number of Lanes	1	1	1	1	1
Paved Width (ft)	20	17	18	17	18
Lane Width (ft)	15	14	18	17	18
<i>Roadway Condition Information</i>					
SCR (Surface Condition Rating)	94	86	95	80	81
PCR (Pavement Condition Rating)	88	82	87	81	76
<i>Distress Index Values</i>					
Structural Crack Index	94	86	95	80	81
Transverse Cracking Index	98	92	97	94	95
Patching Index	100	100	99	100	98
Rutting Index	99	99	99	98	99
Roughness Condition Index (RCI)	79	76	76	83	68

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0020 UNION AVENUE**



PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0020 UNION AVENUE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 5.77 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	5				
<b>Section Length (mi)</b>	0.77				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	18				
Lane Width (ft)	14				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	80				
PCR (Pavement Condition Rating)	79				
<b>Distress Index Values</b>					
Structural Crack Index	80				
Transverse Cracking Index	92				
Patching Index	100				
Rutting Index	99				
Roughness Condition Index (RCI)	78				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable

**ROUTE: 0020 UNION AVENUE**



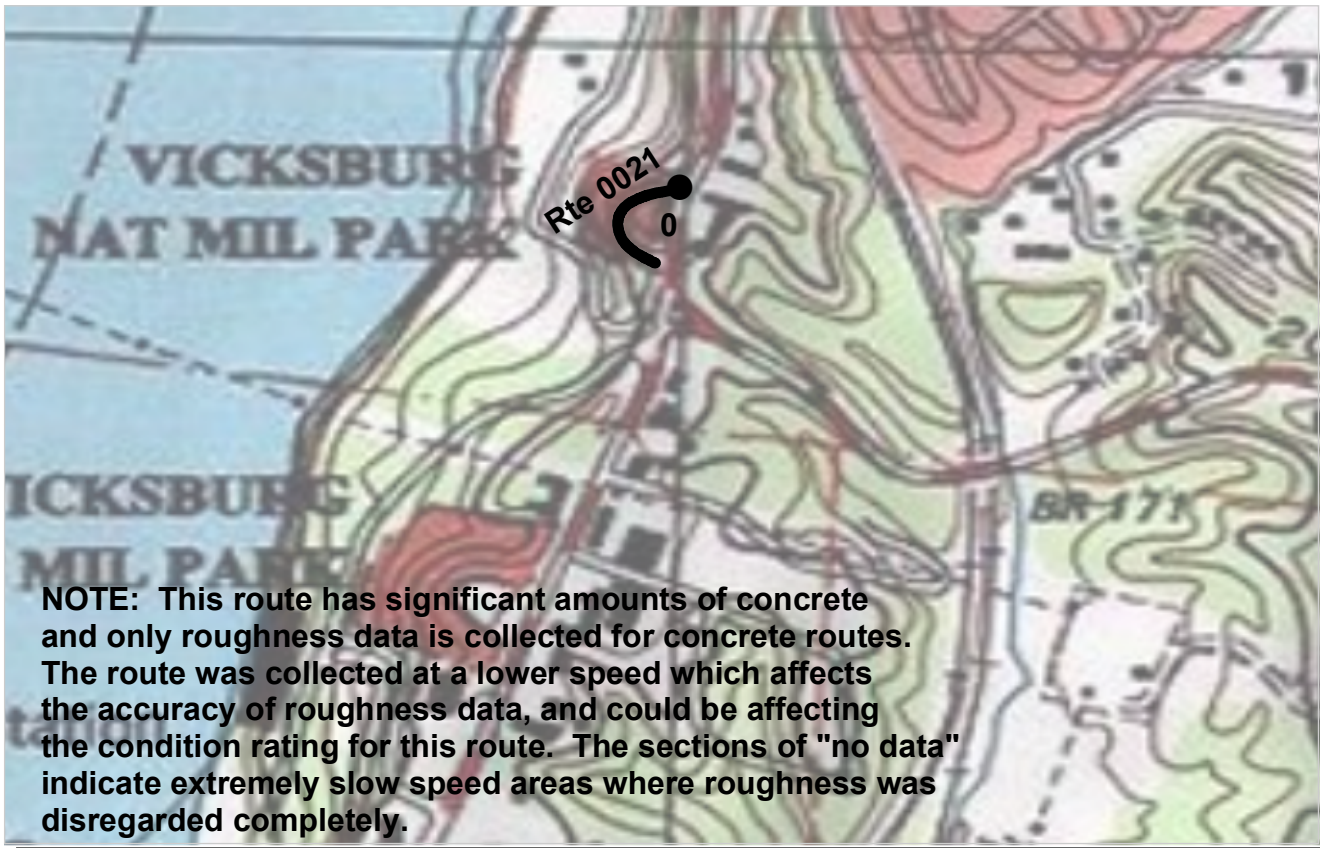

PCR	Poor	<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	Fair	<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	Good	<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	Excellent	<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	No Data	<span style="display:inline-block; width:15px; height:15px; background-color:black;"></span>
		(0 - 60)		(61 - 84)		(85 - 94)		(95 - 100)		

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0021 LOUISIANA CIRCLE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.08 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.08				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	23				
Lane Width (ft)	11				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	NC				
PCR (Pavement Condition Rating)	NC				
<b>Distress Index Values</b>					
Structural Crack Index	NC				
Transverse Cracking Index	NC				
Patching Index	NC				
Rutting Index	NC				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable

**ROUTE: 0021 LOUISIANA CIRCLE**

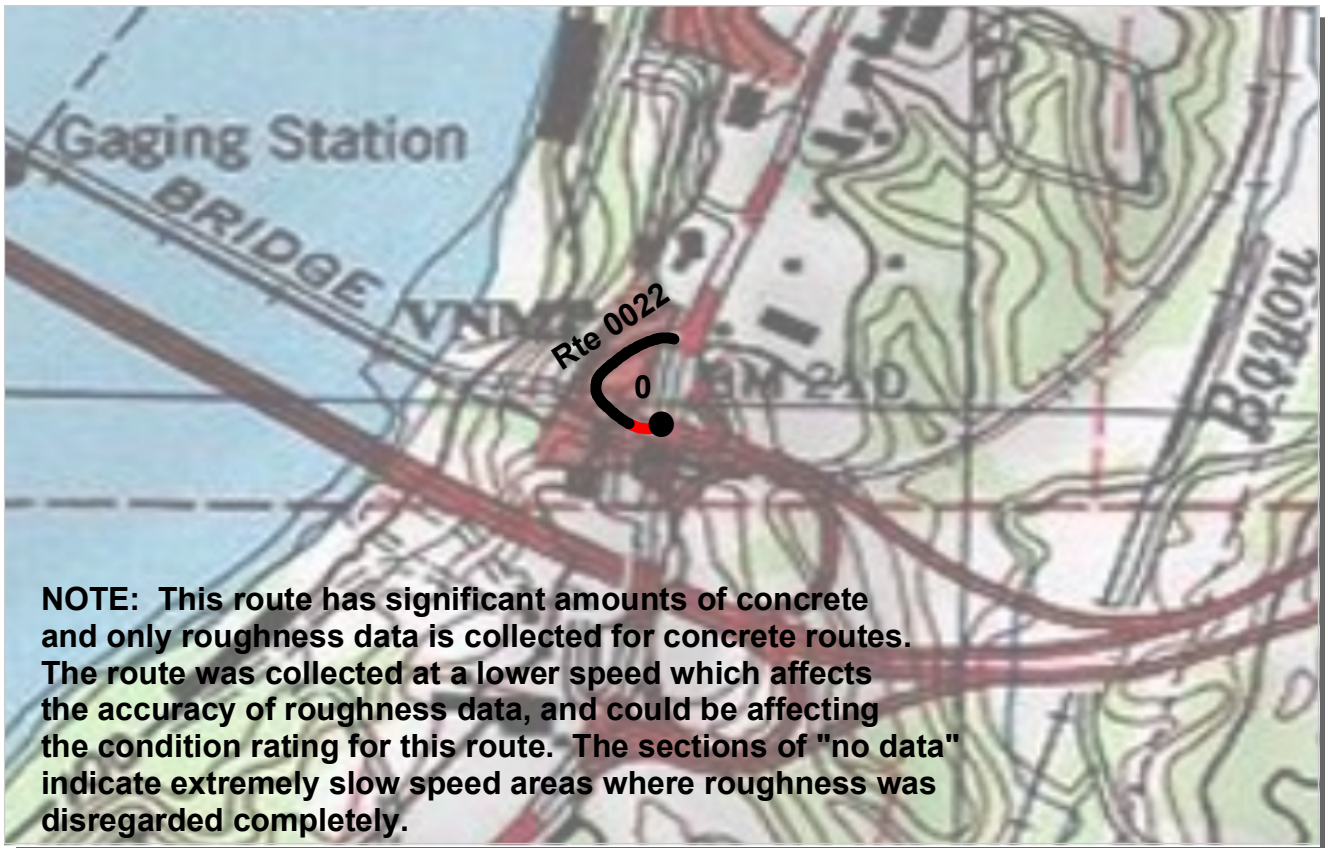

PCR	Poor	<span style="display:inline-block; width:15px; height:15px; background-color:red;"></span>	Fair	<span style="display:inline-block; width:15px; height:15px; background-color:yellow;"></span>	Good	<span style="display:inline-block; width:15px; height:15px; background-color:lightgreen;"></span>	Excellent	<span style="display:inline-block; width:15px; height:15px; background-color:blue;"></span>	No Data	<span style="display:inline-block; width:15px; height:15px; background-color:black;"></span>
		(0 - 60)		(61 - 84)		(85 - 94)		(95 - 100)		

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0022 NAVY CIRCLE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.11 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.11				
<b>Cross Section Information</b>					
Number of Lanes	1				
Paved Width (ft)	16				
Lane Width (ft)	16				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	NC				
PCR (Pavement Condition Rating)	NC				
<b>Distress Index Values</b>					
Structural Crack Index	NC				
Transverse Cracking Index	NC				
Patching Index	NC				
Rutting Index	NC				
Roughness Condition Index (RCI)	NC				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable

**ROUTE: 0022 NAVY CIRCLE**



PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0023 TENNESSEE CIRCLE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.07 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.07				
<b>Cross Section Information</b>					
Number of Lanes	1				
Paved Width (ft)	13				
Lane Width (ft)	13				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	98				
PCR (Pavement Condition Rating)	98				
<b>Distress Index Values</b>					
Structural Crack Index	99				
Transverse Cracking Index	98				
Patching Index	100				
Rutting Index	99				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



ROUTE: 0023 TENNESSEE CIRCLE

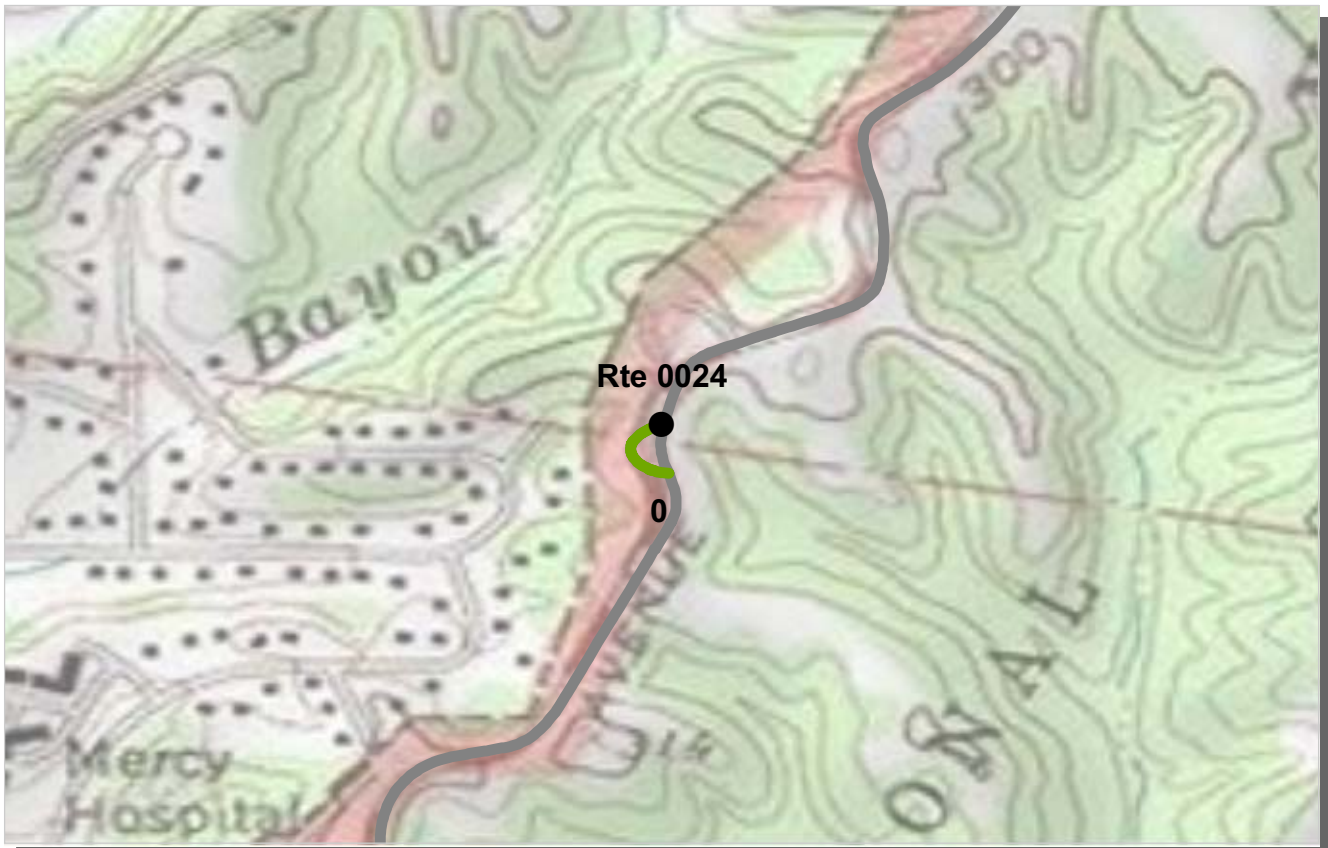

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0024 PEMBERTON CIRCLE**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.05 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.05				
<b>Cross Section Information</b>					
Number of Lanes	1				
Paved Width (ft)	13				
Lane Width (ft)	13				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	91				
PCR (Pavement Condition Rating)	91				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	91				
Patching Index	100				
Rutting Index	94				
Roughness Condition Index (RCI)	NC				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0024 PEMBERTON CIRCLE**



PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0200 SOUTH CEMETERY ROAD (TINDLE ROAD)**  
**VICK : VICKSBURG NATIONAL MILITARY PARK**

**COLLECTED: 1/24/2012**  
**TOTAL LENGTH: 0.72 Miles**

**SOUTHEAST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.72				
<b>Cross Section Information</b>					
Number of Lanes	1				
Paved Width (ft)	14				
Lane Width (ft)	14				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	99				
PCR (Pavement Condition Rating)	99				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	100				
Patching Index	100				
Rutting Index	99				
Roughness Condition Index (RCI)	NC				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0200 SOUTH CEMETERY ROAD (TINDLE ROAD)**

**Section 6**  
**Manually Rated Paved Route**  
**Condition Rating Sheets**



Vicksburg National Military Park



## **MANUALLY RATED ROUTE CONDITION RATING SHEETS**

This park is classified as a Large Park. Therefore, in Cycle 5, no manually rated routes were collected unless the route was modified or previously uncollected by RIP.

**Section 7**  
**Parking Area**  
**Condition Rating Sheets**



Vicksburg National Military Park



Federal Lands Highway  
Road Inventory Program



# VICKSBURG NATIONAL MILITARY PARK

## Route 0909


CAIRO MUSEUM PARKING AREA

FROM END OF ROUTE 0020 (UNION AVENUE)

AND BEGINNING OF ROUTE 0010 (CONNECTING AVENUE) TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0909	PUBLIC	12/13/2011	42,886	0.74	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	5	1	NO CURB AND GUTTER	CONCRETE CURB	GOOD/90

\* Lane miles are based on 11' lane widths

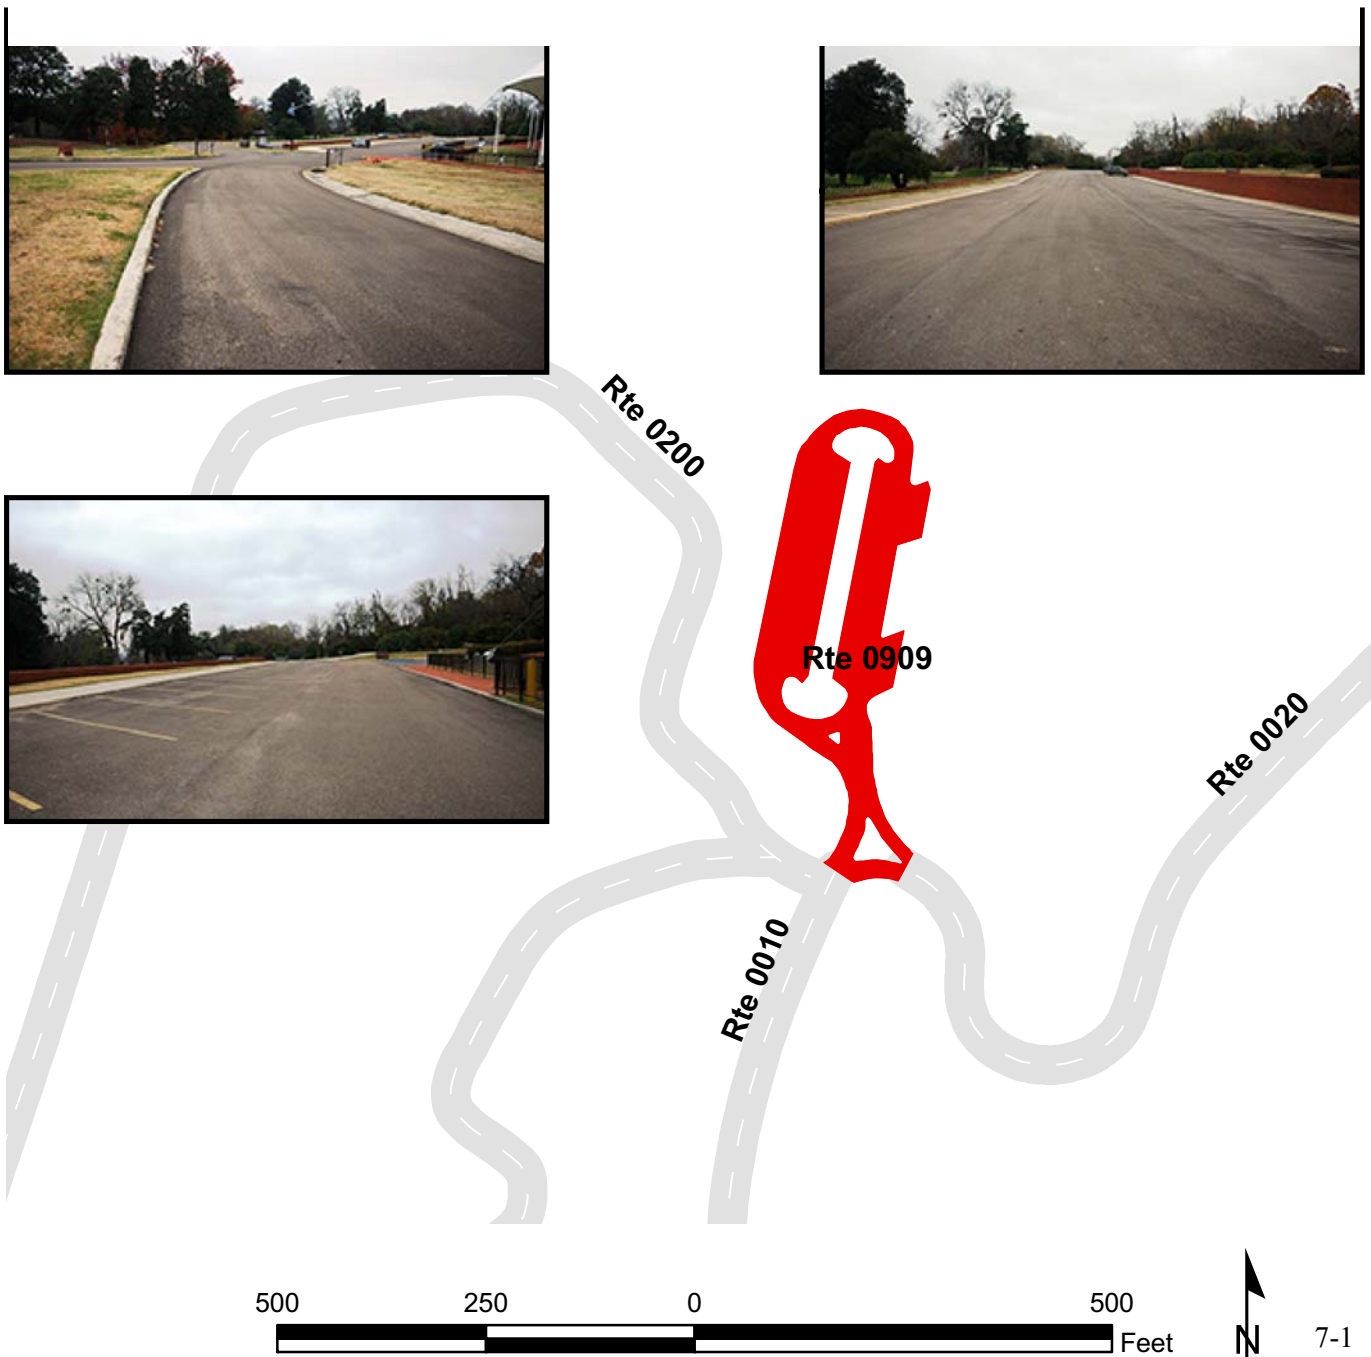

# VICKSBURG NATIONAL MILITARY PARK


## Route 0916

TEXAS PARKING AREA

FROM ROUTE 0019 (SOUTH LOOP) AT MP 0.48 ON RIGHT  
TO ROUTE 0019 (SOUTH LOOP)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0916	PUBLIC	12/13/2011	5,391	0.09	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	NO CURB AND GUTTER	CONCRETE CURB	GOOD/90

\* Lane miles are based on 11' lane widths

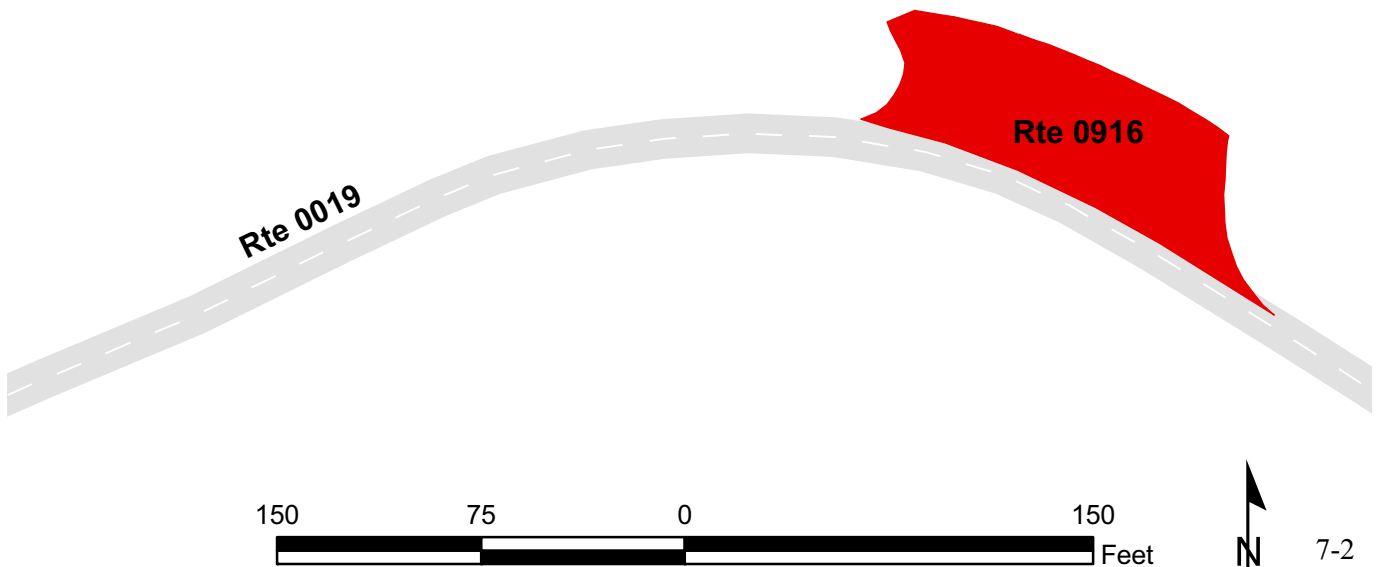


# VICKSBURG NATIONAL MILITARY PARK

## Route 0925

SHIRLEY HOUSE PARKING AREA  
FROM ROUTE 0020 (UNION AVENUE)  
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0925	PUBLIC	12/13/2011	4,139	0.07	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
2	0	1	NO CURB AND GUTTER	CONCRETE CURB	GOOD/90

\* Lane miles are based on 11' lane widths

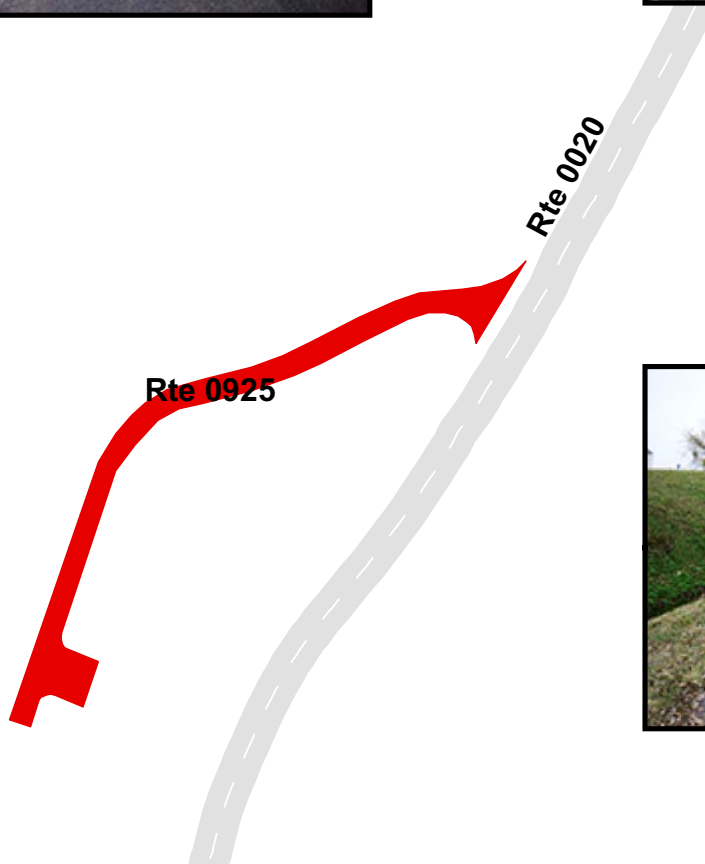


# VICKSBURG NATIONAL MILITARY PARK

## Route 0926

OLD ADMINISTRATION LOOP PARKING AREA  
 FROM ROUTE 0014 (PEMBERTON AVENUE) AT MP 0.17  
 TO ROUTE 0014 (PEMBERTON AVENUE) AT MP 0.18

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0926	PUBLIC	12/13/2011	8,131	0.14	CO
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	2	0	NO CURB AND GUTTER	CONCRETE CURB	POOR/45

\* Lane miles are based on 11' lane widths

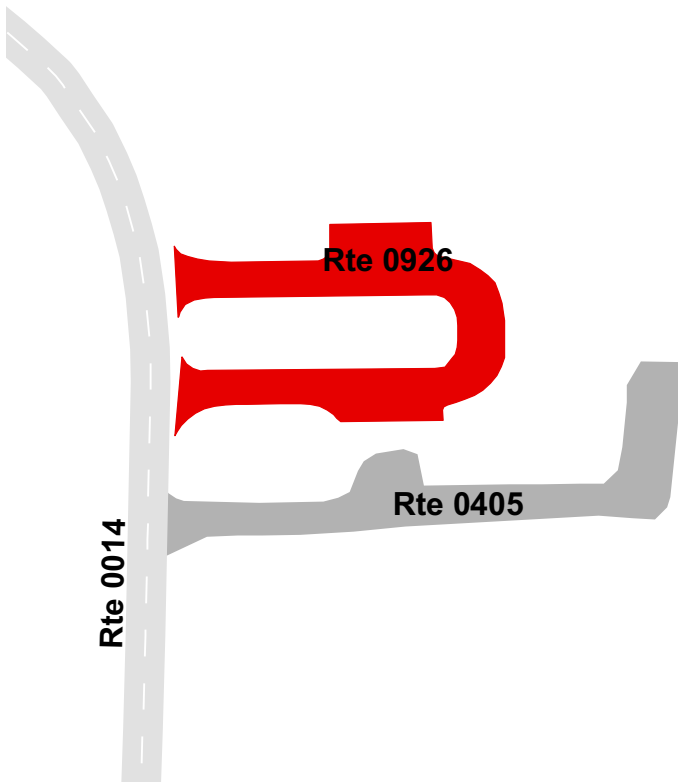

# Section 8

## Route Maintenance Features Summaries



Vicksburg National Military Park



Federal Lands Highway  
Road Inventory Program

# VICK: DCV ROUTE MAINTENANCE FEATURES SUMMARY

Notice: Culverts and drop inlets were NOT marked by NPS in Cycle 5 along new or re-aligned DCV driven routes.

FEATURE	ROUTE 0021 LOUISIANA CIRCLE	ROUTE 0022 NAVY CIRCLE	ROUTE 0023 TENNESSEE CIRCLE	ROUTE 0024 PEMBERTON CIRCLE	UNIT
BRIDGE	0	0	0	0	EACH
CATTLE GUARD	0	0	0	0	EACH
CULVERT	0	0	0	0	EACH
CURB	765	1,073	0	0	LINEAR FEET
DROP INLET	0	0	0	0	EACH
GATE	0	0	0	0	EACH
GUARD/GUIDE RAIL	158	216	0	0	LINEAR FEET
CABLE	0	0	0	0	LINEAR FEET
NON-CABLE	158	216	0	0	LINEAR FEET
GUARD/GUIDE WALL	0	0	0	0	LINEAR FEET
BOLLARD	0	0	0	0	LINEAR FEET
TEMPORARY BARRIER	0	0	0	0	LINEAR FEET
NON TEMP/BOLLARD	0	0	0	0	LINEAR FEET
INTERSECTION	4	6	4	4	EACH
LOW WATER CROSSING	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	EACH
OVERPASS	0	0	0	0	EACH
PARK BOUNDARY	0	0	0	0	EACH
PAVED DITCH	0	0	0	0	LINEAR FEET
PULLOUT	1	2	0	0	EACH
PULLOUT	106	243	0	0	LINEAR FEET
RAILROAD CROSSING	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	LINEAR FEET
SIGN	8	24	5	1	EACH
STATE BOUNDARY	0	0	0	0	EACH
TRAFFIC LIGHT	0	2	0	0	EACH
TUNNEL	0	0	0	0	EACH
TUNNEL	0	0	0	0	LINEAR FEET

## **STRUCTURE LIST**

This park is classified as a large park. Therefore, in Cycle 5, BIP-Structures were inventoried only if they were located along routes that were modified or previously uncollected by RIP, so this report does not provide an all-inclusive listing of all BIP-Structures in the park.

**Section 9**  
**Route Maintenance Features**  
**Road Logs**



Vicksburg National Military Park





# VICK: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0021: LOUISIANA CIRCLE

**Notice:** Culverts and drop inlets were NOT marked by NPS nor inventoried by RIP in Cycle 5 on any new or re-aligned DCV driven routes. Therefore no culverts or drop inlets are reported in Section 9, unless a culvert has a BIP structure number attached to it.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM SOUTH WASHINGTON STREET AT NORTH END
0.000	0.000	INTERSECTION	RIGHT	PAVED ROUTE (SOUTH WASHINGTON STREET / NON NPS)
0.000	0.000	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.000	0.080	ONE-WAY	N/A	N/A
0.000	0.000	INTERSECTION	LEFT	PAVED ROUTE (SOUTH WASHINGTON STREET / NON NPS)
0.004	0.004	SIGN	RIGHT	GUIDE, MISSISSIPPI RIVER OVER LOOK
0.004	0.004	SIGN	RIGHT	GUIDE, PARK CLOSED AFTER DARK
0.005	0.078	CURB	LEFT	N/A
0.006	0.078	CURB	RIGHT	N/A
0.025	0.055	GUARD/GUIDE RAIL	RIGHT	N/A
0.028	0.048	PULLOUT	RIGHT	N/A
0.039	0.039	SIGN	RIGHT	GUIDE, DO NOT CROSS RAIL
0.077	0.077	SIGN	RIGHT	REGULATORY, UNABLE TO READ FROM VIDEO
0.077	0.077	SIGN	RIGHT	REGULATORY, STOP
0.080	0.080	INTERSECTION	LEFT	PAVED ROUTE (SOUTH WASHINGTON STREET / NON NPS)
0.080	0.080	INTERSECTION	RIGHT	PAVED ROUTE (SOUTH WASHINGTON STREET / NON NPS)
0.080	0.080	SIGN	RIGHT	GUIDE, CASHMAN DR
0.080	0.080	SIGN	RIGHT	GUIDE, RIVERFRONT PARK LOOP
0.080	0.080	ROUTE END	N/A	TO SOUTH WASHINGTON STREET (OUTSIDE OF PARK)

# VICK: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0022: NAVY CIRCLE

**Notice:** Culverts and drop inlets were NOT marked by NPS nor inventoried by RIP in Cycle 5 on any new or re-aligned DCV driven routes. Therefore no culverts or drop inlets are reported in Section 9, unless a culvert has a BIP structure number attached to it.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM SOUTH WASHINGTON STREET AT SOUTH END
0.000	0.014	CURB-AND-GUTTER	LEFT	N/A
0.000	0.000	SIGN	RIGHT	GUIDE, NAVY CIRCLE
0.000	0.000	INTERSECTION	RIGHT	PAVED ROUTE (SOUTH WASHINGTON STREET / NON NPS)
0.000	0.000	INTERSECTION	LEFT	PAVED ROUTE (SOUTH WASHINGTON STREET / NON NPS)
0.003	0.003	SIGN	N/A	GUIDE, MONROE
0.003	0.003	SIGN	N/A	REGULATORY, INTERSTATE 20
0.003	0.003	SIGN	N/A	REGULATORY, WEST
0.004	0.004	TRAFFIC LIGHT	N/A	N/A
0.005	0.005	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
0.005	0.005	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
0.005	0.005	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
0.009	0.030	CURB-AND-GUTTER	RIGHT	N/A
0.016	0.016	INTERSECTION	LEFT	PAVED ROUTE (NON NPS)
0.020	0.020	INTERSECTION	LEFT	PAVED ROUTE (NON NPS)
0.020	0.030	CURB-AND-GUTTER	LEFT	N/A
0.020	0.112	ONE-WAY	N/A	N/A
0.022	0.022	SIGN	RIGHT	REGULATORY, NO TRACTOR TRAILERS
0.022	0.022	SIGN	RIGHT	GUIDE, NAVY CIRCLE
0.023	0.023	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.023	0.023	SIGN	LEFT	REGULATORY, ONE WAY
0.026	0.026	SIGN	LEFT	GUIDE, PARK CLOSED AFTER DARK
0.026	0.026	SIGN	LEFT	WARNING, 11'- 6"
0.030	0.065	CURB	LEFT	N/A
0.030	0.108	CURB	RIGHT	N/A
0.037	0.078	GUARD/GUIDE RAIL	LEFT	N/A
0.045	0.065	PULLOUT	LEFT	N/A
0.054	0.054	SIGN	LEFT	GUIDE, DO NOT CROSS RAIL
0.064	0.064	SIGN	LEFT	GUIDE, DO NOT CROSS RAIL
0.067	0.112	CURB	LEFT	N/A

## VICK: ROUTE MAINTENANCE FEATURES ROAD LOG

### ROUTE 0022: NAVY CIRCLE

**Notice:** Culverts and drop inlets were NOT marked by NPS nor inventoried by RIP in Cycle 5 on any new or re-aligned DCV driven routes. Therefore no culverts or drop inlets are reported in Section 9, unless a culvert has a BIP structure number attached to it.

<b>FROM MILEPOST</b>	<b>TO MILEPOST</b>	<b>FEATURE</b>	<b>SIDE</b>	<b>COMMENT</b>
0.074	0.100	PULLOUT	LEFT	N/A
0.076	0.076	SIGN	LEFT	GUIDE, DO NOT CROSS RAIL
0.109	0.109	SIGN	RIGHT	REGULATORY, STOP
0.109	0.109	SIGN	RIGHT	REGULATORY, UNABLE TO READ FROM VIDEO
0.109	0.109	SIGN	RIGHT	REGULATORY, UNABLE TO READ FROM VIDEO
0.110	0.110	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
0.112	0.112	INTERSECTION	RIGHT	PAVED ROUTE (SOUTH WASHINGTON STREET / NON NPS)
0.112	0.112	SIGN	LEFT	REGULATORY, STOP
0.112	0.112	INTERSECTION	LEFT	PAVED ROUTE (SOUTH WASHINGTON STREET / NON NPS)
0.112	0.112	ROUTE END	N/A	TO SOUTH WASHINGTON STREET (OUTSIDE OF PARK)

# VICK: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0023: TENNESSEE CIRCLE

**Notice:** Culverts and drop inlets were NOT marked by NPS nor inventoried by RIP in Cycle 5 on any new or re-aligned DCV driven routes. Therefore no culverts or drop inlets are reported in Section 9, unless a culvert has a BIP structure number attached to it.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0012 (CONFEDERATE AVENUE) AT MP 0.59 ON LEFT
0.000	0.000	INTERSECTION	LEFT	ROUTE 0012 (CONFEDERATE AVENUE)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0012 (CONFEDERATE AVENUE)
0.000	0.000	SIGN	N/A	REGULATORY, ONE WAY
0.000	0.000	SIGN	RIGHT	GUIDE, TENNESSEE CIRCLE
0.012	0.012	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
0.063	0.063	SIGN	RIGHT	GUIDE, TENNESSEE CIRCLE
0.068	0.068	INTERSECTION	LEFT	ROUTE 0012 (CONFEDERATE AVENUE)
0.068	0.068	SIGN	N/A	REGULATORY, ONE WAY
0.068	0.068	INTERSECTION	RIGHT	ROUTE 0012 (CONFEDERATE AVENUE)
0.068	0.068	ROUTE END	N/A	TO ROUTE 0012 (CONFEDERATE AVENUE) AT MP 0.63 ON LEFT

# VICK: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0024: PEMBERTON CIRCLE

**Notice:** Culverts and drop inlets were NOT marked by NPS nor inventoried by RIP in Cycle 5 on any new or re-aligned DCV driven routes. Therefore no culverts or drop inlets are reported in Section 9, unless a culvert has a BIP structure number attached to it.

<b>FROM MILEPOST</b>	<b>TO MILEPOST</b>	<b>FEATURE</b>	<b>SIDE</b>	<b>COMMENT</b>
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0012 (CONFEDERATE AVENUE) AT MP 3.29 ON RIGHT
0.000	0.000	INTERSECTION	LEFT	ROUTE 0012 (CONFEDERATE AVENUE)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0012 (CONFEDERATE AVENUE)
0.000	0.000	SIGN	N/A	REGULATORY, UNABLE TO READ FROM VIDEO
0.050	0.050	INTERSECTION	LEFT	ROUTE 0012 (CONFEDERATE AVENUE)
0.050	0.050	INTERSECTION	RIGHT	ROUTE 0012 (CONFEDERATE AVENUE)
0.050	0.050	ROUTE END	N/A	TO ROUTE 0012 (CONFEDERATE AVENUE) AT MP 3.32 ON RIGHT

# Section 10 Appendix



## Vicksburg National Military Park



Federal Lands Highway  
Road Inventory Program

## **Explanation of Changes to the RIP Index Equations and Determination of PCR**

---

In 2005, the FHWA began implementing the use of a Pavement Management System to assist the National Park Service in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Region, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA as well.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions vis a vis the distresses and indexes that comprise the Pavement Condition Rating (PCR), an extensive study was completed throughout 2010 that has resulted in changes to the Road Inventory Program condition reporting method and specifically, the calculation of PCR. It was determined that a better representation of PCR could be achieved by modifying the relative impact certain distresses would have on the overall rating.

Through the use of HPMA data, it was noted that false failure indicators existed with the existing PCR model, and that it would be necessary to reduce their impact. The distresses affected in this way were Rutting and Roughness. Conversely, experience showed that roadways with extensive cracking present were often shown to have a high PCR. Therefore, the crack index models were adjusted to be more sensitive to changes in crack severity or quantity. It was also determined that these issues were not due to a problem with data acquisition (i.e. the RIP “van”), but with the way the collected data was processed. The final change was to provide guidance on when to use the Roughness Condition Index (RCI) in the PCR calculation. Roughness data is of little value to determining overall condition on routes that, due to their length or geometrics, have lower vehicle operating speeds. Therefore, in Cycle 5, only routes that have lengths of one half mile or greater and posted speed limits of 25 mph or greater will have RCI reported and included in the PCR calculations.

The changes that were implemented were endorsed by management at both the FHWA and NPS. In order to show the effectiveness of these changes, several sites were ground truth tested to ensure that an improvement was achieved between the relationship of PCR and the actual Maintenance and Rehabilitation needs that were represented. The changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection.


# Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that will be implemented in Cycle 5, we will also aim to provide greater assistance in translating good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 60 or below. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System’s data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.

## Condition Categories and Treatments

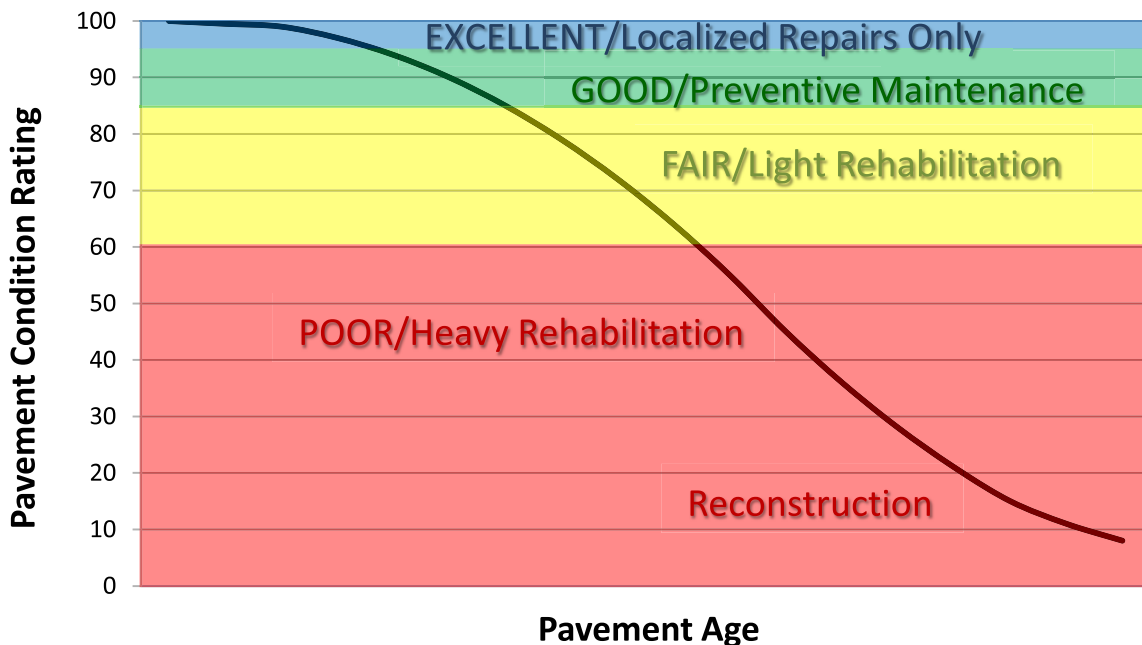



## DESCRIPTION OF RATING SYSTEM

---

The Federal Highway Administration (FHWA), Road Inventory Program (RIP) for the National Park Service (NPS), collects roadway condition data on paved surfaces (asphalt, concrete, brick, and cobblestone) on roads, parkways, and parking areas in national parks nationwide. The road surface condition data is collected using an automated Data Collection Vehicle (DCV). Roads having brick or cobblestone surfacing are not normally surveyed with the DCV, but are manually rated for condition rating.

The FHWA RIP is implemented based on the premise that an accurate pavement surface condition assessment can be accomplished using automated crack detection technology as applied to digital images. Various methods of pavement condition assessment have been developed over the years with varying degrees of accuracy and acceptance. The use of digital photography to record pavement images and subsequent crack detection and classification has undergone continuous improvements over the past decade. Digital cameras with increasingly superior resolution and high definition have become more affordable, and the proprietary programming code and algorithms have been improved in crack detection software.

With the use of quality digital photography and automated crack detection software, FHWA RIP is tasked with executing a pavement condition assessment on about 5000 miles of National Park Service roads and parkways. Foremost in setting up the basis of pavement distress identification is employing the distress identification protocols used by FHWA. There is no single distress identification system that is universal among entities conducting a program of distress identification. For the purpose of the NPS RIP, FHWA employs distress identification protocols that are specific to this program.

FHWA has referenced the “*Distress Identification Manual for the Long-Term Pavement Performance Program*”, Publication No. FHWA-RD 03-031, June 2003, as the point-of-reference for distress types on NPS pavement. In truth, the FHWA RIP distress types are similar to those described in the LTPP manual with some modifications. This document, “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013*” was developed using the “*Distress Identification Manual for the Long-Term Pavement Performance Program*” as a guideline. Definitions of severity levels based on crack width contained in this document adhere to the LTPP Distress ID Manual. Modifications have been made to the definition of Alligator and Longitudinal Cracking and determination of Alligator Cracking severity. This manual also addresses Rutting and Roughness and its application to RIP.

In 2010, FHWA RIP began the fifth cycle of data collection in national parks. For Cycle 5, data will be collected in approximately 81 large parks (10 or more paved route miles) on Functional Class 1, 2, and 7 routes plus any new routes or parking areas previously not collected, totaling an estimated 4,459 paved route miles. Additionally, 168 small parks will be collected comprising approximately 529 paved route miles and associated paved parking areas. The data is used to support the National Park Service road maintenance program and Pavement Management System (PMS) developed and maintained by FHWA.

This “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013*” will be used as a reference resource in crack detection and classification, determination of distress severity and extent, and in the calculation of distress index values for the FHWA RIP Cycle 5.

# **SURFACE DISTRESSES**

---

## **Surface Condition Rating - SCR**

Surface distresses are measured in the primary lane only. In the classification and measurement of all paved surface condition data, results will be reported in the database in record intervals of 0.02 miles (105.6 feet) (smallest granularity) along the route.

### **Surface distresses determined from digital images**

- Transverse Cracks
- Longitudinal Cracks
- Alligator Cracks
- Patching/Potholes

### **Surface distress measured by DCV (Data Collection Vehicle) LRMS (Laser Rut Measuring System)**

- Rutting

### **Each of the five surface distresses is assigned a computed surface distress index**

- Transverse Crack Index
- Longitudinal Crack Index
- Alligator Crack Index
- Patching/Pothole Index
- Rutting Index

Surface distress data are classified as listed above, measured for severity, and quantified for extent. Classification, severity, and extent of these five surface distresses comprise the three main elements for calculation of SCR (Surface Condition Rating).

In addition to the five surface distresses, a **Structural Crack Index** is computed, which is a combination of the Longitudinal Crack Index and the Alligator Crack Index. The Structural Crack Index is then used in lieu of the LC and AC indices to compute SCR.

## **Roughness Condition Index - RCI**

### **Additional condition data measured by DCV (lasers and accelerometers)**

- Roughness (IRI)

Roughness is measured by FHWA's DCV and reported as International Roughness Index (IRI) in inches/mile. Using IRI, the Roughness Condition Index (RCI) is computed.

## **Pavement Condition Rating - PCR**

Using the SCR (computed from the five surface distresses) and the RCI, an overall Pavement Condition Rating (PCR) is computed. The formula for PCR is:

$$\text{Asphalt PCR} = (0.60 * \text{SCR}) + (0.40 * \text{RCI})$$

$$\text{Concrete PCR} = \text{RCI}$$

A detailed description of each distress index formula, roughness index formula, SCR and PCR is provided in this document beginning on page 23.

Each classified surface distress will fall into one or more *severity*...LOW, MEDIUM, or HIGH based on criteria listed. For each severity, an *extent* is established based on the measured quantity of the distress within that severity. Within each *severity* individual distresses are assigned a *Maximum Allowable Extent* (MAE). For example, LOW severity transverse cracking may be allowed up to 21.1 cracks within a 0.02 interval before it reaches MAE and fails.

The index formulas are based on a scale of 0-100. A PCR index value of 100 would indicate a “new” road with no measurable distresses or rough ride. A PCR value of 60 is determined to be *terminable serviceability* and the road is considered failed. The range of index values with condition descriptors is:

POOR (<=60), FAIR (61 - 84), GOOD (85 - 94), EXCELLENT (95 - 100)

Index values are generally computed based on cumulative deducts of the measured severities. As shown in the index formulas below, as any single severity reaches or exceeds MAE, the index computes to a value of 60 or less, and the road fails for that 0.02 interval.

**Note:** As a result of a unique combination of measured surface distresses and IRI, index values occasionally compute to less than 0 or greater than 100. In this instance, an index value < 0 defaults to 0. Index values > 100 default to 100. For all indices, a higher value indicates a better road condition, and a lower value indicates a poorer road condition.

On the following page, Table 1 summarizes the different types of distresses measured.

**TABLE 1: Distress Summary**

<b>ASPHALT-SURFACED PAVEMENT DISTRESS TYPES with RUTTING and ROUGHNESS</b>				
<b>DISTRESS TYPE</b>	<b>UNIT OF MEASURE...</b>	<b>...CONVERTED TO</b>	<b>DEFINED SEVERITY LEVELS?</b>	<b>MEASURED BY</b>
<b>Alligator Cracking</b>	<b>Square Feet</b>	<b>Percent of Lane Per 0.02 Mile</b>	<b>Yes</b>	<b>Digital Image Crack Detection Software</b>
<b>Transverse Cracking</b>	<b>Linear Feet</b>	<b>Number of Cracks Per 0.02 Mile</b>	<b>Yes</b>	<b>Digital Image Crack Detection Software</b>
<b>Longitudinal Cracking</b>	<b>Linear feet</b>	<b>Percent of Lane Length Per 0.02 Mile</b>	<b>Yes</b>	<b>Digital Image Crack Detection Software</b>
<b>Patching/Potholes</b>	<b>Square Feet</b>	<b>Percent of Lane Per 0.02 Mile</b>	<b>No</b>	<b>Digital Image Crack Detection Software</b>
<b>Rutting</b>	<b>Inches</b>	<b>Rut Depth Per 0.02 Mile</b>	<b>Yes</b>	<b>DCV – Laser Rut Measuring System (LRMS)</b>
<b>Roughness</b>	<b>IRI</b>	<b>*RCI Per 0.02 Mile</b>	<b>No</b>	<b>DCV – Lasers /Accelerometers</b>

**\*Note: Roughness is measured on concrete roadways, but surface distresses and rutting are not measured. For concrete, PCR = RCI**

# **ALLIGATOR CRACKING**

## **Description**

Alligator cracking is considered a combination of fatigue and block cracking. It is a series of interconnected cracks in various stages of development. Alligator cracking develops into a many-sided pattern that resembles chicken wire or alligator skin. It can occur anywhere in the road lane. Alligator cracking must have a quantifiable area.

## **Severity Levels**

### **LOW**

An area of cracks with no or very few interconnecting cracks and the cracks are not spalled. Cracks are  $\leq 0.25$  in (6mm) in mean width. Cracks in the pattern are no further apart than 1 foot (0.328 m). May be sealed cracks with sealant in good condition and a crack width that cannot be determined.

### **MEDIUM**

An area of interconnected cracks that form a complete pattern. Cracks may be slightly spalled. Cracks are  $>0.25$  in. (6 mm) and  $\leq 0.75$  in. (19 mm) or any crack with a mean width  $\leq 19$  mm and adjacent low severity cracking. Cracks in the pattern are no further apart than 6 in. (150 mm).

### **HIGH**

An area of interconnected cracks forming a complete pattern. Cracks are moderately or severely spalled. Cracks are  $>0.75$  in (19mm) or any crack with a mean width  $\leq 0.75$  in (19mm) and adjacent medium to high severity random cracking.

A combination of observed crack width and crack pattern is used to determine overall severity of alligator cracking. Based on above description of each severity, the highest level of crack width and crack pattern determines overall severity. Table 2 illustrates this.

**TABLE 2: Alligator Crack Severity Levels**

<b>ALLIGATOR CRACKING SEVERITY LEVELS</b>		<b>Crack Pattern</b>		
		<b>LOW</b>	<b>MED</b>	<b>HIGH</b>
<b>Crack Width</b>	<b>LOW</b>	L	M	H
	<b>MED</b>	M	M	H
	<b>HI</b>	H	H	H

## **LONGITUDINAL CRACKING**

### **Description**

Longitudinal cracking occurs predominantly parallel to the pavement centerline. It can occur anywhere within the lane. Longitudinal cracks occurring in the wheelpath may be noteworthy.

### **Severity Levels**

#### **LOW**

Cracks with a mean width of  $< 0.25$  in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

#### **MED**

Cracks with a mean width  $> 0.25$  in. (6 mm) and  $\leq 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random low severity cracking.

#### **HIGH**

Cracks with a mean width  $> 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random medium to high severity cracking.

## **TRANSVERSE CRACKING**

### **Description**

Transverse cracking occurs predominantly perpendicular to the pavement centerline. It can occur anywhere within the lane.

### **Severity Levels**

#### **LOW**

Cracks with a mean width of  $< 0.25$  in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

#### **MED**

Cracks with a mean width  $> 0.25$  in. (6 mm) and  $\leq 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random low severity cracking.

#### **HIGH**

Cracks with a mean width  $> 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random medium to high severity cracking.

## **PATCHING AND POTHOLES**

### **Description**

Patching is an area of pavement surface that has been removed and replaced with patching material or an area of pavement surface that has had additional patching material applied. Patching may encompass partial lane or full lane width. On full lane width patching; the total, contiguous length of patch may not exceed 0.30 mi. (0.48 km). (Any full-lane patch exceeding 0.30 mi. in length is considered a pavement change). Patching must have a quantifiable area.

Potholes are bowl-shaped holes of various sizes occurring in the pavement surface.

### **Severity Levels**

There are no stratified severities for Patching/Potholes. They either are present or they are not.

## **RUTTING**

### **Description**

Rutting is a longitudinal surface depression in the wheelpath.

### **Severity Levels**

#### **LOW**

Ruts with a measured depth  $\geq 0.20''$  and  $\leq 0.49''$

#### **MED**

Ruts with a measured depth  $\geq 0.50''$  and  $\leq 0.99''$

#### **HIGH**

Ruts with a measured depth  $\geq 1.00''$

Ruts  $< 0.20''$  are not included in the distress calculations.



## **ROUGHNESS**

### **Description**

Roughness is the measurement of the unevenness of the pavement in the direction of travel. It is measured in units of IRI (International Roughness Index), inches per mile, and is indicative of ride comfort.

### **Severity Levels**

There are no stratified severity levels for roughness. The roughness (or smoothness) of a road surface can be defined by IRI in the following table.

**TABLE 3: IRI**

<b>IRI Descriptions</b>	
<b>Type of Road</b>	<b>Typical IRI ( in/mile )</b>
New Road, no noticeable roughness	<90
Small level of roughness	90 – 126
Road of average roughness	126 – 190
Road with above average roughness	190 – 253
Road with severe roughness	253 – 380
Nearly impassable	>380

## INDEX FORMULAS

---

Note: All index formulas listed below contain MAE applicable to 0.02 mile (105.6 feet) interval.

### Alligator Crack Index

$$AC\_INDEX = 100 - 40 * [(\%LOW / 35) + (\%MED / 15) + (\%HI / 5)]$$

Where:

The values *%LOW*, *%MED* and *%HI* report the percentage of the observed pavement (0.02 mile, primary lane) that contains alligator cracking within the respective severities. These values range from 0 to 100.

*%LOW* = Percent of total area (primary lane, 0.02 in length), low severity

*%MED* = Percent of total area (primary lane, 0.02 in length), medium severity

*%HI* = Percent of total area (primary lane, 0.02 in length), high severity

Percent of total area is computed as:

$$\frac{\text{square foot area of alligator crack severity}}{0.02 \text{ mile} * \text{lane width}}$$

In AC\_INDEX, the denominators 35, 15, and 5 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 35% of low severity alligator cracking for a 0.02 interval before failure, 15% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

### Longitudinal Crack Index

$$LC\_INDEX = 100 - 40 * [(\%LOW / 175) + (\%MED / 75) + (\%HI / 25)]$$

Where:

The values *%LOW*, *%MED*, and *%HI* report the length of longitudinal cracking within each severity as a percent of the section length (0.02 mile, primary lane).

These values are  $\geq 0$  and can exceed 100.

*%LOW* = Percent of interval length (primary lane, 0.02 in length), low severity

*%MED* = Percent of interval length (primary lane, 0.02 in length), medium severity

*%HI* = Percent of interval length (primary lane, 0.02 in length), high severity

Percent of interval length is computed as:

$$\frac{\text{length of respective longitudinal cracking}}{0.02 \text{ mile (105.6 feet)}}$$

In LC\_INDEX, the denominators 175, 75, and 25 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 175% of low severity alligator cracking for a 0.02 interval before failure, 75% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

### **Structural Crack Index**

$$SC\_INDEX = [100 - ((100 - AC\_INDEX) + (100 - LC\_INDEX))]$$

**Structural Crack Index** is a combination of Alligator Cracking and Longitudinal Cracking, and is used in the SCR formula in lieu of AC and LC separately.

### **Transverse Crack Index**

$$TC\_INDEX = 100 - 40 * [(LOW / 21.1) + (MED / 4.4) + (HI / 2.6)]$$

Where:

The values *LOW*, *MED* and *HI* report a count of the total number of transverse cracks (reported to three decimals) within each severity level, where one transverse crack is equal to the lane width. These values are  $\geq 0$ .

LOW = Number of cracks in interval (primary lane, 0.02 in length), low severity

MED = Number of cracks in interval (primary lane, 0.02 in length), medium severity

HI = Number of cracks in interval (primary lane, 0.02 in length), high severity

Number of cracks is computed as:

$$\frac{\text{Total length of transverse cracks}}{\text{Lane width}}$$

In TC\_INDEX, the denominators 21.1, 4.4, and 2.6 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 21.1 low severity transverse cracks for a 0.02 interval before failure, 4.4 cracks for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

## Patching Index

$$\text{PATCH\_INDEX} = 100 - 40 * (\% \text{PATCHING} / 80)$$

Where:

The value *%PATCHING* reports the percentage of the observed pavement (0.02 mile, primary lane) that contains patching/potholes. This value ranges from 0 to 100.

*%PATCHING* = Percent of total area (primary lane, 0.02 in length)

Percent of total area is computed as:

$$\frac{\text{square foot area of patching/potholes}}{0.02 \text{ mile} * \text{lane width}}$$

There are no severity levels for patching. It either exists or does not.

In *PATCH\_INDEX*, the denominator 80 is the Maximum Allowable Extent (MAE) for each severity. In other words, we will allow up to 80% patching for a 0.02 interval before failure. As you can see, if patching/potholes reaches MAE the resulting index value is 60, or failure.

## Rutting Index

$$\text{RUT\_INDEX} = 100 - 40 * [(\% \text{LOW} / 535) + (\% \text{MED} / 205) + (\% \text{HI} / 40)]$$

Where:

20 rut depth measurements are taken per 0.02 interval for each of 2 wheel paths (left and right), resulting in a total of 40 measurements taken for both wheel paths. *Each wheelpath is analyzed independently for rut severities.* The values *%LOW*, *%MED* and *%HI* are a *total percentage* of left wheelpath percentage and right wheelpath percentage added together for the respective severity. These values range from 0 to 200.

*%LOW* = Percent of LOW ruts in left wheelpath based on 20 ruts, plus percent of LOW ruts in right wheelpath based on 20 ruts.

*%MED* = Percent of MED ruts in left wheelpath based on 20 ruts, plus percent of MED ruts in right wheelpath based on 20 ruts.

*%HI* = Percent of HI ruts in left wheelpath based on 20 ruts, plus percent of HI ruts in right wheelpath based on 20 ruts.

Percent of rut measurements within each severity can also be computed as:

$$\frac{\text{total number of ruts within each severity in both wheelpaths}}{20} * 100$$

In *RUT\_INDEX*, the denominators 535, 205, and 40 are the Maximum Allowable Extents for each severity. In other words, the formula allows up to 535% low severity

ruts for a 0.02 interval before. However, since 200 is the highest measurable percentage allowed, 535% is unattainable and therefore, no amount of LOW severity rutting will cause the RUT\_INDEX to fail a road. Similarly, since the MAE for MED severity rutting is 205, no amount of MED severity rutting will cause the RUT\_INDEX to reach 60 and fail the road. As you can see, LOW severity rutting reaches MAE the resulting index value is 60, or failure. This formula was intentionally designed to minimize the impact of LOW and MED severity rutting on RUT\_INDEX.

### **Roughness Condition Index (Asphalt)**

$$RCI = 32 * [5 * (2.718282 ^ {(-0.0041 * AVG IRI)})]$$

Where:

The value *AVG IRI* reports the average value of the Left IRI and Right IRI measurements for the interval (0.02 mile, primary lane). This value can range from approximately 40 to 999.0.

Average IRI is computed as:

$$\frac{\text{Left wheelpath IRI} + \text{Right wheelpath IRI}}{2}$$

There is no applicable threshold for failure for this index.

### **Roughness Condition Index (Concrete)**

$$RCI = -0.0012(IRI^2) + 0.0499(IRI) + 99.542$$

For concrete, PCR = RCI

### **Surface Condition Rating Index**

**SCR** = *Lowest* Index Value Of: [SC\_INDEX, TC\_INDEX, PATCH\_INDEX, RUT\_INDEX]

*Note: The modified SCR equation above combines AC\_INDEX and LC\_INDEX, and considers that a single AC/LC index value of the Structural Crack Index (SC\_INDEX). The lowest of the four computed index values (SC\_INDEX, TC\_INDEX, PATCH\_INDEX, or RUT\_INDEX) becomes the SCR.*

Where:

See above for determinations of SC\_INDEX, TC\_INDEX, PATCH\_INDEX and RUT\_INDEX.

The threshold for failure for this index is SCR = 60.

## Data Collection Vehicle Subsystems

---

Data on paved roads in Cycle 5 is collected by FHWA using a Pathway Services Inc. Data Collection Vehicle (DCV), called PathRunner. The DCV is driven in the primary-direction lane at posted speed limits and less.

### CAMERAS

Forward-facing and rear-facing video is collected as .jpg digital imagery at a frequency of 26.4 feet.

Two forward-facing cameras are mounted above the vehicle cab, one pointed straight ahead and the other to the right shoulder providing seamless 120 degree viewing.

<b>CAMERA SPECIFICATIONS</b>	
<b>Two Forward/ One Rear Facing</b>	
Camera lens/type	FUJINON CCTV LENS H16x10B-Y41
Focal length	10 mm – 160 mm
Image size	8.8 mm x 6.6mm
Image format	*.jpg
Image resolution	HD 2000 X 1200
Image pixel size	depends on distance
Zoom ratio	16x
Max Relative Aperture	1:2.5
Iris range	F25-T800 (Equivalent to F800)

Pavement images are created using a Laser Scan Imaging System. This system is composed of a single high resolution line-scan camera and two lasers configured to image an approximate 11-foot wide lane with 1 mm resolution.

<b>CAMERA SPECIFICATIONS</b>	
<b>Pavement Line Scan</b>	
Image size	4280 pixels/line
Image width	4 meters (3950 mm nominal)
Laser class	3B
Power	250W
Vehicle speed limitations	62 mph
Environment	Dry pavement, day or night
Sensor size (approx)	300 mm(H) x 375 mm(L) x 200 mm(D)
Image frame length	26.4 feet

### **DMI (Distance Measuring Instrument)**

The DMI (Distance Measuring Instrument) obtains road length measurements that are accurate to 0.1% for speeds up to 60 mph. The DMI is connected to the hub of the rear wheel on the driver's side, and is calibrated to the revolutions of the rear vehicle axle on a regular basis.

### **ROUGHNESS (IRI)**

The collection system includes a South Dakota type laser profiler manufactured based on active Class 1 ASTM E950 standards. The dynamic profile of the pavement surface is collected from which the IRI roughness data is computed. The sensors include one accelerometer on each wheelpath, one height sensor (laser) on each wheelpath, and a distance transducer.

<b>IRI SPECIFICATIONS</b>	
Reported IRI units	Inches/mile
Vehicle speed limitations	12-62 mph
IRI equipment certification	Texas Transportation Institute (TTI)
Wavelengths accommodated	6 in. – 300 feet
IRI computed & reported	World Bank Technical Paper Number 46
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E950-98 (2004), ASTM E 1926-08, AASHTO MP 11-08, AASHTO PP 49-08

### **RUTTING**

Rutting depths are measured using an INO Laser Rut Measurement System (LRMS). This system is a transverse profiling device that detects and characterizes pavement rutting. The LRMS can acquire full 4 meter width profiles of a pavement lane at normal traffic speeds and uses two laser profilers that digitize transverse sections of the pavement.

<b>RUTTING SPECIFICATIONS</b>	
Reported rut depth units	Inches
Vehicle speed limitations	Up to 62 mph
Sampling rate	30-150 profiles/second
Transverse resolution	1280 points/profile
Transverse field-of-view	4 m
Depth accuracy (nominal)	+/- 1 mm
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E1703M-95 (reapproved 2005)

## **GPS & INERTIAL SYSTEMS**

GPS is collected by an onboard system employing Omnistar real time correction and a gyroscope Inertial Measuring Unit (IMU) to provide accurate positioning data in instances of satellite obstruction. All GPS coordinates are tied to image and linear distance measurements.

<b>GPS SPECIFICATIONS</b>	
Static accuracy	Sub-meter
Dynamic accuracy	2-3 meters
Receiver	12 satellite tracking
Coordinate system	Lat Lon WGS 84
Environment	Day or night
Cross-slope	+ - 0.1 degrees
Grade	+ - 0.1 degrees

### GPS on Manually Rated Roads (MRR)

Parking areas, some roads, and other paved areas that are not fully drivable with the DCV are collected manually by field technicians. GPS is collected for these routes using portable Trimble GPS backpack units.



## Geodatabase – Background and Metadata

---

In addition to this park report, a *geodatabase* containing both tabular and spatial data specific to this park has been provided. All data disseminated in the preceding report has been obtained from the tables and fields within said geodatabase. The geodatabase can be referenced for tabular data via Microsoft Access or for both tabular and spatial data via ESRI's ArcGIS Suite of software which consists of; ArcMap, ArcCatalog and ArcExplorer. Consolidating the RIP data into one database creates a seamless relationship of tables and geographic data. It will allow RIP to facilitate easier updates and enhancements in the future.

A geodatabase can be thought of as simply a database containing spatial data. Many different tables are contained with the park's geodatabase. A complete and thorough description of the tables and fields contained within this geodatabase can be found in the *metadata*. The metadata is attached directly within the geodatabase and can be accessed via ESRI's ArcCatalog.

## **GLOSSARY OF TERMS AND ABBREVIATIONS**

<b><u>TERM OR ABBREVIATION</u></b>	<b><u>DESCRIPTION OR DEFINITION</u></b>
AC	Alligator Cracking
CRS	Condition Rating Sheets (Section 5)
DCV	Data Collection Vehicle
Excellent	Excellent rating with an index value of 95 to 100
Fair	Fair rating with an index value from 61 to 84
FUNCT_CLASS	Functional Classification (see Route ID, Section 2)
Good	Good rating with an index value from 85 to 94
IRI	International Roughness Index
Lane Width	Width from road centerline to fogline, or from centerline to edge-of-pavement when no fogline exists
LC	Longitudinal Cracking
MRR	Manually Rated Route
MRL	Manually Rated Line
MRP	Manually Rated Polygon
N/A	Not Applicable
NC	Not Collected
PATCH	Patching and Potholes
Paved Width	Width from edge-of-pavement to edge-of-pavement
PCR	Pavement Condition Rating
PKG	Parking Area
Poor	Poor rating with an index value of 0 to 60
RCI	Roughness Condition Index
SC	Structural Cracking
SCR	Surface Condition Rating
TC	Transverse Cracking