

NACE Cycle 6

Final Report

Road Inventory and Condition Assessment of Paved Routes National Capital Parks - East




**Federal Lands Highway
Road Inventory Program**

Prepared By:

**Federal Highway Administration
Eastern Federal Lands Highway Division
Road Inventory Program (RIP)**

Report Date: October 2019

National Capital Parks - East in Washington, DC and Maryland

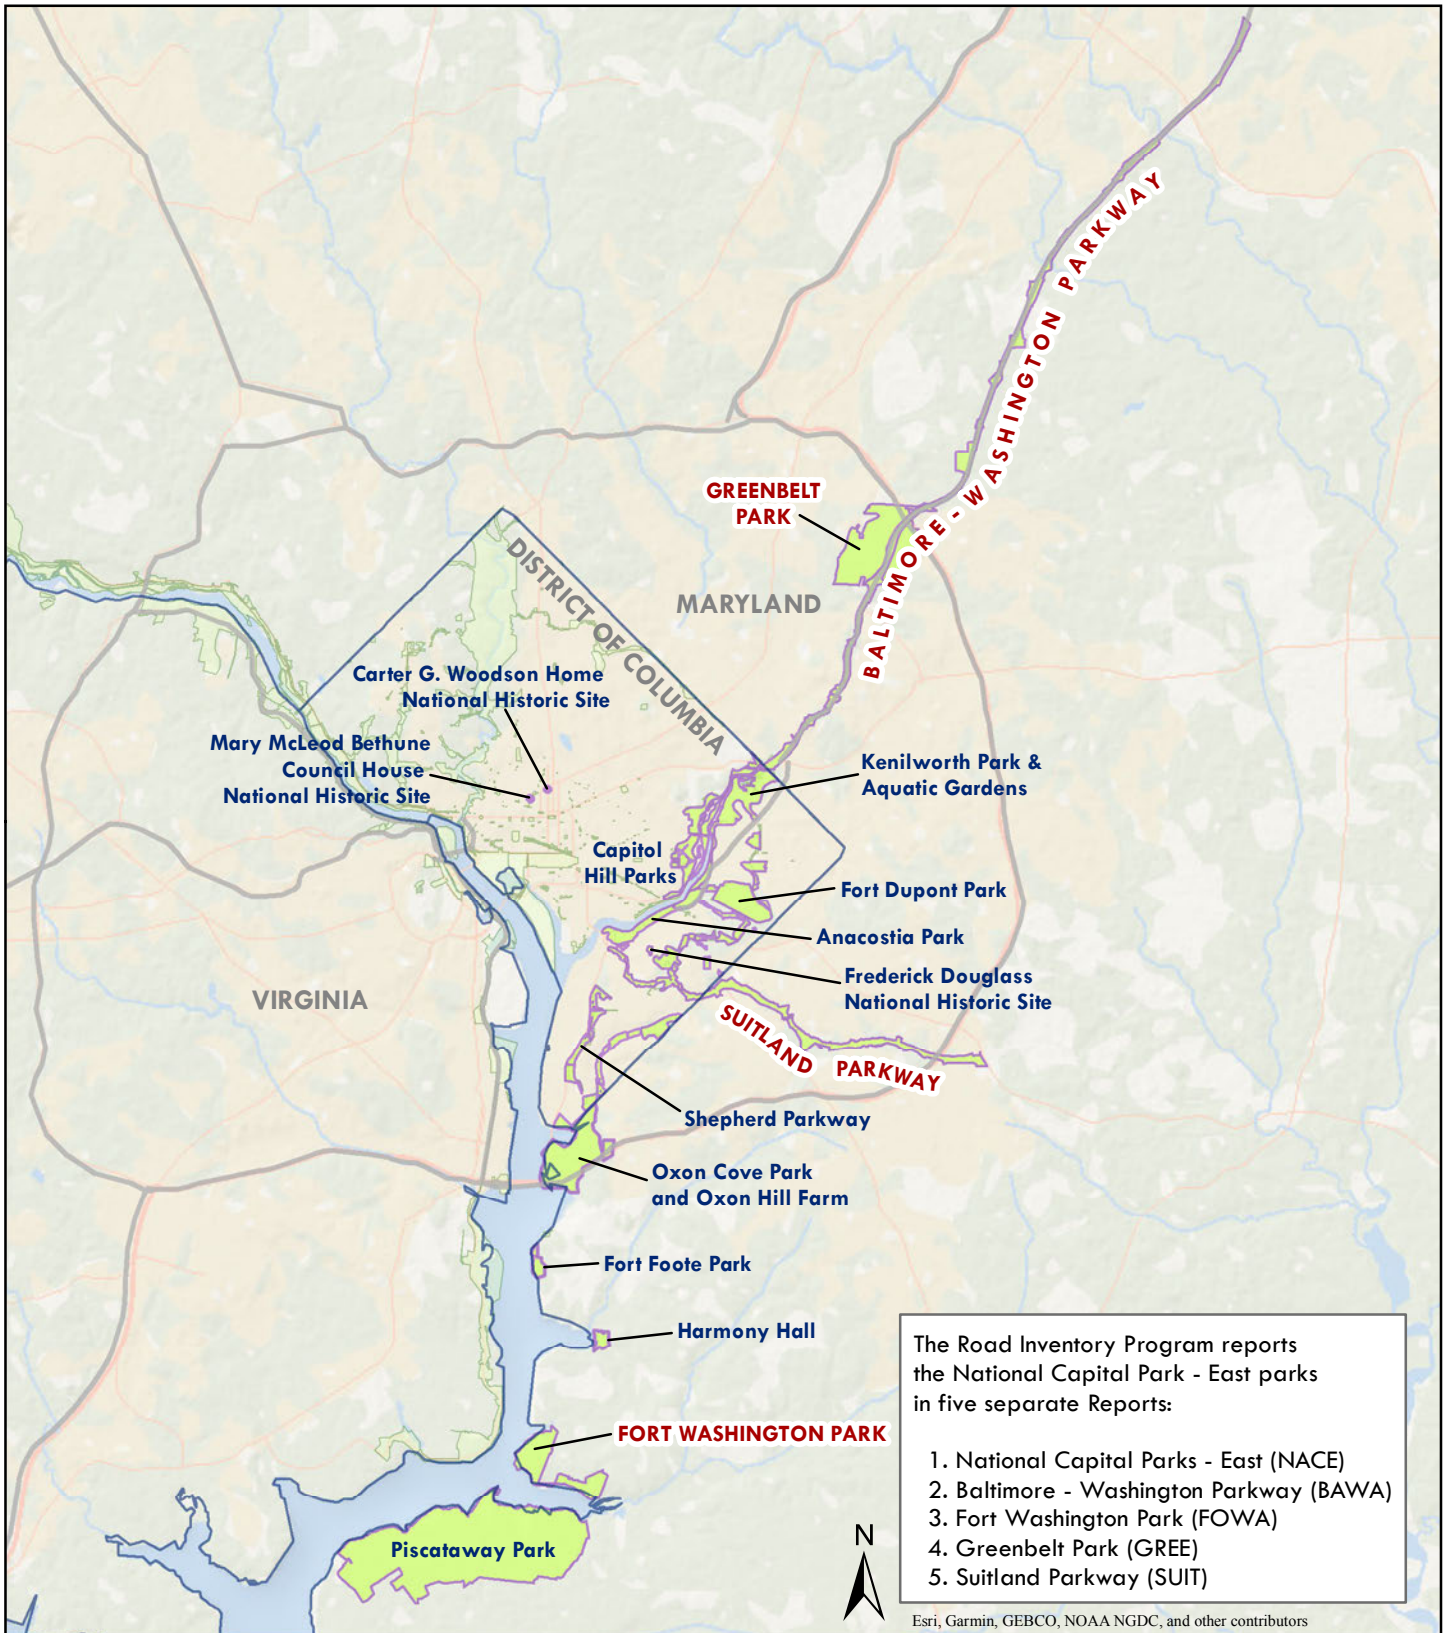

The Road Inventory Program reports the National Capital Park - East parks in five separate Reports:

1. National Capital Parks - East (NACE)
2. Baltimore - Washington Parkway (BAWA)
3. Fort Washington Park (FOWA)
4. Greenbelt Park (GREE)
5. Suitland Parkway (SUIT)



Esri, Garmin, GEBCO, NOAA NGDC, and other contributors

Table of Contents

SECTION	PAGE NO.
1. INTRODUCTION	1 - 1
2. PARK ROUTE INVENTORY Route ID Report, Subcomponent Report, and Changes Report (As Applicable)	2 - 1
3. PARK SUMMARY INFORMATION Parkwide Paved Route Condition Summary	3 - 1
Explanation of Condition Descriptions	3 - 2
Route-Level Condition Summary Reports for Data Collection Vehicle, Manually Rated, and Parking Area Routes (As Applicable)	3 - 3
4. PARK ROUTE LOCATION MAPS Route Location Key Map	4 - 1
Route Location Area Map(s)	4 - 2
Route Condition Key Map – PCR Mile by Mile	4 - 7
Route Condition Area Map(s) – PCR Mile by Mile	4 - 8
5. PAVED ROAD CONDITION RATING SHEETS Paved Road Pages	5 - 1
6. PAVED PARKING AREA CONDITION RATING SHEETS Paved Parking Area Pages	6 - 1
7. ROAD MILEPOST INFORMATION Road Milepost Information and Logs	7 - 1
8. APPENDIX Improvements to the RIP Index Equations and Determination of PCR	8 - 1
Description of the Rating System	8 - 2
Explanation of the Condition Descriptions	8 - 3
Description of Pavement Treatment Types	8 - 4
Appendix A: Methodology for Determining Condition Ratings with the Data Collection Vehicle (DCV)	8 - 5
Appendix B: Methodology for Determining Condition Ratings Using Manual Rating Procedures	8 - 20
Appendix C: Description of Cycle 6 Deliverables	8 - 29
Appendix D: Glossary of Terms and Abbreviations	8 - 32

Section 1 Introduction



FORT DUPONT DRIVE

National Capital Parks - East



**Federal Lands Highway
Road Inventory Program**

Introduction

The Federal Highway Administration’s (FHWA), Road Inventory Program (RIP) inventories all roads and parking areas in the National Park System, and performs condition inspections on all paved roads and parking areas for the National Park Service (NPS). This report contains the results of the Cycle 6 condition assessment of paved roads and parking lots for this park unit. This assessment was done using an automated, state-of-the-art pavement inspection vehicle as well as manual ratings. This information represents the condition of the paved assets at the time of the inspection. The pavement management system utilized by FHWA and the NPS uses these assessments to estimate future conditions and help prioritize pavement maintenance and rehabilitation projects. Further information about RIP data and its role in managing paved roads and bridges can be obtained by contacting the NPS Regional Transportation Program Manager.

A History of the Road Inventory Program:

The FHWA, in the mid-1970s, was charged with the task of identifying surface condition deficiencies and corrective priorities on NPS roads and parkways. Additionally, FHWA was tasked with establishing an integrated maintenance features inventory, locating features such as culverts, guardrails, and signs, among others, along NPS roads and parkways. As a result, in 1976 the NPS and FHWA entered into a Memorandum of Agreement (MOA) which established the RIP. This MOA was revised in 1980 to update RIP data collection standards and develop a long-range program to improve and maintain NPS roads to designated condition standards and establish a pavement management program.

The FHWA completed the initial phase of inventory in the early 1980s. As a result of this effort, each NPS unit included in the collection received a RIP Report known as the “Brown Book” which contained information that was inventoried during this first RIP phase. In the 1990s, a cyclical program was developed, and since then five cycles of collection have been completed. Cycle 6 is currently in progress. A summary of the RIP collection cycles is shown in the table below.

Cycle	Years	Parks Collected
Cycle 1	1994 - 1997	◦ 44 Large Parks
Cycle 2	1997 - 2001	◦ 79 Large Parks ◦ 5 Small Parks
Cycle 3	2001 - 2004	◦ All Large Parks ◦ All Small Parks
Cycle 4	2006 - 2010	◦ 86 Large Parks ◦ Several Small Parks
Cycle 5	2010 - 2014	◦ All Large Parks (Only functional class 1, 2, 7, and new/modified routes collected) ◦ All Small Parks (all roads and parking areas collected)
Cycle 6	2014 – 2020 (±)	◦ All roads and parking areas collected at all Parks ◦ Additional partial collections of functional class 1, 2, and 7 roads at Large Parks ◦ Cycle 6 is expected to last 6 years

Note: Large Parks have ≥ 10 Paved Miles; Small Parks have < 10 Paved Miles

Since 1984, the Road Inventory Program has been funded through the Federal Lands Highway Park Roads and Parkways (PRP) Program. Currently, coordination of the RIP with Federal Lands Highway (FLH) is under the NPS Washington Headquarters Park Facility Management Division. The FLH Washington office coordinates policy and prepares national reports and needs assessment studies for Congress.

In 1998, the Transportation Equity Act for the 21st Century (TEA-21) amended Title 23 U.S.C., and inserted Section 204(a)(6) requiring the FHWA and NPS, to develop by rule, a Pavement Management System (PMS) applied to park roads and parkways serving the National Park System.

In 2012, the Moving Ahead for Progress in the 21st Century Act (MAP-21) amended Title 23 U.S.C., and under Section 203(c)(1-2) stated that the National Park Service in cooperation with the DOT/FHWA, shall maintain a comprehensive national inventory of their transportation facilities, with the goal of quantifying transportation infrastructure needs within the National Park System.

A History of the Pavement Management System:

In 2005, the FHWA began implementing the use of a pavement management system to assist the NPS in prioritizing Pavement Maintenance and Rehabilitation activities. The system used by FHWA is the Highway Pavement Management Application (HPMA), which has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Regional, Park, or Route level. Regional prioritized lists and optimizations have been produced for most regions, and the Service's overall roadway Deferred Maintenance is calculated via the HPMA.

Overview of Cycle 6:

Cycle 6 launched in the spring of 2014 and will again comprise all NPS park units that are served by paved roads and/or parking areas. For Cycle 6, all paved roads (approximately 5,700 miles) and parking areas will be collected in all parks at least once, while the primary routes (functional class 1, 2, and 7 roads) at Large Parks will have additional collections. These multiple collections will provide updated condition data on a majority of the NPS's primary road network and help build a better pavement management system, allowing for more accurate pavement performance prediction models.

FLH is responsible for the accuracy of all data presented in this report. Any questions or comments concerning the contents of this report should be directed to the national RIP Coordinator located in Sterling, Virginia.

Respectfully,

FHWA RIP Team

FHWA/Eastern Federal Lands
21400 Ridgetop Circle
Sterling, VA 20166
(571) 434-1574

FHWA/Central Federal Lands
12300 West Dakota Ave
Lakewood, CO 80228
(720) 963-3556

Section 2 Park Route Inventory



National Capital Parks - East



Federal Lands Highway
Road Inventory Program

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

ROAD INVENTORY (1100 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Name	Route Description		Maintenance District	FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)	Surf. Type	Area Map
						From	To									
0012	6	2	51896		KENILWORTH PARK ACCESS	FROM DEANE AVENUE NE AND LEE STREET SPUR ON RIGHT	TO END AT BARRIER AT MP 1.10	KENILWORTH PARK	YES	0.78	0.32	1.10	3		AS	2
0013	6	2	52184		ANACOSTIA DRIVE	FROM MIDDLE OF FREDERICK DOUGLAS BRIDGE OVERPASS (S CAPITAL STREET)	TO END OF ROUTE 0016ZZ (ANACOSTIA PAVILION LOOP ROAD) AND ROUTE 0908 (ANACOSTIA BOAT RAMP PARKING)	ANACOSTIA PARK	YES	2.05	0.04	2.09	1		AS	1
0014	6	2	52188		GOOD HOPE ROAD	FROM PARK BOUNDARY (NORTHWEST SIDE OF I-295 OVERPASS)	TO ROUTE 0013 (ANACOSTIA DRIVE)	ANACOSTIA PARK	YES	0.07	0	0.07	1		AS	1
0015	6	2	52192		NICHOLSON STREET SE	FROM PARK BOUNDARY (NORTH SIDE OF I-295 ON RAMP OVERPASS)	TO ROUTE 0013 (ANACOSTIA DRIVE)	ANACOSTIA PARK	YES	0.05	0	0.05	1		AS	1
0016ZZ	6	2	52194		ANACOSTIA PAVILION LOOP ROAD	FROM ROUTE 0013 (ANACOSTIA DRIVE)	TO END OF ROUTE 0013 (ANACOSTIA DRIVE) AND ROUTE 0908 (ANACOSTIA BOAT RAMP PARKING)	ANACOSTIA PARK	YES	0.58	0	0.58	1		AS	1
0017	6	2	52113		FORT DUPONT DRIVE	FROM RANDLE CIRCLE SE	TO ROUTE 0018 (FORT DAVIS DRIVE)	FORT DUPONT	YES	0.80	0	0.80	1		AS	3
0018	6	2	52114		FORT DAVIS DRIVE	FROM RIDGE ROAD SE	TO PENNSYLVANIA AVENUE SE	FORT DUPONT	YES	1.21	0	1.21	1		AS	3
0019	6	2	52115		RIDGE PICNIC AREA ROAD	FROM ROUTE 0017 (FORT DUPONT DRIVE)	TO ROUTE 0017 (FORT DUPONT DRIVE)	FORT DUPONT	YES	0.46	0	0.46	3		AS	3
0020ZZ	6	2			HOWARD ROAD AND ANACOSTIA DRIVE SE RAMPS	FROM HOWARD ROAD AND ANACOSTIA DRIVE SE	THROUGH RAMPS	ANACOSTIA PARK	YES	0.25	0	0.25	1		AS	1
0100	NC		52378		FORT FOOTE ROAD	FROM FORT FOOTE ROAD NEAR INTERSECTION WITH JESSICA DRIVE	TO END AT TREE LINE	FORT WASHINGTON	NO	0	0.38	0.38	2		GR	

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

ROAD INVENTORY (1100 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Name	Route Description		Maintenance District	FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)	Surf. Type	Area Map
						From	To									
0101	NC		52238		COLONIAL FARM ACCESS	FROM END OF ROUTE 0112 (BRYAN POINT ROAD)	TO ROUTE 0955 (MAINTENANCE AREA/FUEL STATION)	PISCATAWAY PARK	NO	0	0.44	0.44	2		GR	
0102	6	2	21315		FREDERICK DOUGLAS HOME ACCESS ROAD	FROM 14TH STREET	TO END OF LOOP	FREDERICK DOUGLASS HOME	NO	0.18	0	0.18	6		AS	1
0104ZZ	6	2	52198		ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE	FROM ROUTE 0013 (ANACOSTIA DRIVE)	TO ROUTE 0014 (GOOD HOPE ROAD)	ANACOSTIA PARK	YES	0.54	0	0.54	2		AS	1
0105ZZ	6	2	52226		ANACOSTIA POOL AND RECREATION FACILITY ROADS	FROM ROUTE 0013 (ANACOSTIA DRIVE)	TO ROUTE 0013 (ANACOSTIA DRIVE)	ANACOSTIA PARK	YES	0.13	0	0.13	2		AS	1
0107	NC		52366		COLONIAL FARM BUILDINGS ACCESS	FROM ROUTE 0101 (COLONIAL FARM ACCESS) ON RIGHT	TO ROUTE 0953 (PISCATAWAY PARK / SAYLOR GROVE VISITORS CENTER PARKING) AT GATE	PISCATAWAY PARK	NO	0	0.40	0.40	6		GR	
0108	6	2	52379		FORT STANTON RESERVOIR ACCESS ROAD	FROM ERIE STREET SE	TO GATE AT RESERVOIR AT MP 0.47	FORT STANTON	YES	0.18	0.29	0.47	2		AS	3
0111	6	2	52432		27TH STREET SE	FROM NAYLOR ROAD SE	TO PARK BOUNDARY (TEXAS AVENUE SE)	FORT STANTON	YES	0.13	0	0.13	2		AS	3
0112	6	2	52239		BRYAN POINT ROAD	FROM PARK BOUNDARY AT PAVEMENT CHANGE	TO BEGIN ROUTE 0101 (COLONIAL FARM ACCESS)	PISCATAWAY PARK	YES	0.20	0	0.20	2		AS	5
0114	NC		52203		RAILROAD YARD ACCESS	FROM ROUTE 0908 (ANACOSTIA BOAT RAMP PARKING)	TO RAILROAD TRACKS	ANACOSTIA PARK	NO	0	0.22	0.22	6		GR	
0117	6	2	52116		FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE)	FROM MINNESOTA AVENUE SE	TO ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)	FORT DUPONT	YES	0.14	0	0.14	5		AS	3
0118	6	2	52117		LANHAM ESTATES LOOP ROAD	FROM ALABAMA AVENUE SE	TO END OF LOOP	FORT DUPONT	YES	0.33	0	0.33	3		AS	3

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

ROAD INVENTORY (1100 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Name	Route Description		Maintenance District	FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)	Surf. Type	Area Map
						From	To									
0120	6	2	52367		WHARF ROAD	FROM WHARF ROAD AT PARK BOUNDARY / FENCE LINE	TO ROUTE 0951 (FARMINGTON LANDING PARKING)	PISCATAWAY PARK	YES	0.32	0	0.32	2		AS	5
0121	NC		104575		MOCKLEY / RIVER ACCESS	FROM PARK BOUNDARY (FERGUSON FOUNDATION)	TO ROUTE 0122 (ACCOKEEK / MOCKLEY POINT ROAD)	PISCATAWAY PARK	NO	0	0.50	0.50	4		GR	
0122	NC		104576		ACCOKEEK / MOCKLEY POINT ROAD	FROM ROUTE 0952 (ACCOKEEK CREEK PARKING (TAYAC))	TO MOCKLEY POINT	PISCATAWAY PARK	NO	0	0.75	0.75	4		GR	
0123	6	2	104577		RIVER ROAD	FROM ROUTE 0124 (MARYLAND STATE HIGHWAY 227)	TO PARK BOUNDARY AT SIDE GATE	PISCATAWAY PARK	YES	0.21	0	0.21	2		AS	5
0124	6	2	104595		MARYLAND STATE HIGHWAY 227	FROM PARK BOUNDARY AT SIGN	TO ROUTE 0956 (MARSHALL HALL BOAT RAMP PARKING)	PISCATAWAY PARK	YES	1.12	0	1.12	2		AS	5
0200	NC		20709		ORCHARD ROAD	FROM ROUTE 0950 (OXON HILL VISITORS CENTER PARKING)	TO INTERSECTION OF ROUTE 0400 (MAIN ENTRANCE LOOP) AND ROUTE 0407 (BACK ROAD)	OXON HILL	NO	0	0.25	0.25	3		GR	
0202	NC		52368		ACCOKEEK CREEK ACCESS ROAD	FROM BRYAN POINT ROAD	TO ROUTE 0969 (ACCOKEEK CREEK ACCESS PARKING)	PISCATAWAY PARK	NO	0	0.25	0.25	4		GR	
0203	NC		51841		WAGON ROAD	FROM ROUTE 0950 (OXON HILL VISITORS CENTER PARKING)	TO ROUTE 0407 (BACK ROAD)	OXON HILL	NO	0	0.23	0.23	6		GR	
0206	6	2	103975		RIDGE PICNIC AREA LOOP	FROM ROUTE 0019 (RIDGE PICNIC AREA ROAD)	TO ROUTE 0019 (RIDGE PICNIC AREA ROAD)	FORT DUPONT	YES	0.09	0	0.09	3		AS	3
0208	6	2	252447	■	NORTH STADIUM ENTRANCE ROAD	FROM ROUTE 0928 (RFK STADIUM NORTH PARKING)	TO OKLAHOMA AVENUE NE	ANACOSTIA PARK	YES	0.11	0	0.11	3		AS	1
0209	6	2	252448	■	SOUTH STADIUM ACCESS ROAD	FROM BARNEY CIRCLE AT 17TH STREET	TO ROUTE 0928 (RFK STADIUM NORTH PARKING)	ANACOSTIA PARK	YES	1.15	0.02	1.17	3		AS	1
0210	NC		252449		FORT DUPONT COMMUNITY GARDEN ROAD	FROM ROUTE 0018 (FORT DAVIS DRIVE)	TO END OF LOOP	FORT DUPONT	NO	0	0.27	0.27	3		GR	

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

ROAD INVENTORY (1100 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Name	Route Description		Maintenance District	FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)	Surf. Type	Area Map
						From	To									
0300	6	2	52369		MARSHALL HALL ACCESS ROAD	FROM ROUTE 0124 (MARYLAND STATE HIGHWAY 227) AT MP 0.72	TO ROUTE 0124 (MARYLAND STATE HIGHWAY 227) AT MP 0.94	PISCATAWAY PARK	YES	0.26	0.02	0.28	3		AS	5
0301	6	2	52370		MARSHALL HALL LOOP ROAD	FROM ROUTE 0300 (MARSHALL HALL ACCESS ROAD)	TO END OF COUNTERCLOCKWISE LOOP	PISCATAWAY PARK	YES	0.10	0.03	0.13	3		AS	5
0303	NC		103973		BRANITAN ROAD	FROM ROUTE 0124 (MARYLAND STATE HIGHWAY 227)	TO JOHNSON CULLEN PROPERTY	PISCATAWAY PARK	NO	0	0.94	0.94	2		GR	
0400	NC		51846		MAIN ENTRANCE LOOP	FROM END OF OXON HILL VISITOR CENTER ENTRANCE ROAD	TO END OF LOOP	OXON HILL	NO	0	0.41	0.41	5		GR	
0401	NC		21270		AQUATIC GARDENS ADMINISTRATIVE ACCESS ROAD	FROM ROUTE 0901 (KENILWORTH AQUATIC GARDENS PARKING)	TO ROUTE 0423 (KENILWORTH AQUATIC GARDENS SERVICE ROAD)	KENILWORTH PARK	NO	0	0.25	0.25	6		GR	
0402	4	1	51911		KENILWORTH MAINTENANCE ACCESS	FROM ANACOSTIA AVENUE NE	TO ROUTE 0906 (KENILWORTH MAINTENANCE YARD)	KENILWORTH PARK	NO	0.08	0	0.08	6		AS	2
0403	NC		51923		LANGSTON SERVICE ROAD	FROM ROUTE 0905 (LANGSTON GOLF COURSE PARKING)	TO MAINTENANCE BUILDING / YARD	KENILWORTH PARK	NO	0	0.17	0.17	6		GR	
0404	4	1	52120		RIVER TERRACE ACCESS ROAD	FROM ANACOSTIA AVENUE NE	TO END OF PAVEMENT AT MP 0.64	KENILWORTH PARK	YES	0.05	0.59	0.64	5		AS	3
0406ZZ	6	2	52119		FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS	FROM ROUTE 0117 (FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE))	TO ROUTE 0920 (U.S. PARK POLICE FORT DUPONT STABLES AND PARKING)	FORT DUPONT	NO	0.24	0	0.24	6		AS	3
0407	NC		51849		BACK ROAD	FROM INTERSECTION OF ROUTE 0203 (WAGON ROAD) AND ROUTE 0400 (MAIN ENTRANCE LOOP)	TO ROUTE 0408 (BOTTOM ROAD)	OXON HILL	NO	0	0.47	0.47	5		GR	
0408	NC		51852		BOTTOM ROAD	FROM END OF OXON HILL VISITOR CENTER ENTRANCE ROAD	TO OXON HILL BIKE TRAIL	OXON HILL	NO	0	0.82	0.82	6		GR	4

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

ROAD INVENTORY (1100 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Name	Route Description		Maintenance District	FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)	Surf. Type	Area Map
						From	To									
0409	NC		51853		NURSERY ROAD	FROM ROUTE 0408 (BOTTOM ROAD)	TO OXON HILL NURSERY	OXON HILL	NO	0	0.53	0.53	6		GR	
0410	NC		51854		OXON HILL MAINTENANCE ACCESS ROAD	FROM ROUTE 0408 (BOTTOM ROAD)	TO OXON HILL RESIDENCE	OXON HILL	NO	0	0.09	0.09	6		GR	4
0420	NC		52371		ECOSYSTEM FARM ACCESS ROAD	FROM BRYAN POINT ROAD	TO FARM	PISCATAWAY PARK	NO	0	0.32	0.32	6		GR	
0421	NC		104579		ADMINISTRATIVE LOOP ROAD	FROM ROUTE 0107 (COLONIAL FARM BUILDINGS ACCESS)	TO ROUTE 0107 (COLONIAL FARM BUILDINGS ACCESS)	PISCATAWAY PARK	NO	0	0.07	0.07	6		GR	
0423	NC		104057		KENILWORTH AQUATIC GARDENS SERVICE ROAD	FROM ANACOSTIA AVENUE NE	TO ROUTE 0902 (KENILWORTH AQUATIC GARDENS MAINTENANCE AREA)	KENILWORTH PARK	NO	0	0.32	0.32	6		GR	
0424	6	2	103972		AOF TRAINING PARKING ROAD	FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	TO END OF PAVEMENT	ANACOSTIA PARK	NO	0.11	0	0.11	6		AS	1
0425	NC		103967		FORT DUPONT SUMMER THEATRE SERVICE ROAD	FROM ROUTE 0117 (FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE))	TO ROUTE 0922 (FORT DUPONT ACTIVITY CENTER PARKING)	FORT DUPONT	NO	0	0.09	0.09	6		GR	1
0426	NC		103966		PARK HEADQUARTERS OVERFLOW PARKING ACCESS ROAD	FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	TO ROUTE 0964A (HEADQUARTERS OVERFLOW PARKING A)	ANACOSTIA PARK	NO	0	0.32	0.32	5		GR	
0427	NC		252450		FAA TOWER ACCESS ROAD	FROM ROUTE 0968 (FORT FOOTE PARKING)	TO FAA TOWER	FORT WASHINGTON	NO	0	0.13	0.13	6		GR	
0429	NC		252451		HARMONY HALL ACCESS ROAD	FROM LIVINGSTON ROAD	TO END OF LOOP	FORT WASHINGTON	NO	0	0.16	0.16	5		GR	
0430	6	1	20707		OXON HILL ACCESS ROAD	FROM BALD EAGLE ROAD (PARK BOUNDARY) AND ROUTE 0950 (OXON HILL VISITORS CENTER PARKING)	TO ROUTE 0408 (BOTTOM ROAD)	OXON HILL	NO	0.10	0	0.10	6		AS	4

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

PARKING AREA INVENTORY (1300 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Description		Maintenance District	FLTP	Access Level	Area (SQ FT)	Surf. Type	Area Map	
					Route Name	From							To
0901	6	2	21271		KENILWORTH AQUATIC GARDENS PARKING	FROM ANACOSTIA AVENUE NE	TO ROUTE 0401 (AQUATIC GARDENS ADMINISTRATIVE ACCESS ROAD)	KENILWORTH PARK	YES	PUBLIC	40,446	AS	2
0902	NC		52121		KENILWORTH AQUATIC GARDENS MAINTENANCE AREA	FROM END OF ROUTE 0423 (KENILWORTH AQUATIC GARDENS SERVICE ROAD)	TO PARKING	KENILWORTH PARK	NO	NONPUBLIC	634	GR	
0903	NC		52122		KENILWORTH PARKING 1	ADJACENT TO ROUTE 0012 (KENILWORTH PARK ACCESS) AT MP 0.33 ON RIGHT		KENILWORTH PARK	NO	PUBLIC	50,500	GR	
0904	NC		52123		KENILWORTH PARKING 2	ADJACENT TO ROUTE 0012 (KENILWORTH PARK ACCESS) AT MP 0.72 ON RIGHT		KENILWORTH PARK	NO	PUBLIC	152,000	GR	
0905	6	2	52129		LANGSTON GOLF COURSE PARKING	FROM 26TH STREET NE	TO PARKING	ANACOSTIA PARK	YES	PUBLIC	51,130	AS	1
0906	6	2	21434		KENILWORTH MAINTENANCE YARD	FROM ROUTE 0402 (KENILWORTH MAINTENANCE ACCESS) AT END	THROUGH MAINTENANCE YARD	KENILWORTH PARK	NO	NONPUBLIC	52,432	AS	2
0907	6	2	52217		PAVILION PARKING NORTH	FROM ROUTE 0016ZZ (ANACOSTIA PAVILION LOOP ROAD)	TO ROUTE 0013 (ANACOSTIA DRIVE)	ANACOSTIA PARK	YES	PUBLIC	65,686	AS	1
0908	6	2	21471		ANACOSTIA BOAT RAMP PARKING	FROM ROUTE 0013 (ANACOSTIA DRIVE) AND ROUTE 0016ZZ (ANACOSTIA PAVILION LOOP ROAD)	TO ROUTE 0114 (RAILROAD YARD ACCESS)	ANACOSTIA PARK	YES	PUBLIC	54,654	AS	1
0909	6	2	21429		PAVILION PARKING SOUTH	FROM ROUTE 0016ZZ (ANACOSTIA PAVILION LOOP ROAD)	TO ROUTE 0016ZZ (ANACOSTIA PAVILION LOOP ROAD)	ANACOSTIA PARK	YES	PUBLIC	101,439	AS	1
0911	6	2	52222		NICHOLSON COMFORT STATION PARKING	FROM ROUTE 0015 (NICHOLSON STREET SE)	TO PARKING	ANACOSTIA PARK	YES	PUBLIC	13,448	AS	1
0912	6	2	52223		ANACOSTIA POOL & RECREATION FACILITY PARKING	FROM ROUTE 0105ZZ (ANACOSTIA POOL AND RECREATION FACILITY ROADS) ON RIGHT	TO PARKING	ANACOSTIA PARK	YES	PUBLIC	61,953	AS	1

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

PARKING AREA INVENTORY (1300 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Description		Maintenance District	FLTP	Access Level	Area (SQ FT)	Surf. Type	Area Map	
					From	To							
0913ZZ	6	2	21430		NACE PARK HEADQUARTERS PARKING AREAS	FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	TO PARKING	ANACOSTIA PARK	NO	NONPUBLIC	48,969	AS	1
0915ZZ	6	2	52225		U.S. PARK POLICE AVIATION AND FUEL RAMP PARKING	FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	TO ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	ANACOSTIA PARK	NO	NONPUBLIC	13,535	AS	1
0916	6	2	21432		U.S. PARK POLICE OFFICE PARKING	FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	TO PARKING	ANACOSTIA PARK	YES	PUBLIC	52,940	AS	1
0917	6	2	21316		FREDERICK DOUGLASS HOME PARKING	FROM W STREET SE	TO PARKING	FREDERICK DOUGLASS HOME	YES	PUBLIC	10,727	AS	1
0918	6	2	21427		FORT DUPONT MAINTENANCE YARD PARKING	FROM ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)	TO PARKING	FORT DUPONT	NO	NONPUBLIC	9,416	AS	3
0919A	6	2	52111		FORT DUPONT INTERIOR MAINTENANCE AREA	FROM ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)	TO PARKING	FORT DUPONT	NO	NONPUBLIC	18,281	AS	3
0919B	6	2	104060		FORT DUPONT REAR MAINTENANCE AREA	FROM ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)	TO PARKING	FORT DUPONT	NO	NONPUBLIC	5,466	AS	3
0920	6	2	52112		U.S. PARK POLICE FORT DUPONT STABLES AND PARKING	FROM ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)	TO ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)	FORT DUPONT	NO	NONPUBLIC	10,927	AS	3
0922	6	2	21428		FORT DUPONT ACTIVITY CENTER PARKING	FROM ROUTE 0017 (FORT DUPONT DRIVE) AT MP 0.21 ON LEFT	TO ROUTE 0425 (FORT DUPONT SUMMER THEATRE SERVICE ROAD) AT END	FORT DUPONT	YES	PUBLIC	45,358	AS	3
0924	NC		52231		JAMES CREEK MARINA UNPAVED PARKING	FROM V STREET SE	TO PARKING	ANACOSTIA PARK	NO	PUBLIC	13,175	GR	
0925	6	2	252452	■	RFK STADIUM SOUTH PARKING	FROM 22ND STREET SE	TO PARKING	ANACOSTIA PARK	YES	PUBLIC	155,816	AS	1

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

PARKING AREA INVENTORY (1300 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Description		Maintenance District	FLTP	Access Level	Area (SQ FT)	Surf. Type	Area Map
					From	To						
0926	6	2	252453	■	RFK STADIUM NORTH PARKING / DC POLICE	FROM C STREET RAMP ACCESS AT GATE TO C STREET RAMP ACCESS AT GATE	ANACOSTIA PARK	YES	PUBLIC	109,904	AS	1
0927	6	2	252454	■	RFK STADIUM SOUTHEAST PARKING	FROM INDEPENDENCE AVENUE SE TO ROUTE 0209 (SOUTH STADIUM ACCESS ROAD)	ANACOSTIA PARK	YES	PUBLIC	796,587	AS	1
0928	6	2	252455	■	RFK STADIUM NORTH PARKING	FROM C STREET NE TO PARKING	ANACOSTIA PARK	YES	PUBLIC	1,624,889	AS	1
0930	6	2	252456	■	RFK STADIUM EAST / DC ARMORY OVERFLOW PARKING	FROM 19TH STREET NE TO PARKING	ANACOSTIA PARK	YES	PUBLIC	343,823	AS	1
0950	6	2	20708		OXON HILL VISITORS CENTER PARKING	FROM INTERSECTION OF ROUTE 0408 (BOTTOM ROAD) AND ROUTE 0430 (OXON HILL ACCESS ROAD) TO ROUTE 0430 (OXON HILL ACCESS ROAD)	OXON HILL	YES	PUBLIC	40,739	AS	4
0951	NC		52372		FARMINGTON LANDING PARKING	FROM END OF ROUTE 0120 (WHARF ROAD) TO PARKING	PISCATAWAY PARK	NO	PUBLIC	10,909	GR	
0952	NC		104110		ACCOKEEK CREEK PARKING (TAYAC)	FROM BEGIN ROUTE 0122 (ACCOKEEK / MOCKLEY POINT ROAD) TO PARKING	PISCATAWAY PARK	NO	PUBLIC	1,161	GR	
0953	NC		52374		PISCATAWAY PARK / SAYLOR GROVE VISITORS CENTER PARKING	FROM ROUTE 0112 (BRYAN POINT ROAD) TO END OF ROUTE 0107 (COLONIAL FARM BUILDINGS ACCESS) AT GATE	PISCATAWAY PARK	NO	PUBLIC	51,000	GR	
0954	NC		52375		COLONIAL FARM BUILDINGS PARKING	FROM ROUTE 0101 (COLONIAL FARM ACCESS) ON LEFT TO ROUTE 0101 (COLONIAL FARM ACCESS) ON LEFT	PISCATAWAY PARK	NO	PUBLIC	11,250	GR	
0955	NC		52376		MAINTENANCE AREA/FUEL STATION	FROM END OF ROUTE 0101 (COLONIAL FARM ACCESS) TO PARKING	PISCATAWAY PARK	NO	NONPUBLIC	1,387	GR	
0956	6	2	52377		MARSHALL HALL BOAT RAMP PARKING	FROM END OF ROUTE 0124 (MARYLAND STATE HIGHWAY 227) TO ROUTE 0124 (MARYLAND STATE HIGHWAY 227)	PISCATAWAY PARK	YES	PUBLIC	47,445	AS	5
0957	NC		104279		OXON HILL EMPLOYEE PARKING	FROM ROUTE 0407 (BACK ROAD) TO PARKING	OXON HILL	NO	NONPUBLIC	6,950	GR	

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

PARKING AREA INVENTORY (1300 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Description		Maintenance District	FLTP	Access Level	Area (SQ FT)	Surf. Type	Area Map	
					Route Name	From							To
0959	NC		104278		COLONIAL FARM ADMINISTRATIVE BUILDING PARKING	FROM ROUTE 0421 (ADMINISTRATIVE LOOP ROAD)	TO PARKING	PISCATAWAY PARK	NO	NONPUBLIC	2,625	GR	
0961	NC		104280		ACCOKEEK CREEK OUTER VISITOR PARKING	ADJACENT TO ROUTE 0202 (ACCOKEEK CREEK ACCESS ROAD) ON LEFT		PISCATAWAY PARK	NO	PUBLIC	3,350	GR	
0964A	NC		104281		HEADQUARTERS OVERFLOW PARKING A	FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	TO PARKING	ANACOSTIA PARK	NO	NONPUBLIC	10,098	GR	1
0964B	NC		104282		HEADQUARTERS OVERFLOW PARKING B	FROM ROUTE 0426 (PARK HEADQUARTERS OVERFLOW PARKING ACCESS ROAD)	TO PARKING	ANACOSTIA PARK	NO	NONPUBLIC	6,272	GR	
0964C	NC		104283		HEADQUARTERS OVERFLOW PARKING C	FROM ROUTE 0426 (PARK HEADQUARTERS OVERFLOW PARKING ACCESS ROAD)	TO PARKING	ANACOSTIA PARK	NO	NONPUBLIC	12,594	GR	
0965A	NC		104284		AVIATION ROAD BALLFIELD PARKING A	ADJACENT TO ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)		ANACOSTIA PARK	NO	PUBLIC	9,699	GR	
0965B	NC		104285		AVIATION ROAD BALLFIELD PARKING B	FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	TO PARKING	ANACOSTIA PARK	NO	PUBLIC	9,434	GR	
0966ZZ	NC		252457		LANHAM ESTATES PARK PICNIC PARKING AREAS	FROM ROUTE 0118 (LANHAM ESTATES LOOP ROAD) ON LEFT AND RIGHT SIDES	TO PARKING	FORT DUPONT	NO	PUBLIC	6,580	GR	
0968	NC		104111		FORT FOOTE PARKING	FROM ROUTE 0100 (FORT FOOTE ROAD)	TO PARKING	FORT WASHINGTON	NO	PUBLIC	4,870	GR	
0969	NC		52373		ACCOKEEK CREEK ACCESS PARKING	FROM END OF ROUTE 0202 (ACCOKEEK CREEK ACCESS ROAD)	TO PARKING	PISCATAWAY PARK	NO	PUBLIC	6,799	GR	
0970	NC		104109		KENILWORTH AQUATIC GARDENS EMPLOYEE PARKING 1	FROM ROUTE 0423 (KENILWORTH AQUATIC GARDENS SERVICE ROAD) ON RIGHT	TO PARKING	KENILWORTH PARK	NO	NONPUBLIC	10,608	GR	

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

PARKING AREA INVENTORY (1300 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Description		Maintenance District	FLTP	Access Level	Area (SQ FT)	Surf. Type	Area Map	
					Route Name	From							To
0971	NC		104071		KENILWORTH AQUATIC GARDENS EMPLOYEE PARKING 2	FROM ROUTE 0423 (KENILWORTH AQUATIC GARDENS SERVICE ROAD) ON LEFT	TO PARKING	KENILWORTH PARK	NO	NONPUBLIC	1,200	GR	
0972	NC		51904		LANGSTON DRIVING RANGE PARKING	FROM BENNING ROAD	TO PARKING	KENILWORTH PARK	NO	PUBLIC	91,000	GR	
0981	6	2	252458		U.S. PARK POLICE IMPOUND PARKING / AOF SOUTH ROADWAY	FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	TO ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	ANACOSTIA PARK	NO	NONPUBLIC	24,431	AS	1
0982	6	2	252459		JAMES CREEK PAVED PARKING	FROM V STREET SW	TO V STREET SW	ANACOSTIA PARK	YES	PUBLIC	72,158	AS	1
0987	6	2	252460		QUARLES FIELD PARKING	FROM ANACOSTIA AVENUE NE	TO PARKING	KENILWORTH PARK	YES	PUBLIC	9,051	CO	2
0989	6	2	252461		3801 SOUTH CAPITOL STREET HOUSE PARKING AND COMPLEX	FROM INTERSECTION OF S CAPITOL STREET SE/SW, MARTIN LUTHER KING JR AVENUE, AND HALLEY PLACE SE	TO PARKING		NO	NONPUBLIC	8,797	AS	4
0990	NC		252462		RALEIGH STREET HOUSE ACCESS AND PARKING	FROM RALEIGH STREET SE	TO PARKING		NO	NONPUBLIC	8,590	GR	
0991ZZ	6	2	252463		ANACOSTIA DRIVE PULLOFF AREAS (SOUTH CAPITOL STREET TO BOAT RAMP)	ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE)		ANACOSTIA PARK	YES	PUBLIC	30,311	AS	1

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

Cycle 6 Summary Totals for National Capital Parks - East

Cycle 6 Route Totals			
	NPS Maintained	Concessionaire Maintained	Park Totals
Paved Roads, Data Collection Vehicle Rated (Miles)	10.75	1.26	12.02
Paved Roads, Manually Rated Length (Miles)	0	0	0
Paved Roads, Manually Rated Area (Sq. Ft.)	0	0	0
Unpaved Roads (Miles)	10.06	0.02	10.08
Paved Parking (Sq. Ft.)	889,739	3,031,019	3,920,758
Unpaved Parking (Sq. Ft.)	482,685	0	482,685

Cycle 6 Lane Miles and Overall Pavement Condition		
	Lanes Miles*	Pavement Condition Rating**
Data Collection Vehicle Routes	23.37	53
Manually Rated Roads	0	N/A
Parking Areas	67.51	50

* Equivalent Lane Miles are calculated by route using the following equations:
 - DCV and MRLs = (PAVE_WIDTH x PAVED_MI) / 11 foot lane
 - MRPs and PKGs = SQ_FEET / 5280 / 11 foot lane

**Parking and Manually Rated Routes are assigned the following PCR values based on the type of observed distresses:
 -Excellent = 97 -Good = 90 -Fair = 73
 -Poor = 53, 30, or 0 -Construction / Not Rated = -1

Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

General Park Road Functional Classification (FC) Table

FC	Type	User Access	Description	Route Numbers	Surface Types
1	Principal Park Road Rural Parkway	Public	Roads which constitute the main access route, circulatory tour, or thoroughfare for park visitors. Rural Parkways (e.g. Natchez Trace) are numbered 0001 - 0009.	0001 - 0009 0010 - 0099	AS - Asphaltic Concrete Pavement
2	Connector Park Road	Public	Roads which provide access within a park to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, etc.	0100 - 0199	BR - Brick or Pavers Road Bed CB - Cobble Stone Road Bed
3	Special Purpose Park Road	Public	Roads which provide circulation within public areas, such as campgrounds, picnic areas, visitor center complexes, concessionaire facilities, etc. These roads generally serve low-speed traffic and are often designed for one-way circulation.	0200 - 0299	CO - Portland Cement Concrete Pavement
4	Primitive Park Road	Public	Roads which provide circulation through remote areas and/or access to primitive campgrounds and undeveloped areas. These roads frequently have no minimum design standards and their use may be limited to specially equipped vehicles. Note: Functional Classes 3 and 4 have the same route numbers because, historically, they were numbered similarly.	0200 - 0299	GR - Gravel Road Bed NV - Native or Dirt Material Road Bed
5	Administrative Park Road	Public	All public roads intended for access to administrative developments or structures such as park offices, employee quarters, or utility areas.	0400 - 0499	OT - Other Materials Road Bed
6	Administrative Park Road (Restricted Access)	Nonpublic	All roads normally closed to the public, including patrol roads, truck trails, and other similar roads. Note: Functional Classes 5 and 6 have the same route numbers because historically they were numbered similarly and often there is little distinction between these routes. For example, because utility areas and employee housing are often closed to the public, this restriction would result in classification of FC 6 rather than FC 5.	0400 - 0499	
7	Urban Parkway	Public	These facilities serve high volumes of park and non-park related traffic and are restricted, limited-access facilities in an urban area. This category of roads primarily encompasses the major parkways which serve as gateways to our nation's capital. Other major park roads or portions thereof, however, may be included in this category.	0001 - 0009	
8	City Street	Public	City streets are usually extensions of the adjoining street system that are owned and maintained by the National Park Service. The construction and/or reconstruction should conform with accepted local engineering practice and local conditions.	0600 - 0699	
N/A	Non-NPS Roads	Public	State, County, or City owned roads which border, traverse, or provide access to Park Facilities or Locations. Non-NPS roads are not assigned functional classes and are driven for GPS and Video Log only.	5000 - 5999	

A park road system contains those roads within or giving access to a park or other unit of the NPS which are administered by the NPS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a park road is not based on traffic volumes or design speed, but on the intended use or function of that road or route.

The historic route numbering system also included a 300 series for interpretive roads, and a 500 series for one-way roads. There are approximately 250 roads nationwide which are designated by the 300 and 500 series. The numbers for these roads will be maintained for reporting consistency. However, since these interpretive and one-way routes are not as clearly tied to a specific functional class, the 300 and 500 series will be discontinued for future use.

NPS / RIP Subcomponent Details for NACE

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Paved Routes, Non-NPS

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

SUMMARY ROUTE INVENTORY FOR ROADS (1100 SERIES FMSS LOCATIONS)

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)
						From	To						
0016ZZ	52194	6	2		ANACOSTIA PAVILION LOOP ROAD	FROM ROUTE 0013 (ANACOSTIA DRIVE)	TO END OF ROUTE 0013 (ANACOSTIA DRIVE) AND ROUTE 0908 (ANACOSTIA BOAT RAMP PARKING)	YES	0.58	0.00	0.58	1	
0020ZZ		6	2		HOWARD ROAD AND ANACOSTIA DRIVE SE RAMPS	FROM HOWARD ROAD AND ANACOSTIA DRIVE SE	THROUGH RAMPS	YES	0.25	0.00	0.25	1	
0104ZZ	52198	6	2		ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE	FROM ROUTE 0013 (ANACOSTIA DRIVE)	TO ROUTE 0014 (GOOD HOPE ROAD)	YES	0.54	0.00	0.54	2	
0105ZZ	52226	6	2		ANACOSTIA POOL AND RECREATION FACILITY ROADS	FROM ROUTE 0013 (ANACOSTIA DRIVE)	TO ROUTE 0013 (ANACOSTIA DRIVE)	YES	0.13	0.00	0.13	2	
0406ZZ	52119	6	2		FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS	FROM ROUTE 0117 (FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE))	TO ROUTE 0920 (U.S. PARK POLICE FORT DUPONT STABLES AND PARKING)	NO	0.24	0.00	0.24	6	

SUMMARY ROUTE INVENTORY FOR PARKING AREAS (1300 SERIES FMSS LOCATIONS)

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0913ZZ	21430	6	2		NACE PARK HEADQUARTERS PARKING AREAS	FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	TO PARKING	NO	NONPUBLIC	48,969
0915ZZ	52225	6	2		U.S. PARK POLICE AVIATION AND FUEL RAMP PARKING	FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	TO ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)	NO	NONPUBLIC	13,535
0966ZZ	252457	NC			LANHAM ESTATES PARK PICNIC PARKING AREAS	FROM ROUTE 0118 (LANHAM ESTATES LOOP ROAD) ON LEFT AND RIGHT SIDES	TO PARKING	NO	PUBLIC	6,580
0991ZZ	252463	6	2		ANACOSTIA DRIVE PULLOFF AREAS (SOUTH CAPITOL STREET TO BOAT RAMP)	ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE)		YES	PUBLIC	30,311

NPS / RIP Subcomponent Details for NACE

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Paved Routes, Non-NPS

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

NACE-0016ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)
						From	To						
0016AZ	52194	6	2		ANACOSTIA PAVILION LOOP ROAD (MAIN)	FROM ROUTE 0013 (ANACOSTIA DRIVE)	TO END OF ROUTE 0013 (ANACOSTIA DRIVE) AND ROUTE 0908 (ANACOSTIA BOAT RAMP PARKING)	YES	0.56	0.00	0.56	1	
0016BZ	52194	6	2		ANACOSTIA PAVILION LOOP ROAD SPUR	FROM ROUTE 0016AZ (ANACOSTIA PAVILION LOOP ROAD (MAIN))	TO ROUTE 0013 (ANACOSTIA DRIVE)	YES	0.02	0.00	0.02	1	

NACE-0020ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)
						From	To						
0020AZ		6	2		ANACOSTIA DRIVE SE SPUR RAMP TO S CAPITAL STREET SE	FROM ROUTE 0013 (ANACOSTIA DRIVE)	TO ROUTE 0020BZ (ANACOSTIA DRIVE SE RAMP TO S CAPITAL STREET SE)	YES	0.06	0.00	0.06	1	
0020BZ		6	2		ANACOSTIA DRIVE SE RAMP TO S CAPITAL STREET SE	FROM ROUTE 0013 (ANACOSTIA DRIVE)	TO ANACOSTIA DRIVE SE RAMP AT PARK BOUNDARY	YES	0.08	0.00	0.08	1	
0020CZ		6	2		S CAPITAL STREET SE RAMP TO HOWARD ROAD SE RAMP	FROM S CAPITAL STREET SE RAMP AT PARK BOUNDARY	TO ROUTE 0020DZ (HOWARD ROAD SE RAMP TO ANACOSTIA DRIVE SE)	YES	0.04	0.00	0.04	1	
0020DZ		6	2		HOWARD ROAD SE RAMP TO ANACOSTIA DRIVE SE	FROM HOWARD ROAD SE RAMP AT PARK BOUNDARY	TO ROUTE 0013 (ANACOSTIA DRIVE)	YES	0.07	0.00	0.07	1	

NPS / RIP Subcomponent Details for NACE

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Paved Routes, Non-NPS

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

NACE-0104ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)
						From	To						
0104AZ	52198	6	2		ANACOSTIA COMPOUND ACCESS	FROM ROUTE 0013 (ANACOSTIA DRIVE)	TO BEGIN ROUTE 0104BZ (AVIATION DRIVE) AT INTERSECTION WITH ROUTE 0981 (U.S. PARK POLICE IMPOUND PARKING / AOF SOUTH ROADWAY)	YES	0.18	0.00	0.18	2	
0104BZ	52198	6	2		AVIATION DRIVE	FROM END OF ROUTE 0104AZ (ANACOSTIA COMPOUND ACCESS) AT INTERSECTION WITH ROUTE 0981 (U.S. PARK POLICE IMPOUND PARKING / AOF SOUTH ROADWAY)	TO ROUTE 0014 (GOOD HOPE ROAD)	YES	0.36	0.00	0.36	2	

NACE-0105ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)
						From	To						
0105AZ	52226	6	2		ANACOSTIA POOL AND RECREATION FACILITY ROAD	FROM ROUTE 0013 (ANACOSTIA DRIVE) AT MP 1.23	TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 1.26	YES	0.11	0.00	0.11	2	
0105BZ	52226	6	2		ANACOSTIA POOL AND RECREATION FACILITY ROAD CUT-THRU	FROM ROUTE 0105AZ (ANACOSTIA POOL AND RECREATION FACILITY ROAD) AT MP 0.03	TO ROUTE 0105AZ (ANACOSTIA POOL AND RECREATION FACILITY ROAD) AT MP 0.08	YES	0.02	0.00	0.02	2	

NPS / RIP Subcomponent Details for NACE

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Paved Routes, Non-NPS

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

NACE-0406ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)
						From	To						
0406AZ	52119	6	2		FORT DUPONT STABLE ACCESS	FROM ROUTE 0117 (FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE))	TO ROUTE 0920 (U.S. PARK POLICE FORT DUPONT STABLES AND PARKING)	NO	0.18	0.00	0.18	6	
0406BZ	52119	6	2		FORT DUPONT MAINTENANCE YARD ACCESS	FROM ROUTE 0406AZ (FORT DUPONT STABLE ACCESS)	TO ROUTE 0919A (FORT DUPONT INTERIOR MAINTENANCE AREA)	NO	0.06	0.00	0.06	6	

NACE-0913ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0913AZ	21430	6	2		NACE PARK HEADQUARTERS PARKING A	FROM ROUTE 0104AZ (ANACOSTIA COMPOUND ACCESS)	TO PARKING	NO	NONPUBLIC	17,972
0913BZ	21430	6	2		NACE PARK HEADQUARTERS PARKING B	FROM ROUTE 0104BZ (AVIATION DRIVE)	TO PARKING	NO	NONPUBLIC	13,220
0913CZ	21430	6	2		NACE PARK HEADQUARTERS PARKING C	FROM ROUTE 0104AZ (ANACOSTIA COMPOUND ACCESS)	TO PARKING	NO	NONPUBLIC	17,777

NACE-0915ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0915AZ	52225	6	2		U.S. PARK POLICE AVIATION PARKING	FROM ROUTE 0104BZ (AVIATION DRIVE)	TO ROUTE 0104BZ (AVIATION DRIVE)	NO	NONPUBLIC	8,537
0915BZ	52225	6	2		USPP AVIATION FUEL RAMP	FROM ROUTE 0104BZ (AVIATION DRIVE)	TO ROUTE 0104BZ (AVIATION DRIVE)	NO	NONPUBLIC	4,998

NPS / RIP Subcomponent Details for NACE

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Paved Routes, Non-NPS

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle
 MRL = Manually Rated Line
 MRP = Manually Rated Polygon
 PKG = Parking Areas
 NC = Not Collected

NACE National Capital Parks - East

NACE-0966ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0966AZ	252457	NC			LANHAM ESTATES PARK PICNIC AREA PARKING A	FROM ROUTE 0118 (LANHAM ESTATES LOOP ROAD) ON LEFT	TO PARKING	NO	PUBLIC	3,380
0966BZ	252457	NC			LANHAM ESTATES PARK PICNIC AREA PARKING B	FROM ROUTE 0118 (LANHAM ESTATES LOOP ROAD) ON RIGHT	TO PARKING	NO	PUBLIC	3,200

NACE-0991ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0991AZ	252463	6	2		ANACOSTIA DRIVE PULLOFF AREA A	ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 0.15 ON LEFT		YES	PUBLIC	4,275
0991BZ	252463	6	2		ANACOSTIA DRIVE PULLOFF AREA B	ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 0.702 ON RIGHT		YES	PUBLIC	2,449
0991CZ	252463	6	2		ANACOSTIA DRIVE PULLOFF AREA C	ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 0.969 ON RIGHT		YES	PUBLIC	2,431
0991DZ	252463	6	2		ANACOSTIA DRIVE PULLOFF AREA D	ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 1.04 ON RIGHT		YES	PUBLIC	7,964
0991EZ	252463	6	2		ANACOSTIA DRIVE PULLOFF AREA E	ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 1.318 PM LEFT		YES	PUBLIC	11,362
0991FZ	252463	6	2		ANACOSTIA DRIVE PULLOFF AREA F	ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 1.833 ON LEFT		YES	PUBLIC	1,830

Route Identification Changes to Paved Routes from Previous Cycle National Capital Parks - East

ROUTES REMOVED FROM PREVIOUS INVENTORY:			
Route No.	Route Name	Type of Change	Comments
0010	OXON HILL MAINTENANCE ACCESS ROAD	OTHER	ROUTE IDENT CHANGED FROM 0010 TO 0430, DUE TO CHANGE IN FUNCTIONAL CLASS.
0923	BUZZARD POINT MARINA PARKING	OTHER	REMOVED FROM THE INVENTORY IN CYCLE 6; IT IS A BOAT RAMP.
0983	BUZZARD POINT MARINA UNPAVED PARKING	OTHER	REMOVED FROM THE INVENTORY; NOT OWNED BY THE PARK.
0984	EARTH CONSERVATION CORPS UNPAVED PARKING	OTHER	REMOVED FROM THE INVENTORY; NOT OWNED BY THE PARK.
0985	KENILWORTH PARKSIDE TENNIS COURTS AND POOL	OTHER	REMOVED FROM THE INVENTORY; NOT OWNED BY THE PARK.
0986	KENILWORTH PARKSIDE PARKING	OTHER	REMOVED FROM THE INVENTORY; NOT OWNED BY THE PARK.

ROUTES MODIFIED FROM PREVIOUS INVENTORY:			
Route No.	Route Name	Type of Change	Comments
0012	KENILWORTH PARK ACCESS	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 1 TO 3.
0016ZZ	ANACOSTIA PAVILION LOOP ROAD	ROUTE NUMBER	ROUTE NUMBER CHANGE FROM 0016 TO 0016ZZ, SPUR ADDED (0016BZ).
0102	FREDERICK DOUGLAS HOME ACCESS ROAD	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 5 TO 6; IT IS NON-PUBLIC.
0104ZZ	ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE	ROUTE NAME	ROUTE NAME CHANGED FROM "HEADQUARTERS ACCESS AND AVIATION ROADS" TO "ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE".
0117	FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE)	LENGTH CHANGE	UPDATED LENGTH, NON-PUBLIC SECTION SPLIT AND TURNED INTO 0406AZ.
0118	LANHAM ESTATES LOOP ROAD	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 2 TO 3.
0209	SOUTH STADIUM ACCESS ROAD	LENGTH CHANGE	ROUTE WAS REALIGNED IN THE MIDDLE PORTION SINCE CYCLE 5.

Route Identification Changes to Paved Routes from Previous Cycle National Capital Parks - East

ROUTES MODIFIED FROM PREVIOUS INVENTORY:			
Route No.	Route Name	Type of Change	Comments
0401	AQUATIC GARDENS ADMINISTRATIVE ACCESS ROAD	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 5 TO 6; IT IS NON-PUBLIC.
0403	LANGSTON SERVICE ROAD	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 5 TO 6; IT IS NON-PUBLIC.
0406ZZ	FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS	ROUTE NUMBER	ROUTE NUMBER CHANGED FROM 0406 TO 0406ZZ. SECTION OF ROUTE 0117 CHANGED TO NON-PUBLIC AND ADDED AS ROUTE 0406AZ, FUNCTIONAL CLASS CHANGED FROM 5 TO 6.
0408	BOTTOM ROAD	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 5 TO 6; IT IS NON-PUBLIC. ROUTE NOT COLLECTED BECAUSE IT WAS UNPAVED.
0423	KENILWORTH AQUATIC GARDENS SERVICE ROAD	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 5 TO 6; IT IS NON-PUBLIC.
0424	AOF TRAINING PARKING ROAD	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS CHANGED FROM 5 TO 6; IT IS NON-PUBLIC.
0430	OXON HILL ACCESS ROAD	OTHER	ROUTE IDENT CHANGED FROM 0010 TO 0430, DUE TO CHANGE IN FUNCTIONAL CLASS.
0901	KENILWORTH AQUATIC GARDENS PARKING	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.
0911	NICHOLSON COMFORT STATION PARKING	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.
0913ZZ	NACE PARK HEADQUARTERS PARKING AREAS	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.
0915ZZ	U.S. PARK POLICE AVIATION AND FUEL RAMP PARKING	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.
0917	FREDERICK DOUGLASS HOME PARKING	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.
0918	FORT DUPONT MAINTENANCE YARD PARKING	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.
0919B	FORT DUPONT REAR MAINTENANCE AREA	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.
0950	OXON HILL VISITORS CENTER PARKING	SURFACE TYPE CHANGE	CHANGED SURFACE TYPE FROM ASPHALT TO GRAVEL.
0956	MARSHALL HALL BOAT RAMP PARKING	SURFACE TYPE CHANGE	CHANGED SURFACE TYPE FROM ASPHALT TO GRAVEL.

Route Identification Changes to Paved Routes from Previous Cycle National Capital Parks - East

ROUTES MODIFIED FROM PREVIOUS INVENTORY:			
Route No.	Route Name	Type of Change	Comments
0981	U.S. PARK POLICE IMPOUND PARKING / AOF SOUTH ROADWAY	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.
0987	QUARLES FIELD PARKING	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.
0991ZZ	ANACOSTIA DRIVE PULLOFF AREAS (SOUTH CAPITOL STREET TO BOAT RAMP)	ROUTE NUMBER	ROUTE NUMBER CHANGED FROM 0991 TO 0991ZZ. ROUTE NAME CHANGE FROM "ANACOSTIA SOUTH CAPITAL BRIDGE PARKING" TO "ANACOSTIA DRIVE PULLOFF AREAS (SOUTH CAPITOL STREET TO BOAT RAMP)".

Section 3 Park Summary Information



National Capital Parks - East



Federal Lands Highway
Road Inventory Program

Park Totals for National Capital Parks - East

Summary of Paved Mileages by Functional Class (FC)

	Unit Code	Paved Length by Functional Class (Miles)								Total by Unit
		FC 1	FC 2	FC 3	FC 4	FC 5	FC 6	FC 7	FC 8	
National Capital Parks - East	NACE	5.01	2.83	3.28		0.19	0.71			12.02
Baltimore - Washington Pkwy	BAWA	0.44						51.00		51.44
Fort Washington Park	FOWA	1.43	1.04			0.09	0.48			3.04
Greenbelt Park	GREE	2.97		2.03		0.04	0.56			5.60
Suitland Parkway	SUIT							16.39	0.08	16.47
Total Paved Mileage by FC:		9.85	3.87	5.31	0	0.32	1.75	67.39	0.08	88.57

Summary of Unpaved Mileages by Functional Class (FC)

	Unit Code	Unpaved Length by Functional Class (Miles)								Total by Unit
		FC 1	FC 2	FC 3	FC 4	FC 5	FC 6	FC 7	FC 8	
National Capital Parks - East	NACE	0.04	2.05	0.91	1.50	1.95	3.64			10.08
Baltimore - Washington Pkwy	BAWA									0
Fort Washington Park	FOWA						1.20			1.20
Greenbelt Park	GREE						1.92			1.92
Suitland Parkway	SUIT				0.34					0.34
Total Unpaved Mileage by FC:		0.04	2.05	0.91	1.84	1.95	6.76	0	0	13.54

Summary of Parking Areas by Access Level (Areas and Counts)

	Unit Code	Area (Sq. Ft.)				Counts			
		Paved Public	Paved Nonpublic	Unpaved Public	Unpaved Nonpublic	Paved Public	Paved Nonpublic	Unpaved Public	Unpaved Nonpublic
National Capital Parks - East	NACE	3,728,504	192,254	421,727	60,958	25	12	15	10
Baltimore - Washington Pkwy	BAWA								
Fort Washington Park	FOWA	306,122				13			
Greenbelt Park	GREE	129,728	45,155			17	2		
Suitland Parkway	SUIT		38,041				1		
Totals:		4,164,354	275,450	421,727	60,958	55	15	15	10

Parkwide Paved Route Condition Summary

National Capital Parks - East

Table 1: Paved Route Miles and Parking Area Square Footages by Access Level and PCR

Breakdown of Pavement Condition Rating (PCR) Based on Access Level

	POOR (PCR of 0 - 60)	FAIR (PCR of 61 - 84)	GOOD (PCR of 85 - 94)	EXCELLENT (PCR of 95 -100)	
PAVED ROADS					
Functional Class	Length (miles)	Length (miles)	Length (miles)	Length (miles)	Total Mileage by FC
1	1.50	1.02	1.51	0.98	5.01
2	1.55	0.22	0.39	0.67	2.83
3	1.56	0.56	0.43	0.73	3.28
4					
5	0.14				0.14
6	0.33	0.02	0.14	0.04	0.53
7					
8					
Total Mileage by PCR	5.07	1.82	2.47	2.42	11.79
PAVED PARKING					
Access Level	Area (sq. ft.)	Area (sq. ft.)	Area (sq. ft.)	Area (sq. ft.)	Total Area
PUBLIC	2,287,556	1,340,947	100,001		3,728,504
NONPUBLIC	124,043	18,213	28,241	21,757	192,254
Total Area by PCR	2,411,599	1,359,160	128,242	21,757	3,920,758

NOTES:

1. Data are reported in the table only for paved roads and parking lots that received a condition rating.
2. Non-linear roads (MRP collected routes) are measured by area and converted to equivalent route miles based on a 22-ft pavement width in order to be included in the mileage totals for paved roads shown above.
3. Quantities in the table above are derived from the route condition data within the PMS_20, PMS_MRL, PMS_MRP, and PMS_PKG tables in the Park geodatabase.

Parkwide Condition Percentages


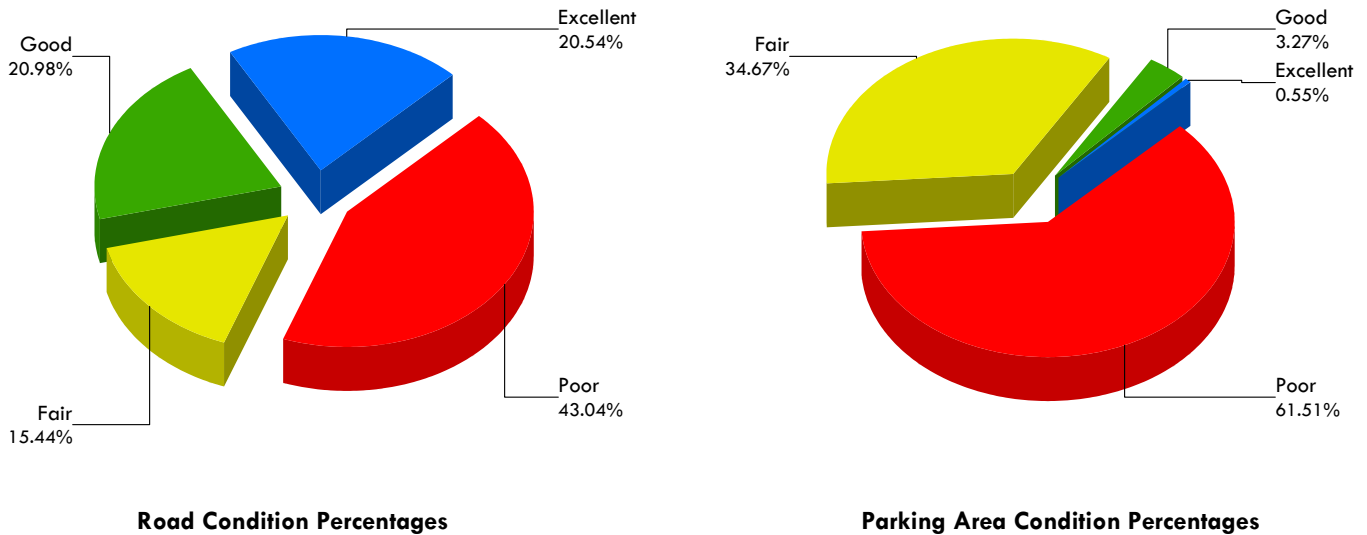


Figure 1: Pavement Condition Rating Breakdown for Paved Roads and Parking Areas

Explanation of the Excellent, Good, Fair, and Poor Condition Descriptions

The Road Inventory Program aims to provide assistance in translating the excellent / good / fair / poor rating categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the type of treatments that should be considered now and into the future.

- Excellent / New: PCR of 95-100
 - Pavements in this range will require only spot repairs
- Good: PCR of 85-94
 - Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84
 - Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include singlelift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 0-60
 - Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

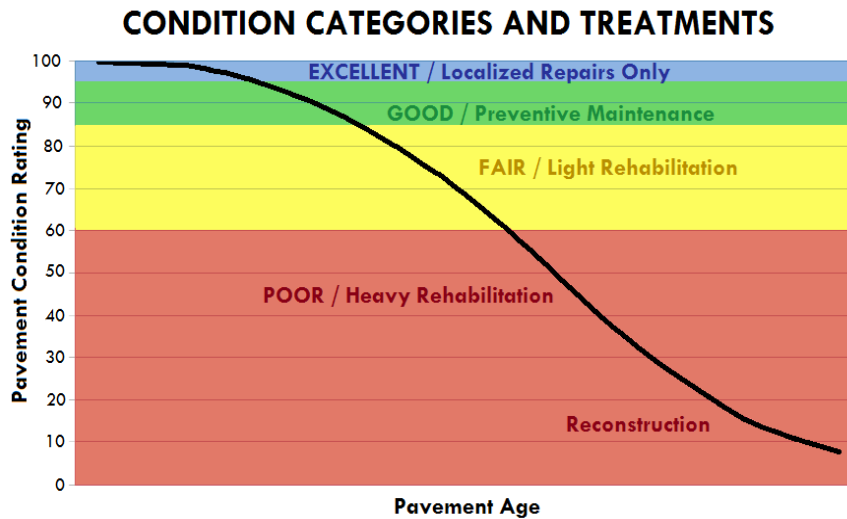

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions at the time in which the data were collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.



Cycle 6 - Road Inventory Program Road Condition Summary Report for Data Collection Vehicle (DCV) Rated Roads

Condition (Rating / Index) Legend

EXCELLENT (95 - 100)
GOOD (85 - 94)
FAIR (61 - 84)
POOR (0 - 60)
NR = NOT RATED

National Capital Parks - East

Notes:

- This condition summary report contains only the roads rated with the Data Collection Vehicle (DCV).
- Condition on roads that were manually rated and parking areas are shown in separate reports.
- Route-level scores shown on this page may not represent scores at smaller intervals (due to rollup calculations).
- Additional details on individual road ratings at 0.10-mile and 1-mile intervals can be found in Section 5 of the Cycle 6 RIP Report.
- Refer to the RIP Report Appendix for an explanation of the rating system and rating methods.

Route-Level Condition for Roads Rated with the Data Collection Vehicle (DCV)

Route No.	FMSS No.	Route Name	Functional Class	Surf. Type	Paved Length (Miles)	Pavement Condition Rating (PCR)	Roughness Condition Index (RCI)	Surface Condition Rating (SCR)	Structural Crack Index	Alligator Crack Index	Longitudinal Cracking Index	Transverse Cracking Index	Patch / Pothole Index	Rutting Index
NACE-0012	51896	KENILWORTH PARK ACCESS	3	AS	0.78	0	NR	0	36	99	37	0	95	92
NACE-0013	52184	ANACOSTIA DRIVE	1	AS	2.05	87	69	99	99	100	99	99	100	99
NACE-0014	52188	GOOD HOPE ROAD	1	AS	0.07	89	NR	89	89	100	89	93	100	99
NACE-0015	52192	NICHOLSON STREET SE	1	AS	0.05	77	NR	77	80	100	80	77	100	93
NACE-0016AZ	52194	ANACOSTIA PAVILION LOOP ROAD (MAIN)	1	AS	0.56	88	74	97	99	99	100	99	100	97
NACE-0016BZ	52194	ANACOSTIA PAVILION LOOP ROAD SPUR	1	AS	0.02	99	NR	99	100	100	100	100	100	99
NACE-0017	52113	FORT DUPONT DRIVE	1	AS	0.80	7	18	0	0	90	0	65	85	84
NACE-0018	52114	FORT DAVIS DRIVE	1	AS	1.21	22	56	0	0	60	39	44	95	91
NACE-0019	52115	RIDGE PICNIC AREA ROAD	3	AS	0.46	73	NR	73	73	96	77	95	87	90
NACE-0020AZ	N/A	ANACOSTIA DRIVE SE SPUR RAMP TO S CAPITAL STREET SE	1	AS	0.06	99	NR	99	99	100	99	100	100	100
NACE-0020BZ	N/A	ANACOSTIA DRIVE SE RAMP TO S CAPITAL STREET SE	1	AS	0.08	95	NR	95	95	100	95	100	100	100
NACE-0020CZ	N/A	S CAPITAL STREET SE RAMP TO HOWARD ROAD SE RAMP	1	CO	0.04	53	NR	NR	NR	NR	NR	NR	NR	NR
NACE-0020DZ	N/A	HOWARD ROAD SE RAMP TO ANACOSTIA DRIVE SE	1	AS	0.07	97	NR	97	97	100	97	97	100	97
NACE-0102	21315	FREDERICK DOUGLAS HOME ACCESS ROAD	6	AS	0.18	92	NR	92	97	100	97	98	100	92
NACE-0104AZ	52198	ANACOSTIA COMPOUND ACCESS	2	AS	0.18	10	NR	10	61	97	64	10	96	97
NACE-0104BZ	52198	AVIATION DRIVE	2	AS	0.36	100	NR	100	100	100	100	100	100	100
NACE-0105AZ	52226	ANACOSTIA POOL AND RECREATION FACILITY ROAD	2	AS	0.11	94	NR	94	94	100	94	98	100	97
NACE-0105BZ	52226	ANACOSTIA POOL AND RECREATION FACILITY ROAD CUT-THRU	2	AS	0.02	96	NR	96	100	100	100	100	100	96
NACE-0108	52379	FORT STANTON RESERVOIR ACCESS ROAD	2	AS	0.18	90	NR	90	97	100	97	90	100	97

Data Collection Date: 06/2018



Federal Lands Highway
Road Inventory Program

Cycle 6 - Road Inventory Program Road Condition Summary Report for Data Collection Vehicle (DCV) Rated Roads

National Capital Parks - East

Condition (Rating / Index) Legend

EXCELLENT (95 - 100)
GOOD (85 - 94)
FAIR (61 - 84)
POOR (0 - 60)
NR = NOT RATED

Notes:

- This condition summary report contains only the roads rated with the Data Collection Vehicle (DCV).
- Condition on roads that were manually rated and parking areas are shown in separate reports.
- Route-level scores shown on this page may not represent scores at smaller intervals (due to rollup calculations).
- Additional details on individual road ratings at 0.10-mile and 1-mile intervals can be found in Section 5 of the Cycle 6 RIP Report.
- Refer to the RIP Report Appendix for an explanation of the rating system and rating methods.

Route-Level Condition for Roads Rated with the Data Collection Vehicle (DCV)

Route No.	FMSS No.	Route Name	Functional Class	Surf. Type	Paved Length (Miles)	Pavement Condition Rating (PCR)	Roughness Condition Index (RCI)	Surface Condition Rating (SCR)	Structural Crack Index	Alligator Crack Index	Longitudinal Cracking Index	Transverse Cracking Index	Patch / Pothole Index	Rutting Index
NACE-0111	52432	27TH STREET SE	2	AS	0.13	29	NR	29	29	60	69	77	100	93
NACE-0112	52239	BRYAN POINT ROAD	2	AS	0.20	66	NR	66	66	82	84	92	100	99
NACE-0117	52116	FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE)	5	AS	0.14	0	NR	0	7	82	25	0	97	99
NACE-0118	52117	LANHAM ESTATES LOOP ROAD	3	AS	0.33	3	NR	3	3	30	73	68	94	71
NACE-0120	52367	WHARF ROAD	2	AS	0.32	94	NR	94	94	99	95	96	98	98
NACE-0123	104577	RIVER ROAD	2	AS	0.21	52	NR	52	52	94	58	71	99	99
NACE-0124	104595	MARYLAND STATE HIGHWAY 227	2	AS	1.12	38	95	0	0	94	1	0	100	98
NACE-0206	103975	RIDGE PICNIC AREA LOOP	3	AS	0.09	75	NR	75	75	97	78	89	91	85
NACE-0208	252447	NORTH STADIUM ENTRANCE ROAD	3	AS	0.11	86	NR	86	86	93	93	95	99	95
NACE-0209	252448	SOUTH STADIUM ACCESS ROAD	3	AS	1.15	94	NR	94	94	98	96	94	99	98
NACE-0300	52369	MARSHALL HALL ACCESS ROAD	3	AS	0.26	0	NR	0	0	56	33	0	100	91
NACE-0301	52370	MARSHALL HALL LOOP ROAD	3	AS	0.10	40	NR	40	58	92	66	40	100	91
NACE-0406AZ	52119	FORT DUPONT STABLE ACCESS	6	AS	0.18	0	NR	0	0	81	12	17	99	95
NACE-0406BZ	52119	FORT DUPONT MAINTENANCE YARD ACCESS	6	AS	0.06	0	NR	0	0	32	0	5	99	97
NACE-0424	103972	AOF TRAINING PARKING ROAD	6	AS	0.11	21	NR	21	64	99	65	21	99	98
NACE-0430	20707	OXON HILL ACCESS ROAD	6	AS	0.10	NR	NR	NR	NR	NR	NR	NR	NR	NR

Data Collection Date: 06/2018



Federal Lands Highway
Road Inventory Program

Cycle 6 - Road Inventory Program

Parking Area Condition Summary Report

National Capital Parks - East

Condition (Rating / Index) Legend

EXCELLENT (97)
GOOD (90)
FAIR (73)
POOR* (0, 30, 53)
NR = NOT RATED

- Notes:
- A PCR of 0 indicates a paved parking area in very poor condition. Individual distresses could not be identified.
 - Additional details on individual parking areas can be found in Section 6 of the Cycle 6 RIP Report.
 - Refer to the RIP Report Appendix for an explanation of the rating system and rating methods.

Route No.	FMSS No.	Route Name	User Access	Surf. Type	Area (Sq. Ft.)	Pavement Condition Rating (PCR)	Asphalt Surface Distresses						Concrete Surface Distresses						
							Alligator Cracking	Longitudinal / Transverse Cracking	Rutting / Distortions	Potholes / Patching	HMA Patching	Surface Raveling / Bleeding	Joint Faulting	Slab Cracking	Joint Distresses	Delamination / Pop-Outs	Potholes / Patching		
NACE-0901	21271	KENILWORTH AQUATIC GARDENS PARKING	PUBLIC	AS	40,446	73	97	90	90	97	90	73							
NACE-0905	52129	LANGSTON GOLF COURSE PARKING	PUBLIC	AS	51,130	53	53	90	90	97	97	73							
NACE-0906	21434	KENILWORTH MAINTENANCE YARD	NONPUBLIC	AS	52,432	30	30	53	73	53	97	73							
NACE-0907	52217	PAVILION PARKING NORTH	PUBLIC	AS	65,686	30	30	53	73	53	90	73							
NACE-0908	21471	ANACOSTIA BOAT RAMP PARKING	PUBLIC	AS	54,654	53	53	53	73	73	90	73							
NACE-0909	21429	PAVILION PARKING SOUTH	PUBLIC	AS	101,439	53	53	90	73	73	97	73							
NACE-0911	52222	NICHOLSON COMFORT STATION PARKING	PUBLIC	AS	13,448	90	97	97	90	97	90	90							
NACE-0912	52223	ANACOSTIA POOL & RECREATION FACILITY PARKING	PUBLIC	AS	61,953	53	97	53	73	97	97	73							
NACE-0913AZ	21430	NACE PARK HEADQUARTERS PARKING A	NONPUBLIC	AS	17,972	30	90	90	30	30	97	73							
NACE-0913BZ	21430	NACE PARK HEADQUARTERS PARKING B	NONPUBLIC	AS	13,220	97	97	97	97	97	97	97							
NACE-0913CZ	21430	NACE PARK HEADQUARTERS PARKING C	NONPUBLIC	AS	17,777	90	97	97	90	97	97	90							
NACE-0915AZ	52225	U.S. PARK POLICE AVIATION PARKING	NONPUBLIC	AS	8,537	97	97	97	97	97	97	97							
NACE-0915BZ	52225	USPP AVIATION FUEL RAMP	NONPUBLIC	AS	4,998	90	97	90	97	97	97	90							
NACE-0916	21432	U.S. PARK POLICE OFFICE PARKING	PUBLIC	AS	52,940	30	73	53	73	30	97	73							
NACE-0917	21316	FREDERICK DOUGLASS HOME PARKING	PUBLIC	AS	10,727	90	97	97	90	97	97	90							
NACE-0918	21427	FORT DUPONT MAINTENANCE YARD PARKING	NONPUBLIC	AS	9,416	73	90	90	97	97	97	73							
NACE-0919A	52111	FORT DUPONT INTERIOR MAINTENANCE AREA	NONPUBLIC	AS	18,281	53	53	90	90	90	97	73							
NACE-0919B	104060	FORT DUPONT REAR MAINTENANCE AREA	NONPUBLIC	AS	5,466	90	90	90	97	97	97	90							
NACE-0920	52112	U.S. PARK POLICE FORT DUPONT STABLES AND PARKING	NONPUBLIC	AS	10,927	30	30	90	90	73	97	73							
NACE-0922	21428	FORT DUPONT ACTIVITY CENTER PARKING	PUBLIC	AS	45,358	53	53	90	90	90	97	73							
NACE-0925	252452	RFK STADIUM SOUTH PARKING	PUBLIC	AS	155,816	73	73	90	90	97	97	90							
NACE-0926	252453	RFK STADIUM NORTH PARKING / DC POLICE	PUBLIC	AS	109,904	30	30	53	90	30	97	73							
NACE-0927	252454	RFK STADIUM SOUTHEAST PARKING	PUBLIC	AS	796,587	73	73	90	90	90	97	90							
NACE-0928	252455	RFK STADIUM NORTH PARKING	PUBLIC	AS	1,624,889	30	30	90	73	30	97	73							
NACE-0930	252456	RFK STADIUM EAST / DC ARMORY OVERFLOW PARKING	PUBLIC	AS	343,823	73	73	90	90	90	97	90							
NACE-0950	20708	OXON HILL VISITORS CENTER PARKING	PUBLIC	AS	40,739	90	97	90	97	97	97	90							



Cycle 6 - Road Inventory Program Parking Area Condition Summary Report

National Capital Parks - East

Condition (Rating / Index) Legend

EXCELLENT (97)
GOOD (90)
FAIR (73)
POOR* (0, 30, 53)
NR = NOT RATED

- Notes:
- A PCR of 0 indicates a paved parking area in very poor condition. Individual distresses could not be identified.
 - Additional details on individual parking areas can be found in Section 6 of the Cycle 6 RIP Report.
 - Refer to the RIP Report Appendix for an explanation of the rating system and rating methods.

Condition Rating Details for Parking Areas

Route No.	FMSS No.	Route Name	User Access	Surf. Type	Area (Sq. Ft.)	Pavement Condition Rating (PCR)	<u>Asphalt Surface Distresses</u>						<u>Concrete Surface Distresses</u>					
							Alligator Cracking	Longitudinal / Transverse Cracking	Rutting / Distortions	Potholes / Patching	HMA Patching	Surface Raveling / Bleeding	Joint Faulting	Slab Cracking	Joint Distresses	Delamination / Pop-Outs	Potholes / Patching	
NACE-0956	52377	MARSHALL HALL BOAT RAMP PARKING	PUBLIC	AS	47,445	53	73	53	90	97	97	73						
NACE-0981	252458	U.S. PARK POLICE IMPOUND PARKING / AOF SOUTH ROADWAY	NONPUBLIC	AS	24,431	30	30	90	53	30	97	73						
NACE-0982	252459	JAMES CREEK PAVED PARKING	PUBLIC	AS	72,158	53	53	53	73	53	97	73						
NACE-0987	252460	QUARLES FIELD PARKING	PUBLIC	CO	9,051	90							97	90	90	97	97	
NACE-0989	252461	3801 SOUTH CAPITOL STREET HOUSE PARKING AND COMPLEX	NONPUBLIC	AS	8,797	73	73	90	73	90	97	90						
NACE-0991AZ	252463	ANACOSTIA DRIVE PULLOFF AREA A	PUBLIC	AS	4,275	73	97	90	90	97	97	73						
NACE-0991BZ	252463	ANACOSTIA DRIVE PULLOFF AREA B	PUBLIC	AS	2,449	90	90	97	97	97	97	97						
NACE-0991CZ	252463	ANACOSTIA DRIVE PULLOFF AREA C	PUBLIC	AS	2,431	90	97	90	97	97	97	97						
NACE-0991DZ	252463	ANACOSTIA DRIVE PULLOFF AREA D	PUBLIC	AS	7,964	90	97	90	90	97	97	97						
NACE-0991EZ	252463	ANACOSTIA DRIVE PULLOFF AREA E	PUBLIC	AS	11,362	90	97	97	97	97	97	90						
NACE-0991FZ	252463	ANACOSTIA DRIVE PULLOFF AREA F	PUBLIC	AS	1,830	90	97	97	97	97	97	90						

Section 4 Park Route Location Maps



National Capital Parks - East




Federal Lands Highway
Road Inventory Program


National Capital Parks - East

ROUTE LOCATION MAP

Key Map

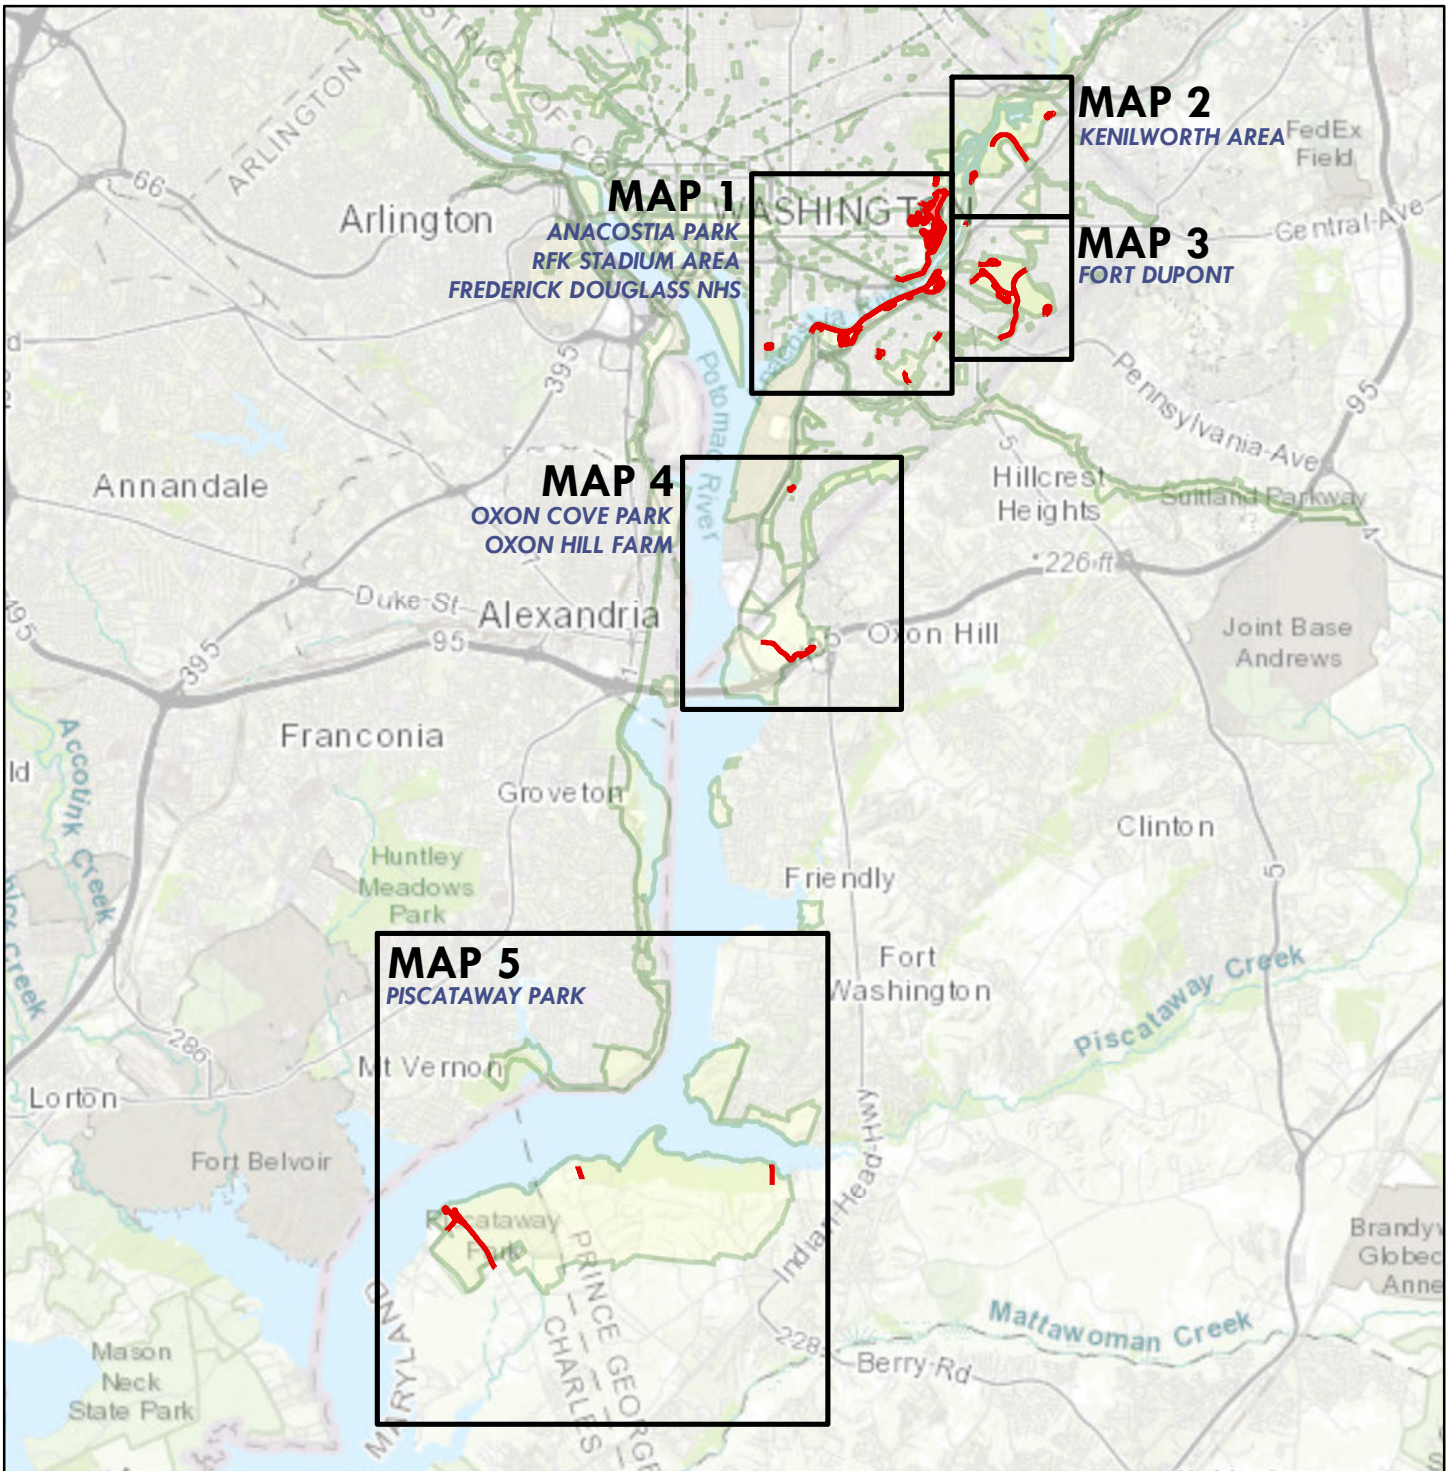

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

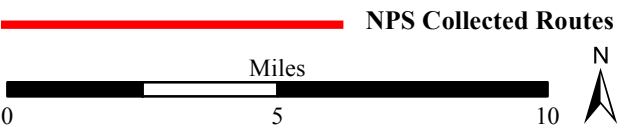


SEE SEPARATE ROAD INVENTORY PROGRAM REPORTS FOR NACE ROADS AND PARKING AT:

- BALTIMORE – WASHINGTON PARKWAY
- FORT WASHINGTON PARK
- GREENBELT PARK
- SUITLAND PARKWAY

National Capital Parks - East


ROUTE LOCATION MAP

MAP 1

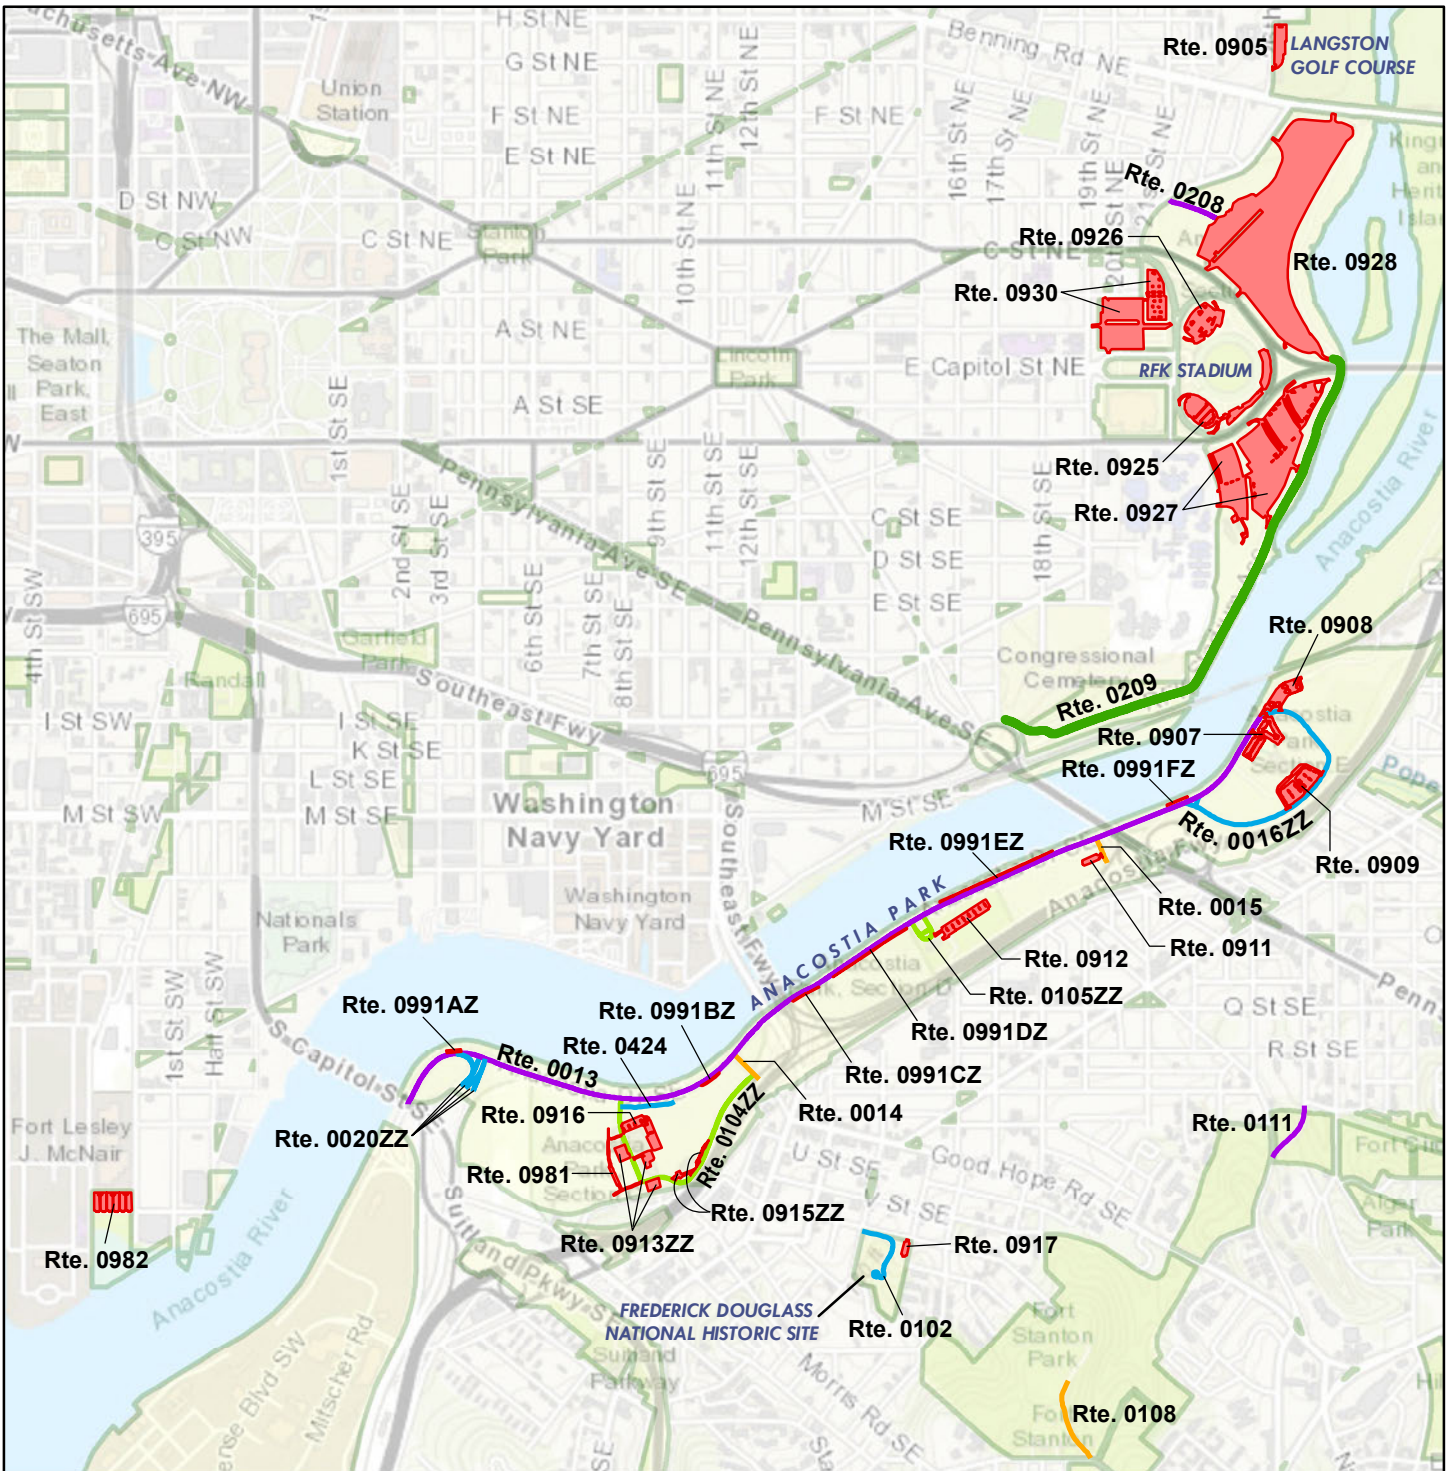

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community


Note: Unique colors are used to differentiate roads



National Capital Parks - East


ROUTE LOCATION MAP

MAP 2

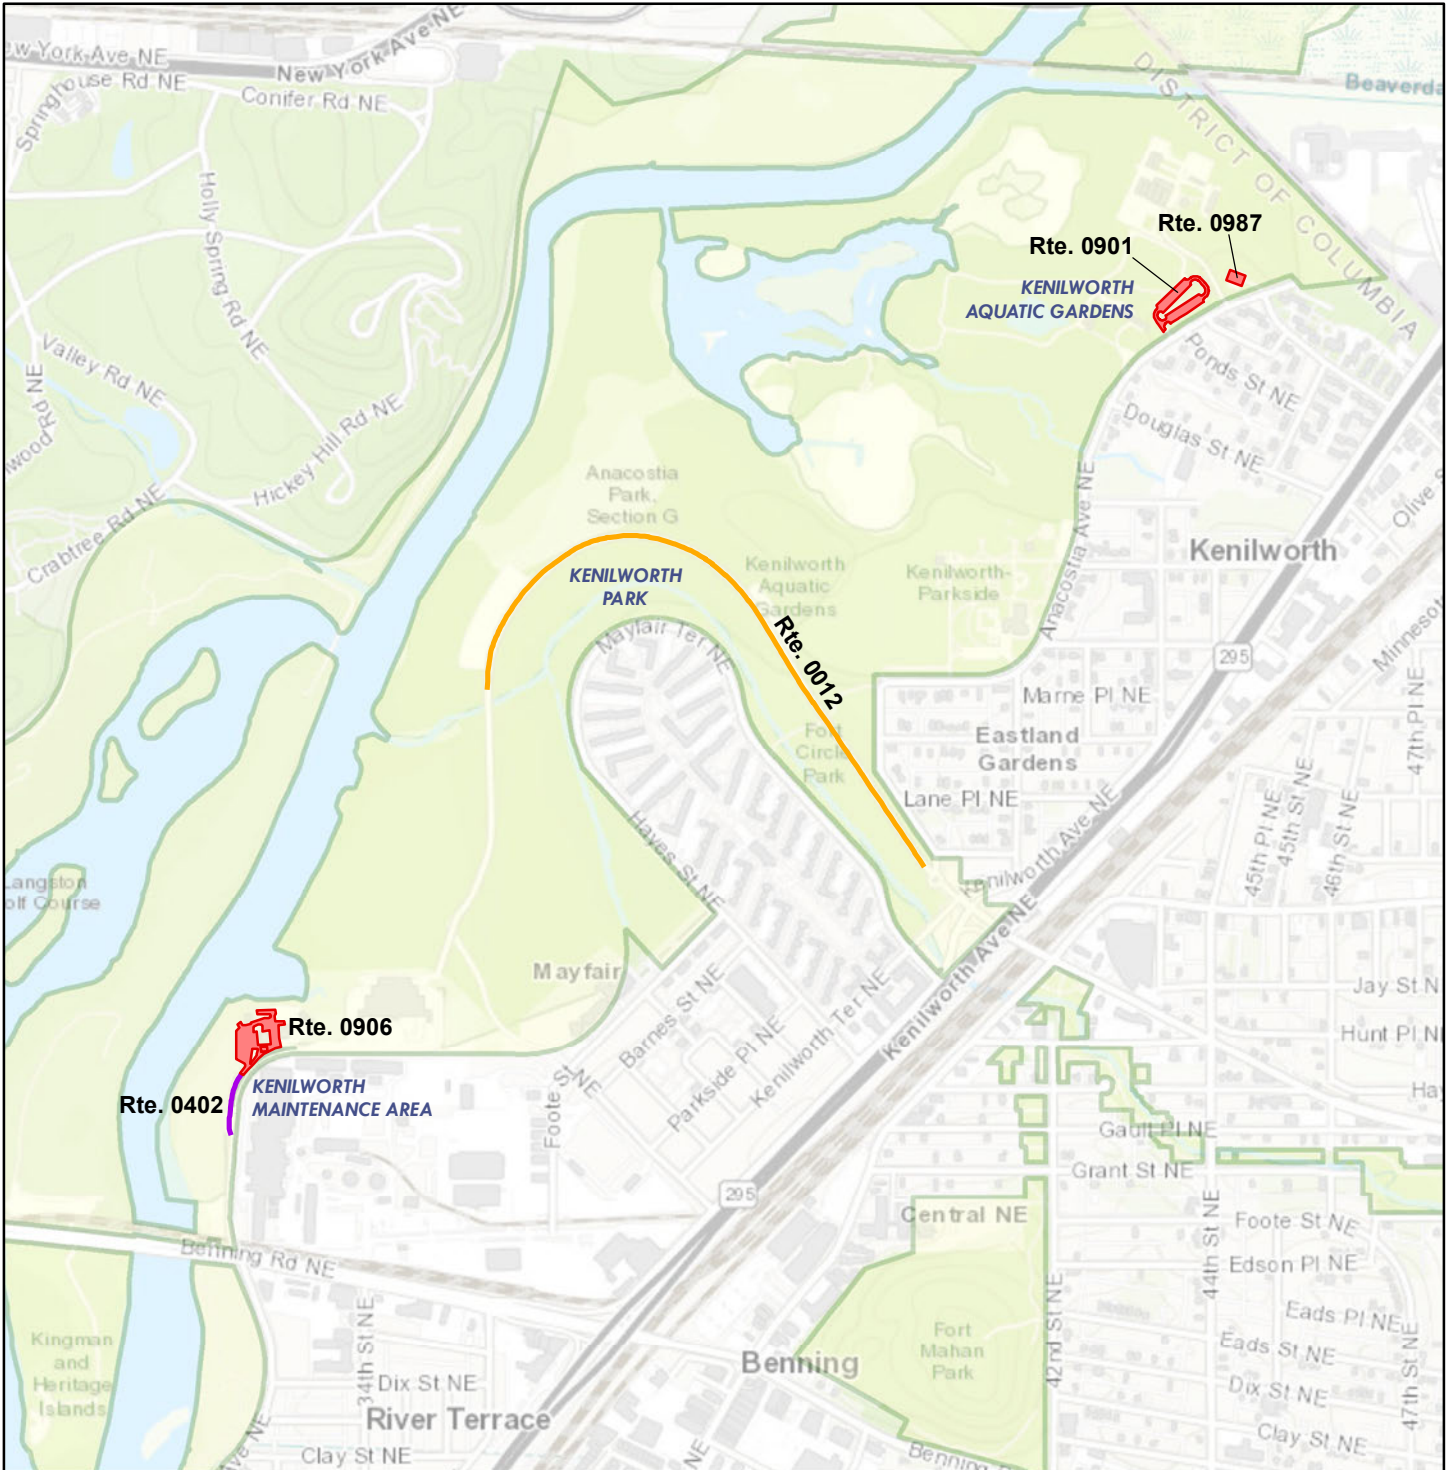

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Note: Unique colors are used to differentiate roads



National Capital Parks - East


ROUTE LOCATION MAP

MAP 3



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community


Note: Unique colors are used to differentiate roads



National Capital Parks - East


ROUTE LOCATION MAP

MAP 4

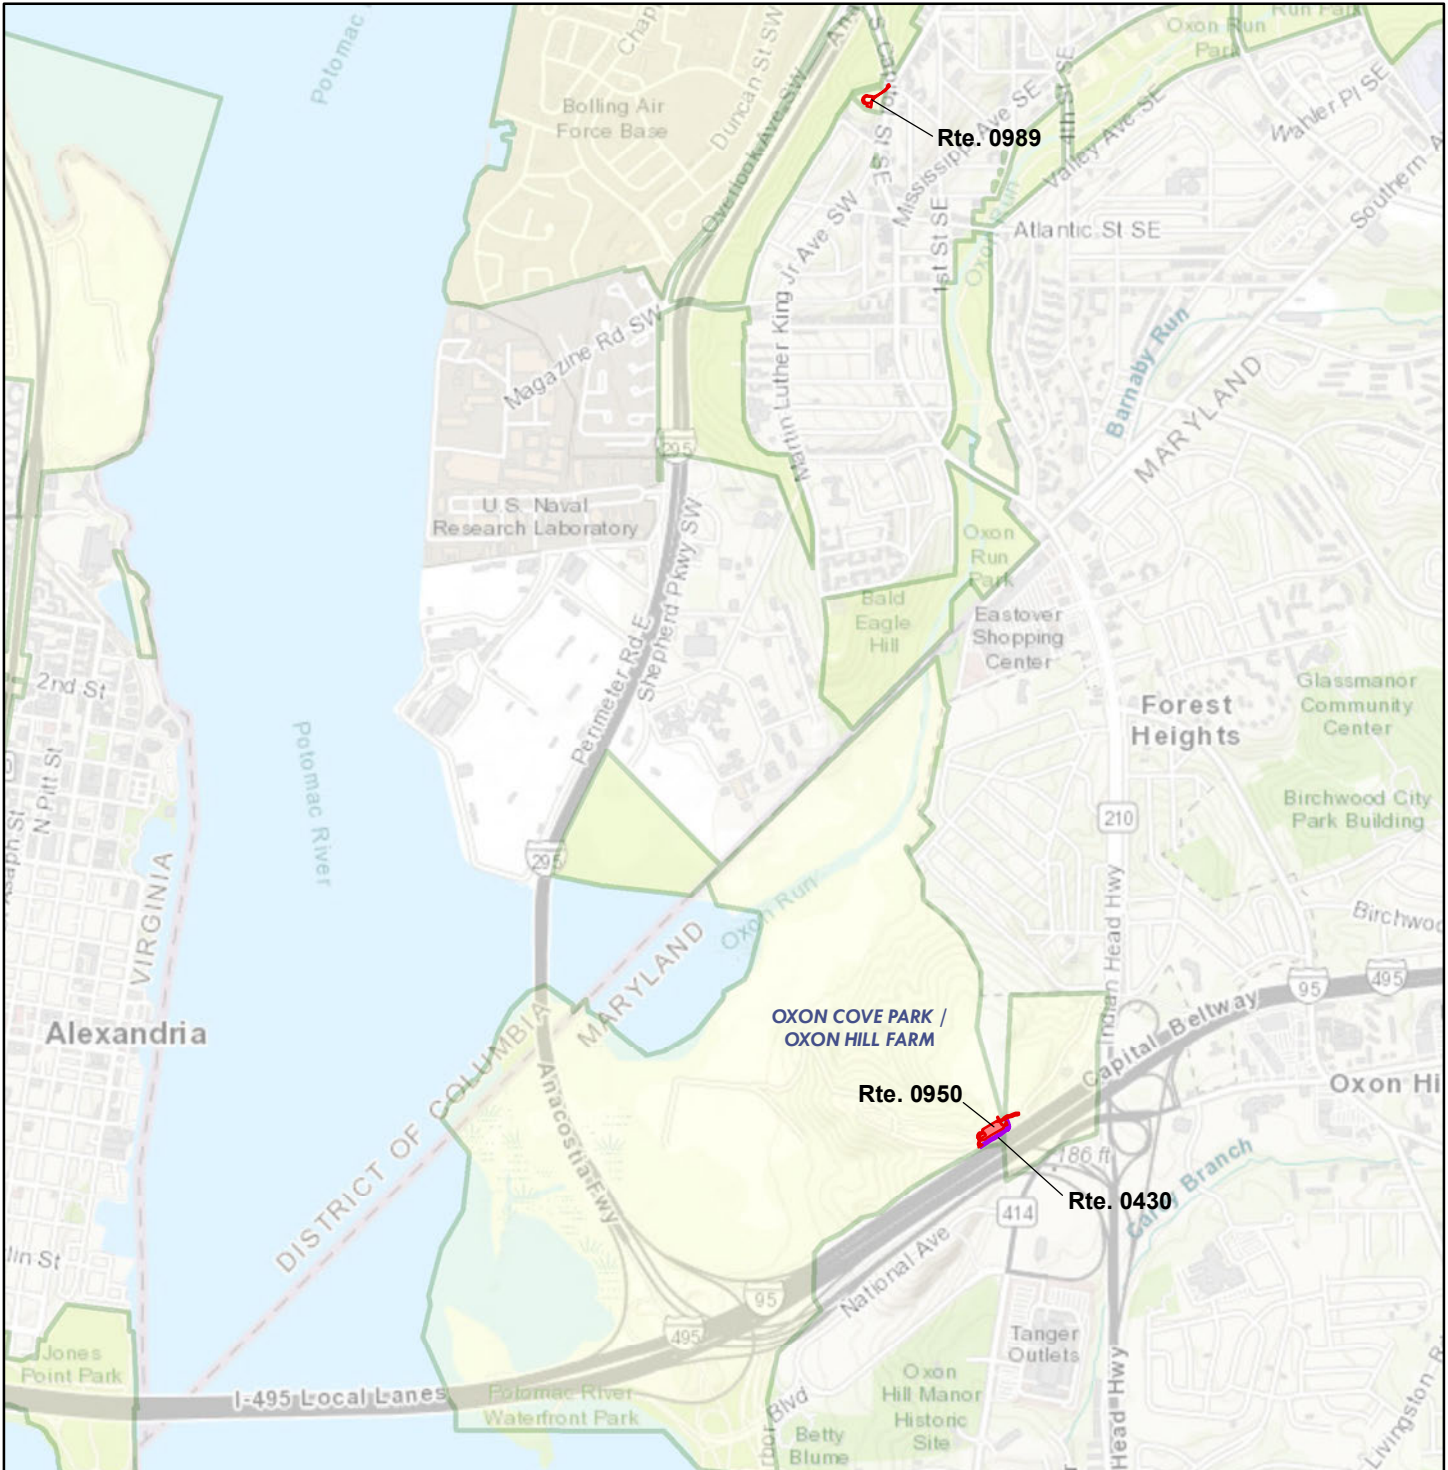

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Note: Unique colors are used to differentiate roads



National Capital Parks - East


ROUTE LOCATION MAP

MAP 5



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Note: Unique colors are used to differentiate roads




National Capital Parks - East

ROUTE CONDITION MAP


PCR - MILE BY MILE

Key Map

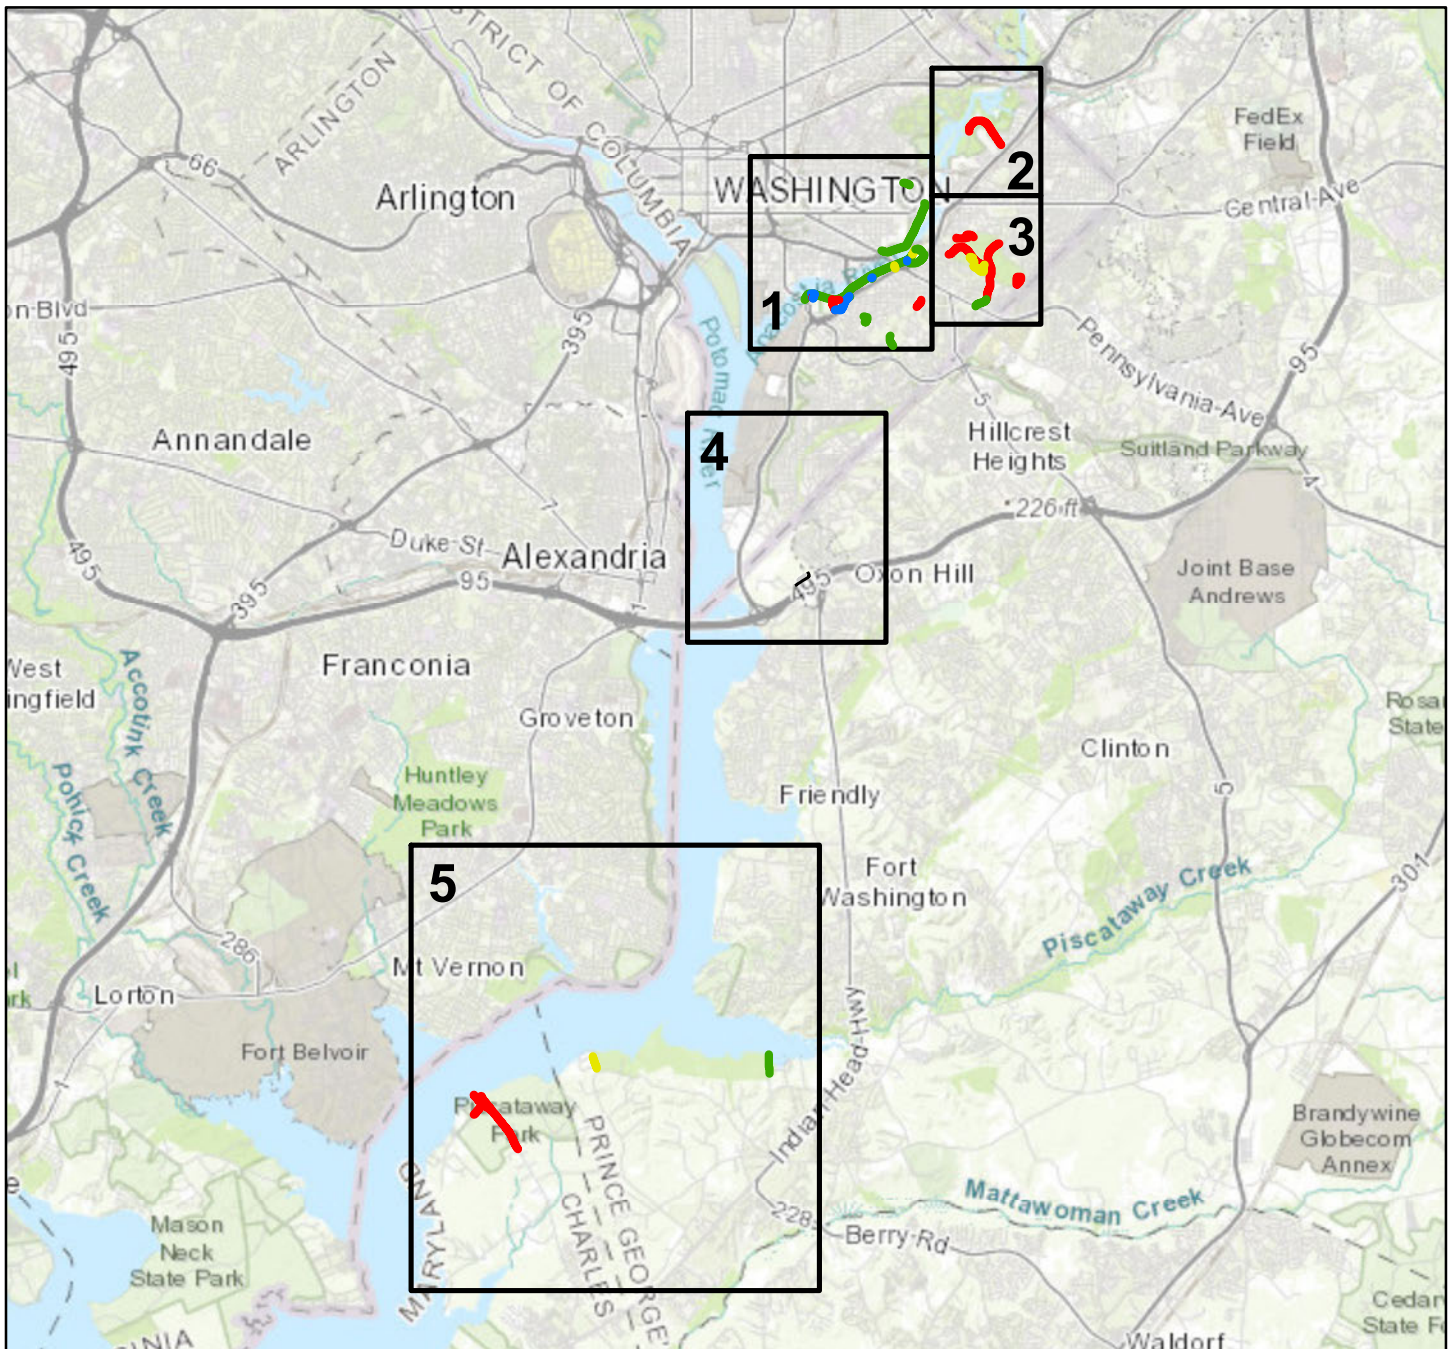


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)



Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas
Only Data Collection Vehicle and Manually Rated Roads are displayed



National Capital Parks - East

ROUTE CONDITION MAP

PCR - MILE BY MILE

Area Map 1




Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas
Only Data Collection Vehicle and Manually Rated Roads are displayed



National Capital Parks - East

ROUTE CONDITION MAP

PCR - MILE BY MILE

Area Map 2




Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas
 Only Data Collection Vehicle and Manually Rated Roads are displayed



National Capital Parks - East

ROUTE CONDITION MAP

PCR - MILE BY MILE

Area Map 3




Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas
Only Data Collection Vehicle and Manually Rated Roads are displayed




National Capital Parks - East

ROUTE CONDITION MAP

PCR - MILE BY MILE

Area Map 4

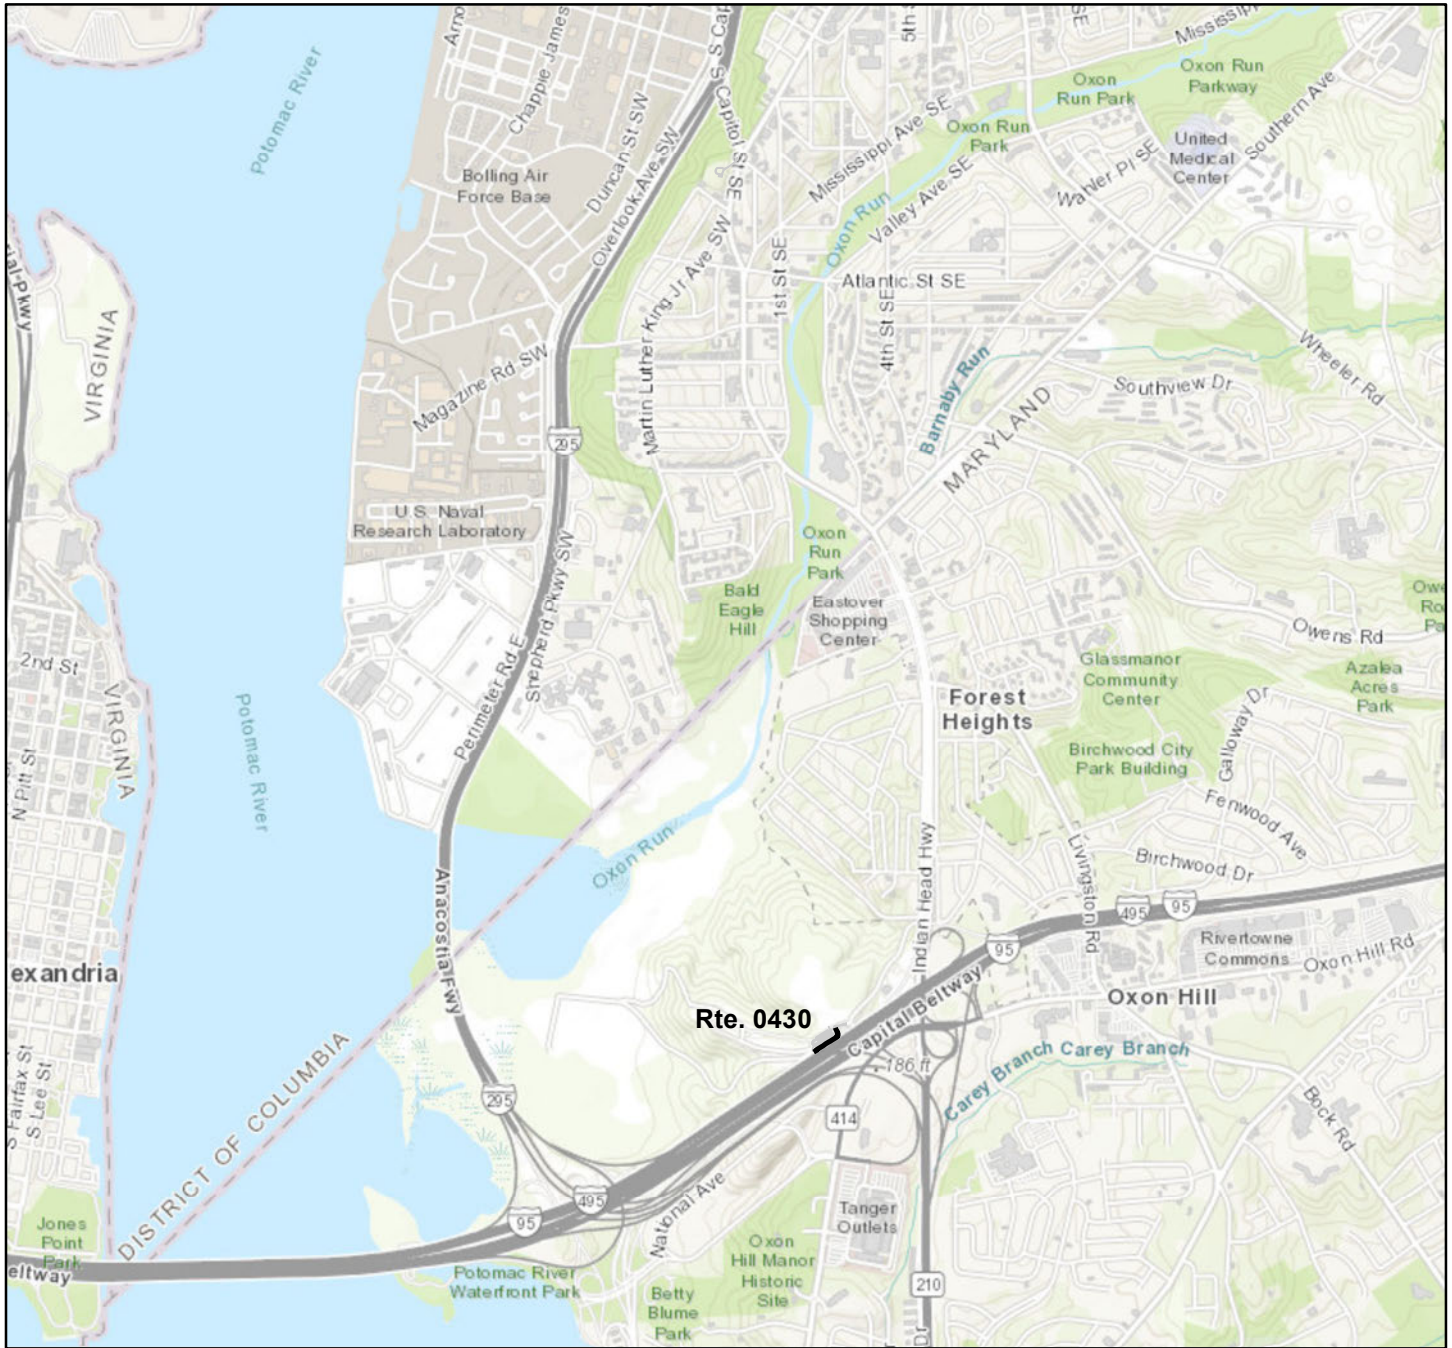


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas
Only Data Collection Vehicle and Manually Rated Roads are displayed



National Capital Parks - East

ROUTE CONDITION MAP

PCR - MILE BY MILE

Area Map 5




Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas
Only Data Collection Vehicle and Manually Rated Roads are displayed



Section 5 Paved Road Condition Rating Sheets



National Capital Parks - East



Federal Lands Highway
Road Inventory Program

National Capital Parks - East

ROUTE 0012: KENILWORTH PARK ACCESS

Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.78	Section Length (MI)	0.78				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	0	0				
Surface Condition Rating (SCR)	0	0				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	36	36				
Alligator Crack Index	99	99				
Longitudinal Crack Index	37	37				
Transverse Cracking Index	0	0				
Patching Index	95	95				
Rutting Index	92	92				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	21	21.1				
Lane Width (ft)	10.3	10.3				

National Capital Parks - East

ROUTE 0013: ANACOSTIA DRIVE

Data Collection Vehicle (DCV) Rating

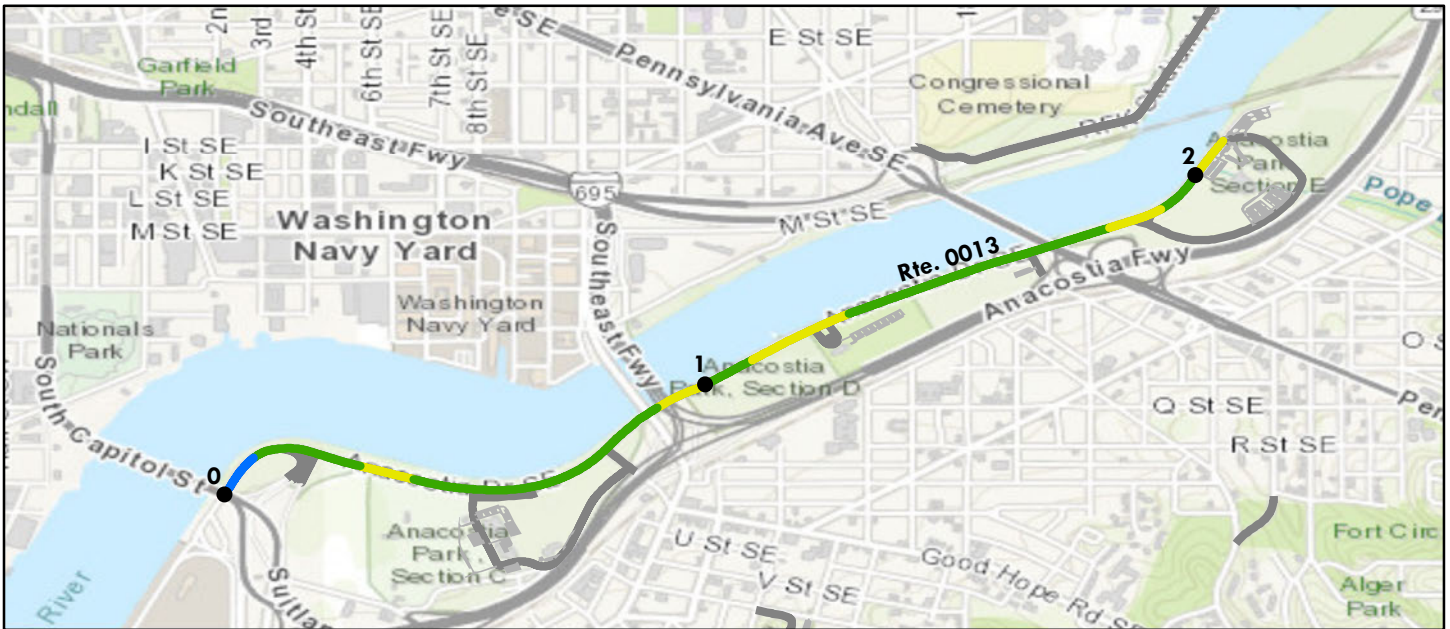

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/7/2018	Beginning Section MP	0	1	2		
Paved Length (Miles): 2.05	Section Length (MI)	1	1	0.05		
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	87	87	87	79		
Surface Condition Rating (SCR)	99	99	99	99		
Roughness Condition Index (RCI)	69	70	69	50		
Distress Index Values						
Structural Crack Index	99	99	100	99		
Alligator Crack Index	100	100	100	100		
Longitudinal Crack Index	99	99	100	99		
Transverse Cracking Index	99	99	100	100		
Patching Index	100	100	100	100		
Rutting Index	99	99	99	99		
International Roughness Index (IRI)	205	201	205	282		
Lane & Width Information						
Number of Lanes	2	2	2	2		
Paved Width (ft)	20.2	20.7	19.9	19.6		
Lane Width (ft)	10.4	10.9	9.9	10		

National Capital Parks - East

ROUTE 0014: GOOD HOPE ROAD

Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.07	Section Length (MI)	0.07				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	89	89				
Surface Condition Rating (SCR)	89	89				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	89	89				
Alligator Crack Index	100	100				
Longitudinal Crack Index	89	89				
Transverse Cracking Index	93	93				
Patching Index	100	100				
Rutting Index	99	99				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	26.1	26.1				
Lane Width (ft)	12.9	12.9				

National Capital Parks - East

ROUTE 0015: NICHOLSON STREET SE

Data Collection Vehicle (DCV) Rating

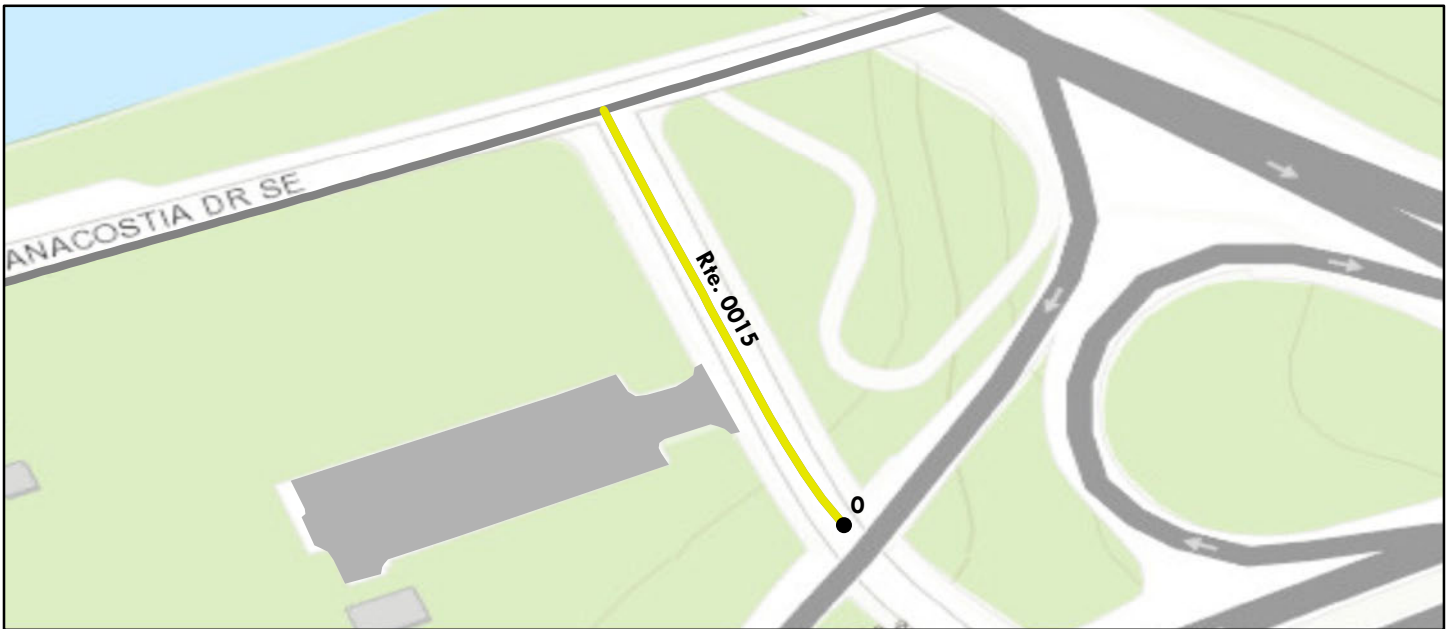

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.05	Section Length (MI)	0.05				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	77	77				
Surface Condition Rating (SCR)	77	77				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	80	80				
Alligator Crack Index	100	100				
Longitudinal Crack Index	80	80				
Transverse Cracking Index	77	77				
Patching Index	100	100				
Rutting Index	93	93				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	27	27				
Lane Width (ft)	12.8	12.8				

National Capital Parks - East

ROUTE 0016ZZ: ANACOSTIA PAVILION LOOP ROAD

Summary Route

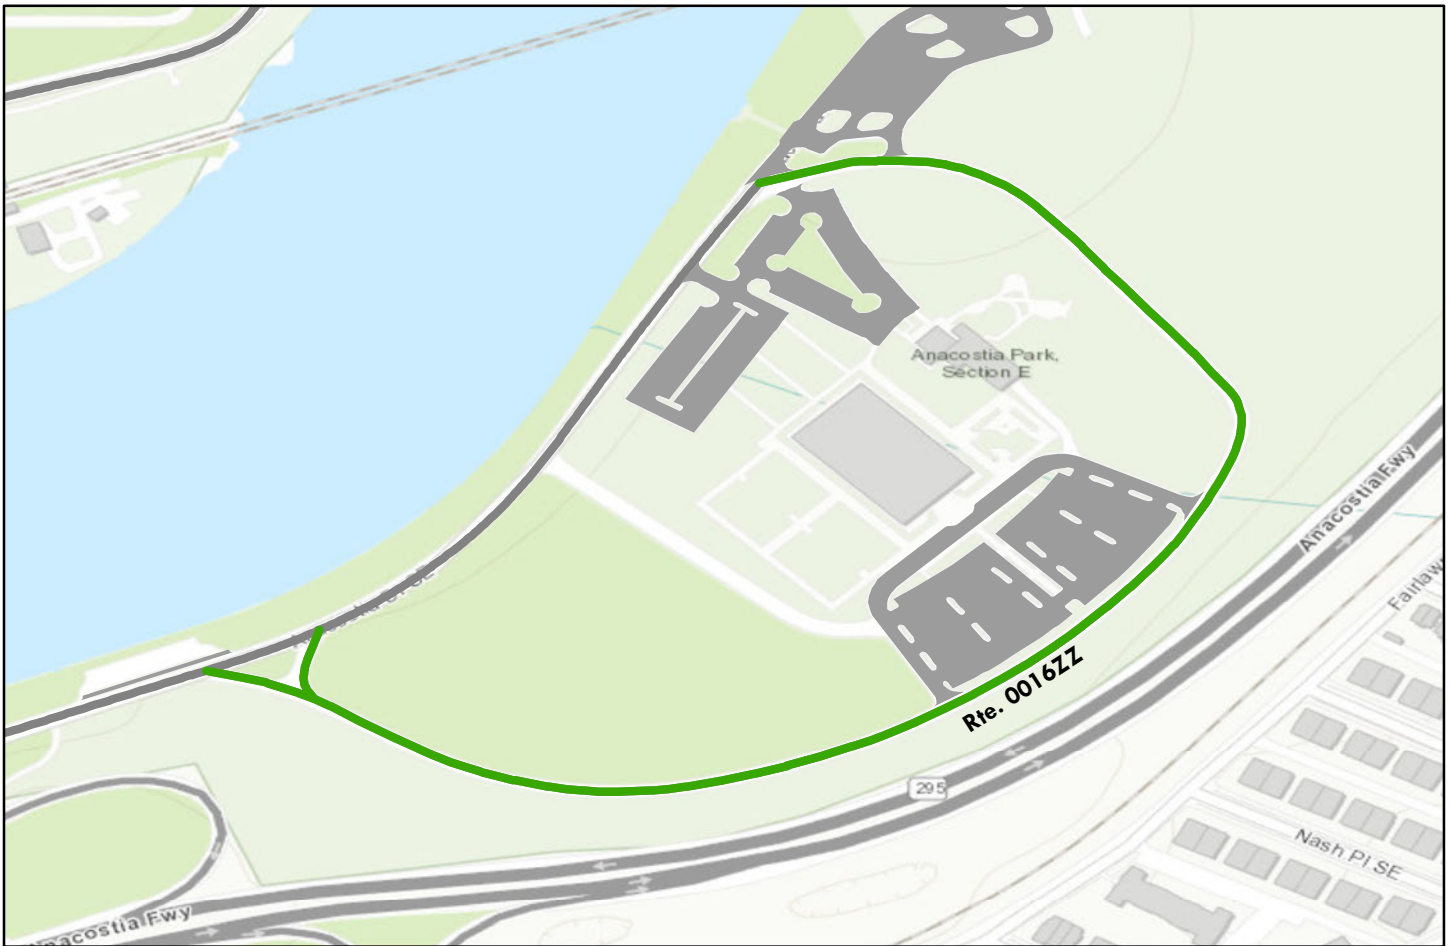

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Note: The weighted average summary PCR value is calculated from only the sections of road where the PCR was collected. The overall PCR for the summary route may not reflect individual subcomponent ratings.


Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
See Appendix for definitions and formulas						
Inspection Date: 6/7/2018						
Paved Length (Miles): 0.58						
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	88					
Lane & Width Information						
Number of Lanes	1					
Paved Width (ft)	21.6					
Lane Width (ft)	10.6					

National Capital Parks - East

ROUTE 0016AZ: ANACOSTIA PAVILION LOOP ROAD (MAIN)

Subcomponent of Route NACE-0016ZZ

Data Collection Vehicle (DCV) Rating

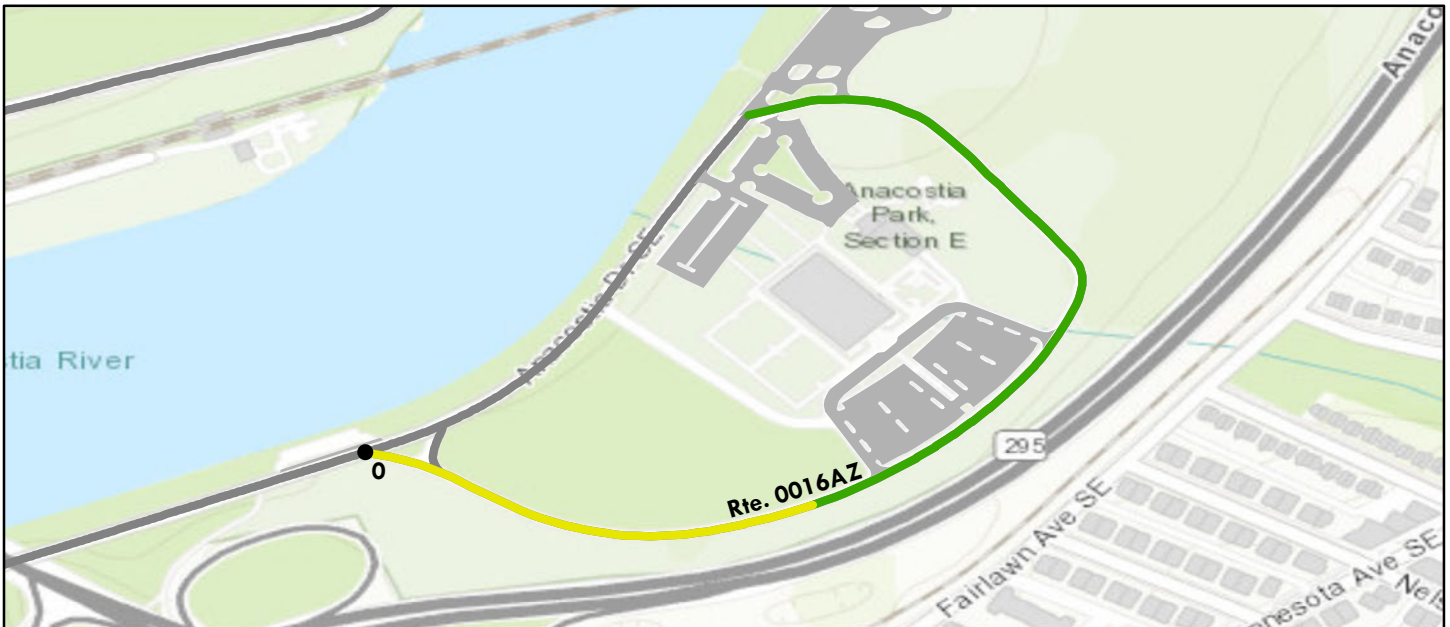

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.56	Section Length (MI)	0.56				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	88	88				
Surface Condition Rating (SCR)	97	97				
Roughness Condition Index (RCI)	74	74				
Distress Index Values						
Structural Crack Index	99	99				
Alligator Crack Index	99	99				
Longitudinal Crack Index	100	100				
Transverse Cracking Index	99	99				
Patching Index	100	100				
Rutting Index	97	97				
International Roughness Index (IRI)	189	189				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	21.5	21.5				
Lane Width (ft)	10.6	10.6				

National Capital Parks - East

ROUTE 0016BZ: ANACOSTIA PAVILION LOOP ROAD SPUR

Subcomponent of Route NACE-0016ZZ
Data Collection Vehicle (DCV) Rating

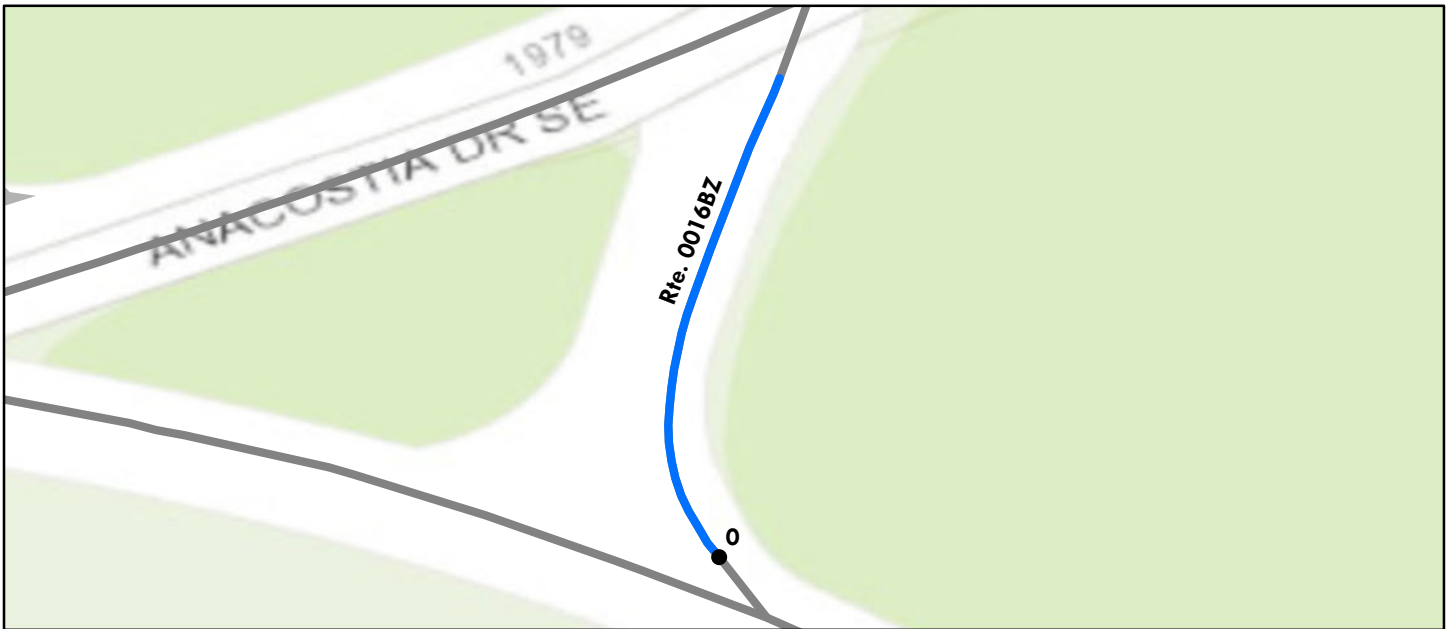


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.02	Section Length (MI)	0.02				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	99	99				
Surface Condition Rating (SCR)	99	99				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	100	100				
Alligator Crack Index	100	100				
Longitudinal Crack Index	100	100				
Transverse Cracking Index	100	100				
Patching Index	100	100				
Rutting Index	99	99				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	24.2	24.2				
Lane Width (ft)	11.3	11.3				

National Capital Parks - East

ROUTE 0017: FORT DUPONT DRIVE

Data Collection Vehicle (DCV) Rating

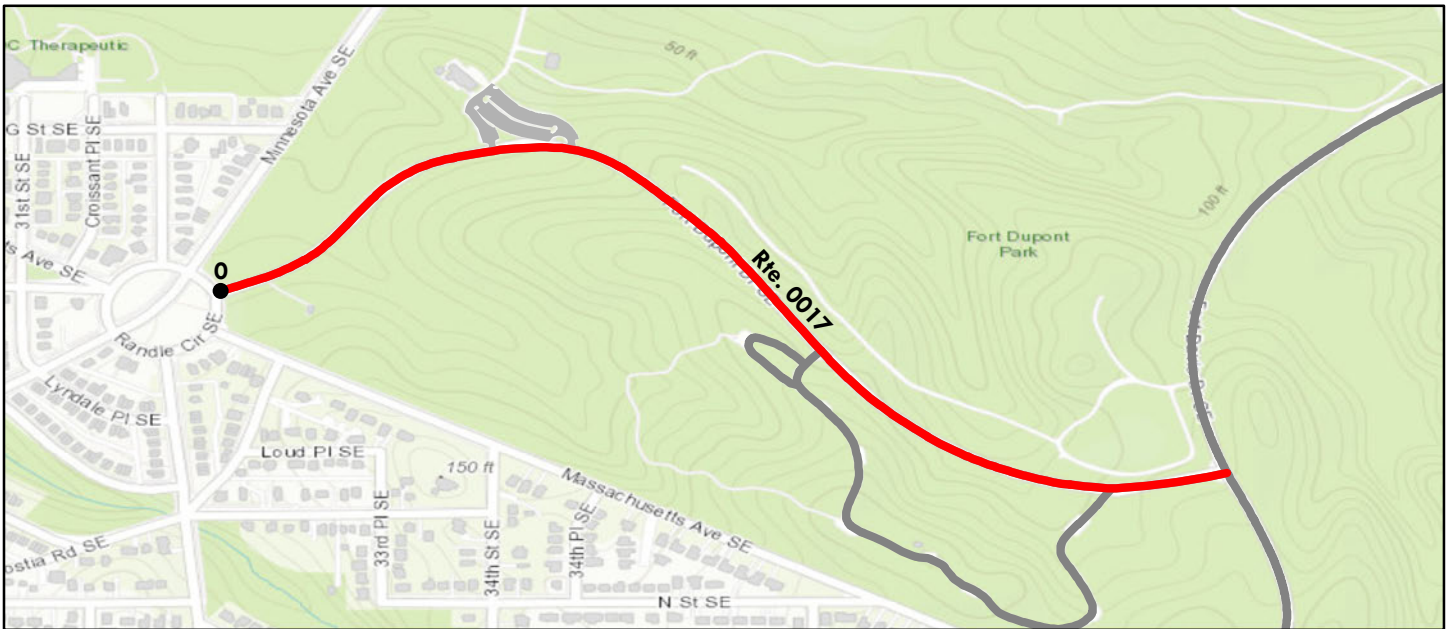

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community


Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.8	Section Length (MI)	0.8				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	7	7				
Surface Condition Rating (SCR)	0	0				
Roughness Condition Index (RCI)	18	18				
Distress Index Values						
Structural Crack Index	0	0				
Alligator Crack Index	90	90				
Longitudinal Crack Index	0	0				
Transverse Cracking Index	65	65				
Patching Index	85	85				
Rutting Index	84	84				
International Roughness Index (IRI)	530	530				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	24.5	24.5				
Lane Width (ft)	10.8	10.8				

NOTE: Cycle 6 condition rating was collected before the 2018/2019 rehab and repaving project.

National Capital Parks - East

ROUTE 0018: FORT DAVIS DRIVE

Data Collection Vehicle (DCV) Rating

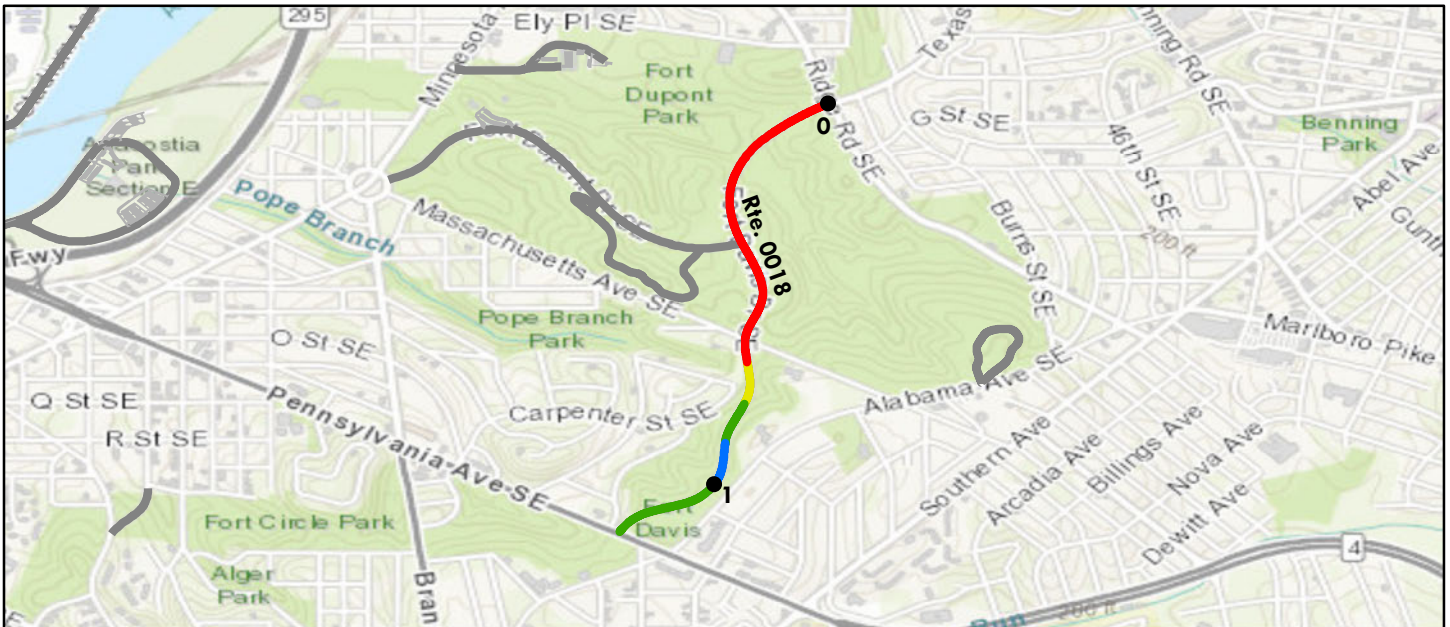

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)										
Poor (0 - 60)		Fair (61 - 84)		Good (85 - 94)		Excellent (95 - 100)		Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.										
Inspection Date:	6/8/2018	Beginning Section MP	0	1						
Paved Length (Miles):	1.21	Section Length (MI)	1	0.21						
Surface Type:	ASPHALT	Route Summary								
Roadway Condition Information										
Pavement Condition Rating (PCR)	22	20	90							
Surface Condition Rating (SCR)	0	0	94							
Roughness Condition Index (RCI)	56	51	84							
Distress Index Values										
Structural Crack Index	0	0	96							
Alligator Crack Index	60	52	100							
Longitudinal Crack Index	39	27	96							
Transverse Cracking Index	44	33	96							
Patching Index	95	94	100							
Rutting Index	91	91	94							
International Roughness Index (IRI)	258	277	158							
Lane & Width Information										
Number of Lanes	2	2	2							
Paved Width (ft)	23.1	23	23.4							
Lane Width (ft)	11.2	11.3	10.7							

NOTE: Cycle 6 condition rating was collected before the 2018/2019 rehab and repaving project.

National Capital Parks - East

ROUTE 0019: RIDGE PICNIC AREA ROAD

Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community


Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.46	Section Length (MI)	0.46				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	73	73				
Surface Condition Rating (SCR)	73	73				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	73	73				
Alligator Crack Index	96	96				
Longitudinal Crack Index	77	77				
Transverse Cracking Index	95	95				
Patching Index	87	87				
Rutting Index	90	90				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	14.4	14.4				
Lane Width (ft)	14.4	14.4				

NOTE: Cycle 6 condition rating was collected before the 2018/2019 rehab and repaving project.

National Capital Parks - East

ROUTE 0020ZZ: HOWARD ROAD AND ANACOSTIA DRIVE SE RAMPS

Summary Route

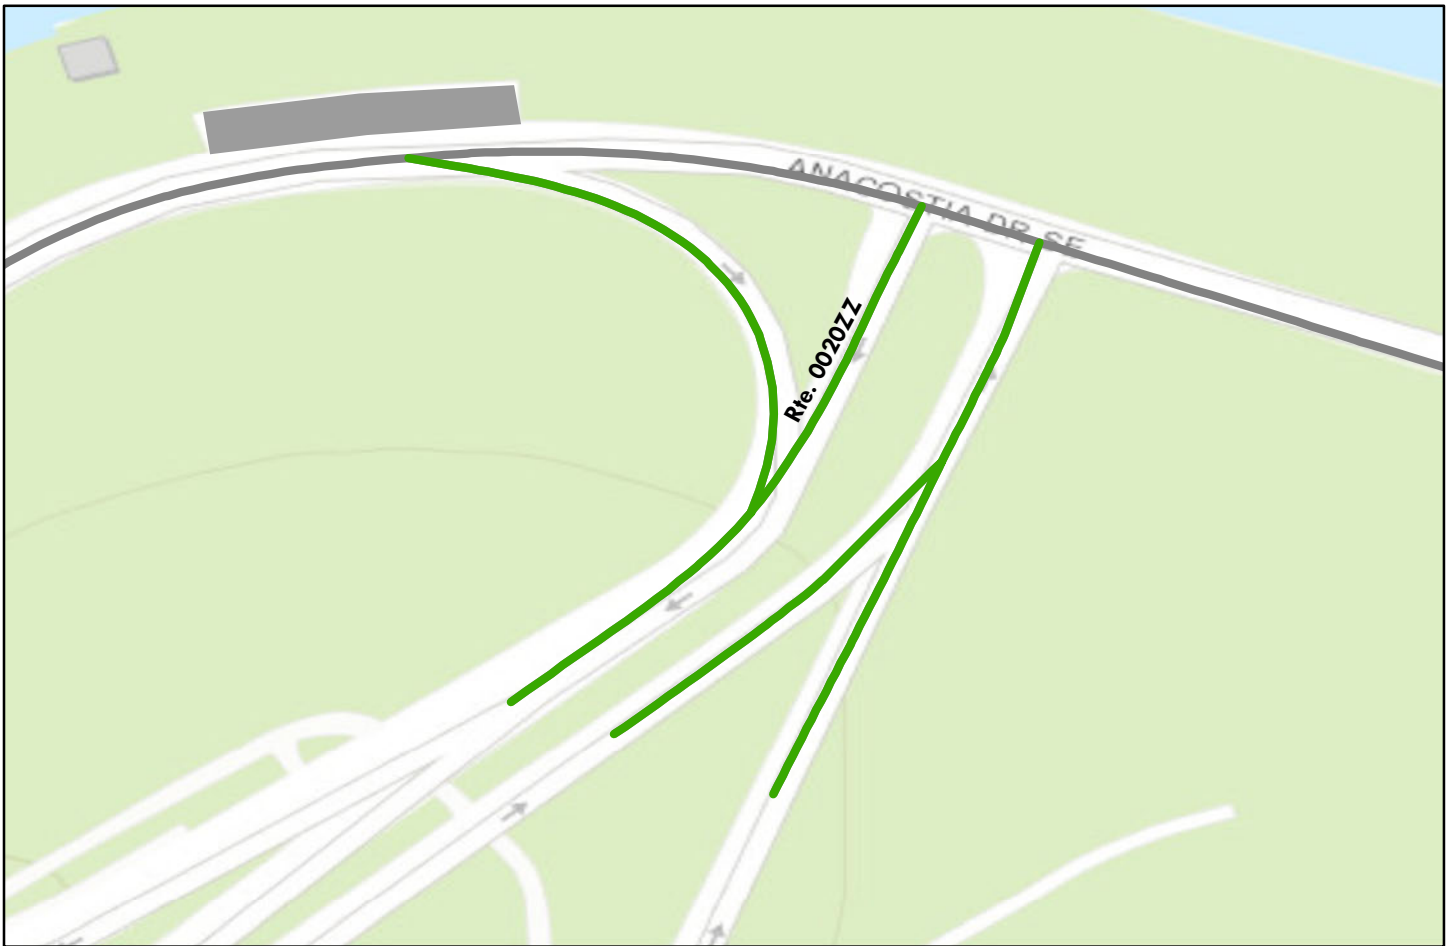

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Note: The weighted average summary PCR value is calculated from only the sections of road where the PCR was collected. The overall PCR for the summary route may not reflect individual subcomponent ratings.


Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
See Appendix for definitions and formulas						
Inspection Date: 6/7/2018						
Paved Length (Miles): 0.25						
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	88					
Lane & Width Information						
Number of Lanes	1					
Paved Width (ft)	15.1					
Lane Width (ft)	14.7					

NOTE: Collected in 2018 before the re-alignment and land transfer.

National Capital Parks - East

ROUTE 0020AZ: ANACOSTIA DRIVE SE SPUR RAMP TO S CAPITAL STREET SE

Subcomponent of Route NACE-0020ZZ
Data Collection Vehicle (DCV) Rating

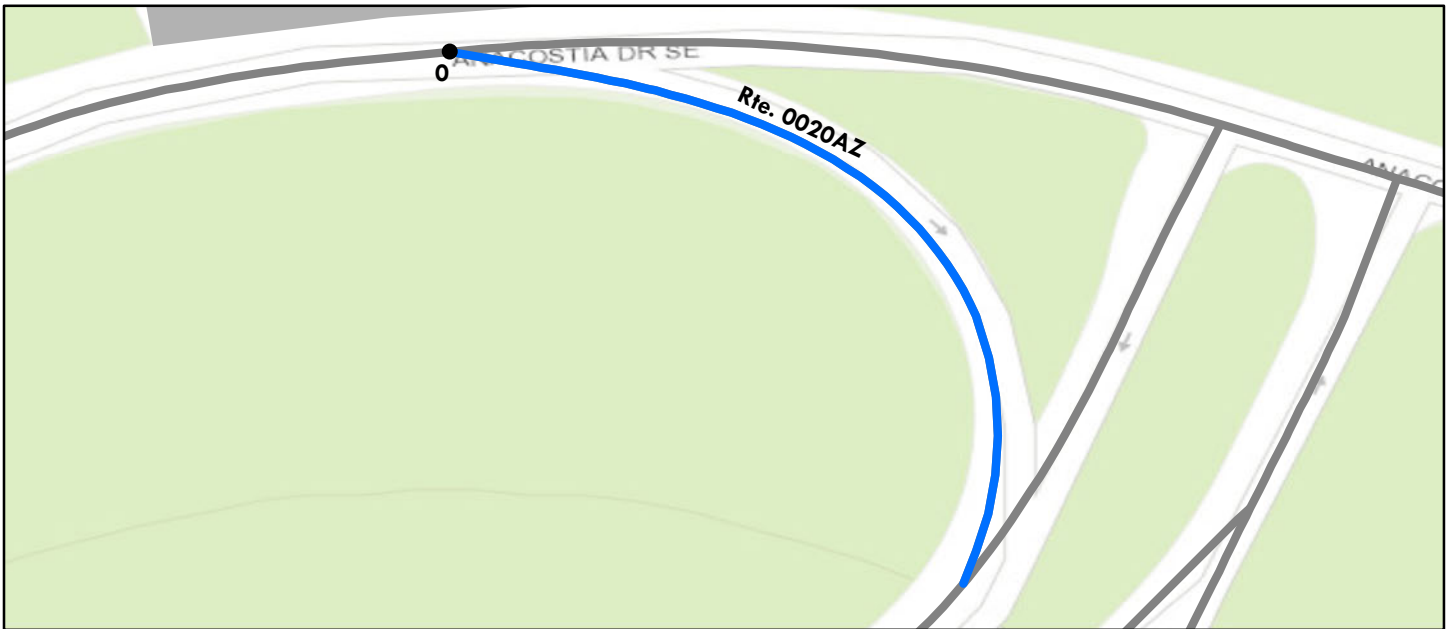

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.06	Section Length (MI)	0.06				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	99	99				
Surface Condition Rating (SCR)	99	99				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	99	99				
Alligator Crack Index	100	100				
Longitudinal Crack Index	99	99				
Transverse Cracking Index	100	100				
Patching Index	100	100				
Rutting Index	100	100				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	13.8	13.8				
Lane Width (ft)	13.8	13.8				

NOTE: Collected in 2018 before the re-alignment and land transfer.

National Capital Parks - East

ROUTE 0020BZ: ANACOSTIA DRIVE SE RAMP TO S CAPITAL STREET SE

Subcomponent of Route NACE-0020ZZ
Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community


Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.07	Section Length (MI)	0.07				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	95	95				
Surface Condition Rating (SCR)	95	95				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	95	95				
Alligator Crack Index	100	100				
Longitudinal Crack Index	95	95				
Transverse Cracking Index	100	100				
Patching Index	100	100				
Rutting Index	100	100				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	14.7	14.7				
Lane Width (ft)	14.7	14.7				

NOTE: Collected in 2018 before the re-alignment and land transfer.

National Capital Parks - East

ROUTE 0020CZ: S CAPITAL STREET SE RAMP TO HOWARD ROAD SE RAMP

Subcomponent of Route NACE-0020ZZ
Data Collection Vehicle (DCV) Rating

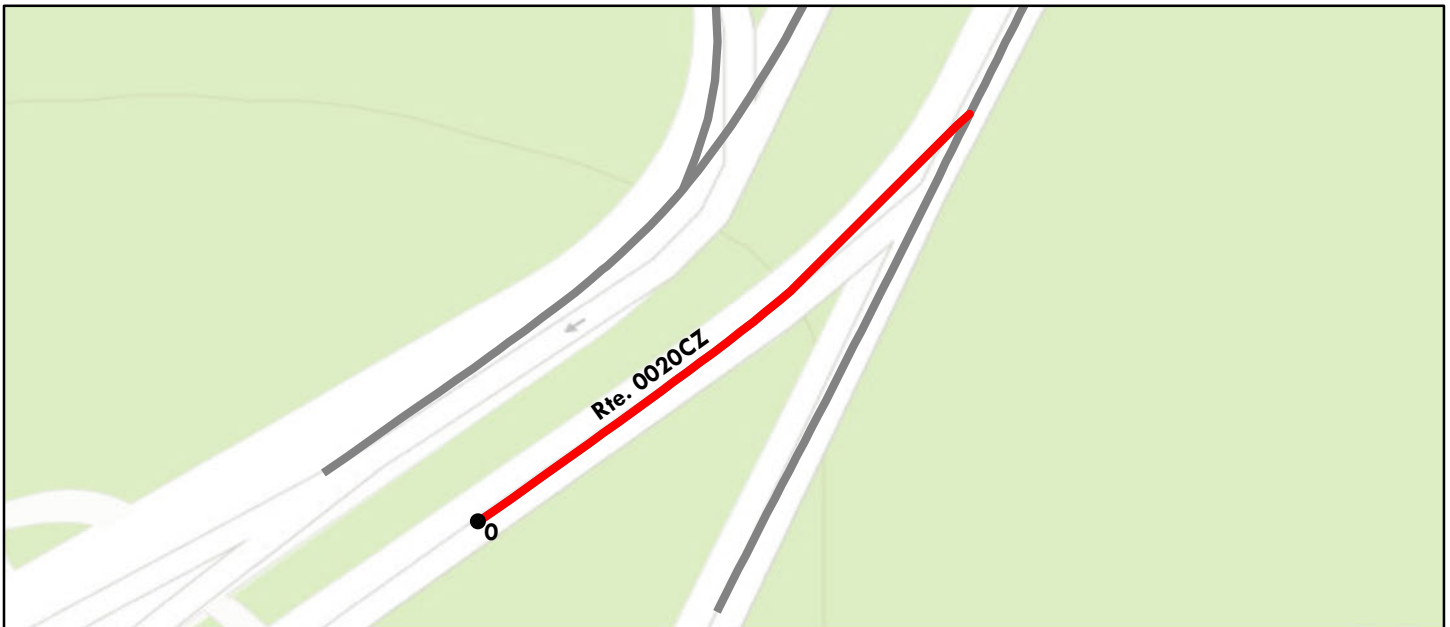

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.04	Section Length (MI)	0.04				
Surface Type: CONCRETE	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	53	53				
Surface Condition Rating (SCR)	N/A	N/A				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	N/A	N/A				
Alligator Crack Index	N/A	N/A				
Longitudinal Crack Index	N/A	N/A				
Transverse Cracking Index	N/A	N/A				
Patching Index	N/A	N/A				
Rutting Index	N/A	N/A				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	18.1	18.1				
Lane Width (ft)	18.1	18.1				

NOTE: Surface is concrete, and the PCR value was determined manually.

Collected in 2018 before the re-alignment and land transfer.

National Capital Parks - East

ROUTE 0020DZ: HOWARD ROAD SE RAMP TO ANACOSTIA DRIVE SE

Subcomponent of Route NACE-0020ZZ
Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community


Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)		Fair (61- 84)		Good (85 - 94)		Excellent (95 - 100)
						Not Rated
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date:	6/7/2018	Beginning Section MP	0			
Paved Length (Miles):	0.07	Section Length (MI)	0.07			
Surface Type:	ASPHALT	Route Summary				
Roadway Condition Information						
Pavement Condition Rating (PCR)	97	97				
Surface Condition Rating (SCR)	97	97				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	97	97				
Alligator Crack Index	100	100				
Longitudinal Crack Index	97	97				
Transverse Cracking Index	97	97				
Patching Index	100	100				
Rutting Index	97	97				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	15	15				
Lane Width (ft)	13.6	13.6				

NOTE: Collected in 2018 before the re-alignment and land transfer.

National Capital Parks - East

ROUTE 0102: FREDERICK DOUGLAS HOME ACCESS ROAD

Data Collection Vehicle (DCV) Rating

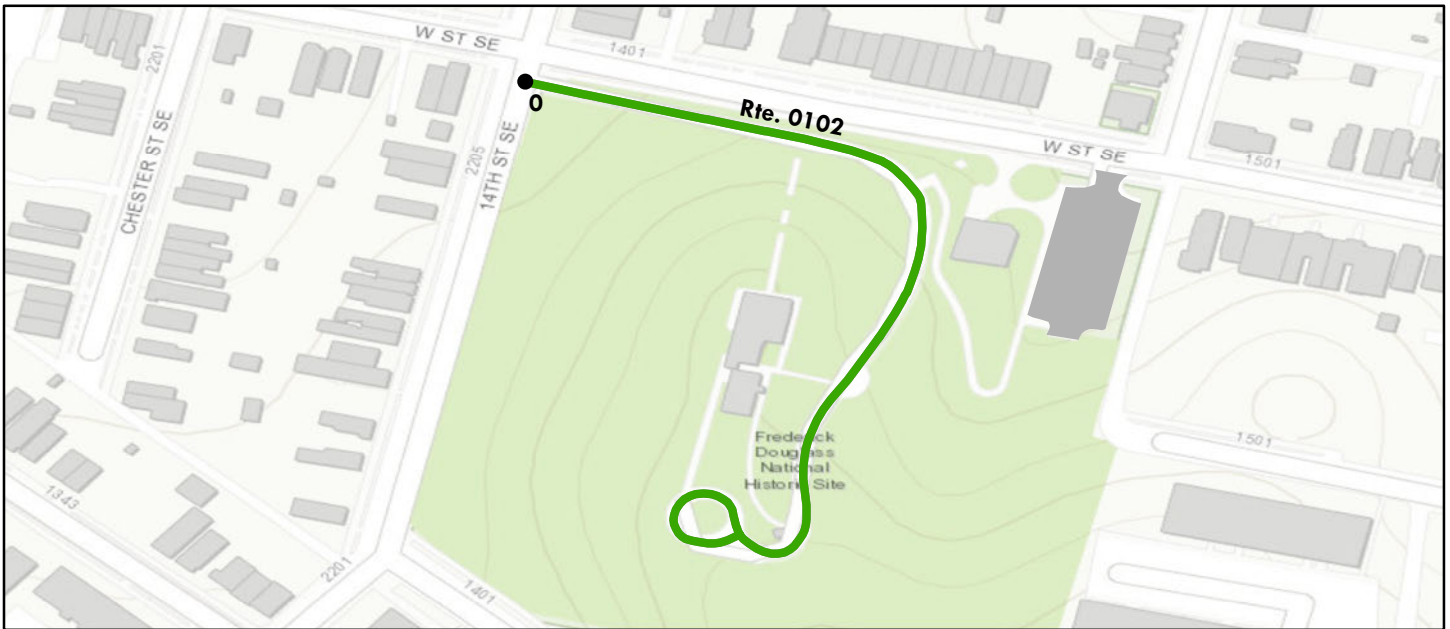

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.18	Section Length (MI)	0.18				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	92	92				
Surface Condition Rating (SCR)	92	92				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	97	97				
Alligator Crack Index	100	100				
Longitudinal Crack Index	97	97				
Transverse Cracking Index	98	98				
Patching Index	100	100				
Rutting Index	92	92				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	12.1	12.1				
Lane Width (ft)	12.1	12.1				

National Capital Parks - East

ROUTE 0104ZZ: ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE

Summary Route



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Note: The weighted average summary PCR value is calculated from only the sections of road where the PCR was collected. The overall PCR for the summary route may not reflect individual subcomponent ratings.

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


See Appendix for definitions and formulas

Inspection Date:	6/7/2018					
Paved Length (Miles):	0.54					
Surface Type:	ASPHALT	Route Summary				
Roadway Condition Information						
Pavement Condition Rating (PCR)	71					
Lane & Width Information						
Number of Lanes	2					
Paved Width (ft)	23.7					
Lane Width (ft)	11					

National Capital Parks - East

ROUTE 0104AZ: ANACOSTIA COMPOUND ACCESS

Subcomponent of Route NACE-0104ZZ
 Data Collection Vehicle (DCV) Rating

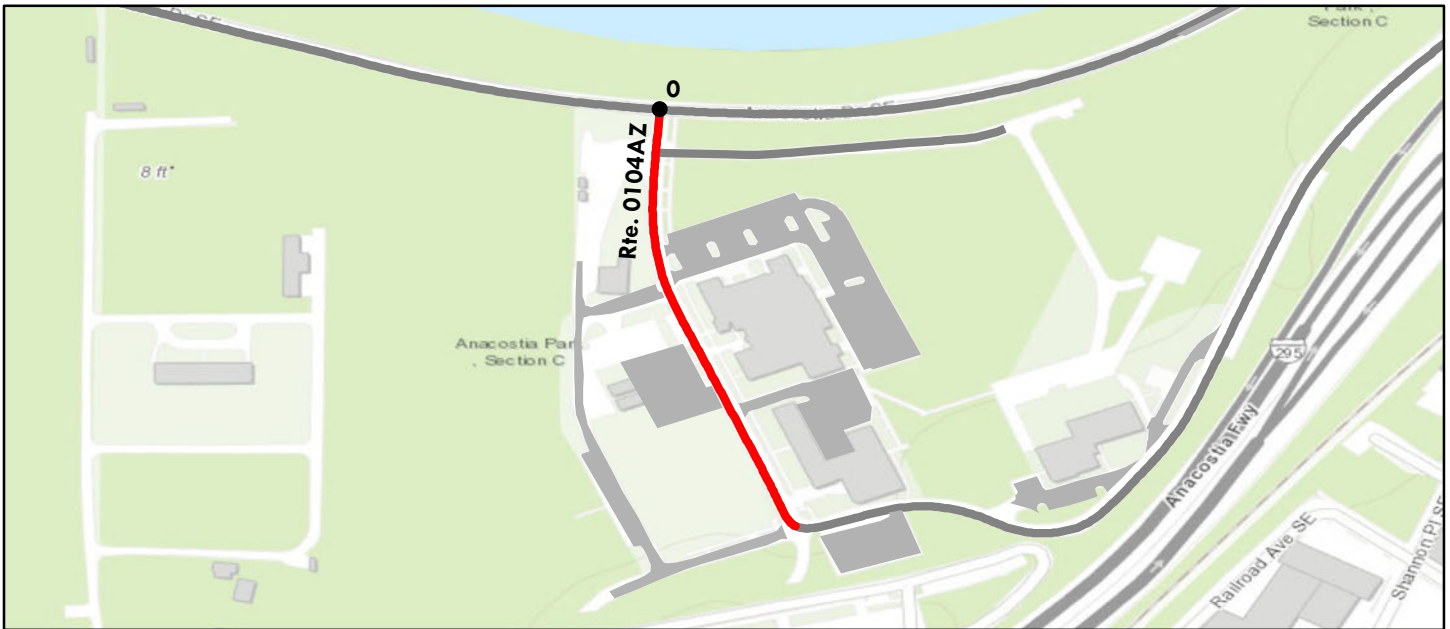

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community


Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.18	Section Length (MI)	0.18				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	10	10				
Surface Condition Rating (SCR)	10	10				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	61	61				
Alligator Crack Index	97	97				
Longitudinal Crack Index	64	64				
Transverse Cracking Index	10	10				
Patching Index	96	96				
Rutting Index	97	97				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	22.8	22.8				
Lane Width (ft)	10.8	10.8				

National Capital Parks - East

ROUTE 0104BZ: AVIATION DRIVE

Subcomponent of Route NACE-0104ZZ

Data Collection Vehicle (DCV) Rating

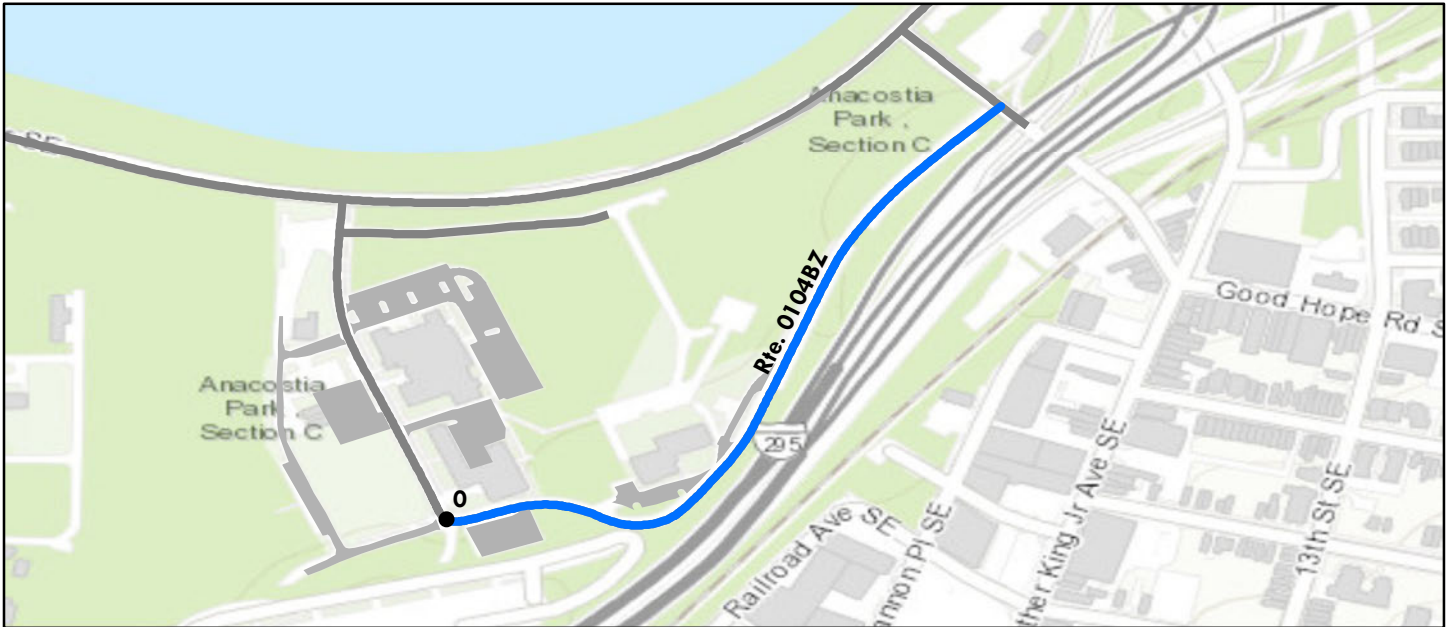

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.36	Section Length (MI)	0.36				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	100	100				
Surface Condition Rating (SCR)	100	100				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	100	100				
Alligator Crack Index	100	100				
Longitudinal Crack Index	100	100				
Transverse Cracking Index	100	100				
Patching Index	100	100				
Rutting Index	100	100				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	24.1	24.1				
Lane Width (ft)	11.1	11.1				

National Capital Parks - East

ROUTE 0105ZZ: ANACOSTIA POOL AND RECREATION FACILITY ROADS

Summary Route

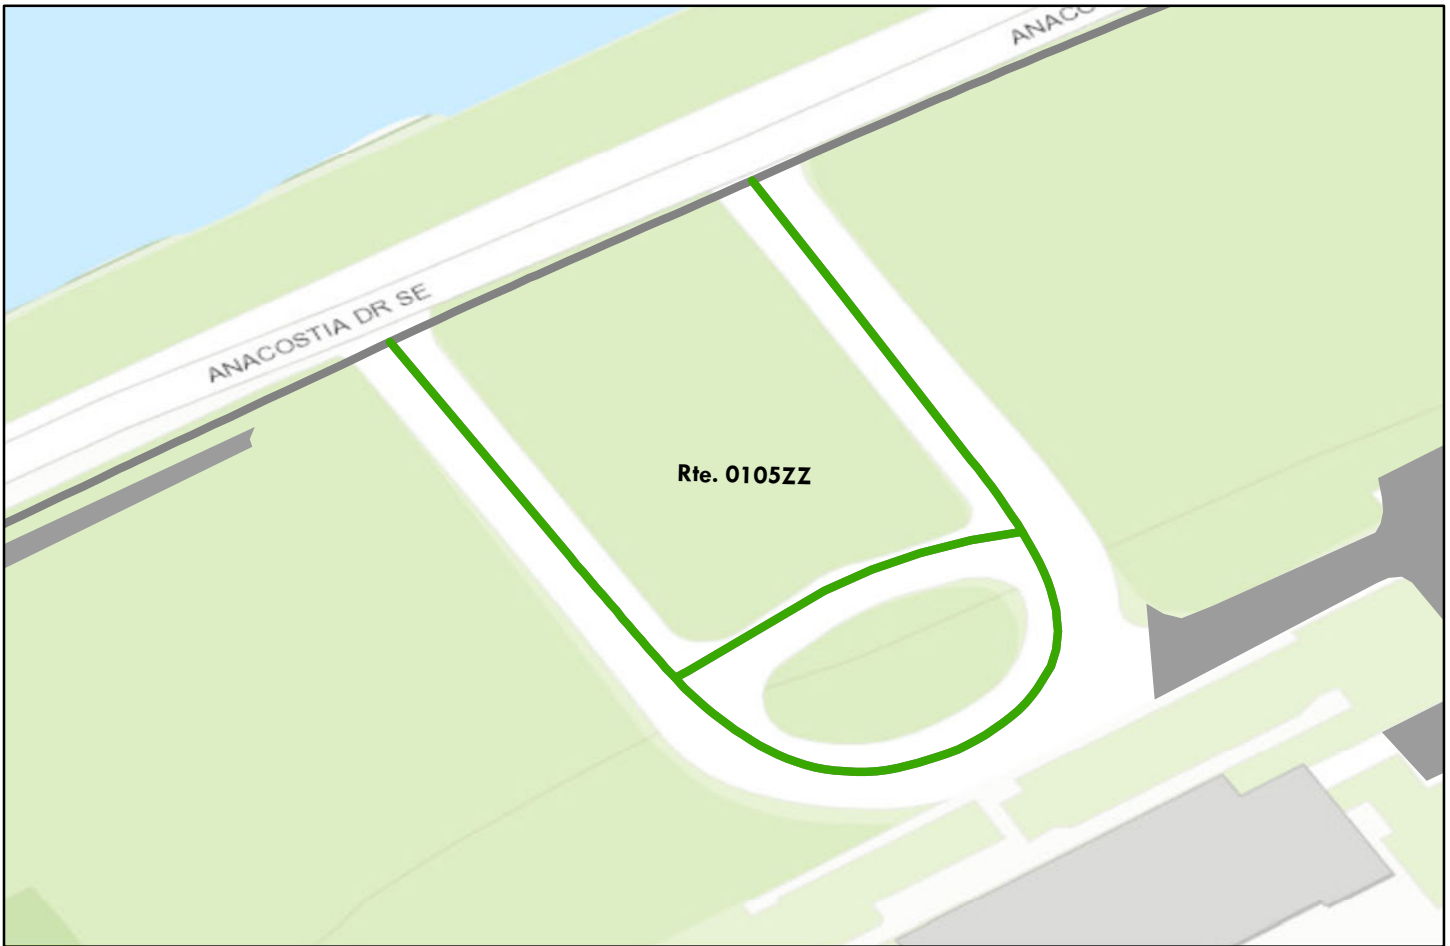

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Note: The weighted average summary PCR value is calculated from only the sections of road where the PCR was collected. The overall PCR for the summary route may not reflect individual subcomponent ratings.

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
See Appendix for definitions and formulas						
Inspection Date: 6/7/2018						
Paved Length (Miles): 0.13						
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	94					
Lane & Width Information						
Number of Lanes	1					
Paved Width (ft)	24.3					
Lane Width (ft)	24.3					

National Capital Parks - East

ROUTE 0105AZ: ANACOSTIA POOL AND RECREATION FACILITY ROAD

Subcomponent of Route NACE-0105ZZ
Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.11	Section Length (MI)	0.11				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	94	94				
Surface Condition Rating (SCR)	94	94				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	94	94				
Alligator Crack Index	100	100				
Longitudinal Crack Index	94	94				
Transverse Cracking Index	98	98				
Patching Index	100	100				
Rutting Index	97	97				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	26	26				
Lane Width (ft)	26	26				

National Capital Parks - East

ROUTE 0105BZ: ANACOSTIA POOL AND RECREATION FACILITY ROAD CUT-THRU

Subcomponent of Route NACE-0105ZZ
 Data Collection Vehicle (DCV) Rating

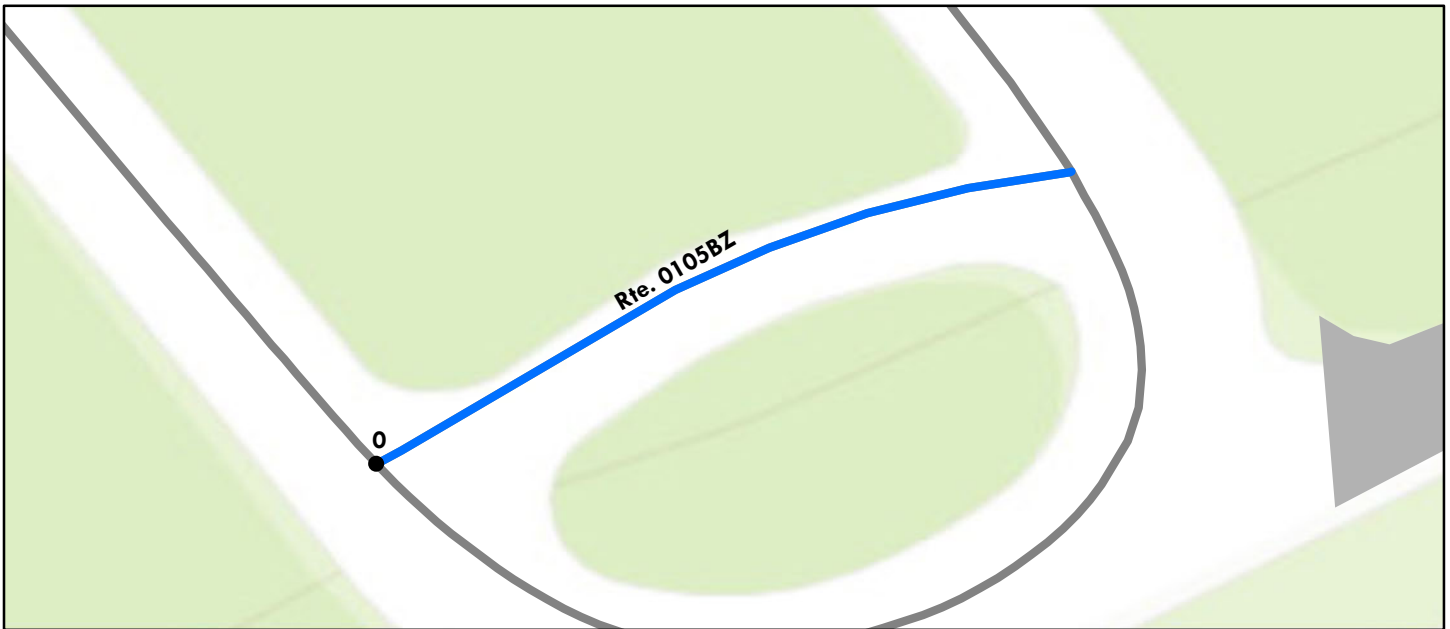

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.02	Section Length (MI)	0.02				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	96	96				
Surface Condition Rating (SCR)	96	96				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	100	100				
Alligator Crack Index	100	100				
Longitudinal Crack Index	100	100				
Transverse Cracking Index	100	100				
Patching Index	100	100				
Rutting Index	96	96				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	16.1	16.1				
Lane Width (ft)	16.1	16.1				

National Capital Parks - East

ROUTE 0108: FORT STANTON RESERVOIR ACCESS ROAD

Data Collection Vehicle (DCV) Rating

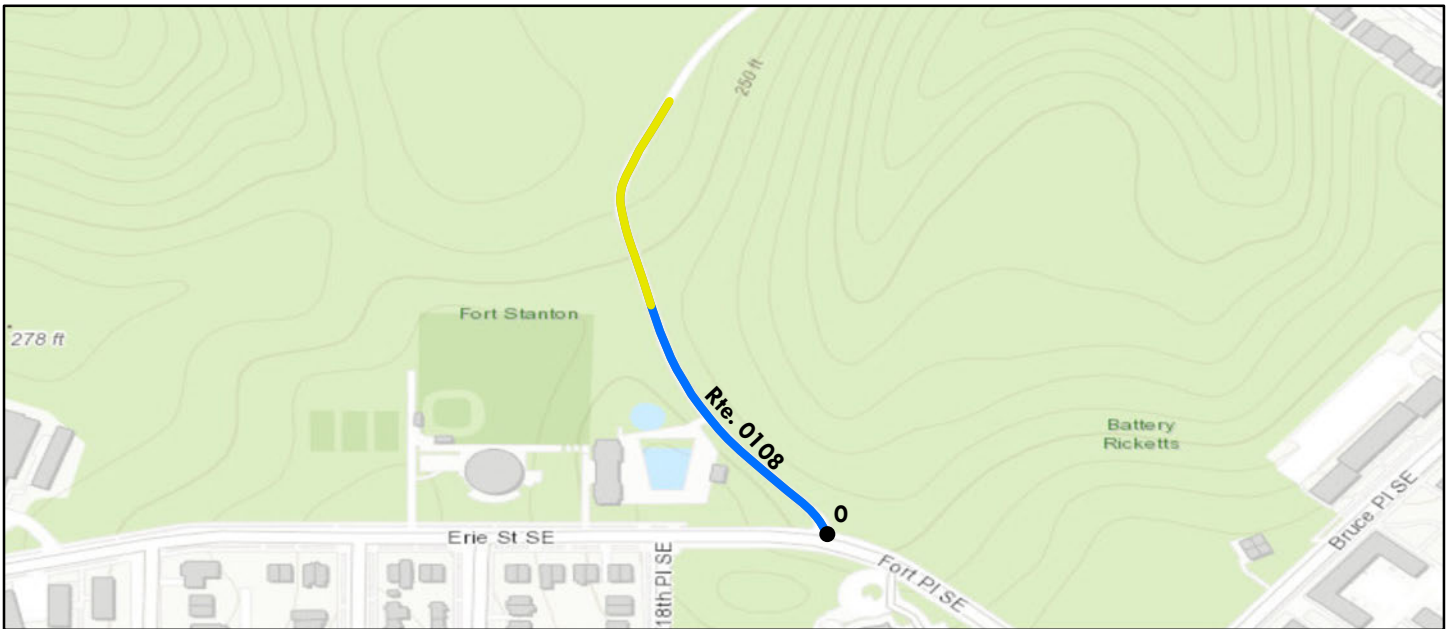


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.18	Section Length (MI)	0.18				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	90	90				
Surface Condition Rating (SCR)	90	90				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	97	97				
Alligator Crack Index	100	100				
Longitudinal Crack Index	97	97				
Transverse Cracking Index	90	90				
Patching Index	100	100				
Rutting Index	97	97				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	12.6	12.6				
Lane Width (ft)	12.6	12.6				

National Capital Parks - East

ROUTE 0111: 27TH STREET SE

Data Collection Vehicle (DCV) Rating

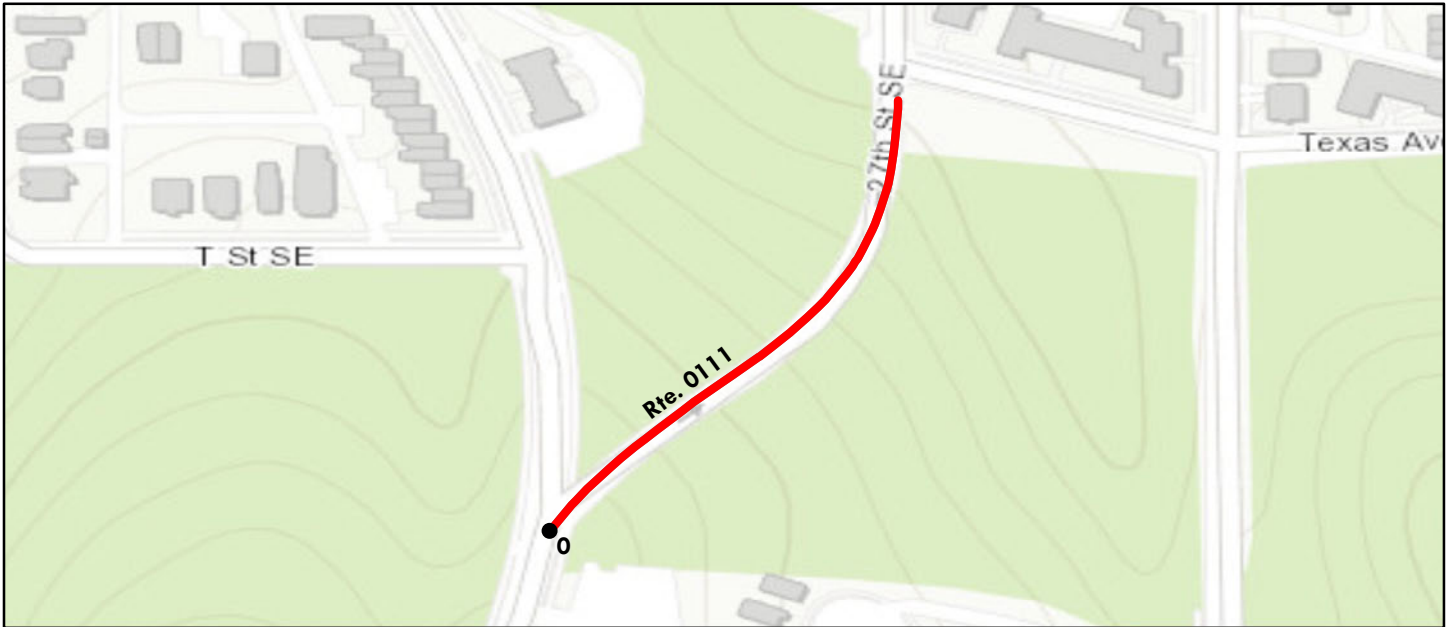

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.13	Section Length (MI)	0.13				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	29	29				
Surface Condition Rating (SCR)	29	29				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	29	29				
Alligator Crack Index	60	60				
Longitudinal Crack Index	69	69				
Transverse Cracking Index	77	77				
Patching Index	100	100				
Rutting Index	93	93				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	23	23				
Lane Width (ft)	23	23				

National Capital Parks - East

ROUTE 0112: BRYAN POINT ROAD

Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.2	Section Length (MI)	0.2				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	66	66				
Surface Condition Rating (SCR)	66	66				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	66	66				
Alligator Crack Index	82	82				
Longitudinal Crack Index	84	84				
Transverse Cracking Index	92	92				
Patching Index	100	100				
Rutting Index	99	99				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	14.8	14.8				
Lane Width (ft)	9.3	9.3				

National Capital Parks - East

ROUTE 0117: FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE)

Data Collection Vehicle (DCV) Rating

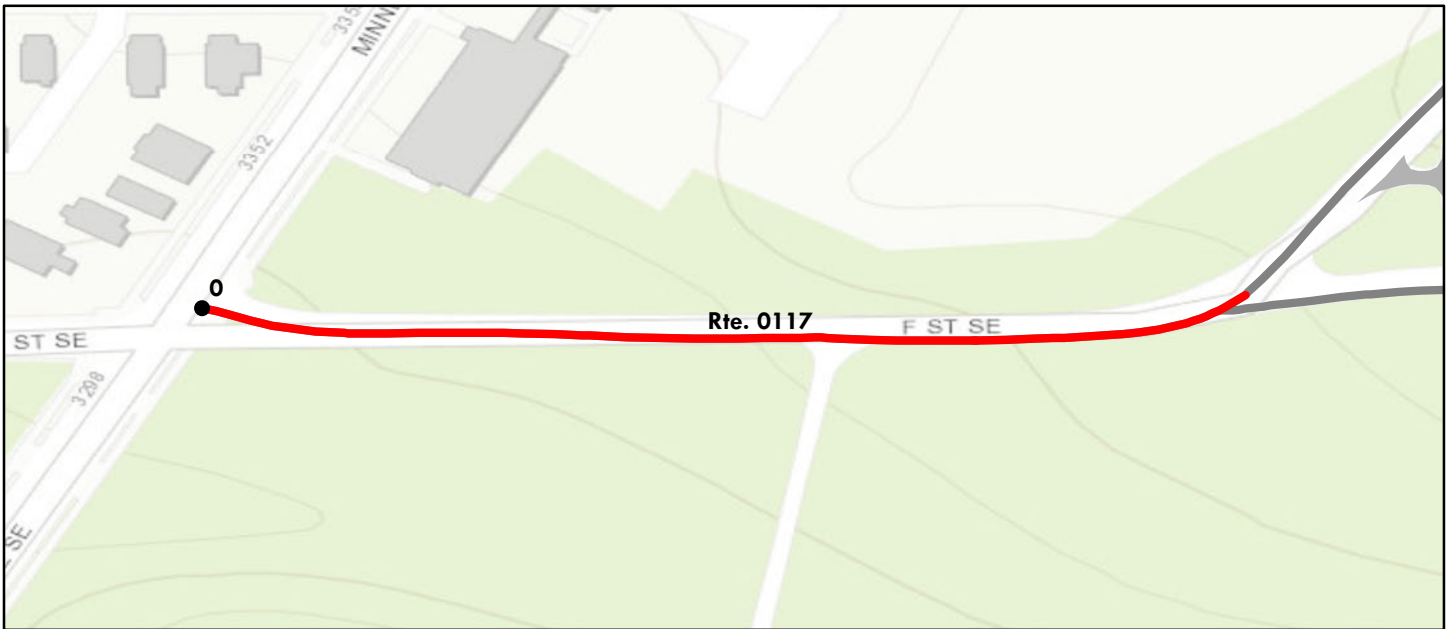

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.14	Section Length (MI)	0.14				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	0	0				
Surface Condition Rating (SCR)	0	0				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	7	7				
Alligator Crack Index	82	82				
Longitudinal Crack Index	25	25				
Transverse Cracking Index	0	0				
Patching Index	97	97				
Rutting Index	99	99				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	16.3	16.3				
Lane Width (ft)	8.3	8.3				

National Capital Parks - East

ROUTE 0118: LANHAM ESTATES LOOP ROAD

Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.33	Section Length (MI)	0.33				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	3	3				
Surface Condition Rating (SCR)	3	3				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	3	3				
Alligator Crack Index	30	30				
Longitudinal Crack Index	73	73				
Transverse Cracking Index	68	68				
Patching Index	94	94				
Rutting Index	71	71				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	11	11				
Lane Width (ft)	11	11				

NOTE: Collected in 2018 before conversion to walking trail and construction of new parking area.

National Capital Parks - East

ROUTE 0120: WHARF ROAD

Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.32	Section Length (MI)	0.32				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	94	94				
Surface Condition Rating (SCR)	94	94				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	94	94				
Alligator Crack Index	99	99				
Longitudinal Crack Index	95	95				
Transverse Cracking Index	96	96				
Patching Index	98	98				
Rutting Index	98	98				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	16	16				
Lane Width (ft)	16	16				

National Capital Parks - East

ROUTE 0123: RIVER ROAD

Data Collection Vehicle (DCV) Rating

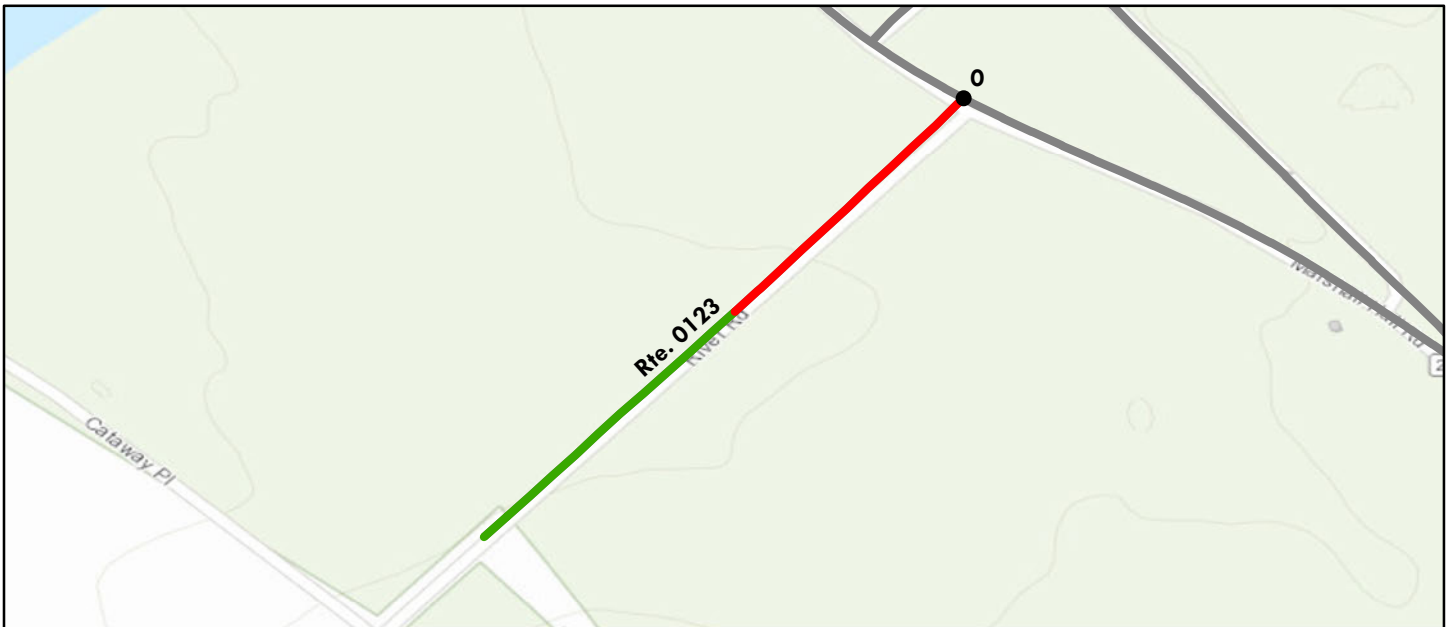

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.21	Section Length (MI)	0.21				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	52	52				
Surface Condition Rating (SCR)	52	52				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	52	52				
Alligator Crack Index	94	94				
Longitudinal Crack Index	58	58				
Transverse Cracking Index	71	71				
Patching Index	99	99				
Rutting Index	99	99				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	20.5	20.5				
Lane Width (ft)	8.7	8.7				

National Capital Parks - East

ROUTE 0124: MARYLAND STATE HIGHWAY 227

Data Collection Vehicle (DCV) Rating

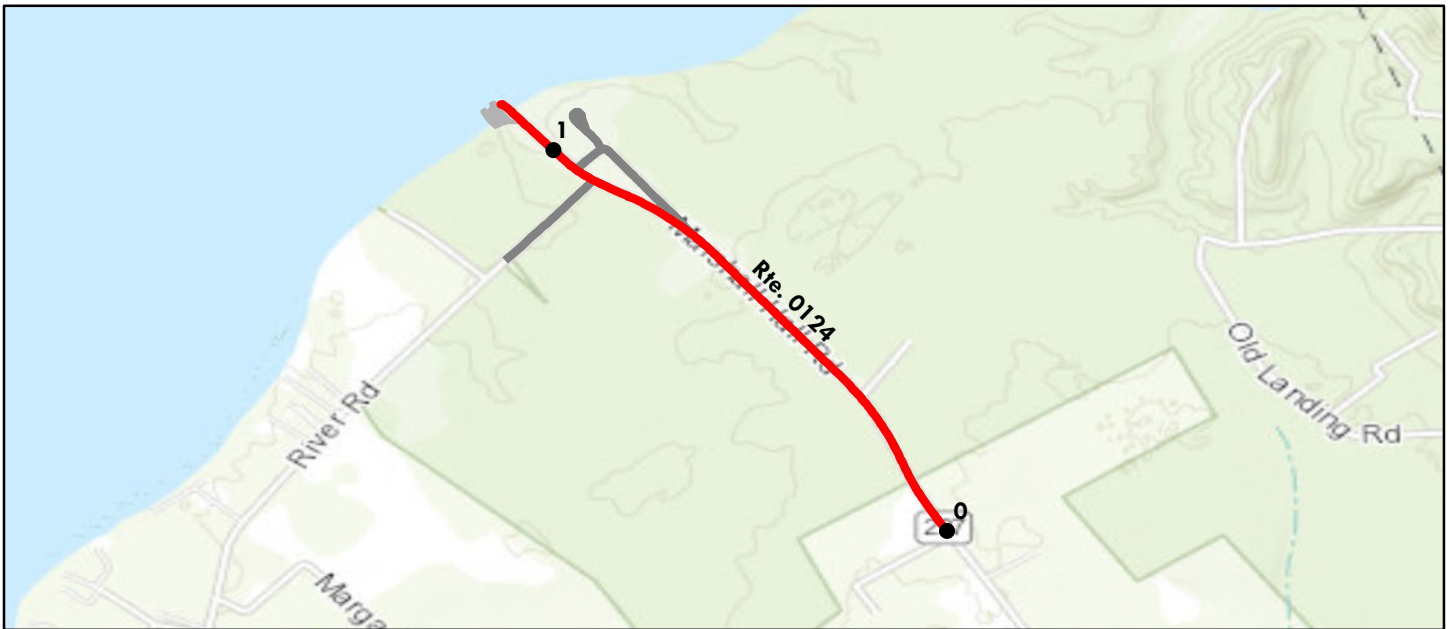


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/8/2018	Beginning Section MP	0	1			
Paved Length (Miles): 1.12	Section Length (MI)	1	0.12			
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	38	40	23			
Surface Condition Rating (SCR)	0	0	0			
Roughness Condition Index (RCI)	95	100	57			
Distress Index Values						
Structural Crack Index	0	0	0			
Alligator Crack Index	94	97	64			
Longitudinal Crack Index	1	0	27			
Transverse Cracking Index	0	0	2			
Patching Index	100	100	100			
Rutting Index	98	99	90			
International Roughness Index (IRI)	128	115	252			
Lane & Width Information						
Number of Lanes	2	2	2			
Paved Width (ft)	34.9	36.6	20.8			
Lane Width (ft)	10.1	10.3	8.5			

National Capital Parks - East

ROUTE 0206: RIDGE PICNIC AREA LOOP

Data Collection Vehicle (DCV) Rating

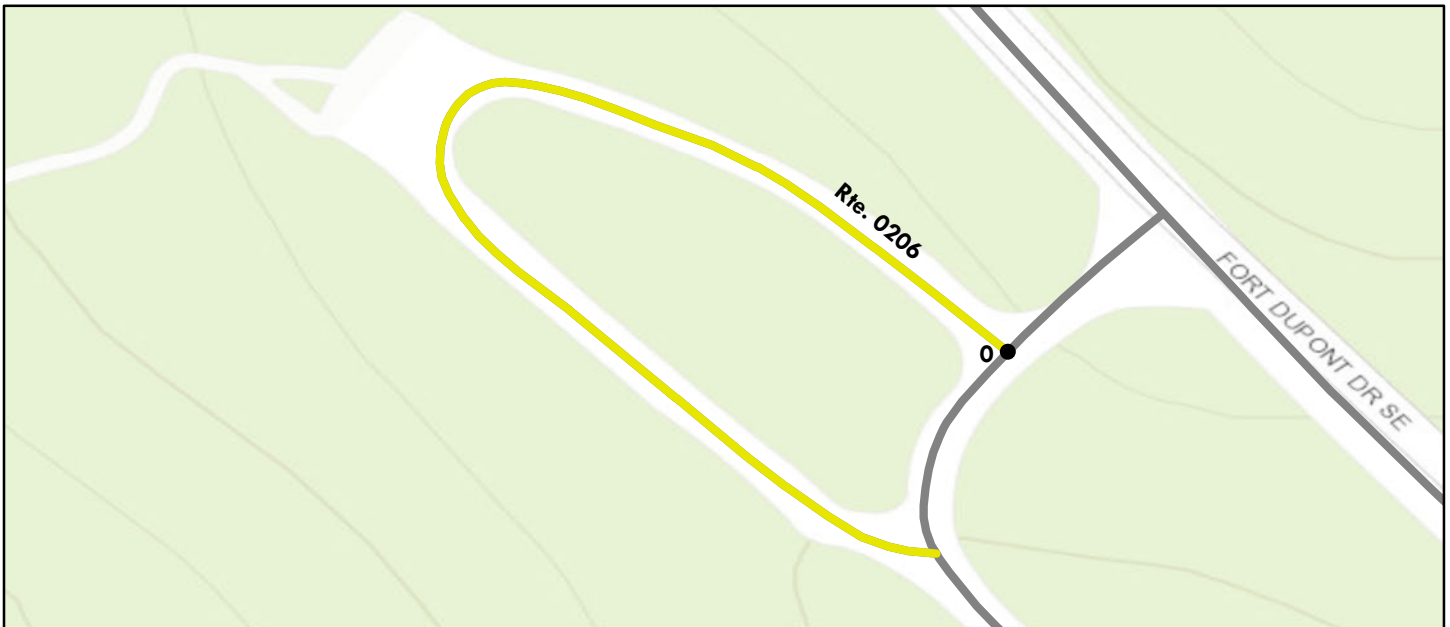

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.09	Section Length (MI)	0.09				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	75	75				
Surface Condition Rating (SCR)	75	75				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	75	75				
Alligator Crack Index	97	97				
Longitudinal Crack Index	78	78				
Transverse Cracking Index	89	89				
Patching Index	91	91				
Rutting Index	85	85				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	14	14				
Lane Width (ft)	14	14				

NOTE: Cycle 6 condition rating was collected before the 2018/2019 rehab and repaving project.

National Capital Parks - East

ROUTE 0208: NORTH STADIUM ENTRANCE ROAD

Data Collection Vehicle (DCV) Rating




Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.11	Section Length (MI)	0.11				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	86	86				
Surface Condition Rating (SCR)	86	86				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	86	86				
Alligator Crack Index	93	93				
Longitudinal Crack Index	93	93				
Transverse Cracking Index	95	95				
Patching Index	99	99				
Rutting Index	95	95				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	23.3	23.3				
Lane Width (ft)	11.6	11.6				

National Capital Parks - East

ROUTE 0209: SOUTH STADIUM ACCESS ROAD

Data Collection Vehicle (DCV) Rating

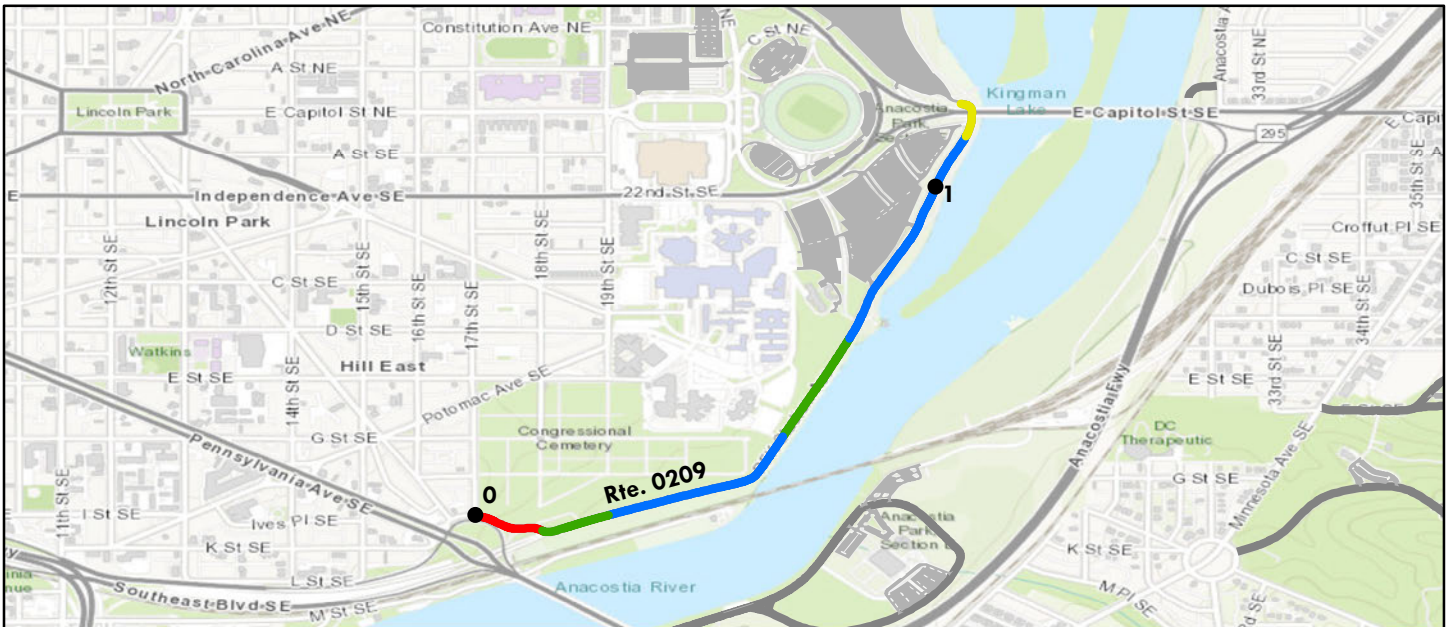

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/8/2018	Beginning Section MP	0	1			
Paved Length (Miles): 1.15	Section Length (MI)	1	0.17			
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	94	94	89			
Surface Condition Rating (SCR)	94	94	89			
Roughness Condition Index (RCI)	N/A	N/A	N/A			
Distress Index Values						
Structural Crack Index	94	95	89			
Alligator Crack Index	98	99	93			
Longitudinal Crack Index	96	96	96			
Transverse Cracking Index	94	94	98			
Patching Index	99	99	100			
Rutting Index	98	98	97			
International Roughness Index (IRI)	N/A	N/A	N/A			
Lane & Width Information						
Number of Lanes	2	2	2			
Paved Width (ft)	22.2	21.8	24.7			
Lane Width (ft)	11.2	11	12.2			

National Capital Parks - East

ROUTE 0300: MARSHALL HALL ACCESS ROAD

Data Collection Vehicle (DCV) Rating




Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.26	Section Length (MI)	0.28				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	0	0				
Surface Condition Rating (SCR)	0	0				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	0	0				
Alligator Crack Index	56	56				
Longitudinal Crack Index	33	33				
Transverse Cracking Index	0	0				
Patching Index	100	100				
Rutting Index	91	91				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	14.7	14.7				
Lane Width (ft)	7.3	7.3				

National Capital Parks - East

ROUTE 0301: MARSHALL HALL LOOP ROAD

Data Collection Vehicle (DCV) Rating

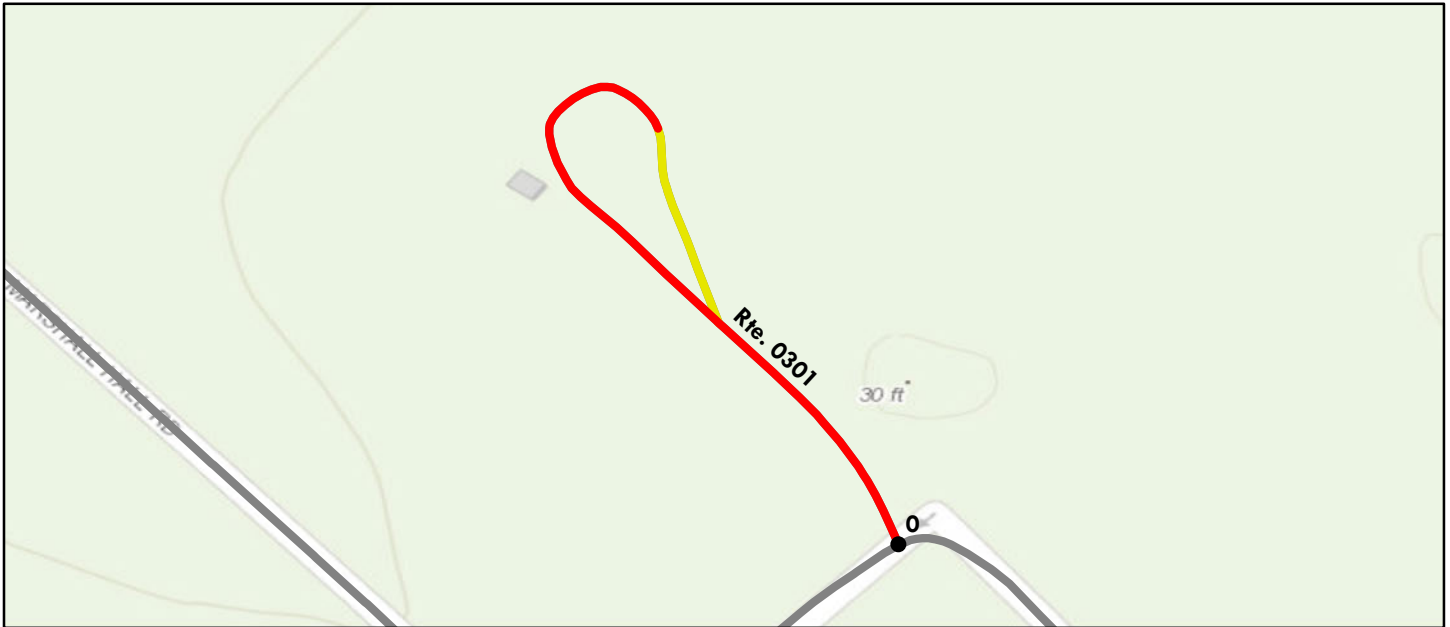


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.1	Section Length (MI)	0.13				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	40	40				
Surface Condition Rating (SCR)	40	40				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	58	58				
Alligator Crack Index	92	92				
Longitudinal Crack Index	66	66				
Transverse Cracking Index	40	40				
Patching Index	100	100				
Rutting Index	91	91				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	1	1				
Paved Width (ft)	12.2	12.2				
Lane Width (ft)	12.2	12.2				

National Capital Parks - East

ROUTE 0402: KENILWORTH MAINTENANCE ACCESS

Data Collection Vehicle (DCV) Rating

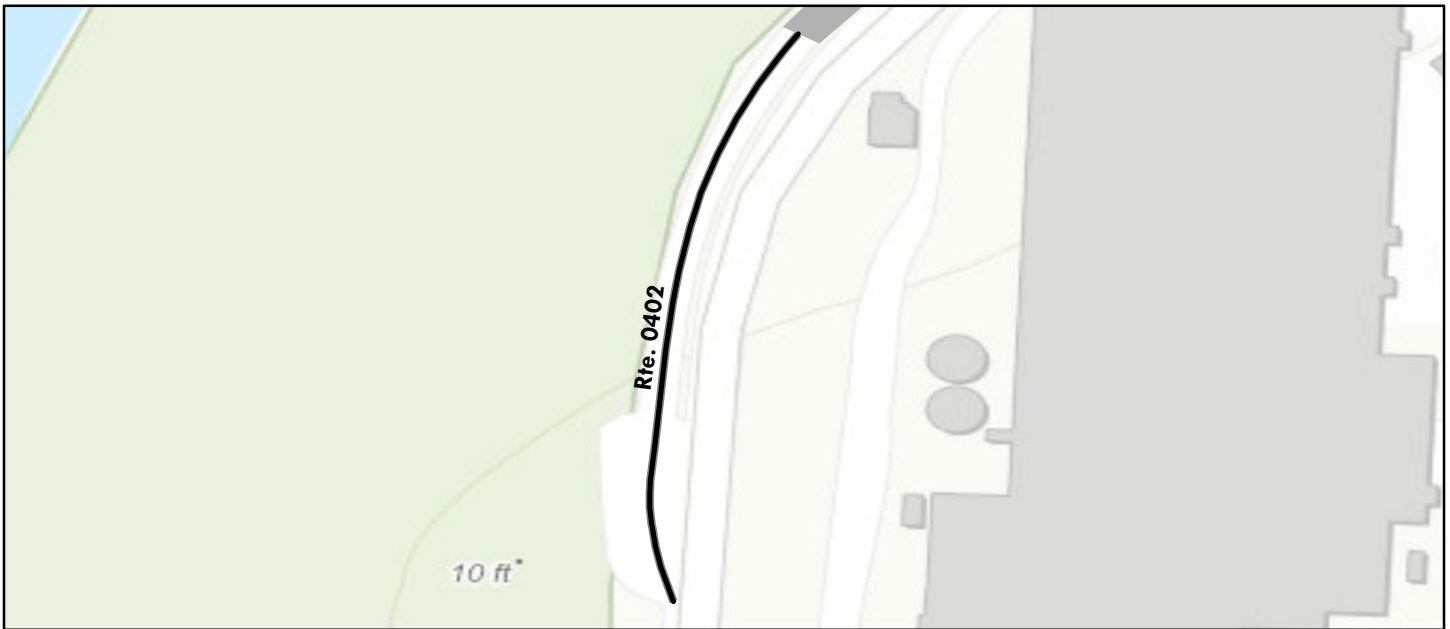

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Note: Not collected in Cycle 6 due to a collection error.

National Capital Parks - East

ROUTE 0404: RIVER TERRACE ACCESS ROAD

Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Note: Not collected in Cycle 6 because it appears to be a bike trail. Review next cycle.

National Capital Parks - East

ROUTE 0406ZZ: FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS

Summary Route

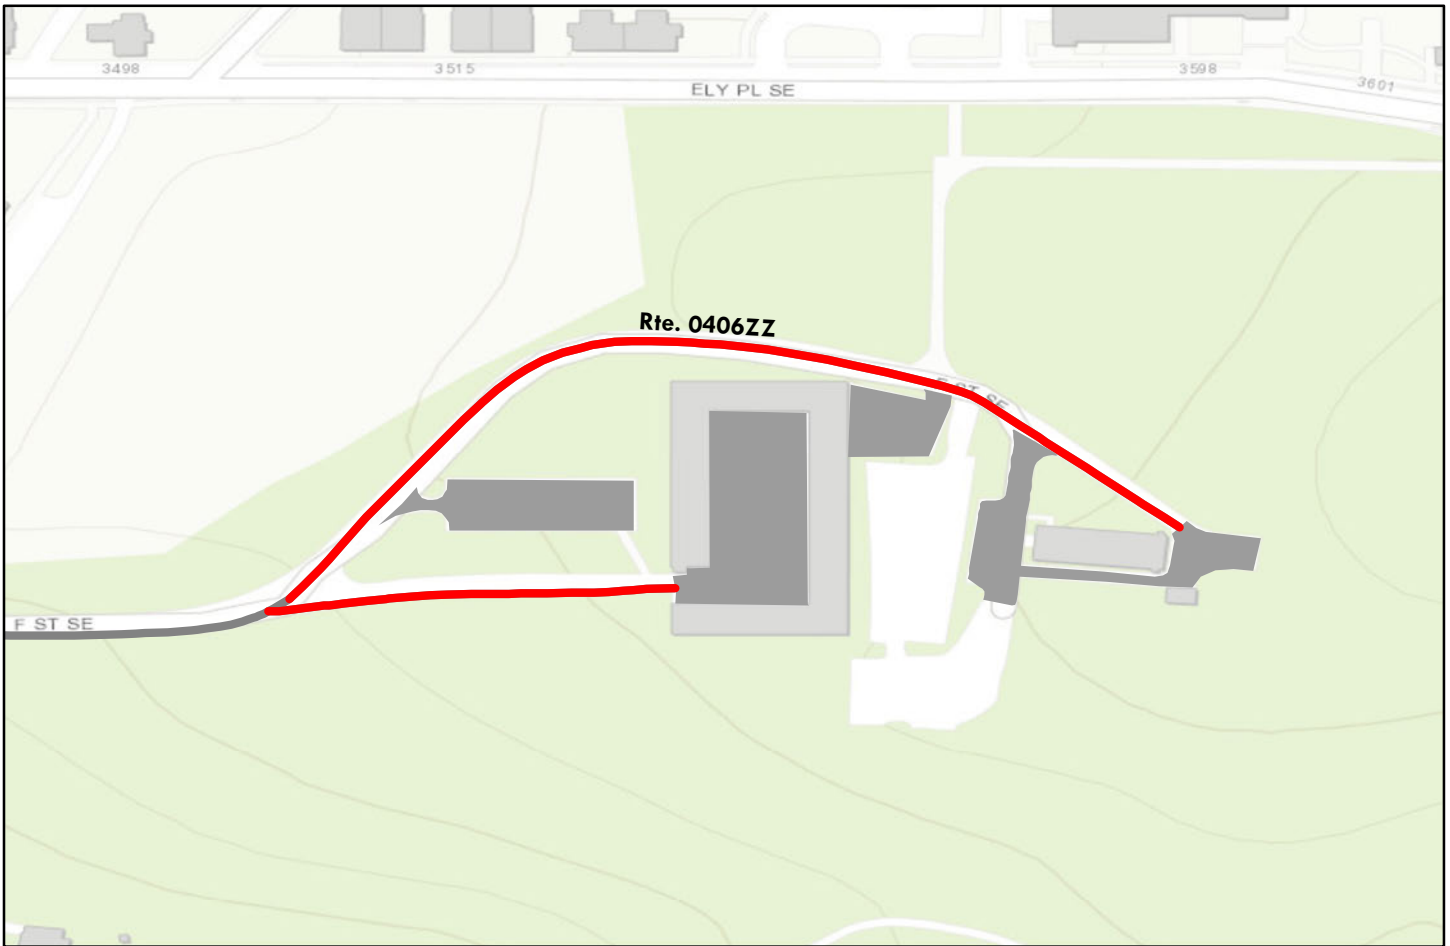

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community


Note: The weighted average summary PCR value is calculated from only the sections of road where the PCR was collected. The overall PCR for the summary route may not reflect individual subcomponent ratings.

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
See Appendix for definitions and formulas						
Inspection Date:	6/8/2018					
Paved Length (Miles):	0.24					
Surface Type:	ASPHALT	Route Summary				
Roadway Condition Information						
Pavement Condition Rating (PCR)	0					
Lane & Width Information						
Number of Lanes	1					
Paved Width (ft)	17					
Lane Width (ft)	8.3					

National Capital Parks - East

ROUTE 0406AZ: FORT DUPONT STABLE ACCESS

Subcomponent of Route NACE-0406ZZ
Data Collection Vehicle (DCV) Rating

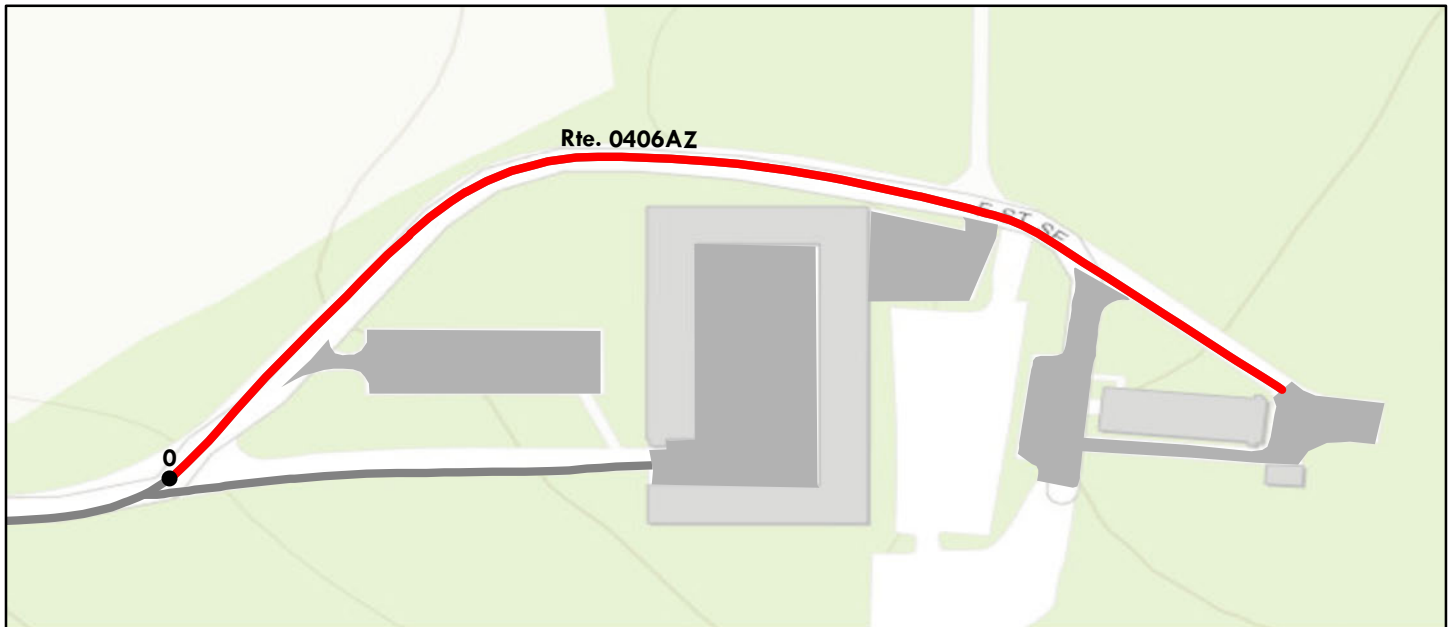

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community


Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.18	Section Length (MI)	0.18				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	0	0				
Surface Condition Rating (SCR)	0	0				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	0	0				
Alligator Crack Index	81	81				
Longitudinal Crack Index	12	12				
Transverse Cracking Index	17	17				
Patching Index	99	99				
Rutting Index	95	95				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	17	17				
Lane Width (ft)	8.2	8.2				

National Capital Parks - East

ROUTE 0406BZ: FORT DUPONT MAINTENANCE YARD ACCESS

Subcomponent of Route NACE-0406ZZ

Data Collection Vehicle (DCV) Rating

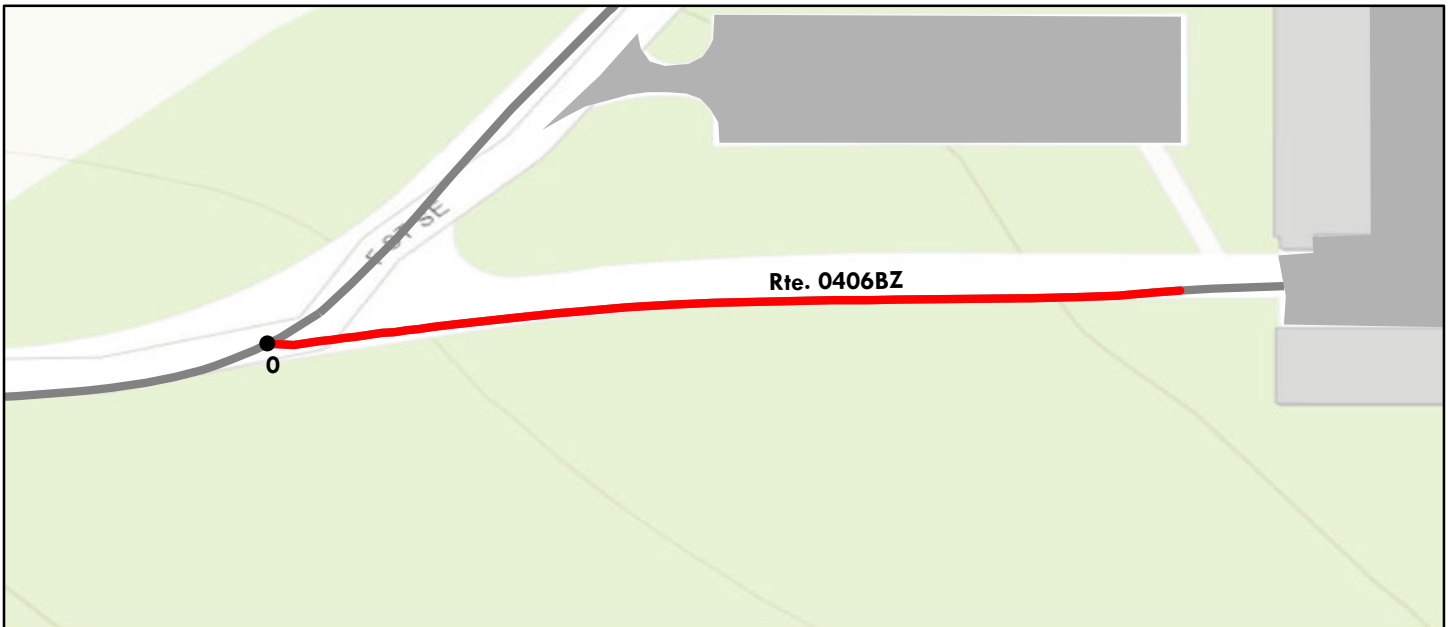

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

Inspection Date: 6/8/2018	Beginning Section MP	0				
Paved Length (Miles): 0.06	Section Length (MI)	0.06				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	0	0				
Surface Condition Rating (SCR)	0	0				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	0	0				
Alligator Crack Index	32	32				
Longitudinal Crack Index	0	0				
Transverse Cracking Index	5	5				
Patching Index	99	99				
Rutting Index	97	97				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	17	17				
Lane Width (ft)	8.5	8.5				

National Capital Parks - East

ROUTE 0424: AOF TRAINING PARKING ROAD

Data Collection Vehicle (DCV) Rating

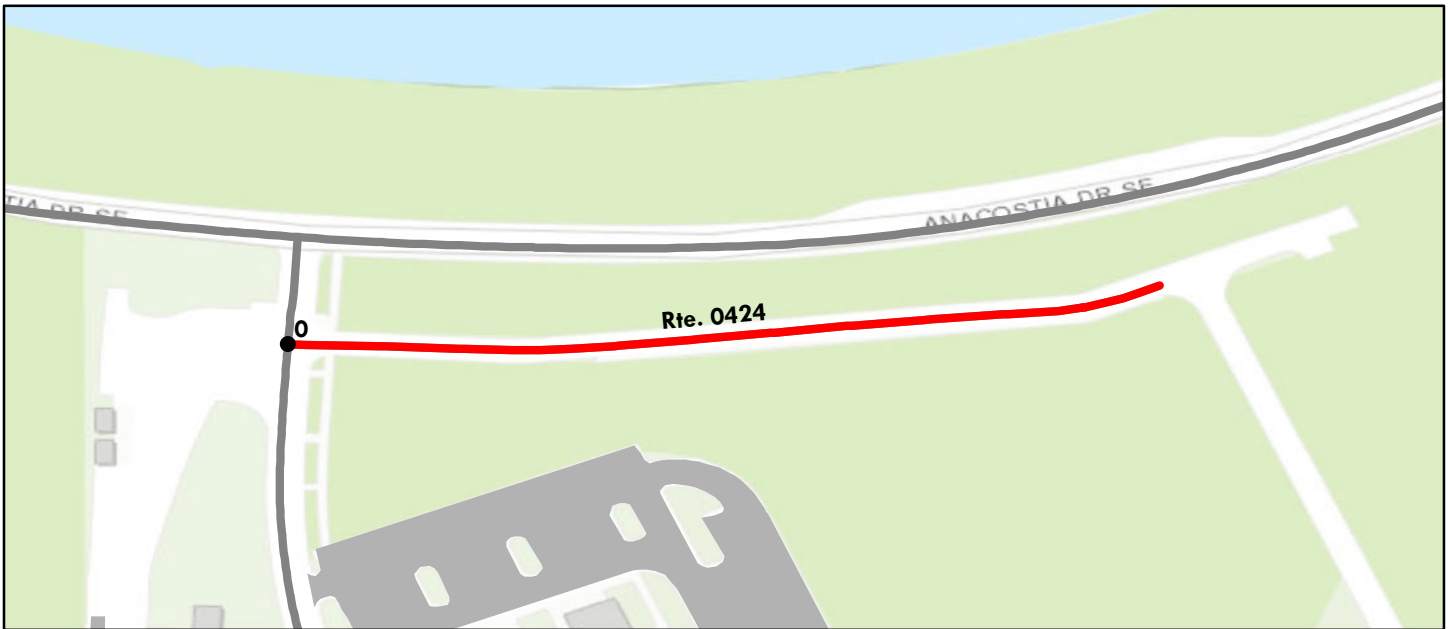


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
Inspection Date: 6/7/2018	Beginning Section MP	0				
Paved Length (Miles): 0.11	Section Length (MI)	0.11				
Surface Type: ASPHALT	Route Summary					
Roadway Condition Information						
Pavement Condition Rating (PCR)	21	21				
Surface Condition Rating (SCR)	21	21				
Roughness Condition Index (RCI)	N/A	N/A				
Distress Index Values						
Structural Crack Index	64	64				
Alligator Crack Index	99	99				
Longitudinal Crack Index	65	65				
Transverse Cracking Index	21	21				
Patching Index	99	99				
Rutting Index	98	98				
International Roughness Index (IRI)	N/A	N/A				
Lane & Width Information						
Number of Lanes	2	2				
Paved Width (ft)	19.3	19.3				
Lane Width (ft)	9.7	9.7				

National Capital Parks - East

ROUTE 0430: OXON HILL ACCESS ROAD

Data Collection Vehicle (DCV) Rating

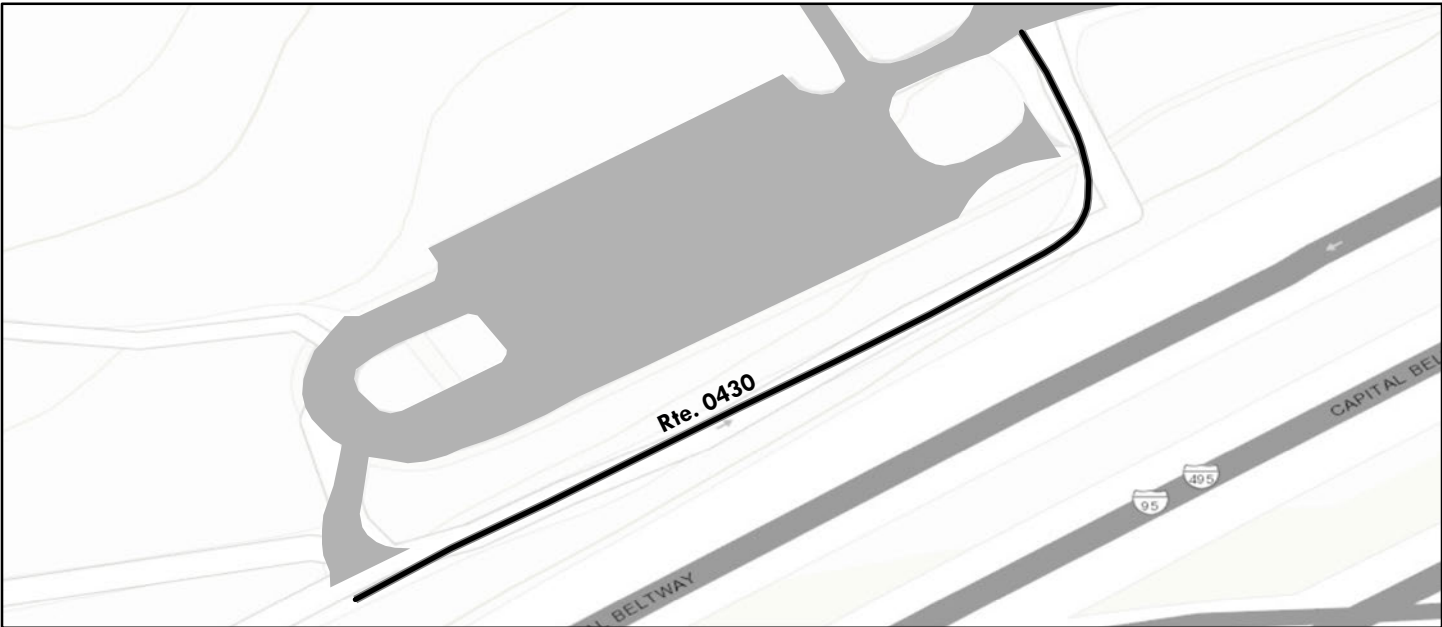

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), swisstopo, © OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)				
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.				

Note: Not collected in Cycle 6, due to access being blocked.

Section 6 Paved Parking Area Condition Rating Sheets



National Capital Parks - East



Federal Lands Highway
Road Inventory Program

National Capital Parks - East

ROUTE 0901: KENILWORTH AQUATIC GARDENS PARKING

Manual Rating

FROM ANACOSTIA AVENUE NE



TO ROUTE 0401 (AQUATIC GARDENS ADMINISTRATIVE ACCESS ROAD)

Inspection Date	FMSS Number	User Access	Surface Type
10/4/2018	21271	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
40,446	0.696	NOT APPLICABLE	DO NOTHING
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

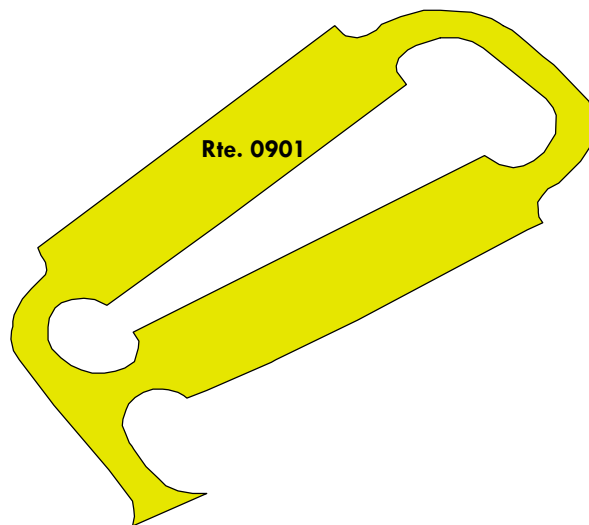

National Capital Parks - East

ROUTE 0905: LANGSTON GOLF COURSE PARKING

Manual Rating

FROM 26TH STREET NE



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	52129	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
51,130	0.88	3	MODERATE REPAIR
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
HEAVY 3R TREATMENTS		POOR / 53	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

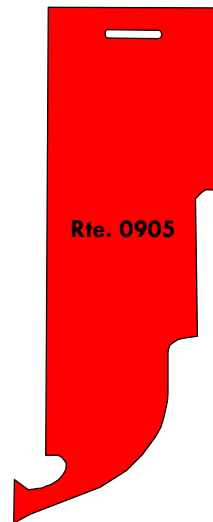

National Capital Parks - East

ROUTE 0906: KENILWORTH MAINTENANCE YARD

Manual Rating

FROM ROUTE 0402 (KENILWORTH MAINTENANCE ACCESS) AT END
THROUGH MAINTENANCE YARD

Inspection Date	FMSS Number	User Access	Surface Type
10/4/2018	21434	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
52,432	0.903	6	DO NOTHING
Curb Type		Curb & Gutter Type	
WOOD		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
RECONSTRUCTION		POOR / 30	



Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas



Note: Parking area consists of multiple surface types: 1 part Asphalt at 51,165 square feet; 1 part Concrete at 1,267 square feet.

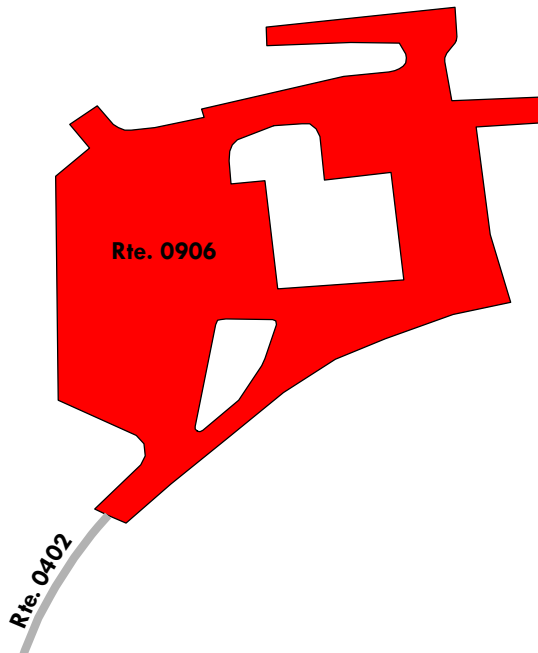

National Capital Parks - East

ROUTE 0907: PAVILION PARKING NORTH

Manual Rating

FROM ROUTE 0016ZZ (ANACOSTIA PAVILION LOOP ROAD)



TO ROUTE 0013 (ANACOSTIA DRIVE)

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	52217	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
65,686	1.131	NOT APPLICABLE	MODERATE REPAIR
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
RECONSTRUCTION		POOR / 30	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

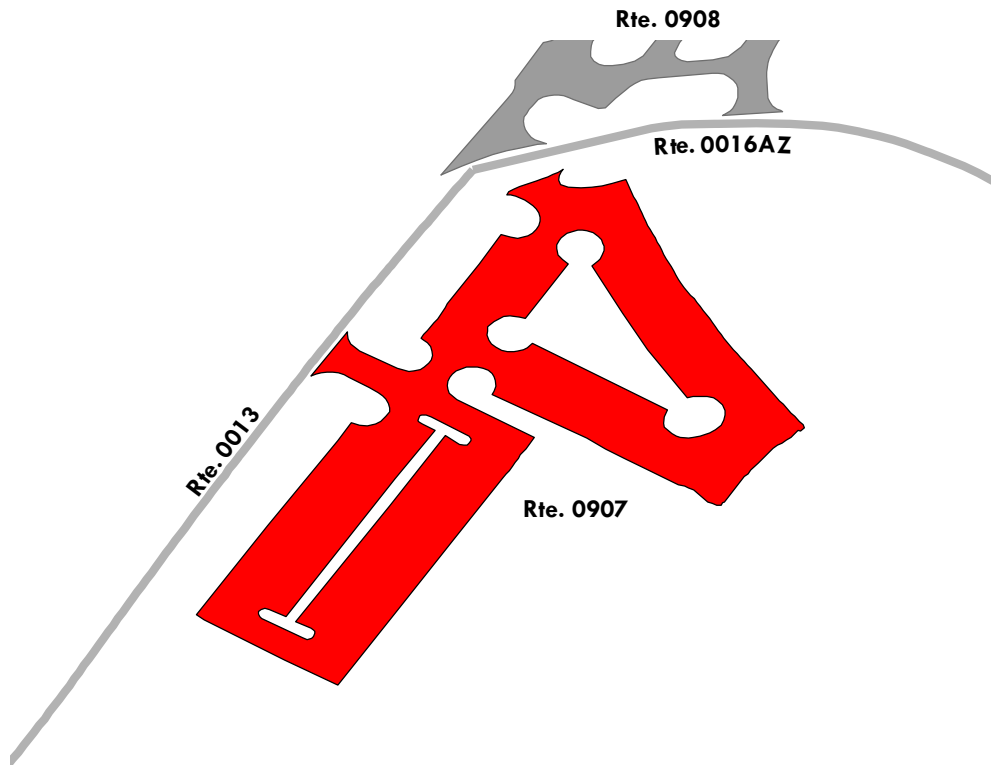

National Capital Parks - East

ROUTE 0908: ANACOSTIA BOAT RAMP PARKING

Manual Rating


FROM ROUTE 0013 (ANACOSTIA DRIVE) AND ROUTE 0016ZZ (ANACOSTIA PAVILION LOOP ROAD)
TO ROUTE 0114 (RAILROAD YARD ACCESS)

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	21471	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
54,654	0.941	NOT APPLICABLE	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
HEAVY 3R TREATMENTS		POOR / 53	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

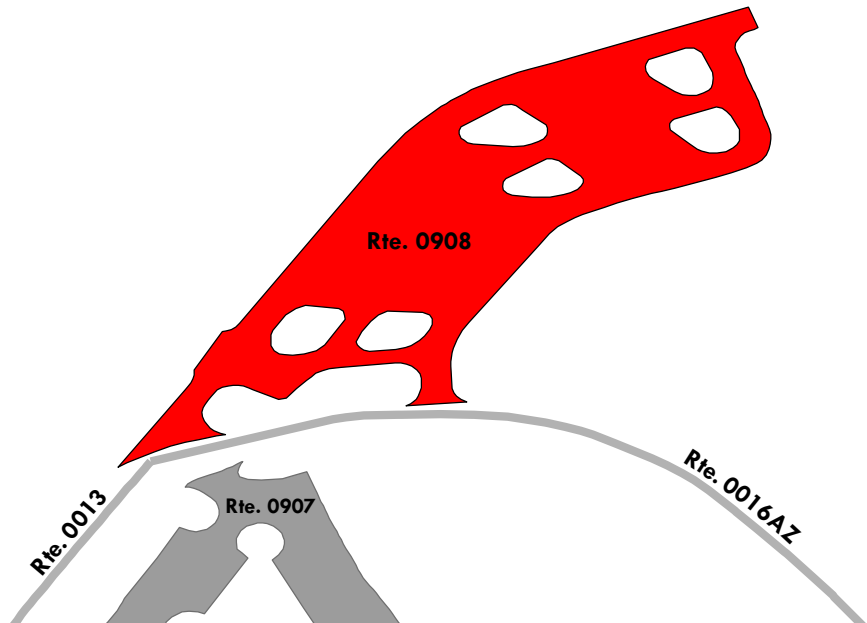

National Capital Parks - East

ROUTE 0909: PAVILION PARKING SOUTH

Manual Rating

FROM ROUTE 0016ZZ (ANACOSTIA PAVILION LOOP ROAD)

TO ROUTE 0016ZZ (ANACOSTIA PAVILION LOOP ROAD)

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	21429	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
101,439	1.747	NOT APPLICABLE	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
HEAVY 3R TREATMENTS		POOR / 53	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)



Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas

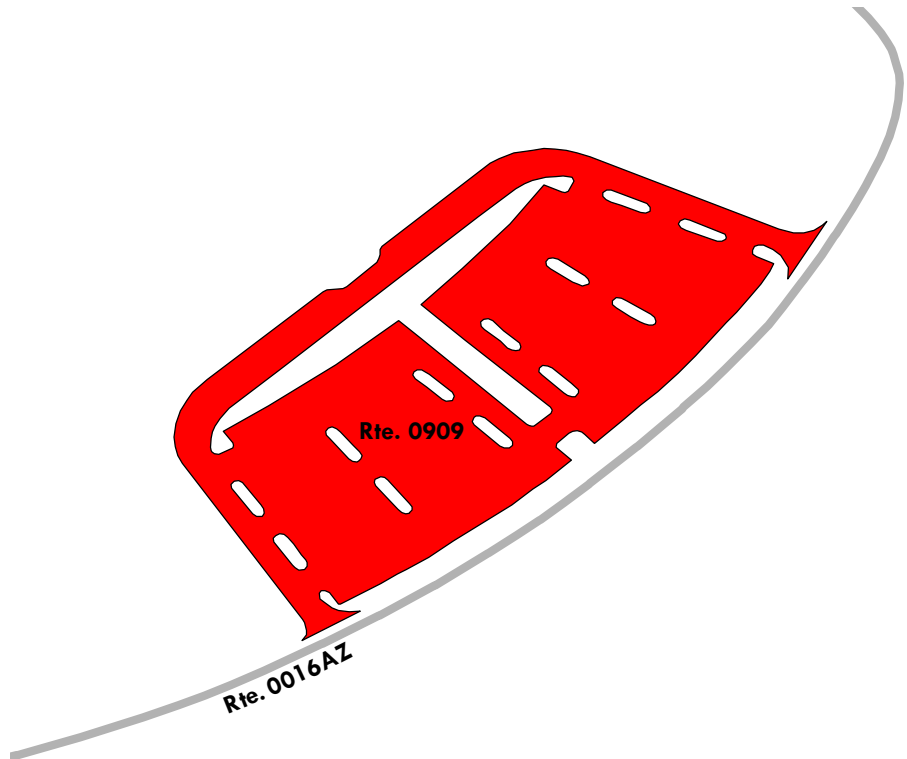

National Capital Parks - East

ROUTE 0911: NICHOLSON COMFORT STATION PARKING

Manual Rating

FROM ROUTE 0015 (NICHOLSON STREET SE)




TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	52222	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
13,448	0.232	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

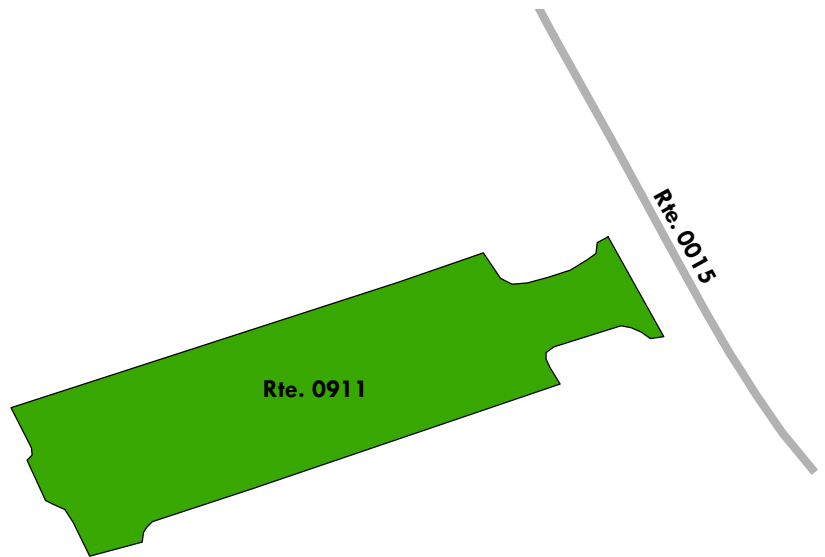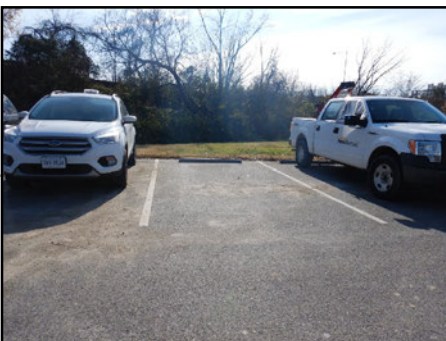

National Capital Parks - East

ROUTE 0912: ANACOSTIA POOL & RECREATION FACILITY PARKING

Manual Rating



FROM ROUTE 0105ZZ (ANACOSTIA POOL AND RECREATION FACILITY ROADS) ON RIGHT
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	52223	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
61,953	1.067	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
HEAVY 3R TREATMENTS		POOR / 53	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)
Fair (61- 84)
Good (85 - 94)
Excellent (95 - 100)
Not Rated

See Appendix for definitions and formulas

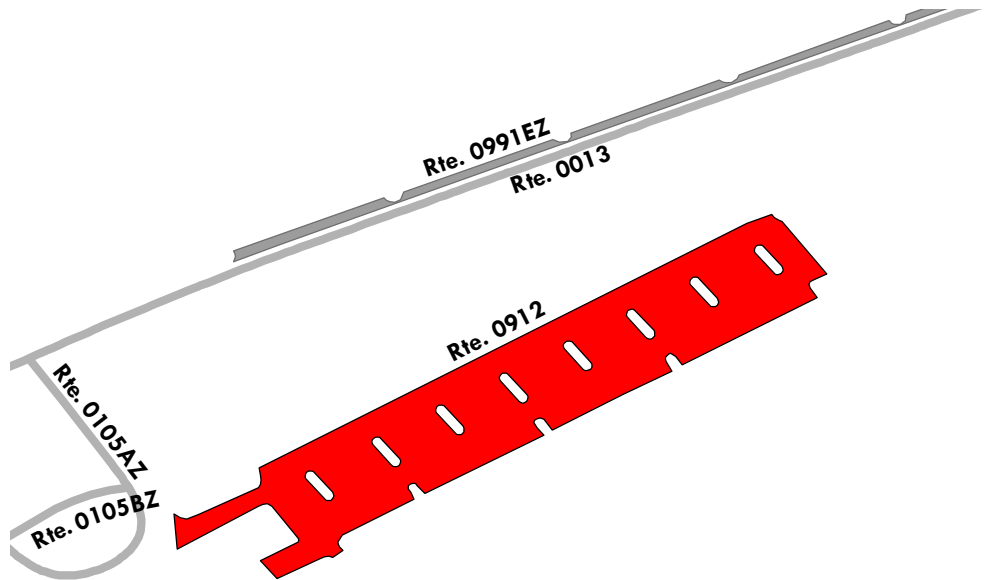

National Capital Parks - East

ROUTE 0913ZZ: NACE PARK HEADQUARTERS PARKING AREAS

Summary Route
Manual Rating

FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	21430	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Condition Rating / PCR	
48,969	0.843	SUMMARY / 70	



Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

The condition shown on this page reflects the overall route condition and may not reflect individual subcomponent ratings.

Rte. 0913ZZ
(3 Subcomponents)

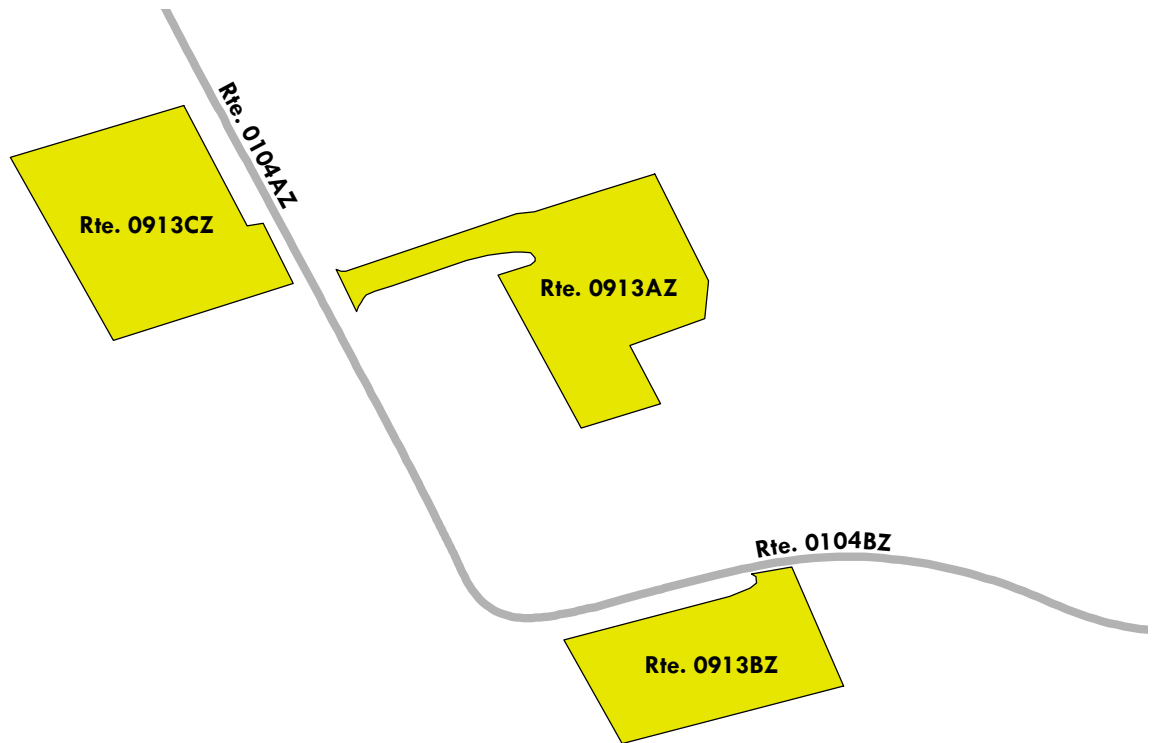

National Capital Parks - East

ROUTE 0913AZ: NACE PARK HEADQUARTERS PARKING A

Subcomponent of Route NACE-0913ZZ
Manual Rating




FROM ROUTE 0104AZ (ANACOSTIA COMPOUND ACCESS)
 TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	21430	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
17,972	0.309	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
RECONSTRUCTION		POOR / 30	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

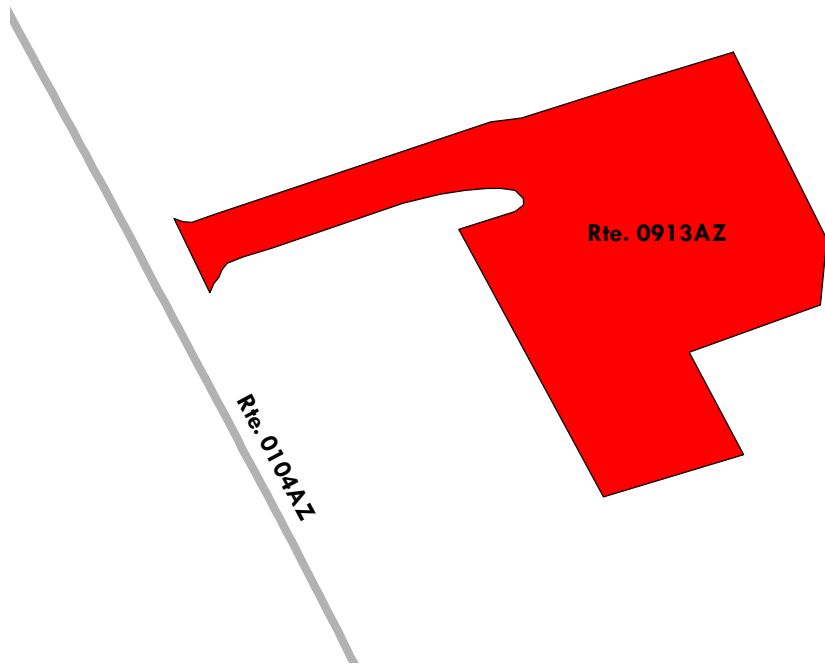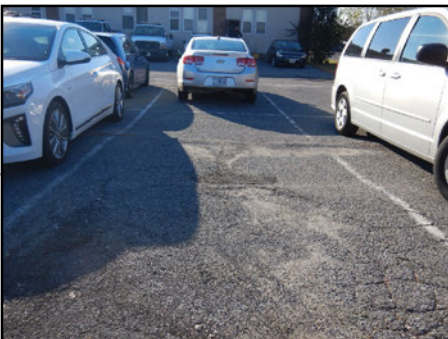

National Capital Parks - East

ROUTE 0913BZ: NACE PARK HEADQUARTERS PARKING B

Subcomponent of Route NACE-0913ZZ

Manual Rating

FROM ROUTE 0104BZ (AVIATION DRIVE)



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	21430	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
13,220	0.228	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
DO NOTHING		EXCELLENT / 97	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

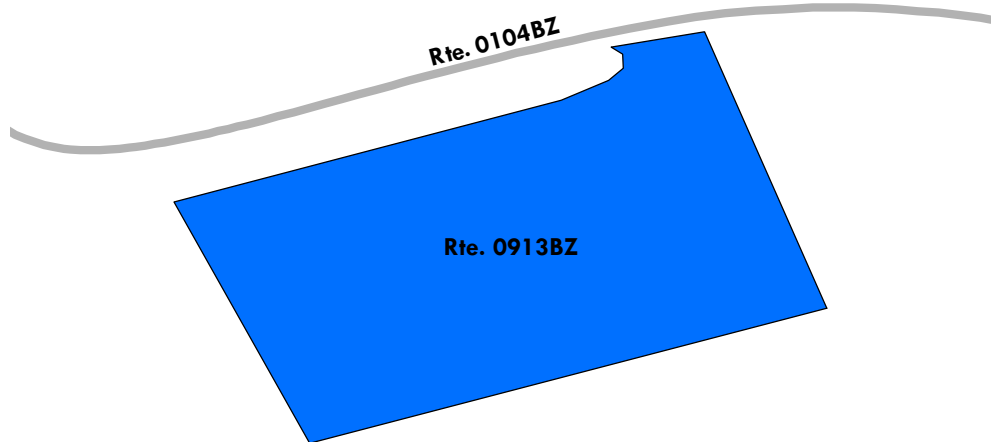

National Capital Parks - East

ROUTE 0913CZ: NACE PARK HEADQUARTERS PARKING C

Subcomponent of Route NACE-0913ZZ

Manual Rating

FROM ROUTE 0104AZ (ANACOSTIA COMPOUND ACCESS)



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	21430	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
17,777	0.306	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

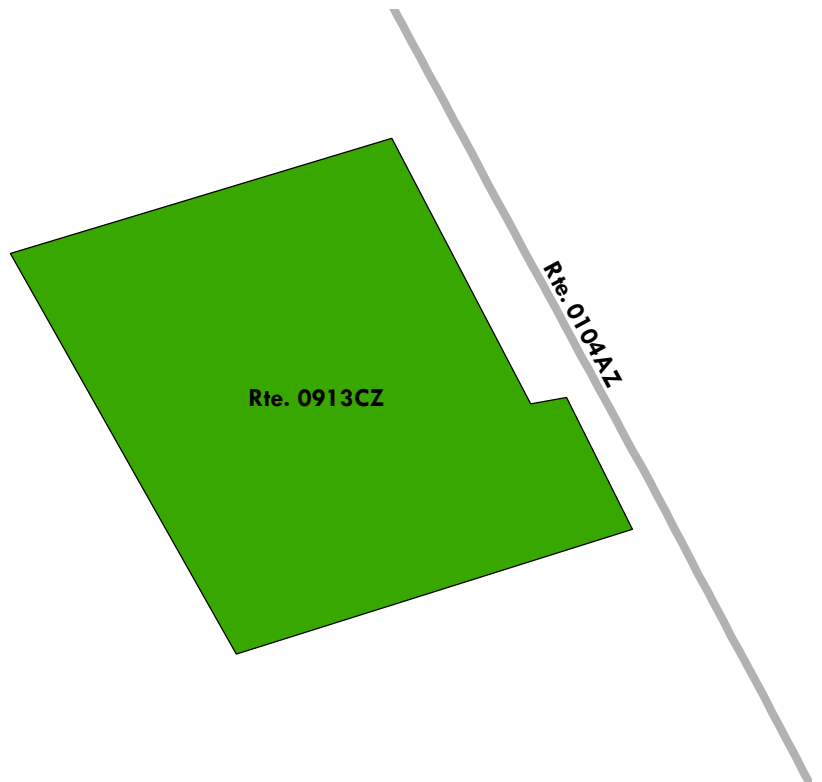

National Capital Parks - East

ROUTE 0915ZZ: U.S. PARK POLICE AVIATION AND FUEL RAMP PARKING

Summary Route

Manual Rating

FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)


TO ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	52225	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Condition Rating / PCR	
13,535	0.233	SUMMARY / 94	

Route Condition Legend – Pavement Condition Rating (PCR)				
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
See Appendix for definitions and formulas				

The condition shown on this page reflects the overall route condition and may not reflect individual subcomponent ratings.

Rte. 0915ZZ
(2 Subcomponents)

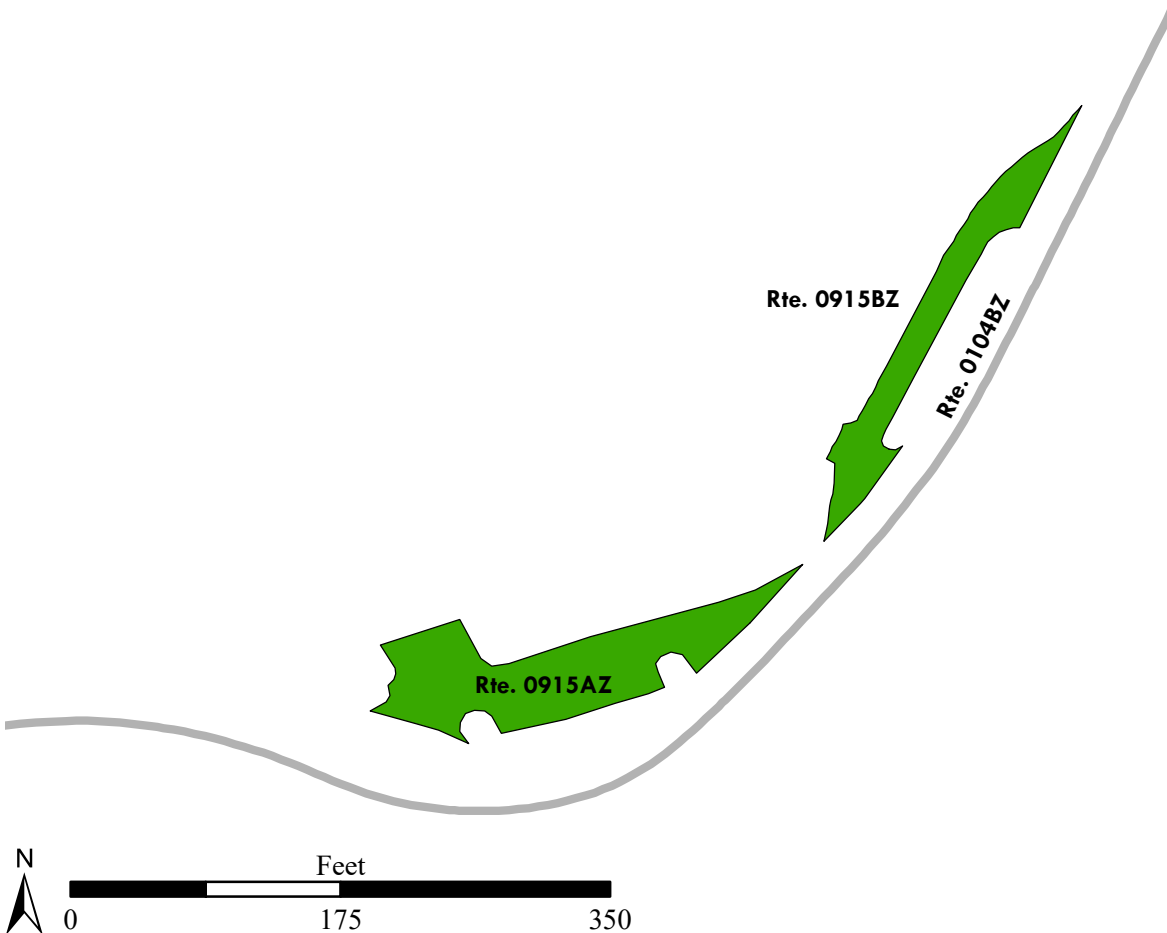

National Capital Parks - East

ROUTE 0915AZ: U.S. PARK POLICE AVIATION PARKING

Subcomponent of Route NACE-0915ZZ

Manual Rating

FROM ROUTE 0104BZ (AVIATION DRIVE)




TO ROUTE 0104BZ (AVIATION DRIVE)

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	52225	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
8,537	0.147	6	DO NOTHING
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
DO NOTHING		EXCELLENT / 97	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

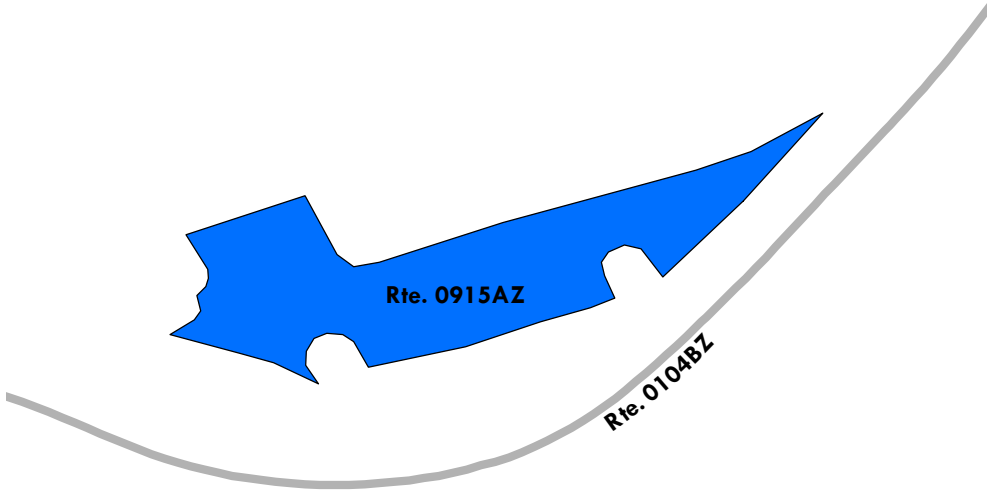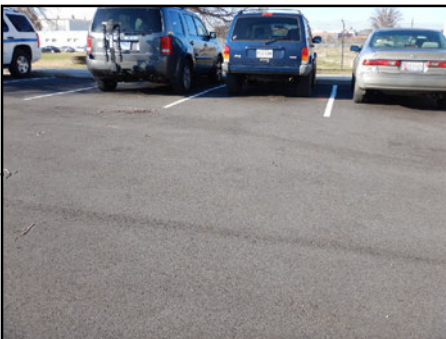

National Capital Parks - East

ROUTE 0915BZ: USPP AVIATION FUEL RAMP

Subcomponent of Route NACE-0915ZZ
Manual Rating

FROM ROUTE 0104BZ (AVIATION DRIVE)

TO ROUTE 0104BZ (AVIATION DRIVE)




Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	52225	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
4,998	0.086	2	DO NOTHING
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

Note: Parking area consists of multiple surface types: 1 part Asphalt at 3,945 square feet; 1 part Concrete at 1,053 square feet.

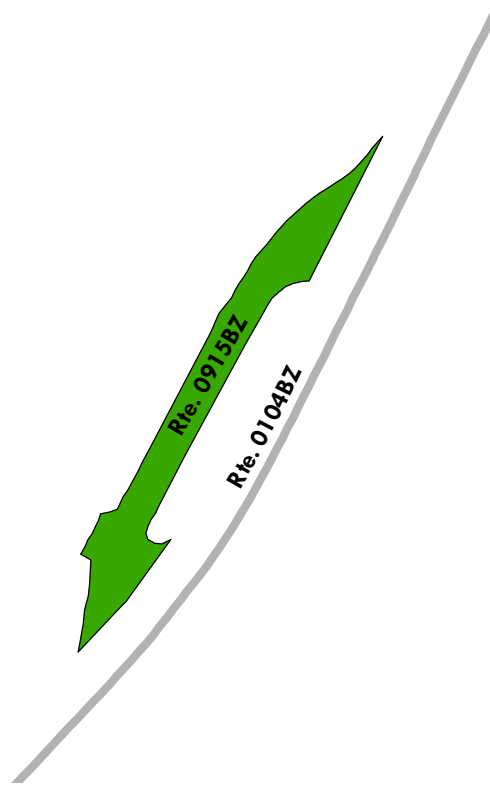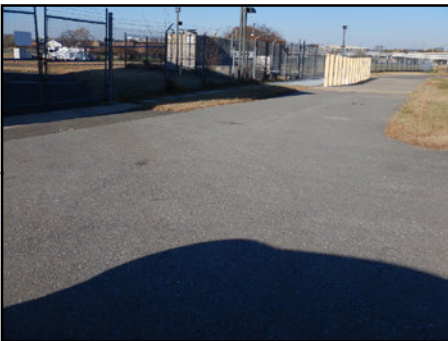

National Capital Parks - East

ROUTE 0916: U.S. PARK POLICE OFFICE PARKING

Manual Rating


FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	21432	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
52,940	0.912	NOT APPLICABLE	DO NOTHING
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
RECONSTRUCTION		POOR / 30	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

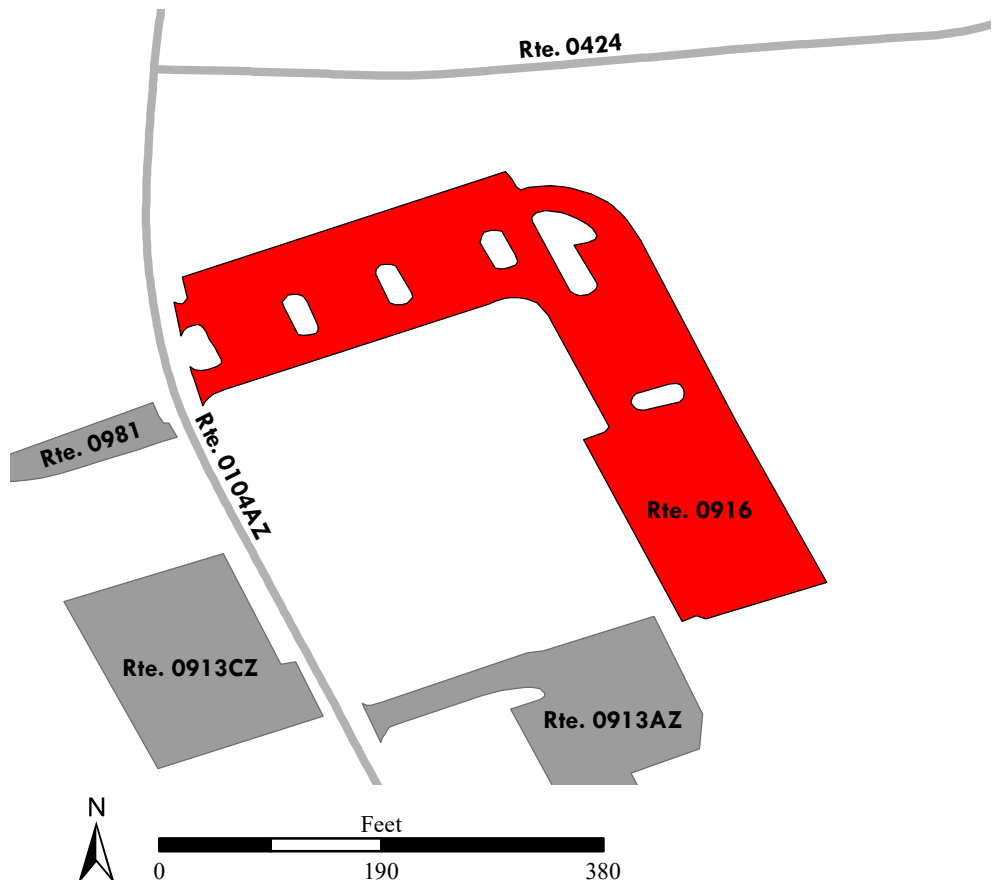

National Capital Parks - East

ROUTE 0917: FREDERICK DOUGLASS HOME PARKING

Manual Rating

FROM W STREET SE



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	21316	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
10,727	0.185	5	DO NOTHING
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

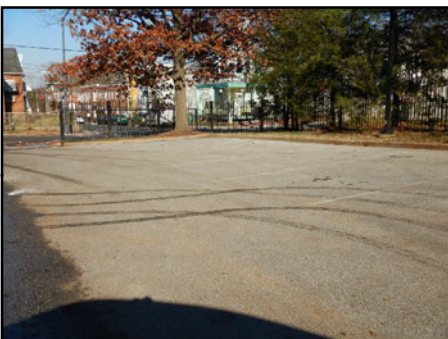

National Capital Parks - East

ROUTE 0918: FORT DUPONT MAINTENANCE YARD PARKING

Manual Rating




FROM ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
10/4/2018	21427	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
9,416	0.162	NOT APPLICABLE	DO NOTHING
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

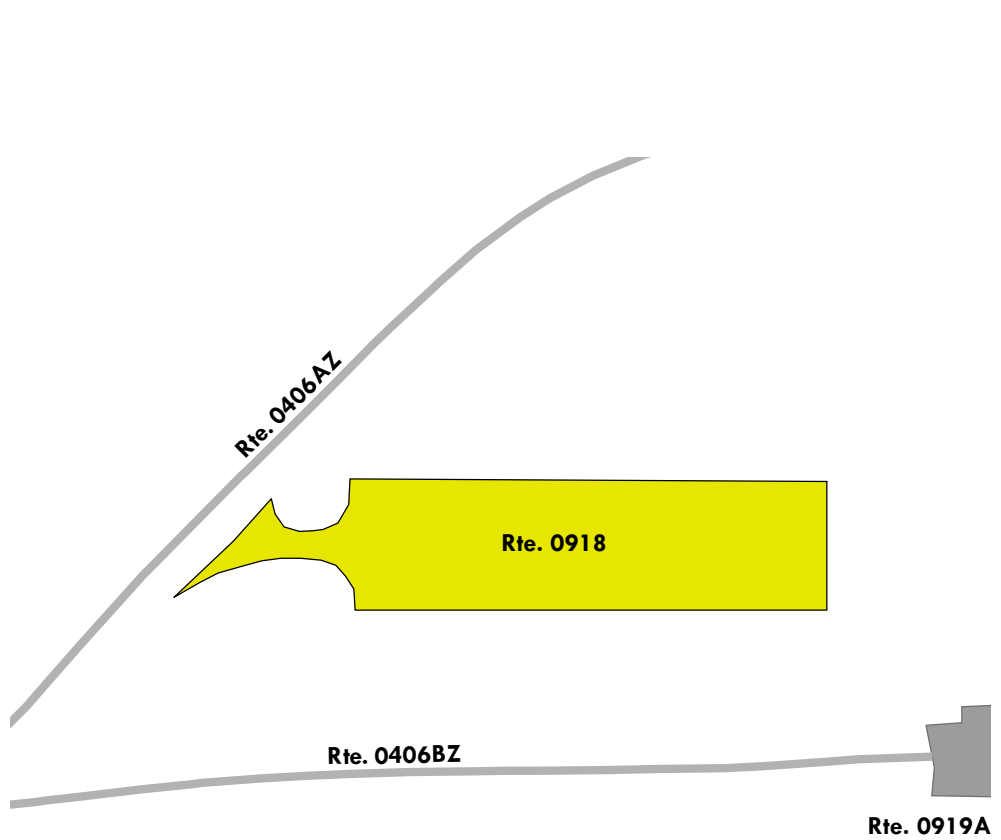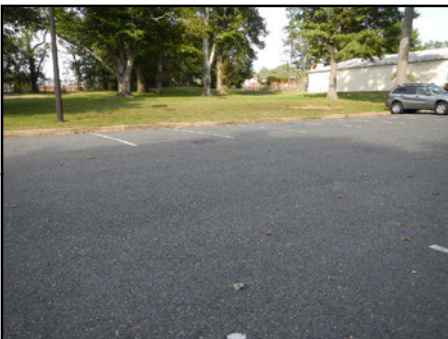

National Capital Parks - East

ROUTE 0919A: FORT DUPONT INTERIOR MAINTENANCE AREA

Manual Rating

FROM ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
10/4/2018	52111	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
18,281	0.315	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
HEAVY 3R TREATMENTS		POOR / 53	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)


Fair (61- 84)

Good (85 - 94)



Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas

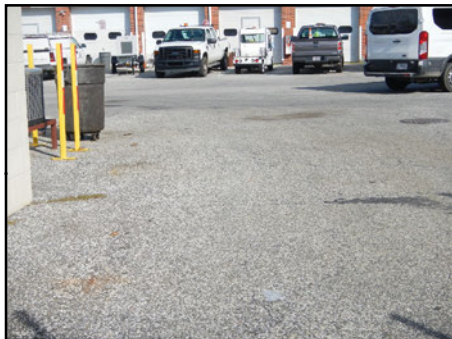

Note: Parking area consists of multiple surface types: 1 part Asphalt at 15,909 square feet; 1 part Concrete at 2,372 square feet.

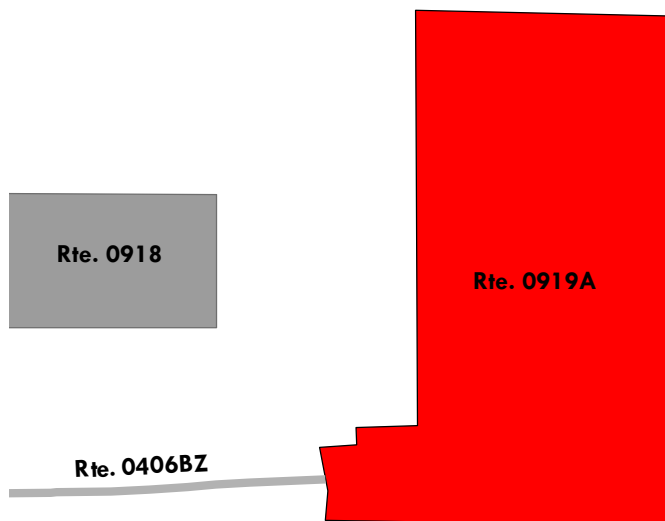

National Capital Parks - East

ROUTE 0919B: FORT DUPONT REAR MAINTENANCE AREA

Manual Rating



FROM ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
10/4/2018	104060	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
5,466	0.094	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

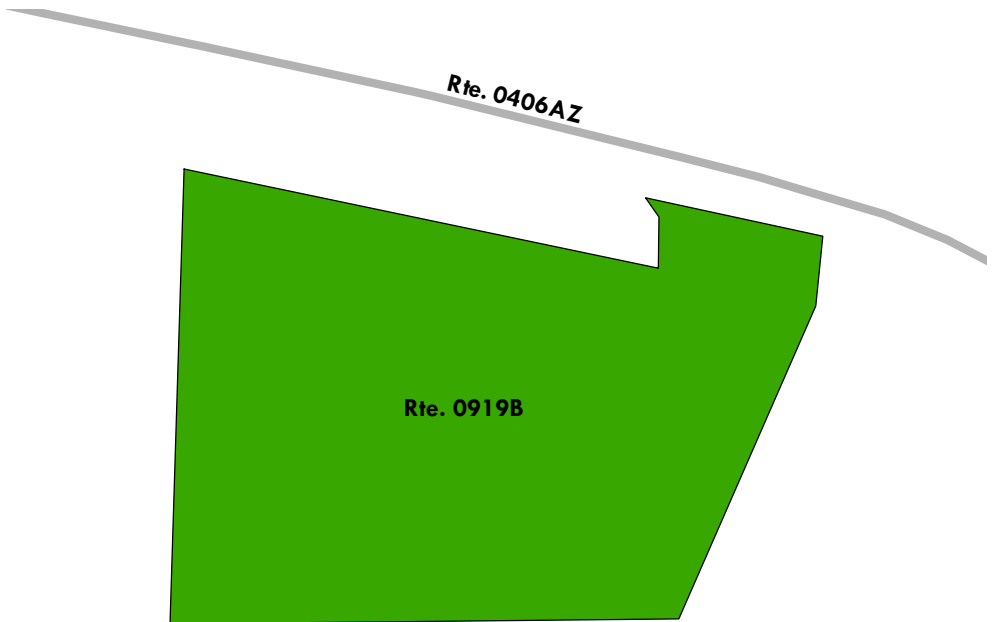

National Capital Parks - East

ROUTE 0920: U.S. PARK POLICE FORT DUPONT STABLES AND PARKING

Manual Rating

FROM ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)



TO ROUTE 0406ZZ (FORT DUPONT MAINTENANCE YARD AND STABLES ACCESS ROADS)

Inspection Date	FMSS Number	User Access	Surface Type
10/4/2018	52112	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
10,927	0.188	5	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
ASPHALT		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
RECONSTRUCTION		POOR / 30	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

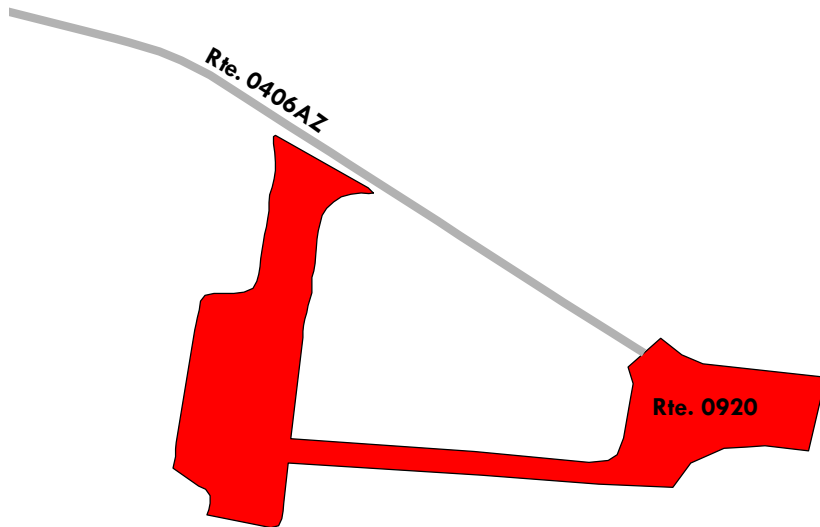

National Capital Parks - East

ROUTE 0922: FORT DUPONT ACTIVITY CENTER PARKING

Manual Rating

FROM ROUTE 0017 (FORT DUPONT DRIVE) AT MP 0.21 ON LEFT

TO ROUTE 0425 (FORT DUPONT SUMMER THEATRE SERVICE ROAD) AT END

Inspection Date	FMSS Number	User Access	Surface Type
10/4/2018	21428	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
45,358	0.781	6	DO NOTHING
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
HEAVY 3R TREATMENTS		POOR / 53	



Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas



NOTE: Cycle 6 condition rating was collected before the 2018/2019 rehab and repaving project.

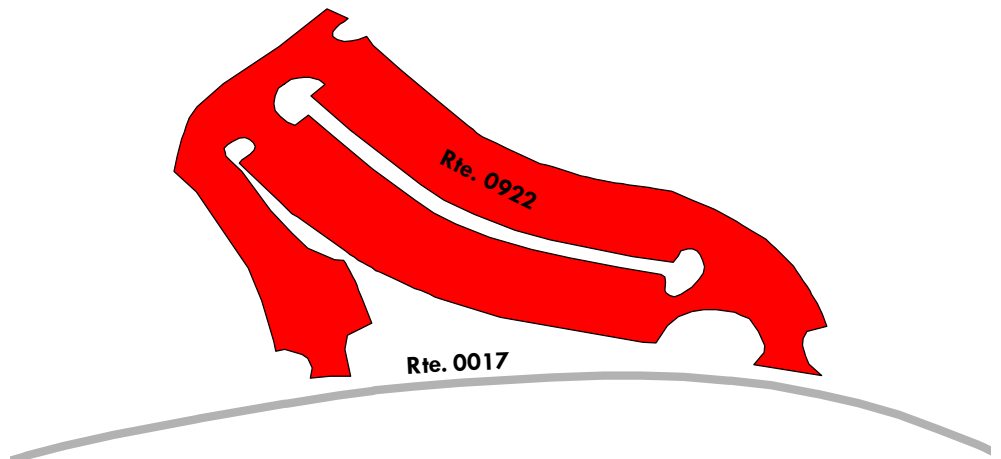

National Capital Parks - East

ROUTE 0925: RFK STADIUM SOUTH PARKING

Manual Rating

FROM 22ND STREET SE



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252452	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
155,816	2.683	NOT APPLICABLE	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

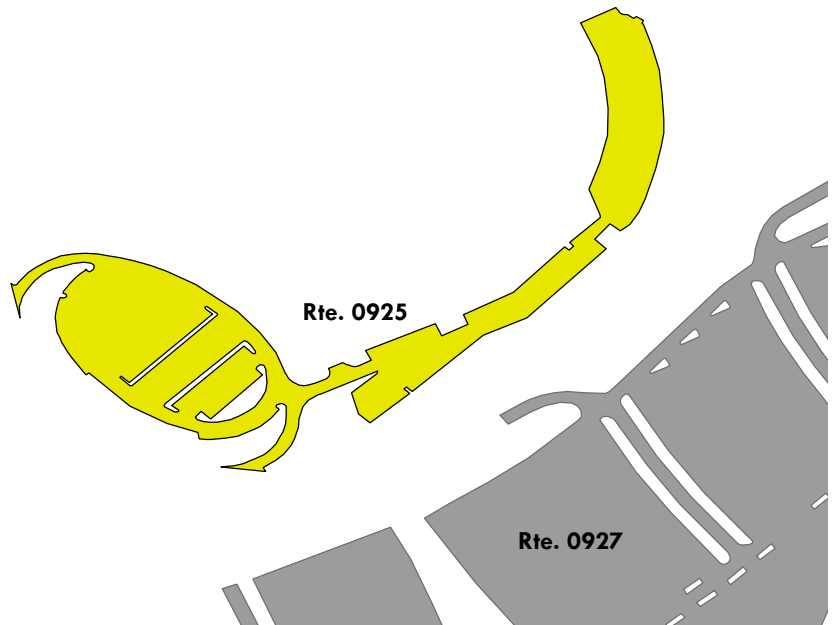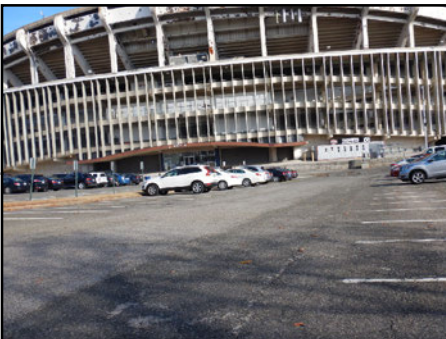

National Capital Parks - East

ROUTE 0926: RFK STADIUM NORTH PARKING / DC POLICE

Manual Rating

FROM C STREET RAMP ACCESS AT GATE



TO C STREET RAMP ACCESS AT GATE

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252453	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
109,904	1.892	2	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
RECONSTRUCTION		POOR / 30	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

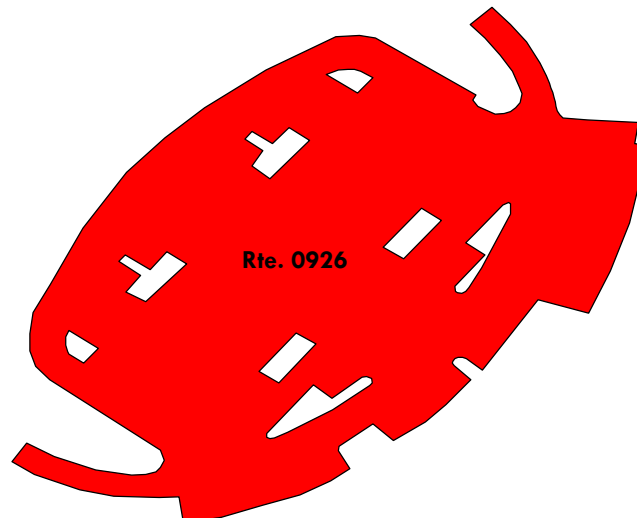

National Capital Parks - East

ROUTE 0927: RFK STADIUM SOUTHEAST PARKING

Manual Rating

FROM INDEPENDENCE AVENUE SE
TO ROUTE 0209 (SOUTH STADIUM ACCESS ROAD)



Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252454	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
796,587	13.715	4	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
CONCRETE		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

Note: Parking area consists of multiple surface types: 1 part Asphalt at 792,673 square feet; 1 part Brick at 3,914 square feet.

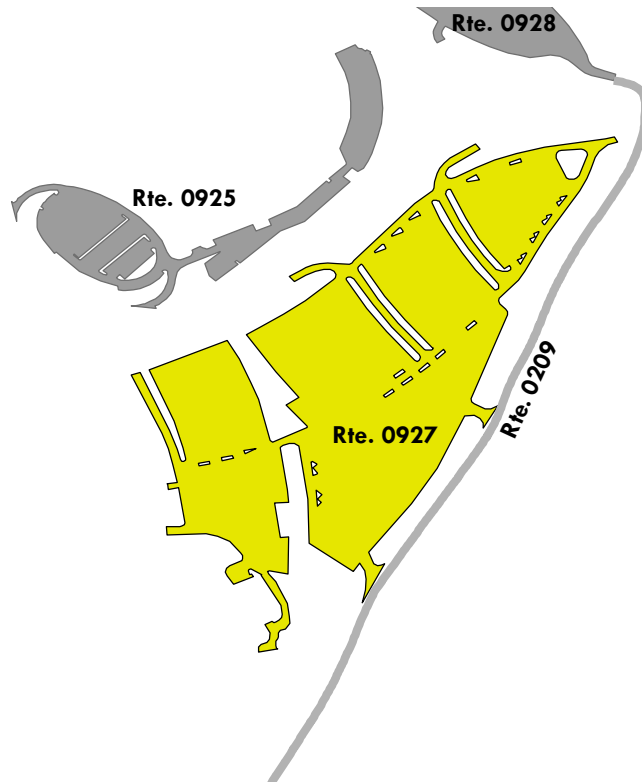

National Capital Parks - East

ROUTE 0928: RFK STADIUM NORTH PARKING

Manual Rating

FROM C STREET NE

TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252455	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
1,624,889	27.977	NOT APPLICABLE	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
RECONSTRUCTION		POOR / 30	



Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas



Note: Majority of the parking area was under construction and not rated. Square footage will be reduced after construction of new soccer fields. The GPS and area reported in Cycle 6 reflect the old parking lot area and layout. Review and update next cycle.

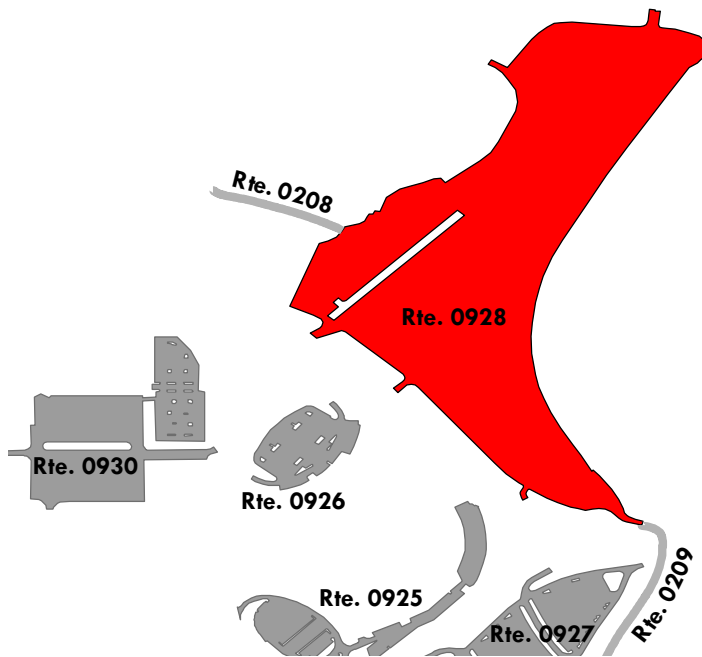

National Capital Parks - East

ROUTE 0930: RFK STADIUM EAST / DC ARMORY OVERFLOW PARKING

Manual Rating

FROM 19TH STREET NE



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252456	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
343,823	5.92	NOT APPLICABLE	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

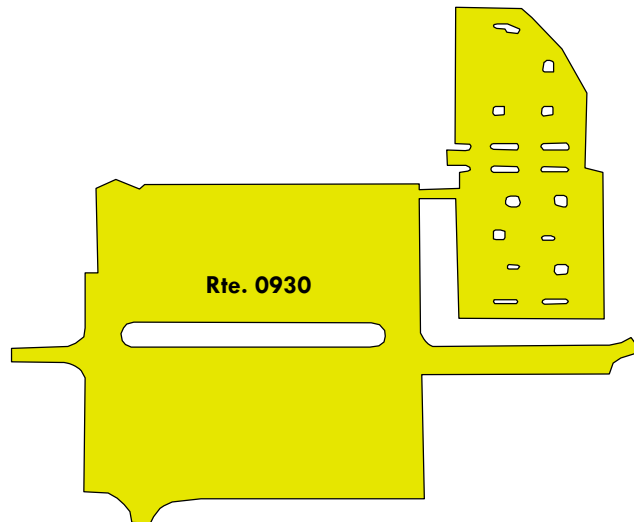

National Capital Parks - East

ROUTE 0950: OXON HILL VISITORS CENTER PARKING

Manual Rating




FROM INTERSECTION OF ROUTE 0408 (BOTTOM ROAD) AND ROUTE 0430 (OXON HILL ACCESS ROAD)
TO ROUTE 0430 (OXON HILL ACCESS ROAD)

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	20708	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
40,739	0.701	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

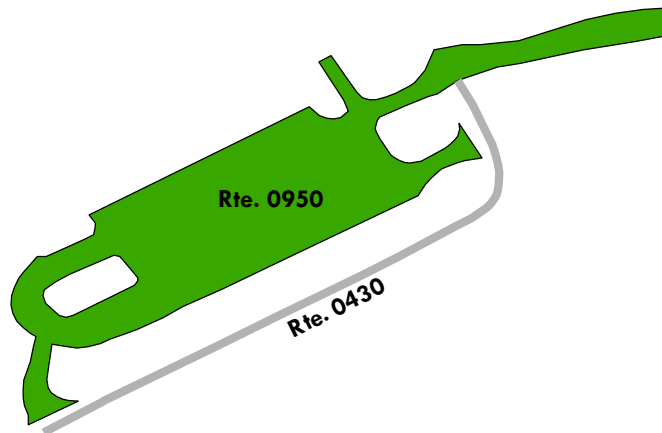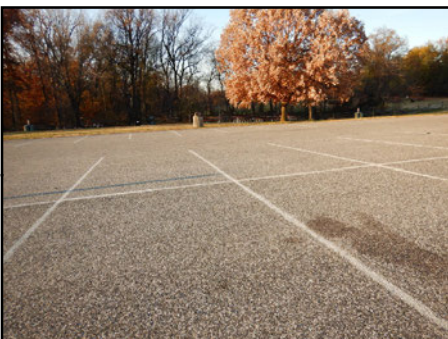

National Capital Parks - East

ROUTE 0956: MARSHALL HALL BOAT RAMP PARKING

Manual Rating

FROM END OF ROUTE 0124 (MARYLAND STATE HIGHWAY 227)



TO ROUTE 0124 (MARYLAND STATE HIGHWAY 227)

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	52377	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
47,445	0.817	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
HEAVY 3R TREATMENTS		POOR / 53	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

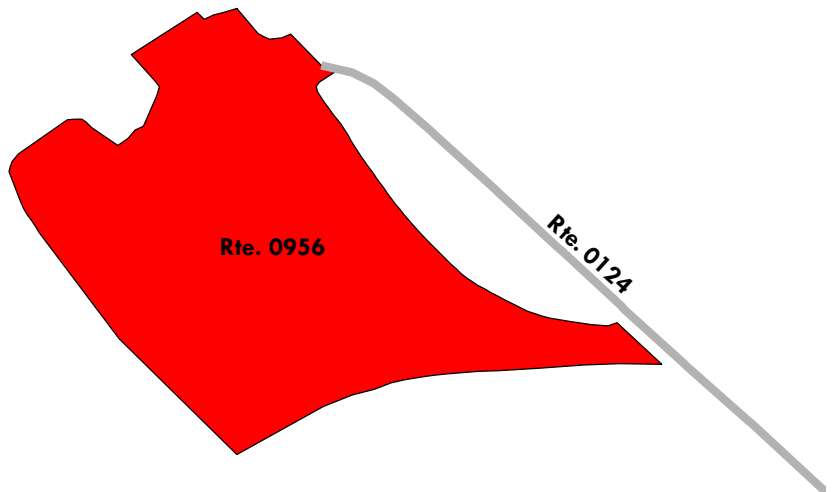

National Capital Parks - East

ROUTE 0981: U.S. PARK POLICE IMPOUND PARKING / AOF SOUTH ROADWAY

Manual Rating

FROM ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)



TO ROUTE 0104ZZ (ANACOSTIA COMPOUND ACCESS AND AVIATION DRIVE)

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252458	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
24,431	0.421	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
RECONSTRUCTION		POOR / 30	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

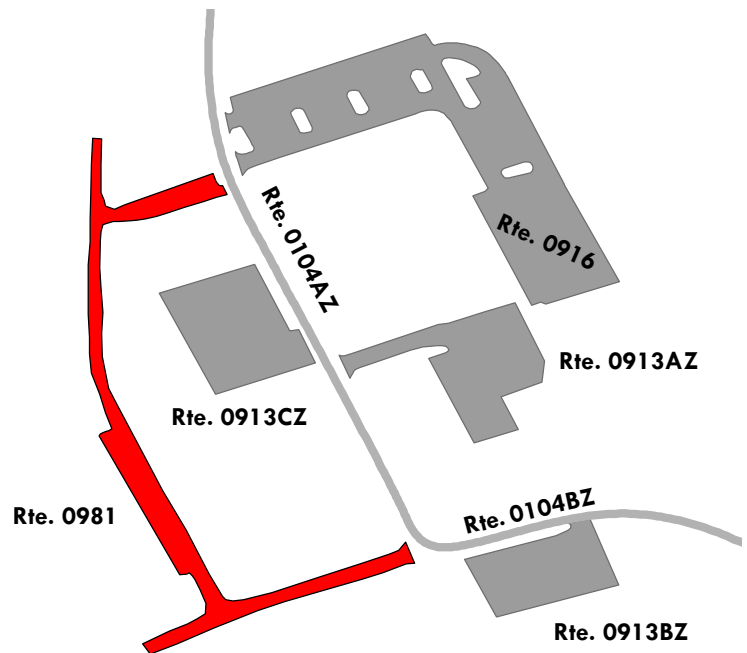

National Capital Parks - East

ROUTE 0982: JAMES CREEK PAVED PARKING

Manual Rating

FROM V STREET SW



TO V STREET SW

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252459	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
72,158	1.242	6	MODERATE REPAIR
Curb Type		Curb & Gutter Type	
ASPHALT AND CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
HEAVY 3R TREATMENTS		POOR / 53	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

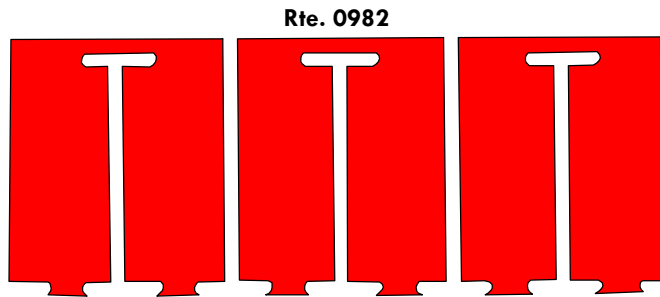

National Capital Parks - East

ROUTE 0987: QUARLES FIELD PARKING

Manual Rating

FROM ANACOSTIA AVENUE NE

TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
10/4/2018	252460	PUBLIC	CONCRETE
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
9,051	0.156	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)



Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas

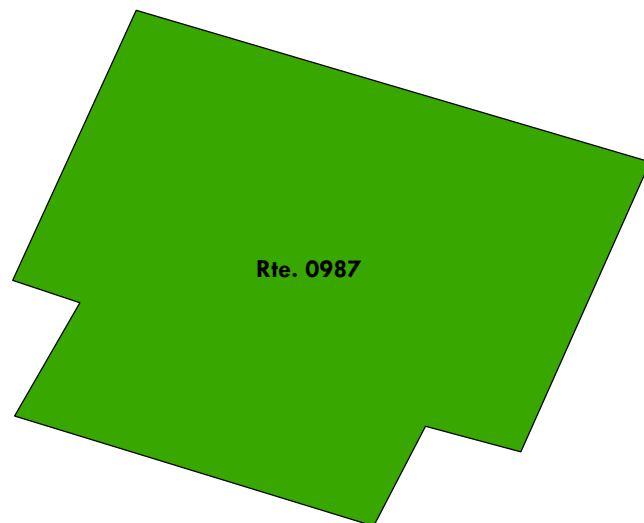

National Capital Parks - East

ROUTE 0989: 3801 SOUTH CAPITOL STREET HOUSE PARKING AND COMPLEX

Manual Rating

FROM INTERSECTION OF S CAPITOL STREET SE/SW, MARTIN LUTHER KING JR AVENUE, AND HALLEY PLACE SE




TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252461	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
8,797	0.151	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

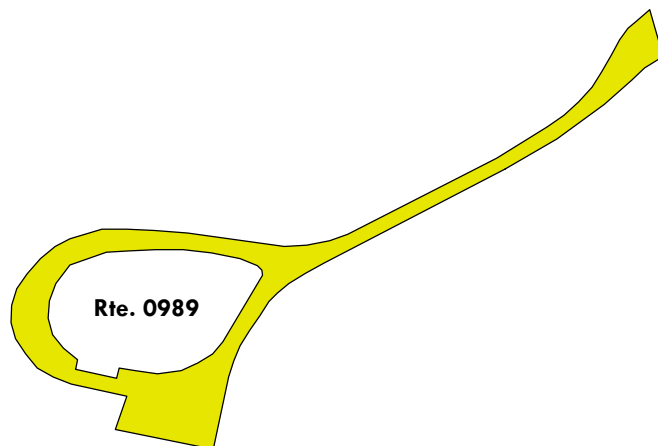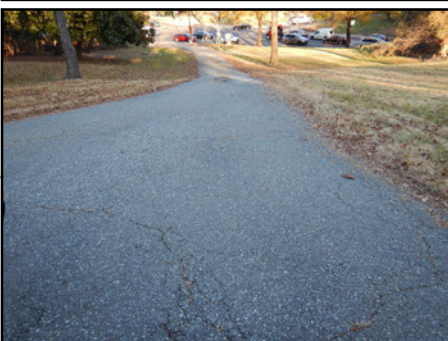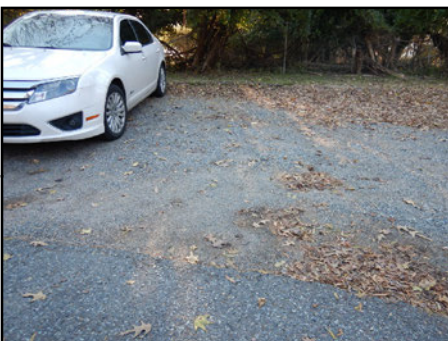

National Capital Parks - East

ROUTE 0991ZZ: ANACOSTIA DRIVE PULLOFF AREAS (SOUTH CAPITOL STREET TO BOAT RAMP)

Summary Route
Manual Rating



ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE)

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252463	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Condition Rating / PCR	
30,311	0.523	SUMMARY / 88	

Route Condition Legend – Pavement Condition Rating (PCR)				
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
See Appendix for definitions and formulas				

The condition shown on this page reflects the overall route condition and may not reflect individual subcomponent ratings.

Rte. 0991ZZ
(6 Subcomponents)

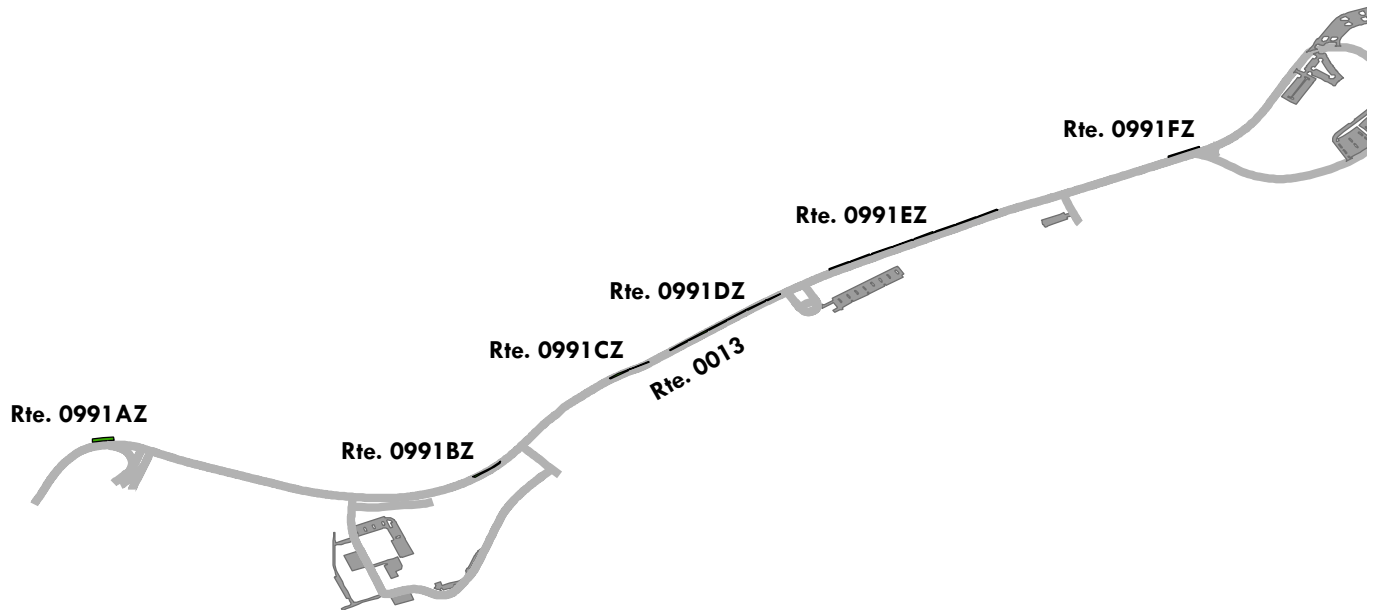

National Capital Parks - East

ROUTE 0991AZ: ANACOSTIA DRIVE PULLOFF AREA A

Subcomponent of Route NACE-0991ZZ
Manual Rating



ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 0.15 ON LEFT

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252463	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
4,275	0.074	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

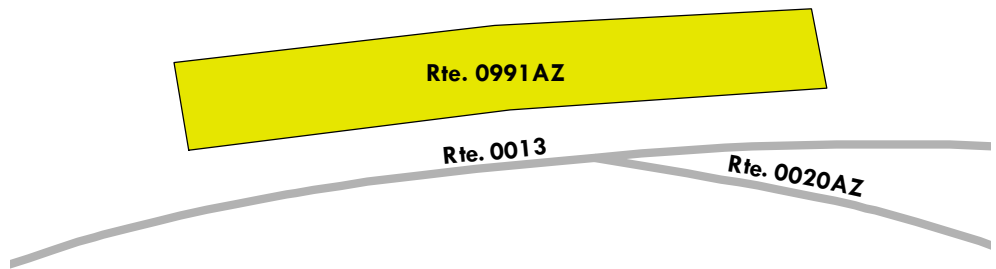

National Capital Parks - East

ROUTE 0991BZ: ANACOSTIA DRIVE PULLOFF AREA B

Subcomponent of Route NACE-0991ZZ
Manual Rating



ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 0.702 ON RIGHT

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252463	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
2,449	0.042	NOT APPLICABLE	DO NOTHING
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

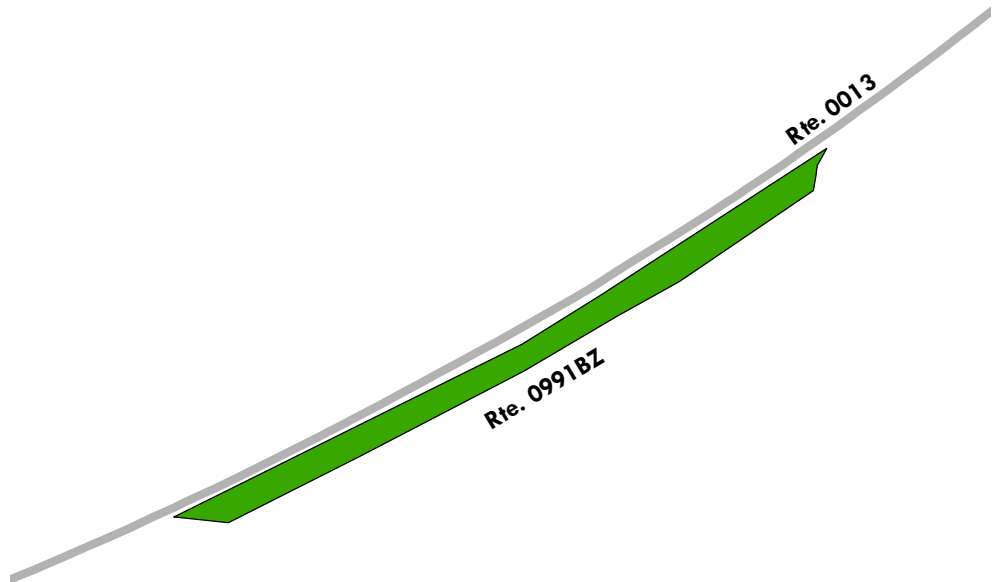

National Capital Parks - East

ROUTE 0991CZ: ANACOSTIA DRIVE PULLOFF AREA C

Subcomponent of Route NACE-0991ZZ
Manual Rating



ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 0.969 ON RIGHT

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252463	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
2,431	0.042	NOT APPLICABLE	DO NOTHING
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

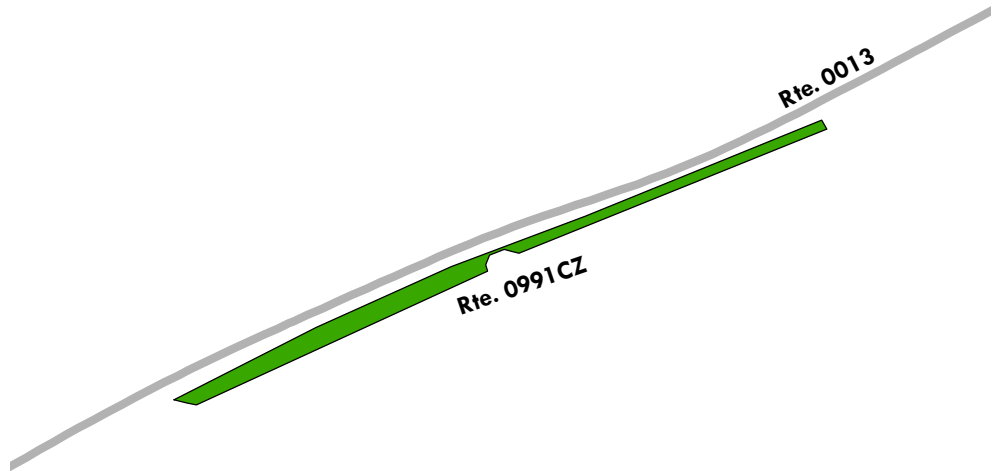

National Capital Parks - East

ROUTE 0991DZ: ANACOSTIA DRIVE PULLOFF AREA D

Subcomponent of Route NACE-0991ZZ
Manual Rating



ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 1.04 ON RIGHT

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252463	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
7,964	0.137	NOT APPLICABLE	DO NOTHING
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

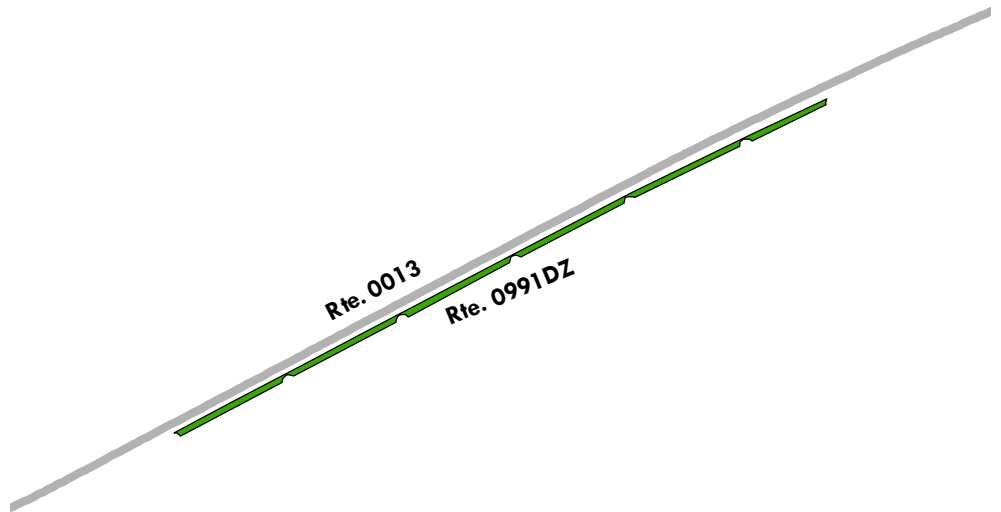

National Capital Parks - East

ROUTE 0991EZ: ANACOSTIA DRIVE PULLOFF AREA E

Subcomponent of Route NACE-0991ZZ
Manual Rating



ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 1.318 PM LEFT

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252463	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
11,362	0.196	NOT APPLICABLE	DO NOTHING
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

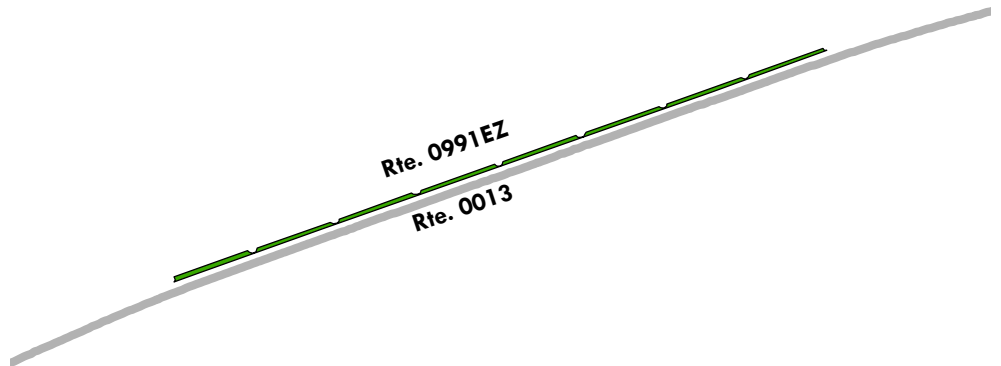

National Capital Parks - East

ROUTE 0991FZ: ANACOSTIA DRIVE PULLOFF AREA F

Subcomponent of Route NACE-0991ZZ
Manual Rating



ADJACENT TO ROUTE 0013 (ANACOSTIA DRIVE) AT MP 1.833 ON LEFT

Inspection Date	FMSS Number	User Access	Surface Type
11/29/2018	252463	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
1,830	0.032	NOT APPLICABLE	DO NOTHING
Curb Type		Curb & Gutter Type	
NO CURB		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

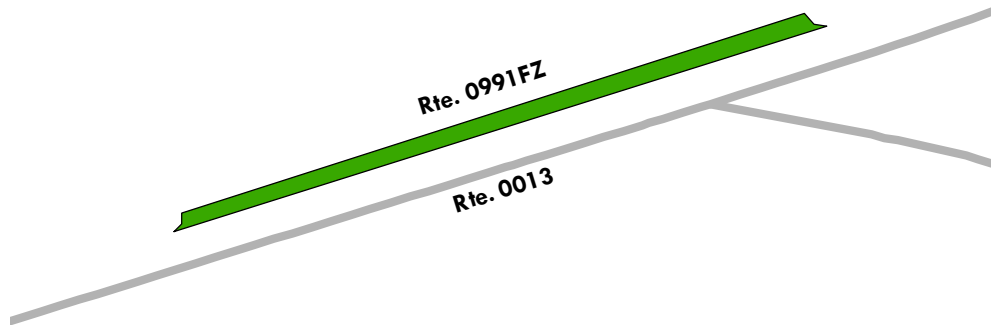

Section 7 Road Milepost Information



HARMONY HALL ACCESS ROAD

National Capital Parks - East



**Federal Lands Highway
Road Inventory Program**

Road Milepost Information

This report section contains road milepost information for all paved roads in the park that were collected with the Data Collection Vehicle (DCV). The milepost data is obtained from the DCV by using a distance measuring instrument (DMI) that is calibrated to record mileage to the nearest thousandth of a mile. Park roads that were manually rated did not have milepost data collected, and thus are not included in this report section.

For Cycle 6, the information presented in this section differs from previous RIP cycles in that it does not contain the roadside features inventories for the paved park roads. Some examples of the features previously collected are signs, culverts/drop inlets, guardrails, curbing, pullouts, etc. If the park was collected in a previous RIP cycle, then the latest features data can be obtained by referencing the following:

Where to find the latest Features Inventories for NPS Parks:

- For Small Parks (parks with less than 10 miles of paved roads):
 - Refer to Cycle 5 data (collected 2010 - 2014)
 - Features were reported in Section 9 of the *Cycle 5* RIP report
 - Video of features can be viewed using the *PathViewVO* program and *Cycle 5* data
- For Large Parks (parks with more than 10 miles of paved roads):
 - Refer to Cycle 4 data (collected 2006 - 2009)
 - Features were reported in Section 9 of the *Cycle 4* RIP report
 - Video of features can be viewed using the *VisiData* program and *Cycle 4* data
 - Note: Features inventories were updated in Large Parks in *Cycle 5* only on a route by route basis if the route was new or modified in *Cycle 5*. If this is the case for a particular route, then features for the route can be obtained using the *PathViewVO* program and *Cycle 5* data (same as above for Small parks).

Milepost Events Verified in Cycle 6

In Cycle 6, the following events were collected and reported in Section 7 of this report:

- Intersections with roads and parking areas
- All bridges and culverts with BIP Numbers (bridge inspection program numbers)
- Mile Marker Signs
- One-Way travel directions
- Overpasses
- Tunnels
- Low Water Crossings (LWCR)
- Surface type changes
- Construction areas where no pavement condition data was obtained

GPS Mileage Matching

A consistent survey milepost and constant route length as recorded by the Data Collection Vehicle (DCV) is a challenge to maintain from one collection cycle to the next. The challenge is due to many factors such as driver characteristics, DMI calibration, tire pressure etc. After Cycle 4 (~2010), a decision was made to hold constant the length of roads so long as there was no physical change from reconstruction projects or realignments that would result in a change to the length of a road. Consequently, the “GPS Mileage Match” was implemented to specify which cycle the route length is being matched. Route mileages and GPS are matched to a previous collection whenever there is no physical change to a route alignment. The route mileage and GPS is not matched to previous cycles whenever it is determined that a road length and GPS needs to be updated. When this happens the GPS and length is updated to the cycle that displays the change, and that collection cycle is used as the matching cycle in subsequent collections of the road. Thus, the Cycle 6 GIS could be either the survey length collected in Cycle 4, Cycle 5, or Cycle 6 and therefore, may not match the survey milepost displayed in the latest Cycle 6 DCV video which is viewable in *PathView VO*.

The features inventories and road logs collected on NPS routes contain mileposts that are determined from the corresponding cycle that the GPS is matched to. Therefore, the mileposts contained in the Cycle 4 or 5 features inventories or the Cycle 6 road logs may not exactly match the survey milepost collected in the latest Cycle 6 video of the road.

Locating Mile Marker Signs

For routes that have mile marker signs along them, the milepost reported by RIP will most likely not line up exactly with the sign located in the field. This could be happening for many reasons, most likely due to either the error falling within the acceptable calibration range of the vehicle, or the level of accuracy that the mile marker signs were placed in the field.

Because mile marker signs are important features in many project plans and location descriptions, RIP is reporting locations of mile marker signs in three ways in Cycle 6:

1. Mileposts from Cycle 6 GIS: the official RIP milepost taken from the features inventories and the matching GPS/mileage cycle as described above. This is the milepost that should be used on project plans and when finding locations in the field
2. Mileposts from Cycle 6 Video: milepost shown to help locate the mile marker sign in the latest *PathView VO* video.
3. Latitude / Longitude: a constant way of locating a mile marker sign so long as the park has not moved the sign

The mileposts from Cycle 6 Video and GIS should be nearly the same, but on longer roads it has been observed that the Video milepost deviates more from the official GIS milepost that comes from the matching cycle.

NACE: Route Milepost Log

ROUTE 0012: KENILWORTH PARK ACCESS

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (DEANE AVENUE NE / NON-NPS)
0.32	0.32	INTERSECTION	R	ROUTE 0903 (KENILWORTH PARKING 1)
0.75	0.75	INTERSECTION	R	ROUTE 0904 (KENILWORTH PARKING 2)
0.80	0.80	INTERSECTION	N/A	DEAD END

NACE: Route Milepost Log

ROUTE 0013: ANACOSTIA DRIVE

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	OVERPASS	N/A	A BIP STRUCTURE NUMBER HAS NOT BEEN ASSIGNED TO THIS BRIDGE (S CAPITAL STREET SW BRIDGE)
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (ANACOSTIA DRIVE SOUTHEAST / NON-NPS)
0.15	0.15	INTERSECTION	L	ROUTE 0991AZ (ANACOSTIA DRIVE PULLOFF AREA A)
0.16	0.16	INTERSECTION	R	ROUTE 0020AZ (ANACOSTIA DRIVE SE SPUR RAMP TO S CAPITAL STREET SE)
0.20	0.20	INTERSECTION	R	ROUTE 0020BZ (ANACOSTIA DRIVE SE RAMP TO S CAPITAL STREET SE)
0.22	0.22	INTERSECTION	R	ROUTE 0020DZ (HOWARD ROAD SE RAMP TO ANACOSTIA DRIVE SE)
0.51	0.51	INTERSECTION	R	ROUTE 0104AZ (ANACOSTIA COMPOUND ACCESS)
0.70	0.70	INTERSECTION	R	ROUTE 0991BZ (ANACOSTIA DRIVE PULLOFF AREA B)
0.77	0.77	INTERSECTION	R	ROUTE 0014 (GOOD HOPE ROAD)
0.88	0.88	OVERPASS	N/A	A BIP STRUCTURE NUMBER HAS NOT BEEN ASSIGNED TO THIS BRIDGE (INTERSTATE 295 SB BRIDGE)
0.92	0.92	OVERPASS	N/A	A BIP STRUCTURE NUMBER HAS NOT BEEN ASSIGNED TO THIS BRIDGE (INTERSTATE 295 NB BRIDGE)
0.97	0.97	INTERSECTION	R	ROUTE 0991CZ (ANACOSTIA DRIVE PULLOFF AREA C)
1.04	1.04	INTERSECTION	R	ROUTE 0991DZ (ANACOSTIA DRIVE PULLOFF AREA D)
1.24	1.24	INTERSECTION	R	ROUTE 0105AZ (ANACOSTIA POOL AND RECREATION FACILITY ROAD)
1.26	1.26	INTERSECTION	R	ROUTE 0105AZ (ANACOSTIA POOL AND RECREATION FACILITY ROAD)
1.32	1.32	INTERSECTION	L	ROUTE 0991EZ (ANACOSTIA DRIVE PULLOFF AREA E)
1.65	1.65	INTERSECTION	R	ROUTE 0015 (NICHOLSON STREET SE)
1.69	1.69	OVERPASS	N/A	A BIP STRUCTURE NUMBER HAS NOT BEEN ASSIGNED TO THIS BRIDGE (PENNSYLVANIA AVENUE SE BRIDGE)
1.83	1.83	INTERSECTION	L	ROUTE 0991FZ (ANACOSTIA DRIVE PULLOFF AREA F)
1.85	1.85	INTERSECTION	R	ROUTE 0016AZ (ANACOSTIA PAVILION LOOP ROAD (MAIN))
1.88	1.88	INTERSECTION	R	PAVED SPUR
2.05	2.05	INTERSECTION	R	ROUTE 0907 (PAVILION PARKING NORTH)
2.09	2.09	INTERSECTION	R	ROUTE 0016AZ (ANACOSTIA PAVILION LOOP ROAD (MAIN))
2.09	2.09	INTERSECTION	N/A	ROUTE 0908 (ANACOSTIA BOAT RAMP PARKING)

Data Collected on 6/2018

NACE: Route Milepost Log

ROUTE 0014: GOOD HOPE ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (GOOD HOPE ROAD / NON-NPS)
0.00	0.00	PARK BOUNDARY	N/A	N/A
0.02	0.02	INTERSECTION	L	ROUTE 0104BZ (AVIATION DRIVE)
0.07	0.07	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)
0.07	0.07	INTERSECTION	R	ROUTE 0013 (ANACOSTIA DRIVE)

ROUTE 0015: NICHOLSON STREET SE

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (22ND STREET / NON-NPS)
0.00	0.00	PARK BOUNDARY	N/A	N/A
0.02	0.02	INTERSECTION	L	ROUTE 0911 (NICHOLSON COMFORT STATION PARKING)
0.05	0.05	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)
0.05	0.05	INTERSECTION	R	ROUTE 0013 (ANACOSTIA DRIVE)

NACE: Route Milepost Log

ROUTE 0016AZ: ANACOSTIA PAVILION LOOP ROAD (MAIN)

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	ROUTE 0013 (ANACOSTIA DRIVE)
0.00	0.00	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)
0.03	0.03	INTERSECTION	L	ROUTE 0016BZ (ANACOSTIA PAVILION LOOP ROAD SPUR)
0.23	0.23	INTERSECTION	L	ROUTE 0909 (PAVILION PARKING SOUTH)
0.33	0.33	INTERSECTION	L	ROUTE 0909 (PAVILION PARKING SOUTH)
0.52	0.52	INTERSECTION	R	ROUTE 0908 (ANACOSTIA BOAT RAMP PARKING)
0.52	0.52	ONE-WAY START	N/A	N/A
0.55	0.55	INTERSECTION	R	ROUTE 0908 (ANACOSTIA BOAT RAMP PARKING)
0.55	0.55	INTERSECTION	L	ROUTE 0907 (PAVILION PARKING NORTH)
0.56	0.56	ONE-WAY END	N/A	N/A
0.56	0.56	INTERSECTION	R	ROUTE 0013 (ANACOSTIA DRIVE)
0.56	0.56	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)

ROUTE 0016BZ: ANACOSTIA PAVILION LOOP ROAD SPUR

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 6.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	ROUTE 0016AZ (ANACOSTIA PAVILION LOOP ROAD (MAIN))
0.00	0.00	INTERSECTION	L	ROUTE 0016AZ (ANACOSTIA PAVILION LOOP ROAD (MAIN))
0.02	0.02	INTERSECTION	R	ROUTE 0013 (ANACOSTIA DRIVE)
0.02	0.02	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)

NACE: Route Milepost Log

ROUTE 0017: FORT DUPONT DRIVE

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	PAVED ROUTE (RANDLE CIRCLE SE / NON-NPS)
0.00	0.00	INTERSECTION	L	PAVED ROUTE (RANDLE CIRCLE SE / NON-NPS)
0.21	0.21	INTERSECTION	L	ROUTE 0922 (FORT DUPONT ACTIVITY CENTER PARKING)
0.27	0.27	INTERSECTION	L	ROUTE 0922 (FORT DUPONT ACTIVITY CENTER PARKING)
0.50	0.50	INTERSECTION	R	ROUTE 0019 (RIDGE PICNIC AREA ROAD)
0.73	0.73	INTERSECTION	R	ROUTE 0019 (RIDGE PICNIC AREA ROAD)
0.80	0.80	INTERSECTION	L	ROUTE 0018 (FORT DAVIS DRIVE)
0.80	0.80	INTERSECTION	R	ROUTE 0018 (FORT DAVIS DRIVE)

ROUTE 0018: FORT DAVIS DRIVE

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	PARK BOUNDARY	N/A	N/A
0.00	0.00	INTERSECTION	R	PAVED ROUTE (RIDGE ROAD SE / NON-NPS)
0.00	0.00	INTERSECTION	L	PAVED ROUTE (RIDGE ROAD SE / NON-NPS)
0.03	0.03	INTERSECTION	R	UNPAVED ROUTE
0.34	0.34	INTERSECTION	R	UNPAVED ROUTE
0.41	0.41	INTERSECTION	R	ROUTE 0017 (FORT DUPONT DRIVE)
0.65	0.65	INTERSECTION	L	PAVED ROUTE (MASSACHUSETTS AVENUE SE / NON-NPS)
0.65	0.65	INTERSECTION	R	PAVED ROUTE (MASSACHUSETTS AVENUE SE / NON-NPS)
1.21	1.21	INTERSECTION	L	PAVED ROUTE (PENNSYLVANIA AVENUE / NON-NPS)
1.21	1.21	INTERSECTION	R	PAVED ROUTE (PENNSYLVANIA AVENUE / NON-NPS)

NACE: Route Milepost Log

ROUTE 0019: RIDGE PICNIC AREA ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	INTERSECTION	R	ROUTE 0017 (FORT DUPONT DRIVE)
0.00	0.00	INTERSECTION	L	ROUTE 0017 (FORT DUPONT DRIVE)
0.02	0.02	INTERSECTION	R	ROUTE 0206 (RIDGE PICNIC AREA LOOP)
0.03	0.03	INTERSECTION	R	ROUTE 0206 (RIDGE PICNIC AREA LOOP)
0.46	0.46	INTERSECTION	L	ROUTE 0017 (FORT DUPONT DRIVE)
0.46	0.46	INTERSECTION	R	ROUTE 0017 (FORT DUPONT DRIVE)
0.46	0.46	ONE-WAY END	N/A	N/A

ROUTE 0020AZ: ANACOSTIA DRIVE SE SPUR RAMP TO S CAPITAL STREET SE

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	ROUTE 0013 (ANACOSTIA DRIVE)
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)
0.06	0.06	INTERSECTION	N/A	ROUTE 0020BZ (ANACOSTIA DRIVE SE RAMP TO S CAPITAL STREET SE)
0.06	0.06	ONE-WAY END	N/A	N/A
0.06	0.06	INTERSECTION	L	ROUTE 0020BZ (ANACOSTIA DRIVE SE RAMP TO S CAPITAL STREET SE)

NACE: Route Milepost Log

ROUTE 0020BZ: ANACOSTIA DRIVE SE RAMP TO S CAPITAL STREET SE

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	ROUTE 0013 (ANACOSTIA DRIVE)
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)
0.04	0.04	INTERSECTION	R	ROUTE 0020AZ (ANACOSTIA DRIVE SE SPUR RAMP TO S CAPITAL STREET SE)
0.08	0.08	INTERSECTION	N/A	PAVED ROUTE (ANACOSTIA DRIVE SE RAMP / NON NPS)
0.08	0.08	ONE-WAY END	N/A	N/A
0.08	0.08	PARK BOUNDARY	N/A	N/A

ROUTE 0020CZ: S CAPITAL STREET SE RAMP TO HOWARD ROAD SE RAMP

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (S CAPITAL STREET SE RAMP / NON NPS)
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	PARK BOUNDARY	N/A	N/A
0.04	0.04	ONE-WAY END	N/A	N/A
0.04	0.04	INTERSECTION	R	ROUTE 0020DZ (HOWARD ROAD SE RAMP TO ANACOSTIA DRIVE SE)
0.04	0.04	INTERSECTION	L	ROUTE 0020DZ (HOWARD ROAD SE RAMP TO ANACOSTIA DRIVE SE)

NACE: Route Milepost Log

ROUTE 0020DZ: HOWARD ROAD SE RAMP TO ANACOSTIA DRIVE SE

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	INTERSECTION	R	PAVED ROUTE (HOWARD ROAD SE RAMP / NON NPS)
0.00	0.00	PARK BOUNDARY	N/A	N/A
0.04	0.04	INTERSECTION	L	ROUTE 0020CZ (S CAPITAL STREET SE RAMP TO HOWARD ROAD SE RAMP)
0.07	0.07	INTERSECTION	R	ROUTE 0013 (ANACOSTIA DRIVE)
0.07	0.07	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)
0.07	0.07	ONE-WAY END	N/A	N/A

ROUTE 0102: FREDERICK DOUGLAS HOME ACCESS ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	PAVED ROUTE (14TH STREET SE / NON-NPS)
0.00	0.00	INTERSECTION	R	PAVED ROUTE (14TH STREET SE / NON-NPS)
0.16	0.16	INTERSECTION	L	ROUTE 0102 (FREDERICK DOUGLAS HOME ACCESS ROAD)
0.18	0.18	INTERSECTION	N/A	ROUTE 0102 (FREDERICK DOUGLAS HOME ACCESS ROAD)
0.18	0.18	INTERSECTION	L	ROUTE 0102 (FREDERICK DOUGLAS HOME ACCESS ROAD)

NACE: Route Milepost Log

ROUTE 0104AZ: ANACOSTIA COMPOUND ACCESS

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)
0.00	0.00	INTERSECTION	R	ROUTE 0013 (ANACOSTIA DRIVE)
0.01	0.01	INTERSECTION	L	ROUTE 0424 (AOF TRAINING PARKING ROAD)
0.02	0.02	INTERSECTION	R	ROUTE 0964A (HEADQUARTERS OVERFLOW PARKING A)
0.06	0.06	INTERSECTION	L	ROUTE 0916 (U.S. PARK POLICE OFFICE PARKING)
0.07	0.07	INTERSECTION	L	ROUTE 0916 (U.S. PARK POLICE OFFICE PARKING)
0.08	0.08	INTERSECTION	R	ROUTE 0981 (U.S. PARK POLICE IMPOUND PARKING / AOF SOUTH ROADWAY)
0.09	0.09	INTERSECTION	R	PAVED PARKING (PARK POLICE PARKING)
0.12	0.12	INTERSECTION	R	PAVED PARKING (PARK POLICE PARKING)
0.13	0.13	INTERSECTION	L	ROUTE 0913AZ (NACE PARK HEADQUARTERS PARKING A)
0.17	0.17	INTERSECTION	L	PAVED PARKING (PARK POLICE PARKING)
0.18	0.18	INTERSECTION	R	ROUTE 0981 (U.S. PARK POLICE IMPOUND PARKING / AOF SOUTH ROADWAY)
0.18	0.18	INTERSECTION	N/A	ROUTE 0104BZ (AVIATION DRIVE)

ROUTE 0104BZ: AVIATION DRIVE

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	ROUTE 0104AZ (ANACOSTIA COMPOUND ACCESS)
0.02	0.02	INTERSECTION	R	ROUTE 0913BZ (NACE PARK HEADQUARTERS PARKING B)
0.06	0.06	INTERSECTION	L	ROUTE 0915AZ (U.S. PARK POLICE AVIATION PARKING)
0.11	0.11	INTERSECTION	L	ROUTE 0915AZ (U.S. PARK POLICE AVIATION PARKING)
0.13	0.13	INTERSECTION	L	ROUTE 0915BZ (USPP AVIATION FUEL RAMP)
0.18	0.18	INTERSECTION	L	ROUTE 0915BZ (USPP AVIATION FUEL RAMP)
0.21	0.21	INTERSECTION	R	ROUTE 0965A (AVIATION ROAD BALLFIELD PARKING A)
0.32	0.32	INTERSECTION	R	ROUTE 0965B (AVIATION ROAD BALLFIELD PARKING B)
0.36	0.36	INTERSECTION	L	ROUTE 0014 (GOOD HOPE ROAD)
0.36	0.36	INTERSECTION	R	ROUTE 0014 (GOOD HOPE ROAD)

NACE: Route Milepost Log

ROUTE 0105AZ: ANACOSTIA POOL AND RECREATION FACILITY ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	INTERSECTION	R	ROUTE 0013 (ANACOSTIA DRIVE)
0.03	0.03	INTERSECTION	L	ROUTE 0105BZ (ANACOSTIA POOL AND RECREATION FACILITY ROAD CUT-THRU)
0.06	0.06	INTERSECTION	R	ROUTE 0912 (ANACOSTIA POOL & RECREATION FACILITY PARKING)
0.07	0.07	INTERSECTION	L	ROUTE 0105BZ (ANACOSTIA POOL AND RECREATION FACILITY ROAD CUT-THRU)
0.11	0.11	INTERSECTION	L	ROUTE 0013 (ANACOSTIA DRIVE)
0.11	0.11	ONE-WAY END	N/A	N/A
0.11	0.11	INTERSECTION	R	ROUTE 0013 (ANACOSTIA DRIVE)

ROUTE 0105BZ: ANACOSTIA POOL AND RECREATION FACILITY ROAD CUT-THRU

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	ROUTE 0105AZ (ANACOSTIA POOL AND RECREATION FACILITY ROAD)
0.00	0.00	INTERSECTION	R	ROUTE 0105AZ (ANACOSTIA POOL AND RECREATION FACILITY ROAD)
0.00	0.00	ONE-WAY START	N/A	N/A
0.02	0.02	ONE-WAY END	N/A	N/A
0.02	0.02	INTERSECTION	L	ROUTE 0105AZ (ANACOSTIA POOL AND RECREATION FACILITY ROAD)
0.02	0.02	INTERSECTION	R	ROUTE 0105AZ (ANACOSTIA POOL AND RECREATION FACILITY ROAD)

NACE: Route Milepost Log

ROUTE 0108: FORT STANTON RESERVOIR ACCESS ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	PAVED ROUTE (ERIE STREET SE / NON-NPS)
0.00	0.00	INTERSECTION	L	PAVED ROUTE (ERIE STREET SE / NON-NPS)
0.07	0.07	INTERSECTION	L	UNPAVED PARKING
0.18	0.18	INTERSECTION	N/A	ROUTE 0108 (FORT STANTON RESERVOIR ACCESS ROAD)

ROUTE 0111: 27TH STREET SE

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	PAVED ROUTE (NAYLOR ROAD SE / NON-NPS)
0.00	0.00	INTERSECTION	R	PAVED ROUTE (NAYLOR ROAD SE / NON-NPS)
0.00	0.00	ONE-WAY START	N/A	N/A
0.13	0.13	PARK BOUNDARY	N/A	N/A
0.13	0.13	ONE-WAY END	N/A	N/A
0.13	0.13	INTERSECTION	R	PAVED ROUTE (TEXAS AVENUE SE / NON-NPS)
0.13	0.13	INTERSECTION	N/A	PAVED ROUTE (27TH STREET SE / NON-NPS)

ROUTE 0112: BRYAN POINT ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (BRYAN POINT ROAD / NON-NPS)
0.00	0.00	PARK BOUNDARY	N/A	N/A
0.01	0.01	INTERSECTION	R	ROUTE 0969 (ACCOKEEK CREEK ACCESS PARKING)
0.14	0.14	INTERSECTION	R	ROUTE 0953 (PISCATAWAY PARK / SAYLOR GROVE VISITORS CENTER PARKING)
0.20	0.20	INTERSECTION	N/A	DEAD END
0.20	0.20	INTERSECTION	L	ROUTE 0101 (COLONIAL FARM ACCESS)

NACE: Route Milepost Log

ROUTE 0117: FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE)

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 6.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	PAVED ROUTE (MINNESOTA AVENUE SE/ NON-NPS)
0.00	0.00	INTERSECTION	L	PAVED ROUTE (MINNESOTA AVENUE SE/ NON-NPS)
0.08	0.08	INTERSECTION	R	ROUTE 0425 (FORT DUPONT SUMMER THEATRE SERVICE ROAD)
0.14	0.14	INTERSECTION	L	ROUTE 0406AZ (FORT DUPONT STABLE ACCESS)
0.14	0.14	INTERSECTION	R	ROUTE 0406BZ (FORT DUPONT MAINTENANCE YARD ACCESS)

ROUTE 0118: LANHAM ESTATES LOOP ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	PAVED ROUTE (ALABAMA AVENUE SE / NON NPS)
0.00	0.00	INTERSECTION	R	PAVED ROUTE (ALABAMA AVENUE SE / NON NPS)
0.00	0.00	ONE-WAY START	N/A	N/A
0.01	0.01	INTERSECTION	R	ROUTE 0118 (LANHAM ESTATES LOOP ROAD)
0.01	0.02	BRIDGE	N/A	A BIP STRUCTURE NUMBER HAS NOT BEEN ASSIGNED TO THIS BRIDGE
0.08	0.08	INTERSECTION	R	ROUTE 0966BZ (LANHAM ESTATES PARK PICNIC AREA PARKING B)
0.08	0.08	INTERSECTION	L	ROUTE 0966AZ (LANHAM ESTATES PARK PICNIC AREA PARKING A)
0.33	0.33	INTERSECTION	L	ROUTE 0118 (LANHAM ESTATES LOOP ROAD)
0.33	0.33	INTERSECTION	R	ROUTE 0118 (LANHAM ESTATES LOOP ROAD)
0.33	0.33	ONE-WAY END	N/A	N/A

ROUTE 0120: WHARF ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (WHARF ROAD / NON NPS)
0.00	0.00	PARK BOUNDARY	N/A	N/A
0.32	0.32	INTERSECTION	R	ROUTE 0951 (FARMINGTON LANDING PARKING)

NACE: Route Milepost Log

ROUTE 0123: RIVER ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	ROUTE 0124 (MARYLAND STATE HIGHWAY 227)
0.00	0.00	INTERSECTION	R	ROUTE 0124 (MARYLAND STATE HIGHWAY 227)
0.20	0.20	INTERSECTION	R	UNPAVED ROUTE (GATED)
0.21	0.21	PARK BOUNDARY	N/A	N/A
0.21	0.21	INTERSECTION	N/A	PAVED ROUTE (RIVER ROAD / NON-NPS)

ROUTE 0124: MARYLAND STATE HIGHWAY 227

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (MARYLAND STATE HIGHWAY 227/ NON-NPS)
0.00	0.00	PARK BOUNDARY	N/A	N/A
0.31	0.31	INTERSECTION	R	PAVED ROUTE (BRANITAN PLACE / NON-NPS)
0.72	0.72	INTERSECTION	R	ROUTE 0300 (MARSHALL HALL ACCESS ROAD)
0.77	0.77	INTERSECTION	R	ROUTE 0300 (MARSHALL HALL ACCESS ROAD) SPUR
0.91	0.91	INTERSECTION	L	ROUTE 0123 (RIVER ROAD)
0.94	0.94	INTERSECTION	R	ROUTE 0300 (MARSHALL HALL ACCESS ROAD)
1.07	1.07	INTERSECTION	L	ROUTE 0956 (MARSHALL HALL BOAT RAMP PARKING)
1.12	1.12	INTERSECTION	L	ROUTE 0956 (MARSHALL HALL BOAT RAMP PARKING)
1.12	1.12	INTERSECTION	N/A	DEAD END

NACE: Route Milepost Log

ROUTE 0206: RIDGE PICNIC AREA LOOP

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	ROUTE 0019 (RIDGE PICNIC AREA ROAD)
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	INTERSECTION	R	ROUTE 0019 (RIDGE PICNIC AREA ROAD)
0.09	0.09	ONE-WAY END	N/A	N/A
0.09	0.09	INTERSECTION	N/A	ROUTE 0019 (RIDGE PICNIC AREA ROAD)
0.09	0.09	INTERSECTION	L	ROUTE 0019 (RIDGE PICNIC AREA ROAD)

ROUTE 0208: NORTH STADIUM ENTRANCE ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	ROUTE 0928 (RFK STADIUM NORTH PARKING)
0.11	0.11	INTERSECTION	L	PAVED ROUTE (OKLAHOMA AVENUE NE / NON NPS)
0.11	0.11	INTERSECTION	R	PAVED ROUTE (OKLAHOMA AVENUE NE / NON NPS)

ROUTE 0209: SOUTH STADIUM ACCESS ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 6.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (BARNEY CIRCLE / NON NPS)
0.00	0.00	INTERSECTION	L	PAVED ROUTE (17TH STREET NE / NON NPS)
0.11	0.11	INTERSECTION	R	PAVED ROUTE (RFK STADIUM ACCESS / NON NPS)
0.85	0.85	INTERSECTION	L	ROUTE 0927 (RFK STADIUM SOUTHEAST PARKING)
0.97	0.97	INTERSECTION	L	ROUTE 0927 (RFK STADIUM SOUTHEAST PARKING)
1.17	1.17	INTERSECTION	N/A	ROUTE 0928 (RFK STADIUM NORTH PARKING)

NACE: Route Milepost Log

ROUTE 0300: MARSHALL HALL ACCESS ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	ROUTE 0124 (MARYLAND STATE HIGHWAY 227)
0.00	0.00	INTERSECTION	L	ROUTE 0124 (MARYLAND STATE HIGHWAY 227)
0.05	0.05	INTERSECTION	L	ROUTE 0300 (MARSHALL HALL ACCESS ROAD) SPUR
0.22	0.22	INTERSECTION	R	ROUTE 0301 (MARSHALL HALL LOOP ROAD)
0.28	0.28	INTERSECTION	R	ROUTE 0124 (MARYLAND STATE HIGHWAY 227)
0.28	0.28	INTERSECTION	L	ROUTE 0124 (MARYLAND STATE HIGHWAY 227)

ROUTE 0301: MARSHALL HALL LOOP ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	ROUTE 0300 (MARSHALL HALL ACCESS ROAD)
0.00	0.00	INTERSECTION	N/A	ROUTE 0300 (MARSHALL HALL ACCESS ROAD)
0.04	0.04	INTERSECTION	R	ROUTE 0301 (MARSHALL HALL LOOP ROAD)
0.09	0.09	INTERSECTION	R	UNPAVED ROUTE
0.13	0.13	INTERSECTION	R	ROUTE 0301 (MARSHALL HALL LOOP ROAD)
0.13	0.13	INTERSECTION	N/A	ROUTE 0301 (MARSHALL HALL LOOP ROAD)

ROUTE 0402: KENILWORTH MAINTENANCE ACCESS

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (ANACOSTIA AVENUE / NON-NPS)
0.00	0.00	INTERSECTION	R	PAVED ROUTE (ANACOSTIA AVENUE / NON-NPS)
0.08	0.08	INTERSECTION	N/A	ROUTE 0906 (KENILWORTH MAINTENANCE YARD)

NACE: Route Milepost Log

ROUTE 0404: RIVER TERRACE ACCESS ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	PAVED ROUTE (ANACOSTIA AVENUE NE / NON-NPS)
0.00	0.00	INTERSECTION	L	PAVED ROUTE (ANACOSTIA AVENUE NE / NON-NPS)
0.05	0.05	INTERSECTION	N/A	ROUTE 0404 (RIVER TERRACE ACCESS ROAD) UNPAVED SECTION

ROUTE 0406AZ: FORT DUPONT STABLE ACCESS

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 6.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	ROUTE 0406BZ (FORT DUPONT MAINTENANCE YARD ACCESS)
0.00	0.00	INTERSECTION	N/A	ROUTE 0117 (FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE))
0.02	0.02	INTERSECTION	R	ROUTE 0918 (FORT DUPONT MAINTENANCE YARD PARKING)
0.04	0.04	INTERSECTION	R	UNPAVED PARKING
0.13	0.13	INTERSECTION	L	PAVED ROUTE (AUTHORIZED VEHICLES ONLY)
0.13	0.13	INTERSECTION	R	ROUTE 0919B (FORT DUPONT REAR MAINTENANCE AREA)
0.13	0.13	INTERSECTION	R	UNPAVED PARKING
0.14	0.14	INTERSECTION	R	ROUTE 0920 (U.S. PARK POLICE FORT DUPONT STABLES AND PARKING)
0.18	0.18	INTERSECTION	N/A	ROUTE 0920 (U.S. PARK POLICE FORT DUPONT STABLES AND PARKING)

ROUTE 0406BZ: FORT DUPONT MAINTENANCE YARD ACCESS

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	ROUTE 0117 (FORT DUPONT MAINTENANCE ACCESS ROAD (F STREET SE))
0.00	0.00	INTERSECTION	L	ROUTE 0406AZ (FORT DUPONT STABLE ACCESS)
0.06	0.06	INTERSECTION	N/A	ROUTE 0919A (FORT DUPONT INTERIOR MAINTENANCE AREA)

Data Not Collected on Cycle 6.

NACE: Route Milepost Log

ROUTE 0424: AOF TRAINING PARKING ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	ROUTE 0104AZ (ANACOSTIA COMPOUND ACCESS)
0.00	0.00	INTERSECTION	L	ROUTE 0104AZ (ANACOSTIA COMPOUND ACCESS)
0.11	0.11	INTERSECTION	N/A	DEAD END

ROUTE 0430: OXON HILL ACCESS ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 4.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	PAVED ROUTE (BALD EAGLE ROAD / NON-NPS)
0.00	0.00	INTERSECTION	R	ROUTE 0950 (OXON HILL VISITORS CENTER PARKING)
0.00	0.00	PARK BOUNDARY	N/A	N/A
0.01	0.01	INTERSECTION	R	ROUTE 0950 (OXON HILL VISITORS CENTER PARKING)
0.10	0.10	INTERSECTION	R	ROUTE 0950 (OXON HILL VISITORS CENTER PARKING)
0.10	0.10	INTERSECTION	N/A	ROUTE 0408 (BOTTOM ROAD)

Section 8 Appendix



FORT DUPONT DRIVE

National Capital Parks - East



**Federal Lands Highway
Road Inventory Program**

Improvements to the RIP Index Equations and Determination of PCR

In 2005, the Federal Highway Administration (FHWA) began implementing the use of a Pavement Management System (PMS) to assist the National Park Service (NPS) in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) which has the ability to store inventory and condition data from the Road Inventory Program (RIP) and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Region, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA as well.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions the distresses and indexes that comprise the Pavement Condition Rating (PCR), an extensive study was completed throughout 2010 that has resulted in changes to the RIP condition reporting method and specifically, the calculation of PCR. It was determined that a better representation of PCR could be achieved by modifying the relative impact certain distresses would have on the overall rating.

Through the use of HPMA data, it was noted that false failure indicators existed with the existing PCR model, and that it would be necessary to reduce their impact. The distresses affected in this way were Rutting and Roughness. Conversely, experience showed that roadways with extensive cracking present were often shown to have a high PCR. Therefore, the crack index models were adjusted to be more sensitive to changes in crack severity or quantity. It was also determined that these issues were not due to a problem with data acquisition (i.e. the RIP “van”), but with the way the collected data was processed. The final change was to provide guidance on when to use the Roughness Condition Index (RCI) in the PCR calculation. Roughness data is of little value to determining overall condition on routes that, due to their length or geometrics, have lower vehicle operating speeds. Therefore, in Cycle 5, only routes that have lengths of one half mile or greater and posted speed limits of 25 mph or greater will have RCI reported and included in the PCR calculations.

Additionally, methodologies were updated in 2013 for Manually Rated Routes (paved routes that the collection vehicle is unable to drive) as well as Parking Areas to provide more accurate condition data to the HPMA. These updated methodologies allow for the efficient assessment of pavement conditions using a visual inspection method to denote specific distresses. These distresses are indicative of current conditions, the causes for current and future deterioration, and identify the level of targeted repair and rehabilitation practices required.

The changes that were implemented were endorsed by management at both the FHWA and NPS. In order to show the effectiveness of these changes, several sites were ground truth tested in early 2014 to ensure that an improvement was achieved between the relationship of PCR and the actual Maintenance and Rehabilitation needs that were represented. The changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection.

Description of the Rating System

The Federal Highway Administration, National Park Service Road Inventory Program (NPS-RIP), collects roadway condition data on paved surfaces (asphalt, concrete, brick, and cobblestone) on roads, parkways, and parking areas in national parks nationwide. The road surface condition data is collected using an automated Data Collection Vehicle (DCV) and manually using Manually Rated Route (MRR) procedures. Roads having brick or cobblestone surfacing are not normally surveyed with the DCV, but are manually rated for condition rating.

The FHWA RIP is implemented based on the premise that an accurate pavement surface condition assessment can be accomplished using automated crack detection technology as applied to digital images. Various methods of pavement condition assessment have been developed over the years with varying degrees of accuracy and acceptance. The use of digital photography to record pavement images and subsequent crack detection and classification has undergone continuous improvements over the past decade. Digital cameras with increasingly superior resolution and high definition have become more affordable, and the proprietary programming code and algorithms have been improved in crack detection software.

With the use of quality digital photography and automated crack detection software, FHWA RIP is tasked with executing a pavement condition assessment on a network of roughly 5,700 miles of National Park Service roads and parkways. Because a subset of roads will be collected multiple times this cycle, the total collection length will be around 13,000 miles. Foremost in setting up the basis of pavement distress identification is employing the distress identification protocols used by FHWA. There is no single distress identification system that is universal among entities conducting a program of distress identification. For the purpose of the NPS RIP, FHWA employs distress identification protocols that are specific to this program.

FHWA has referenced the “*Distress Identification Manual for the Long-Term Pavement Performance Program*”, Publication No. FHWA-RD 03-031, June 2003, as the point-of-reference for distress types on NPS pavement. In truth, the FHWA RIP distress types are similar to those described in the LTPP manual with some modifications. This document, “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 6, 2014-2020*” was developed using the “*Distress Identification Manual for the Long-Term Pavement Performance Program*” as a guideline. Definitions of severity levels based on crack width contained in this document adhere to the LTPP Distress ID Manual. Modifications have been made to the definition of Alligator and Longitudinal Cracking and determination of Alligator Cracking severity. This manual also addresses Rutting and Roughness and its application to RIP.

Cycle 6 has launched in the spring of 2014 and will again comprise all parks, large and small, that are served by paved roads and/or parking areas. For Cycle 6, roughly 333 large and small parks will have all paved routes and parking areas collected at least once in the cycle, some will have multiple collections depending on the size of the park and the functional class of the route.

This “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 6, 2014-2020*” will be used as a reference resource in crack detection and classification, determination of distress severity and extent, and in the calculation of distress index values for the FHWA RIP Cycle 6.


Explanation of the Condition Descriptions

In addition to the RIP Index changes that were implemented in Cycle 5, we will also aim to provide greater assistance in translating good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for preventive maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 60 or below. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific maintenance and rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional PMS data from our (HPMA) please contact the Eastern Federal Lands pavement team.

Condition Categories and Treatments

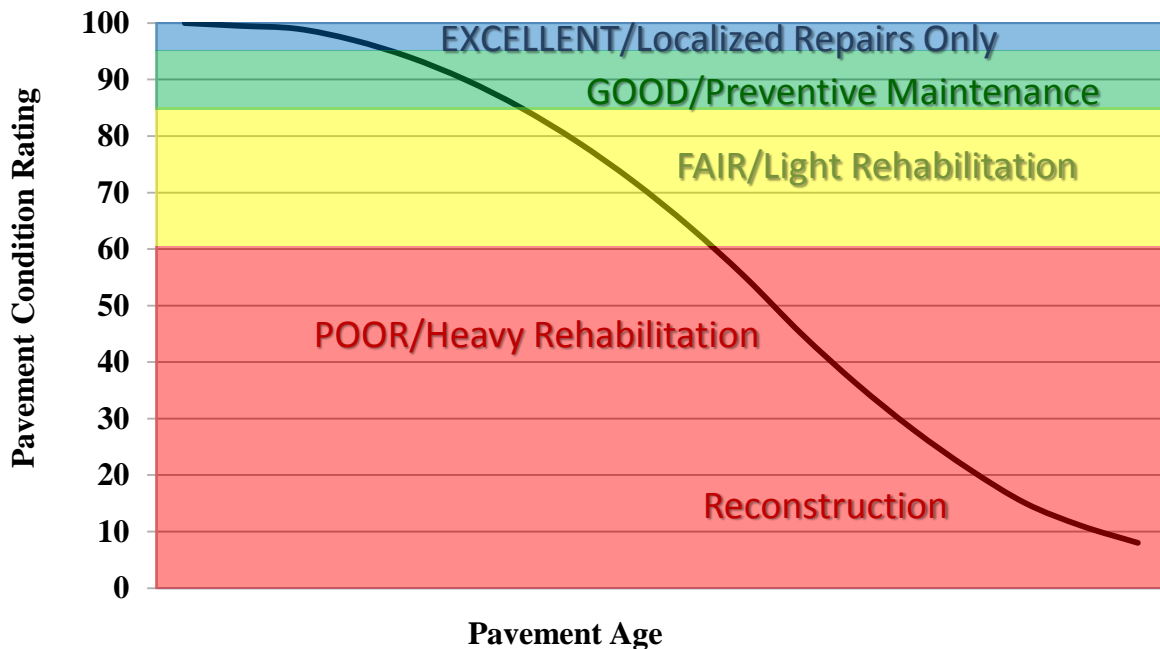

Description of Pavement Treatment Types

1. **Preventive Maintenance** is a planned strategy of cost-effective treatments to an existing roadway system and its appurtenances that preserves the system, retards future deterioration, and maintains or improves the functional condition of the system (without significantly increasing the structural capacity). Preventive maintenance is typically applied to pavements in good condition having significant remaining service life. As a major component of pavement preservation, preventive maintenance is a strategy of extending the service life by applying cost-effective treatments to the surface or near-surface of structurally sound pavements. Examples of preventive treatments include asphalt crack sealing, chip sealing, slurry or micro-surfacing, thin and ultra-thin hot-mix asphalt overlay, concrete joint sealing, diamond grinding, dowel-bar retrofit, and isolated, partial and/or full-depth concrete repairs to restore functionality of individual slabs.
2. Pavement Rehabilitation consists of structural enhancements that extend the service life of an existing pavement and/or improve its load carrying capacity. Rehabilitation techniques include restoration treatments and structural overlays. Rehabilitation projects extend the life of existing pavement structures either by restoring existing structural capacity through the elimination of age-related, environmental cracking of embrittled pavement surface or by increasing pavement thickness to strengthen existing pavement sections to accommodate existing or projected traffic loading conditions. Two sub-categories result from these distinctions, which are directly related to the restoration or increase of structural capacity.
 - **Light Rehabilitation (L3R)** - Examples include single-lift overlays up to 2.5 inches in total thickness and milling and overlays for flexible pavements
 - **Heavy Rehabilitation (H3R)** – Requires rehabilitation with grade improvement. H3R stands for resurfacing, restoration, and rehabilitation projects. H3R projects typically involve multi-depth (overlays greater than 2.5 inches) pavement improvement work (short of full-depth replacement) and targeted safety improvements. H3R projects generally involve retention of the existing three-dimensional alignment.
3. **Reconstruction (4R)** is defined as the replacement of the entire existing pavement structure by the placement of the equivalent or increased pavement structure. Reconstruction usually requires the complete removal and replacement of the existing pavement structure. Reconstruction may utilize either new or recycled materials incorporated into the materials used for the reconstruction of the complete pavement section. Reconstruction is required when a pavement has either failed or has become functionally obsolete.

Appendix A

Methodology for Determining Condition Ratings with the Data Collection Vehicle (DCV)

Surface Distresses Identified by the Data Collection Vehicle

Surface Condition Rating – SCR

Surface distresses are measured in the primary lane only. In the classification and measurement of all paved surface condition data, results will be reported in the database in record intervals of 0.02 miles (105.6 feet) (smallest granularity) along the route.

Surface distresses and rutting are determined from digital images that provide both the longitudinal and transverse profile. The images also provide an elevation profile of the road, creating a 3-dimensional image of the paved surface.

- Transverse Cracks
- Longitudinal Cracks
- Alligator Cracks
- Patching/Potholes
- Rutting

Each of the five surface distresses is assigned a computed surface distress index

- Transverse Crack Index
- Longitudinal Crack Index
- Alligator Crack Index
- Patching/Pothole Index
- Rutting Index

Surface distress data are classified as listed above, measured for severity, and quantified for extent. Classification, severity, and extent of these five surface distresses comprise the three main elements for calculation of Surface Condition Rating (SCR).

In addition to the five surface distresses, a Structural Crack Index is computed, which is a combination of the Longitudinal Crack Index and the Alligator Crack Index. The Structural Crack Index is then used in lieu of the LC and AC indices to compute SCR.

Roughness Condition Index - RCI

Additional condition data measured by DCV (lasers and accelerometers)

- Roughness (IRI)

Roughness is measured by FHWA's DCV and reported as International Roughness Index (IRI) in inches/mile. Using IRI, the Roughness Condition Index (RCI) is computed.

Pavement Condition Rating - PCR

Using the SCR (computed from the five surface distresses) and the RCI, an overall Pavement Condition Rating (PCR) is computed. The formula for PCR is:

$$\text{Asphalt PCR} = (0.60 * \text{SCR}) + (0.40 * \text{RCI})$$

$$\text{Concrete PCR} = \text{RCI}$$

A detailed description of each distress index formula, roughness index formula, SCR and PCR is provided in this document.

Each classified surface distress will fall into one or more severity - LOW, MEDIUM, or HIGH based on criteria listed. For each severity, an extent is established based on the measured quantity of the distress within that severity. Within each severity individual distresses are assigned a Maximum Allowable Extent (MAE). For example, LOW severity transverse cracking may be allowed up to 21.1 cracks within a 0.02 mile interval before it reaches MAE and fails.

The index formulas are based on a scale of 0 to 100. A PCR index value of 100 would indicate a “new” road with no measurable distresses or rough ride. A PCR value of 60 is determined to be terminable serviceability and the road is considered failed. The range of index values with condition descriptors is:

POOR = (less than or equal to 60), **FAIR**= (61 – 84), **GOOD**= (85 - 94), **EXCELLENT**= (95 - 100)

Index values are generally computed based on cumulative deducts of the measured severities. As shown in the index formulas below, as any single severity reaches or exceeds MAE, the index computes to a value of 60 or less, and the road fails for that 0.02 interval.

Note: *As a result of a unique combination of measured surface distresses and IRI, index values occasionally compute to less than 0 or greater than 100. In this instance, an index value less than 0 defaults to 0. Index values greater than 100 defaults to 100. For all indices, a higher value indicates a better road condition, and a lower value indicates a poorer road condition.*

On the following page, Table 1 summarizes the different types of distresses measured.

ASPHALT-SURFACED PAVEMENT DISTRESS TYPES WITH RUTTING AND ROUGHNESS				
Distress Type	Units Of Measure	Converted To	Defined Severity Levels?	Measured By
Alligator Cracking	Square Feet	Percent of Lane Per 0.02 Mile	Yes	3 Dimensional pavement imaging system
Transverse Cracking	Linear feet	Number of Cracks Per 0.02 Mile	Yes	3 Dimensional pavement imaging system
Longitudinal Cracking	Linear feet	Percent of Lane Length Per 0.02 Mile	Yes	3 Dimensional pavement imaging system
Patching / Potholes	Square Feet	Percent of Lane Per 0.02 Mile	No	3 Dimensional pavement imaging system
Rutting	Inches	Rut Depth Per 0.02 Mile	Yes	3 Dimensional pavement imaging system
Roughness	IRI	*RCI Per 0.02 Mile	No	DCV – Lasers / Accelerometers

**Note: Roughness is measured on concrete roadways, but surface distresses and rutting are not measured. For concrete, PCR = RCI*

Table 1. Distress summary

Alligator Cracking

Description:

Alligator cracking is considered a combination of fatigue and block cracking. It is a series of interconnected cracks in various stages of development. Alligator cracking develops into a many-sided pattern that resembles chicken wire or alligator skin. It can occur anywhere in the road lane. Alligator cracking must have a quantifiable area.

Severity Levels:

LOW

An area with little to no interconnecting cracks with no visible spalling. Cracks are less than or equal to a mean width of 0.25 in. (6mm). Cracks in the pattern are no further apart than 1 foot (0.328 m). May be sealed cracks with sealant in good condition and a crack width that cannot be determined.

MEDIUM

An area of interconnected cracks that form a complete pattern. Cracks may be slightly spalled. Cracks are greater than 0.25 in. (6 mm) but less than or equal to 0.75 in. (19 mm) or any crack with a mean width less than or equal to 0.75 in. (19 mm) and adjacent low severity cracking. Cracks in the pattern are no further apart than 6 in. (150 mm).

HIGH

An area of interconnected cracks forming a complete pattern. Cracks are moderately or severely spalled. Cracks are greater than 0.75 in. (19mm) or any crack with a mean width less than or equal to 0.75 in. (19mm) and adjacent medium to high severity random cracking.

A combination of observed crack width and crack pattern is used to determine overall severity of alligator cracking. Based on above description of each severity, the highest level of crack width and crack pattern determines overall severity as shown in Table 2.

ALLIGATOR CRACKING SEVERITY LEVELS				
	CRACK SEVERITY	CRACK PATTERN		
		LOW	MED	HIGH
CRACK WIDTH	LOW	LOW	MED	HIGH
	MED	MED	MED	HIGH
	HIGH	HIGH	HIGH	HIGH

Table 2. Alligator Crack Severity Levels

Longitudinal Cracking

Description:

Longitudinal cracking occurs predominantly parallel to the pavement centerline. It can occur anywhere within the lane. Longitudinal cracks occurring in the wheelpath may be noteworthy.

Severity Levels:

LOW

Cracks with a mean width less than or equal to 0.25 in. (6 mm). This also includes sealed cracks with sealant in good condition and a width that cannot be determined.

MEDIUM

Cracks with a mean width greater than 0.25 in. (6 mm) but less than 0.75 in. (19 mm). Also, any crack with a mean width less than 0.75 in. (19 mm) and adjacent random low severity cracking.

HIGH

Cracks with a mean width greater than 0.75 in. (19 mm). Also, any crack with a mean width less than 0.75 in. (19 mm) and adjacent random medium to high severity cracking.

Transverse Cracking

Description:

Transverse cracking occurs predominantly perpendicular to the pavement centerline. It can occur anywhere within the lane.

Severity Levels:

LOW

Cracks with a mean width of less than or equal to 0.25 in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

MEDIUM

Cracks with a mean width greater 0.25 in. (6 mm) and less than or equal to 0.75 in. (19 mm). Also, any crack with a mean width less than 0.75 in. (19 mm) and adjacent random low severity cracking.

HIGH

Cracks with a mean width greater than 0.75 in. (19 mm). Also, any crack with a mean width less than 0.75 in. (19 mm) and adjacent random medium to high severity cracking.

Patching and Potholes

Description:

Patching is an area of pavement surface that has been removed and replaced with patching material or an area of pavement surface that has had additional patching material applied. Patching may encompass partial lane or full lane width. On full lane width patching; the total, contiguous length of patch may not exceed 0.100 mi. (0.161 km). (Any full-lane patch exceeding 0.100 mi. in length is considered a pavement change). Patching must have a quantifiable area.

Potholes are bowl-shaped holes of various sizes occurring in the pavement surface.

Manhole covers should not be rated as patches unless there is obvious patching around the manhole.

Speed bumps should not be rated as patches

Severity Levels:

There are no stratified severities for Patching and Potholes. They either are present or they are not.

RUTTING

Description:

Rutting is a longitudinal surface depression in the wheelpath.

Severity Levels:

LOW

Ruts with a measured depth of 0.20 inches to 0.49 inches
Ruts less than 0.20 in. are not included in the distress calculations.

MEDIUM

Ruts with a measured depth of 0.50 inches to 0.99 inches

HIGH

Ruts with a measured depth greater than 1.00 inch

ROUGHNESS

Description:

Roughness is the measurement of the unevenness of the pavement in the direction of travel. It is measured in units of IRI (International Roughness Index), inches per mile, and is indicative of ride comfort.

Severity Levels:

There are no stratified severity levels for roughness. The roughness (or smoothness) of a road surface can be defined by IRI in the following table.

IRI DESCRIPTIONS	
Type of Road	Typical IRI (in/mile)
New Road, no noticeable roughness	<90
Small level of roughness	90 – 126
Road of average roughness	126 – 190
Road with above average roughness	190 – 253
Road with severe roughness	253 – 380
Nearly impassable	>380

Table 3. International Roughness Index

Roughness Collection Parameters

On shorter roads with a lower speed limit the usefulness in collecting and reporting IRI is negligible. Lower, inconsistent speeds can lead to a less accurate IRI value. Therefore RIP has put in place the following protocols for reporting IRI.

International Roughness Index (IRI) is not reported on routes with the following criteria:

- Posted speed limit is less than 25 mph
- Length of route is less than 0.50 miles

When a collected route has a posted speed limit of at least 25 mph and length of at least 0.50 miles, IRI will be collected except on road sections where the speed is less than 20 mph

Other situations may arise where the speed and length factors are met, but reporting IRI could lead to an inaccurate PCR. RIP will determine whether or not it is reasonable to report IRI on these routes on a case by case basis.

Index Formulas

Note: All index formulas listed below contain MAE applicable to 0.02 mile (105.6 feet) interval.

Alligator Crack Index

$$AC_INDEX = 100 - 40 * [(\%LOW / 35) + (\%MED / 15) + (\%HI / 5)]$$

Where:

The values %LOW, %MED and %HI report the percentage of the observed pavement (0.02 mile, primary lane) that contains alligator cracking within the respective severities. These values range from 0 to 100.

%LOW = Percent of total area (primary lane, 0.02 in length), low severity

%MED = Percent of total area (primary lane, 0.02 in length), medium severity

%HI = Percent of total area (primary lane, 0.02 in length), high severity

Percent of total area is computed as:

$$\frac{\text{square foot area of alligator crack severity}}{(0.02 \text{ mile}) * (\text{lane width})}$$

In AC_INDEX, the denominators 35, 15, and 5 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 35% of low severity alligator cracking for a 0.02 interval before failure, 15% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Longitudinal Crack Index

$$LC_INDEX = 100 - 40 * [(\%LOW / 175) + (\%MED / 75) + (\%HI / 25)]$$

Where:

The values %LOW, %MED, and %HI report the length of longitudinal cracking within each severity as a percent of the section length (0.02 mile, primary lane). These values are greater than or equal to 0 and can exceed 100.

%LOW = Percent of interval length (primary lane, 0.02 in length), low severity

%MED = Percent of interval length (primary lane, 0.02 in length), medium severity

%HI = Percent of interval length (primary lane, 0.02 in length), high severity

Percent of interval length is computed as:

$$\frac{\text{length of respective longitudinal cracking}}{(0.02 \text{ mile}) * (105.6 \text{ ft.})}$$

In LC_INDEX, the denominators 175, 75, and 25 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 175% of low severity longitudinal cracking for a 0.02 interval before failure, 75% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Structural Crack Index

$$SC_INDEX = [100 - ((100 - AC_INDEX) + (100 - LC_INDEX))]$$

Structural Crack Index is a combination of Alligator Cracking and Longitudinal Cracking, and is used in the SCR formula in lieu of AC and LC separately.

Transverse Crack Index

$$TC_INDEX = 100 - 40 * [(LOW / 21.1) + (MED / 4.4) + (HI / 2.6)]$$

Where:

The values LOW, MED and HI report a count of the total number of transverse cracks (reported to three decimals) within each severity level, where one transverse crack is equal to the lane width. These values are greater than or equal to 0.

LOW = Number of cracks in interval (primary lane, 0.02 in length), low severity

MED = Number of cracks in interval (primary lane, 0.02 in length), medium severity

HI = Number of cracks in interval (primary lane, 0.02 in length), high severity

Number of cracks is computed as:

$$\frac{\text{Total length of transverse cracks}}{\text{Lane width}}$$

In TC_INDEX, the denominators 21.1, 4.4, and 2.6 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 21.1 low severity transverse cracks for a 0.02 interval before failure, 4.4 cracks for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Patching Index

$$PATCH_INDEX = (100 - 40) * (\%PATCHING / 80)$$

Where:

The value %PATCHING reports the percentage of the observed pavement (0.02 mile, primary lane) that contains patching/potholes. This value ranges from 0 to 100.

%PATCHING = Percent of total area (primary lane, 0.02 in length)

Percent of total area is computed as:

$$\frac{\text{square foot area of patching/potholes}}{(0.02 \text{ mile}) * (\text{lane width})}$$

There are no severity levels for patching. It either exists or does not.

There are no severity levels for patching. It either exists or does not. In PATCH_INDEX, the denominator 80 is the Maximum Allowable Extent (MAE) for each severity. In other words, we will allow up to 80% patching for a 0.02 interval before failure. As you can see, if patching/potholes reaches MAE the resulting index value is 60, or failure.

Rutting Index

$$\text{RUT_INDEX} = 100 - 40 * [(\% \text{LOW} / 535) + (\% \text{MED} / 205) + (\% \text{HI} / 40)]$$

Where:

20 rut depth measurements are taken per 0.02 interval for each of 2 wheel paths (left and right), resulting in a total of 40 measurements taken for both wheel paths. Each wheelpath is analyzed independently for rut severities. The values %LOW, %MED and %HI report the percentage of the 40 measurements within that severity. These values range from 0 to 200.

%LOW = Percent of LOW ruts in left wheelpath based on 20 ruts, plus percent of LOW ruts in right wheelpath based on 20 ruts.

%MED = Percent of MED ruts in left wheelpath based on 20 ruts, plus percent of MED ruts in right wheelpath based on 20 ruts.

%HI = Percent of HI ruts in left wheelpath based on 20 ruts, plus percent of HI ruts in right wheel path based on 20 ruts.

Percent of rut measurements within each severity can also be computed as:

$$\frac{\text{(total number of ruts within each severity in both wheelpaths)}}{20} \times 100$$

In RUT_INDEX, the denominators 535, 205, and 40 are the Maximum Allowable Extents for each severity; Low, Medium, and High, respectively. Only the MAE for high severity rutting can fail a section, since 200% of *only* low severity ruts would yield a rut index of 85 and 200% of *only* medium severity ruts would yield a rut index of 61.

Roughness Condition Index (Asphalt)

$$\text{RCI} = 32 * [5 * (2.718282^{(-.0041 * \text{AVG IRI}))}]$$

Where:

The value AVG IRI reports the average value of the Left IRI and Right IRI measurements for the interval (0.02 mile, primary lane). This value can range from approximately 40 to 999.0.

Average IRI is computed as:

$$\frac{(\text{Left wheelpath IRI}) + (\text{Right wheelpath IRI})}{2}$$

There is no applicable threshold for failure for this index.

Roughness Condition Index (Concrete)

$$\text{RCI} = (-0.0012)(\text{IRI}^2) + (0.0499)(\text{IRI}) + 99.542$$

For concrete, PCR = RCI

Surface Condition Rating Index

SCR = Lowest Index Value Of: [SC_INDEX, TC_INDEX, PATCH_INDEX, RUT_INDEX]

Note: The modified SCR equation above combines AC_INDEX and LC_INDEX, and considers that a single AC/LC index value of the Structural Crack Index (SC_INDEX). The lowest of the four computed index values (SC_INDEX, TC_INDEX, PATCH_INDEX, or RUT_INDEX) becomes the SCR.

Where:

See above for determinations of SC_INDEX, TC_INDEX, PATCH_INDEX and RUT_INDEX.

The threshold for failure for this index is SCR = 60. Data Collection Vehicle Subsystems

Data on paved roads is collected by FHWA using a Pathway Services Inc. Data Collection Vehicle (DCV), called a PathRunner. The DCV is driven in the primary-direction lane at posted speed limits and less.

Cameras

Forward-facing and rear-facing video is collected as jpeg digital imagery files at a frequency of every 26.4feet.

Two forward-facing cameras are mounted above the vehicle cab, one pointed straight ahead and the other to the right shoulder providing seamless roughly 120 degree viewing. A third camera is mounted in the rear of the vehicle, recording the left shoulder.

CAMERA SPECIFICATIONS TWO FORWARD / ONE REAR FACING CAMERA	
Camera lens/type	Prosilica GT 2750 (GigE Technology)
Image format	*.jpg
Image resolution	2750 x 2200, 18 frames/second
Image pixel size	depends on distance
Zoom ratio	16mm Fixed
Iris range	Aperture Range F 1.8 – Infinity (P-Iris, Automatic)

Pavement Imaging and Rutting

High resolution rutting data and surface imaging are collected in a single data stream using a three-dimensional (3D) pavement surface transverse profile data acquisition system. The 3D camera captures a laser line as it is projected over the pavement surface and uses the location of this line to measure the height deviations of the pavement surface. These height deviations can be used to calculate rutting in both wheelpaths. These deviations also provide a grayscale image detailing the change in height throughout the surface, i.e. providing depth measurements for cracking.

THREE-DIMENSIONAL PAVEMENT SURFACE AND TRANSVERSE PROFILE DATA ACQUISITION SYSTEM	
Surface Image Specifications	
Image size	1536 pixels/scan @ 3000 Hz
Image width	4 meters (3950 mm nominal)
Laser class	3B
Power	16W (Two lasers @ 8W Ea)
Vehicle speed limitations	62 mph
Environment	Dry pavement, day or night
Sensor size (approximate)	1536 pixels x 512 pixels
Image display length	26.4 feet
Rutting Specifications	
Reported rut depth units	Inches
Vehicle speed limitations	Up to 62 mph
Sampling rate	3000 profiles/second
Transverse resolution	1536 points/profile
Transverse field-of-view	14 feet
Depth accuracy (nominal)	<1mm
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E1703M-95 (reapproved 2005)

Distance Measuring Instrument (DMI)

The DMI (Distance Measuring Instrument) obtains road length measurements that are accurate to 0.15% for speeds up to 60 mph. The DMI is connected to the hub of the rear wheel on the driver's side, and is calibrated to the revolutions of the rear vehicle axle on a regular basis.

Roughness (IRI)

IRI SPECIFICATIONS	
Reported IRI units	Inches/mile
Vehicle speed limitations	12-62 mph
IRI equipment certification	Texas Transportation Institute (TTI)
Wavelengths accommodated	0.5 feet to 300 feet
IRI computed & reported	World Bank Technical Paper Number 46
Environment	Dry pavement, day or night, above 32 degrees
Adherence to specifications	ASTM E950 Class 1 & AASHTO M 328

The collection system includes a South Dakota type laser profiler manufactured based on active Class 1 ASTM E950 standards. The dynamic profile of the pavement surface is collected from which the IRI roughness data is computed. The sensors include one accelerometer on each wheelpath, one height sensor (laser) on each wheelpath, and a distance transducer.

GPS & Inertial Systems

GPS is collected by an onboard system employing Omnistar real time correction and a spinning gyroscope to provide accurate positioning data in instances of satellite obstruction. All GPS coordinates are tied to an image and linear distance measurements.

GPS SPECIFICATIONS	
Static accuracy	Sub-meter
Dynamic accuracy	2-3 meters
Receiver	12 satellite tracking
Coordinate system	Lat Lon WGS 84
Environment	Day or night
Cross-slope	± 1.75%
Grade	± 1.75%
Adherence to specifications	ASTM E1703M-95 (reapproved 2005)

*NOTE – GPS accuracy is dependent on many different factors. Satellite constellation, tree coverage, GPS receiver quality, and real-time correction availability can all affect the locational and elevation accuracies. The elevation (z coordinate) accuracy is less dependable than locational or horizontal accuracy (x/y coordinates or latitude/longitude). In areas of heavy tree coverage or poor satellite constellations, elevation data can vary by as much as +/- 100 feet.

Appendix B

**Methodology for Determining Condition Ratings
Using Manual Rating Procedures**

Description of Manual Rating Methods

In 2013, the Federal Highway Administration updated existing Manual Rating Procedures in an effort to better align pavement conditions for Manually Rated Routes and Parking with the Highway Pavement Management Application (HPMA). HPMA is the Pavement Management System used by the FHWA to store inventory and condition data from the Road Inventory Program (RIP) and forecast future performance using prediction models. HPMA uses pavement condition data (collected by the Road Inventory Program) to develop life cycles for pavements and recommend treatments to maximize useable pavement life while minimizing costs associated with maintenance and repair.

The Federal Highway Administration (FHWA) developed a set of manual rating methods for pavement that are appropriate for Federal Roadways. Two different methods were developed for linear roads and a separate method was developed for parking areas and nonlinear roads. These methods employ a 0 to 100 rating scale and improve consistency and objectivity in the manual evaluation of surface distresses. They are compatible with ratings that are collected by the automated Data Collection Vehicle (DCV).

- The first of the two manual evaluation methods for roads uses rating criteria to assign index values to each distress type based on a visual evaluation of severity and extent.
- The second manual evaluation method for roads is very time demanding and is best employed on only a select set of routes which may have the highest visitor use and require a more intensive assessment. This method will be used for the Manual Rating of Function Class 1, 2, 7, and 8 Roads. This method is based on measurements that are recorded for each instance of a surface distress. These measurements are converted into index values using conversion formulas.
- Parking areas and non-linear roads are rated similar to the first method shown above, however, there are some slight differences due to the non-linear nature.

The details and criteria used for each of these rating methods are outlined below.

Visual Inspection Method for Manually Rating Secondary Roads

The visual inspection method for manually rated roads uses condition rating criteria that have been developed by FHWA. This criteria is based on a visual evaluation of the severity and extent of distresses to determine the overall condition of the roadway. This method is used for secondary roads that are Functional Class 3, 4, 5, and 6. This constitutes the majority of manually rated roads collected by the Road Inventory Program.

Rating Section Lengths

For this method, Manually Rated Roads are rated in sections. These sections may be made based on length of changes in surface type or condition as described below. The ratings are then aggregated to give an overall rating for the Route:

- Rating sections should be no longer than 0.25 miles in order to keep the area being rated manageable.
- A new rating section may be started based on changes in condition, width, or surface type if these changes represent a significant portion of the route (are not isolated instances).
- If the road condition, width, and surface type remain constant then new sections do not need to be created unless the road exceeds 0.25 miles.

Rating Criteria

For this method, Manually Rated Roads are evaluated using a visual inspection of the six distress types listed below. Each distress is assigned one of five index values. An overall Surface Condition Rating (SCR) and Pavement Condition Rating (PCR) are calculated based on these index values.

- Alligator Cracking
 - Rating based on percentage of road surface affected
- Longitudinal Cracking
 - Rating based on severity level (crack width) and percentage of road section length of longitudinal cracks
- Transverse Cracking
 - Rating based on crack width, crack spacing, and percentage of surface affected
- Patching
 - Rating based on percentage of road surface affected
- Rutting
 - Rating based on percentage of road section length affected by visible rutting (>1 inch depth) that requires remediation
- Roughness
 - Manual assessments of roughness are not made due to the subjectivity of the measurement. Therefore, roughness is not incorporated into the PCR calculation of manually rated roads.

Concrete Routes also receive a PCR rating based on visual evaluation of the following six distress types.

- Slab Faulting at Joints
- Slab Cracking and breakup
- Surface Delamination and Pop-outs
- Joint Distresses
- Patching

Distress Measurement Method for Manually Rating Primary Roads

A more intensive and time demanding assessment than our standard method was developed for Primary roads that are functional class 1, 2, 7, or 8. These high visitation roads are usually accessible by the automated Data Collection Vehicle but in rare instances may need to be manually rated. The method developed is based on measuring each instance of a distress. These measurements are totaled over each section length being measured and are then converted into index values between 0 and 100 (100 being a road with no distress) using index formula equations outlined below. The goal of this method is to produce measured index values which are directly comparable to the automated DCV.

Rating Section Lengths

For the distress measurement method roads are broken into sections in order to rate. Distress measurements are totaled for each section separately in order to determine the index value for that particular section. The section length to be rated is determined based on the following rules:

- Rating sections are between 0.25 and 0.50 miles long
- A new rating section is created if there is a significant change in condition or pavement width
- If there are no significant changes in condition or pavement width, rating sections are broken at equal intervals, typically 0.50 miles

Manual Distress Measurements

Alligator Cracking

- Alligator cracking is measured by area (square feet). Instances of Alligator cracking are measured along the length and multiplied by the average width of the distressed area.
- The index for alligator cracking takes the total area of cracking compared to the interval length and converts it to a percentage. That percentage is then input into an index formula that yields a value between 0 and 100 (0 being the most distressed).
- Severity levels are not defined for manually measured Alligator cracks. The Alligator Crack Index formula is calculated based on an assumption of medium severity.

Longitudinal Cracking

- Longitudinal cracking (cracking in the direction parallel to the roadway) is measured by length (ft.).
- The index for longitudinal cracking takes the total length of cracking compared to the interval length and converts it to a percentage broken down by severity. That percentage is then input into a formula that yields a value between 0 and 100 (0 being the most distressed).
- Two severity levels are defined for manually measured Longitudinal Cracks. Lower severity cracks are those with a mean width of less than 0.25 inches. Sealed cracks with sealant in good condition are also considered lower severity. Higher severity cracks are those with a mean width of greater than 0.25 inches.

Transverse Cracking

- Transverse cracking (cracking in the direction perpendicular to the roadway) is measured by length (ft).
- The index for transverse cracking takes the total number of cracks (1 crack would encompass the full lane) broken down by severity. The total numbers of each severity are then put into a formula that yields a value between 0 and 100 (0 being the most distressed).
- Two severity levels are defined for manually measured Transverse Cracks. Lower severity cracks are those with a mean width of less than or equal to 0.25 inches. Sealed cracks with sealant in

good condition are also considered lower severity. Higher severity cracks are those with a mean width of greater than 0.25 inches.

Patching and Potholes

- Patching and Potholes are measured by area (square feet). Instances of Patching are measured along the length and multiplied by the average width of the patch.
- Instances of full lane width patching cannot be longer than 0.100 miles, otherwise it should be considered a pavement change rather than a distress.
- There are no stratified severities for Patching. It is either present or it is not.

Rutting

- Visible rutting is measured by length (ft.) in each wheel path. Only visible ruts are rated, which are ruts greater than 1 inch deep.
- All rutting recorded in a manual rating is considered to be high severity (> 1 inch). Lesser severities are generally not distinguishable in a visual inspection.

Roughness

- Manual assessments of roughness are not made due to the subjectivity of the measurement. Therefore, roughness is not incorporated into the PCR calculation of manually rated roads.

Index Formulas for Distress Measurement Method:

The method used to convert distress measurements into index values is shown below. The Surface Condition Rating and Pavement Condition Rating are calculated based on these index values.

Alligator Crack Index for Manual Rating:

$$AC_INDEX = 100 - 40 * (\%ALLIGATOR / 15)$$

Where:

%ALLIGATOR = Percent of total area of section being rated that contains Alligator cracking.

Longitudinal Crack Index for Manual Rating:

$$LC_INDEX = 100 - 40 * [(\%LOW / 175) + (\%MED / 75)]$$

Where:

%LOW = Percent length of longitudinal cracks where crack width less than or equal to 0.25 inches

%HIGH = Percent length of longitudinal cracks where crack width greater than 0.25 inches

Transverse Crack Index for Manual Rating:

$$TC_INDEX = (100 - 40) * [(LOW / 21.1) + (MED / 4.4)]$$

Where:

LOW = Count of the total number of transverse cracks within the section length where one transverse crack is equal to the lane width and the crack width \leq 0.25 inches

HIGH = Count of the total number of transverse cracks within the section length where one transverse crack is equal to the lane width and the crack width $>$ 0.25 inches

Number of cracks is computed as:
Total length of transverse cracks/Lane width

Patching Index for Manual Rating:

$$\text{PATCH_INDEX} = (100 - 40) * (\% \text{PATCHING} / 80)$$

Where:

%PATCHING = Percentage of pavement section that contains patching/potholes.

Rutting Index for Manual Rating:

$$\text{RUT_INDEX} = 100 - 40 * (\% \text{RUTTING} / 40)$$

Where:

%RUTTING = Percentage length of high severity rutting within the section being measured.

Method for Manually Rating Paved Parking Areas and Non-Linear Roads

Parking areas are evaluated based on a visual inspection using condition rating criteria that has been developed by FHWA. This criteria is based on a visual evaluation of the severity and extent of distresses to determine the overall condition of the parking area. This overall condition rating is linked to the level of repair and rehabilitation practices required.

A distress index is determined for each of the distresses listed below for Asphalt and Concrete Parking areas. The overall Pavement Condition Rating (PCR) of the parking lot is driven by the most severe distress present.

Rating Criteria:

Asphalt Parking Distress Types

- Alligator Cracking
 - Rating based on percentage of road surface affected
- Longitudinal, Transverse and Block cracking
 - Rating based on crack width, crack spacing, and percentage of surface affected
- Rutting and Distortions
 - Rating based on percentage of road surface affected
- Hot Mix Asphalt Patches
 - Rating based on overall percentage of HMA patches
- Potholes and Cold Patches
 - Rating based on percentage of road surface affected
- Surface Raveling and Bleeding
 - Rating based on percentage of road surface affected

Concrete Parking Distress Types

- Slab Faulting at Joints
 - Rating based on height differential between adjacent slabs or pieces of broken slabs
- Slab Cracking and breakup
 - Rating based on quantity of cracks and if slab is acting to able distribute load as designed
- Surface Delamination and Pop-outs
 - Rating based on percentage of road surface affected to include pop-outs, spalls and surface delamination
- Joint Distresses
 - Rating based on sealant condition and concrete distresses at/or adjacent to joints
- Patching
 - Rating based on percentage of road surface affected

Curb Inspection and Treatments

During inspections of manually rated parking lots and routes, the curb reveal and overall curb condition are evaluated. The curb condition is used to determine a recommendation.

Curb Reveal

The vertical distance on the curb face from the gutter flow line or pavement surface to the top of curb. When resurfacing adjacent to curb, the resulting curb reveal should be no less than 4 inches. Additionally, when resurfacing adjacent to a gutter, the resulting pavement surface should be flush with the gutter pan. In cases where a resurfacing would violate either of these parameters, the surface may need to be milled or removed to adjust to these field conditions.

Curb Recommendations

The following treatment categories are based on the overall percentage of distresses along the entire curb structure for a specific pavement structure. Distresses include spalling, cracking, loss of material and any other damage which prevents the curb from conveying storm runoff or failing to perform in its intended function.

- Overall curb damage ranging 0%-5%:
 - DO NOTHING
- Overall curb damage ranging 5%-20%
 - LIGHT REPAIR
- Overall curb damage ranging 20%-50%
 - MODERATE REPAIR
- Overall curb damage greater than 50%:
 - REPLACE

GPS for Manually Rated Roads and Parking

GPS information for Manually Collected Cycle 6 Routes will be recorded using the latest hardware and software by TRIMBLE 6000 Series GeoXT. Cycle 6 GPS collection units will allow access to GPS and GLONASS, improving overall GPS reliability, accuracy and precision to submeter accuracy.

Additionally, the new GPS units have an enhanced ability to collect accurate signals underneath tree cover or adjacent to buildings or natural terrain with extreme vertical gradations that typically reduce GPS accuracy. Trees and buildings create “satellite shadows”, limiting the areas where you can reliably collect high-accuracy GPS data. The updated GPS receiver will deliver improved usable data under tree canopy or in natural or urban canyons. Routes that were previously collected accurately will not be recollected in Cycle 6.

TRIMBLE 6000 SERIES GeoXT GPS SPECIFICATIONS	
Receiver	Trimble Maxwell™ 6 GNSS chipset
Channels	220 channels
Systems	GPS / GLONASS / WAAS
Accuracy	Sub-meter
Operation Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Cellular and Wireless	UMTS / HSDPA / GPRS / EDGE / Wi-Fi / Bluetooth
Internal Still Camera w/ GEOTAG ability	Autofocus 5 MP (JPG) and WMV w/ Audio

Appendix C
Description of Cycle 6 Deliverables

Final Report Delivery

The Final Report will contain all data collected by Manual Inspection and the Data Collection Vehicle. All information provided in the Interim Report will be included in the Final report. Manually collected information reported in the Interim Report may be updated in the Final Report if pavement conditions have substantially changed between the Manual Inspection and Data Collection Vehicle Inspection or other unforeseen circumstances.

The final report will be released approximately 8 months after the Data Collection Vehicle completes its collection of that specific park.

Data included in the Final Report package consists of the following:

- **Condition Photos:** All photos taken during Cycle 6.
- **Data Video:** Data and video of each route collected by the DCV will be viewable through PATHVIEW software. PATHVIEW Software and training will be provided to NPS personnel by Eastern Federal Lands.
- **GPS on All Rated Routes:** All GPS data collected from the DCV will be provided. Parking areas, some roads, and other paved areas that are not fully drivable with the DCV are collected manually by field technicians. GPS is collected for these routes using portable Trimble GPS units.
 - GPS will be provided as Shapefiles and KMLs
 - All GPS data related to road collection will be linear referenced to the collected length
- **Geodatabase – Background and Metadata:** In addition to this park report, a geodatabase containing both tabular and spatial data specific to this park has been provided.
 - All data disseminated in the preceding report has been obtained from the tables and fields within said geodatabase. The geodatabase can be referenced for tabular data via Microsoft Access or for both tabular and spatial data via ESRI's ArcGIS Suite of software which consists of; ArcMap, ArcCatalog and ArcExplorer.
 - Consolidating the RIP data into one database creates a seamless relationship of tables and geographic data. It allows RIP to facilitate easier updates and enhancements in the future. A geodatabase can be thought of as simply a database containing spatial data. A complete and thorough description of the tables and fields contained within this geodatabase can be found in the metadata. The metadata is attached directly within the geodatabase and can be accessed via ESRI's ArcCatalog.
- **Report (RIP Report and Route ID):** A PDF report will be provided that includes a list of all routes and key data. Condition reports for each route will be included. All changes, additions and deletions to any route will be included in the report. Features along routes will not be collected in Cycle 6.

Partial DCV Collections

Additional Partial DCV Collections may be done on specific parks depending on their size and overall mileage of routes within its boundaries during Cycle 6. Parks with greater than 10 miles of paved roadways will receive at least one additional Partial DCV collection during Cycle 6. Data collected during these Partial DCV Collections will not result in the delivery of an additional report to the park.

Data collected by the DCV during Partial DCV Collection will be used to improve HPMA modeling by providing additional “snapshots in time” of park pavement conditions. This improved HMPA modeling will assist in the programming and budgeting of future projects which will help maximize the life of pavement infrastructures.

Instead of receiving a report of conditions collected during the Partial DCV collection, the park will receive a formal letter from the Road Inventory Program requesting coordination for the additional Partial DCV collection, identifying the dates of the Partial DCV Collection and will reinforce the purpose and importance of the Partial DCV Collection.

Appendix D
Glossary of Terms and Abbreviations

Glossary of Terms and Abbreviations

TERM OR ABBREVIATION	DESCRIPTION OR DEFINITION
AC	Alligator Cracking
CRS	Condition Rating Sheets (Section 5)
Curb Recommendation	Curb remediation based on overall percentage of curb distress
Curb Reveal	Height of curb exposed from gutter flow line to top of curb
DCV	Data Collection Vehicle
Excellent	Excellent rating with an index value of 95 to 100
Fair	Fair rating with an index value from 61 to 84
FUNCT_CLASS	Functional Classification (see Route ID, Section 2)
Good	Good rating with an index value from 85 to 94
IRI	International Roughness Index
HPMA	Highway Pavement Management Application
Lane Width	Width from road centerline to fogline, or from centerline to edge-of-pavement when no fogline exists
LC	Longitudinal Cracking
MRR	Manually Rated Route
MRL	Manually Rated Line
MRP	Manually Rated Polygon
N/A	Not Applicable
NC	Not Collected
PATCH	Patching and Potholes
Paved Width	Width from edge-of-pavement to edge-of-pavement
PCR	Pavement Condition Rating
PKG	Parking Area
Poor	Poor rating with an index value of 0 to 60
RCI	Roughness Condition Index
SC	Structural Cracking
SCR	Surface Condition Rating
TC	Transverse Cracking