



Federal Lands Highway Road Inventory Program

Road Inventory and Condition Assessment




National Capital Parks – East Fort Washington Park FOWA

Cycle 5 Report

Prepared By: Federal Highway Administration
Road Inventory Program (RIP)
Data Collected: 02/2013
Report Date: 09/2013

Fort Washington Park in Maryland

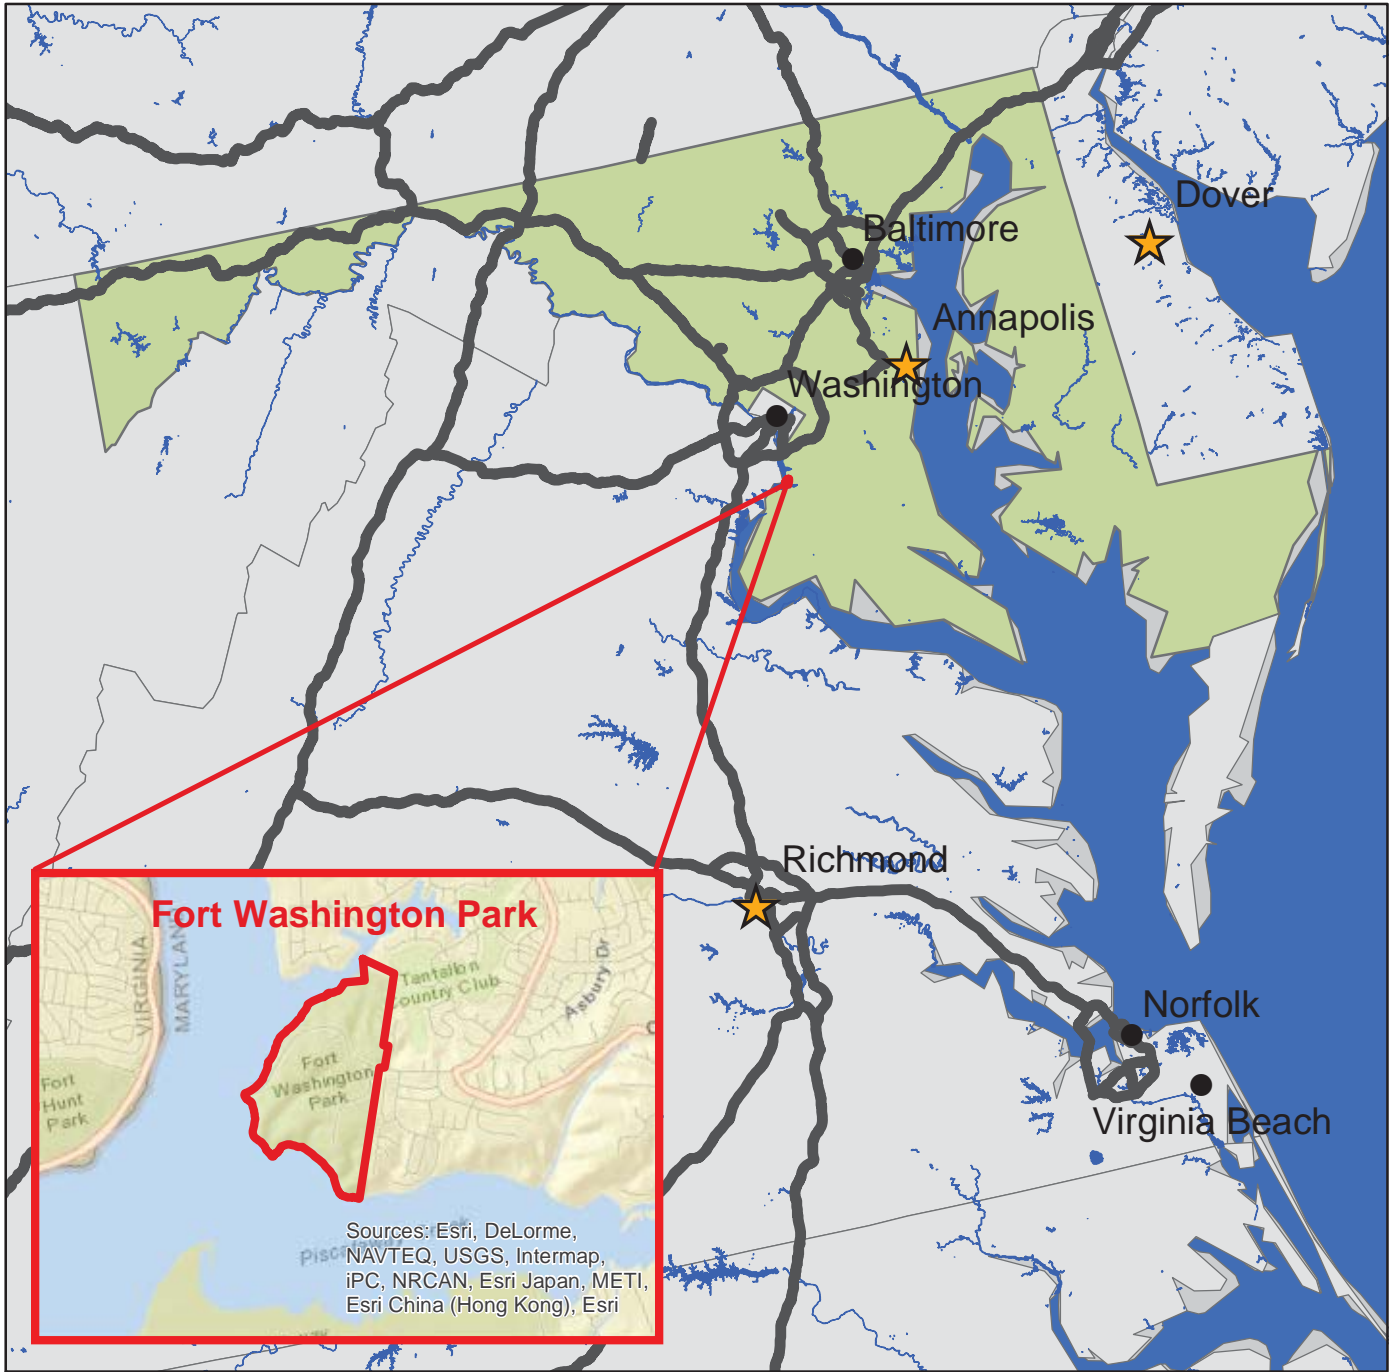



DCV = Data Collection Vehicle

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1. INTRODUCTION	1 - 1
2. PARK ROUTE INVENTORY Route IDs, Subcomponents & Changes Report (As Applicable)	2 - 1
3. PARK SUMMARY INFORMATION Paved Route Miles and Percentages by Functional Class and PCR DCV Road Condition Summary Parkwide DCV Condition Summary	3 - 1 3 - 3 3 - 5
4. PARK ROUTE LOCATION MAPS Route Location Key Map Route Location Area Map Route Condition Key Map – PCR Mile by Mile Route Condition Area Map – PCR Mile by Mile	4 - 1 4 - 2 4 - 3 4 - 4
5. PAVED ROUTE CONDITION RATING SHEETS CRS Pages	5 - 1
6. MANUALLY RATED PAVED ROUTE CONDITION RATING SHEETS MRR Pages	6 - 1
7. PARKING AREA CONDITION RATING SHEETS Paved Parking Area Pages	7 - 1
8. PARKWIDE / ROUTE MAINTENANCE FEATURES SUMMARIES Parkwide Maintenance Features Summary DCV Route Maintenance Features Summary Structure List	8 - 1 8 - 2 8 - 4
9. ROUTE MAINTENANCE FEATURES ROAD LOGS Route Maintenance Features Road Logs	9 - 1
10. APPENDIX Explanation of Changes to the RIP Index Equations and Determination of PCR Explanation of the Excellent, Good, Fair and Poor Condition Descriptions Description of Rating System Surface Distresses Index Formulas Data Collection Vehicle Subsystems Geodatabase – Background and Metadata Glossary of Terms and Abbreviations	10 - 1 10 - 2 10 - 3 10 - 5 10 - 12 10 - 16 10 - 19 10 - 20

Section 1 Introduction



Fort Washington Park



Federal Lands Highway
Road Inventory Program

INTRODUCTION

The Federal Highway Administration, (FHWA), in the mid 1970s, was charged with the task of identifying surface condition deficiencies and corrective priorities on National Park Service (NPS) roads and parkways. Additionally, FHWA was tasked with establishing an integrated maintenance features inventory, locating features such as culverts, guardrails, and signs, among others, along NPS roads and parkways. As a result, in 1976 the NPS and FHWA entered into an MOA (Memorandum Of Agreement) which established the RIP (Road Inventory Program). This MOA was terminated and revised in 1980 to establish a new MOA aiming to update RIP data and develop a long-range program to improve and maintain NPS roads to designated condition standards and establish a maintenance management program.

The FHWA completed this initial phase of the RIP in the early 1980s. As a result of this effort, each NPS site included in the study received a RIP Report known as the “Brown Book” which included the information collected during this first RIP phase.

In the 1990s, the effort was again renewed to update and maintain the RIP data. By this time the computer age was upon us and a process was employed that relied heavily on electronic data collection and computer technology. A cyclical program was developed and the RIP completed two cycles of data collection from 1994 to 2001. Cycle 1, starting in 1994, was conducted in 44 “large parks” (parks containing 10 or more paved route miles). Cycle 2 began in 1997 and comprised 79 large parks and 5 small parks totaling 4,874 paved route miles. Each of these parks received a RIP Report known as the “Blue Book”. Cycle 3, from 2001 to 2004, was conducted in all parks, large and small, that contained any paved routes, including parking areas and, again, each park received a RIP Report and associated electronic files.

Cycle 4 was initiated in the spring of 2006 covering 86 large parks and several associated small parks consisting of 5,553 paved route miles and 6,232 paved parking areas. Data collection has been completed for Cycle 4 and all data has been delivered to the NPS.

In 2005, the FHWA began implementing the use of a Pavement Management System (PMS) to assist the NPS in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Regional, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions, an extensive study was completed throughout 2010 that has resulted in changes to the RIP condition reporting method, specifically the distresses and indexes that comprise the Pavement Condition Rating (PCR). It was determined that a better representation of PCR could

be achieved by modifying the relative impact certain distresses would have on the overall rating. The changes that were implemented were endorsed by management at both the FHWA and NPS in October 2010. These changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection. Because of these changes, the PCR Condition ratings reported in Cycle 5 do not directly relate to the condition ratings reported in previous cycle RIP Reports. For more detailed information about the changes, see Section 3 and Section 10 in this RIP Report.

Cycle 5 has launched in the summer of 2010 and will again comprise all parks, large and small, that are served by paved roads and/or parking areas. For Cycle 5, the decision was made to collect condition data in large parks on Functional Class 1, 2, and 7 paved routes only, as well as any new routes that were previously not collected. In small parks, all paved routes and parking areas will be collected. As a result, this will include 81 large parks with 4,459 paved route miles and 231 small parks with 529 paved route miles and associated paved parking areas.

Since 1984, the Road Inventory Program has been funded through the Federal Lands Highway Park Roads and Parkways (PRP) Program. Currently, coordination of the RIP with FLH is under the NPS Washington Headquarters Park Facility Management Division. The FLH Washington office coordinates policy and prepares national reports and needs assessment studies for Congress.

In 1998, the Transportation Equity Act for the 21st Century (TEA-21) amended Title 23 U.S.C., and inserted Section 204(a)(6) requiring the FHWA and NPS, to develop by rule, a Pavement Management System (PMS) applied to park roads and parkways serving the National Park System.

FLH is responsible for the accuracy of all data presented in this report. Any questions or comments concerning the contents of this report should be directed to the national RIP Coordinator located in Sterling, Virginia.

Respectfully,

FHWA RIP Team

FHWA/Eastern Federal Lands
21400 Ridgetop Circle
Sterling, VA 20166
(703) 404-6371

FHWA/Central Federal Lands
12300 West Dakota Ave
Lakewood, CO 80228
(720) 963-3556

Section 2

Park Route Inventory



Fort Washington Park



Federal Lands Highway
Road Inventory Program

Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 09/05/2013

(Numerical By Route #)

Page 2 of 5

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

** DCV - Data Collection Vehicle NC - Not Collected

FOWA

FORT WASHINGTON PARK

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description From To	Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
0409	NC	52753		PUMP STATION ROAD	FROM ROUTE 0403 (LIGHTHOUSE SERVICE ROAD) TO END OF LOOP	N/A	0.00	0.19	0.19	6		GR	
0410	5	90258		FOWA VISITORS CENTER HANDICAPPED DROPOFF	FROM ROUTE 0400 (FORT WASHINGTON SERVICE ROAD) TO END OF LOOP	N/A	0.05	0.00	0.05	5	3,564	CO	1
0411	5			D-3 PICNIC AREA ACCESS ROAD	FROM ROUTE 0011 (WARBURTON DRIVE) TO DEAD END	N/A	0.04	0.00	0.04	5	3,155	AS	1
0901	5	21449		FOWA BIKE LANE / PICNIC AREA 1 PARKING	FROM ROUTE 0010 (WASHINGTON DRIVE) TO ROUTE 0010 (WASHINGTON DRIVE)	N/A	0.00	0.00	0.00		11,691	AS	1
0902	5	52755		FOWA PICNIC AREA 2 PARKING	FROM ROUTE 0010 (WASHINGTON DRIVE) TO PARKING	N/A	0.00	0.00	0.00		10,179	AS	1
0903	5	21446		FORT WASHINGTON MAIN PARKING LOT	FROM ROUTE 0010 (WASHINGTON DRIVE) TO ROUTE 0400 (FORT WASHINGTON SERVICE ROAD)	N/A	0.00	0.00	0.00		139,187	AS	1
0904	5	52754		WARBURTON MANOR SITE PARKING	ADJACENT TO ROUTE 0010 (WASHINGTON DRIVE)	N/A	0.00	0.00	0.00		4,074	AS	1
0905	5	52757		L'ENFANT ROAD PARKING AREA	FROM END OF ROUTE 0100 (L'ENFANT ROAD) TO BEGINNING OF ROUTE 0403 (LIGHTHOUSE SERVICE ROAD)	N/A	0.00	0.00	0.00		21,247	AS	1
0906	5	21450		OLD QUARTERS PARKING	FROM ROUTE 0101 (OLD QUARTERS ACCESS) TO PARKING	N/A	0.00	0.00	0.00		4,717	AS	1
0907	5	21451		FOWA PICNIC AREA A PARKING	FROM ROUTE 0011 (WARBURTON DRIVE) TO PARKING	N/A	0.00	0.00	0.00		20,355	AS	1
0908	5	21454		FOWA PICNIC AREA B PARKING	FROM ROUTE 0011 (WARBURTON DRIVE) TO ROUTE 0011 (WARBURTON DRIVE)	N/A	0.00	0.00	0.00		46,112	AS	1
0909	5	21461		FOWA PICNIC AREA C PARKING	FROM ROUTE 0011 (WARBURTON DRIVE) TO PARKING	N/A	0.00	0.00	0.00		19,726	AS	1
0910	5	21457		FOWA PICNIC PARKING D-1	ADJACENT TO ROUTE 0011 (WARBURTON DRIVE)	N/A	0.00	0.00	0.00		2,103	AS	1
0911	5	21459		FOWA PICNIC PARKING D-2	ADJACENT TO ROUTE 0011 (WARBURTON DRIVE)	N/A	0.00	0.00	0.00		2,126	AS	1

Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 09/05/2013

(Numerical By Route #)

Page 4 of 5

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

** DCV - Data Collection Vehicle NC - Not Collected

CYCLE 5 SUMMARY TOTALS FOR FORT WASHINGTON PARK

CYCLE 5 ROUTE TOTALS

DCV Driven Route Miles	2.91
Manually Rated Route Miles	0.13
TOTAL PARK ROUTE MILES COLLECTED IN CYCLE 5	3.04
Manually Rated Routes (SQFT)	0.00
TOTAL UNPAVED PARK ROUTE MILES	1.20

CYCLE 5 CONCESSION TOTALS

Concession Paved Route Miles	0.00
Concession Unpaved Route Miles	0.00
TOTAL CONCESSION ROUTE MILES	0.00
Concession Paved Parking Area SQFT	0
Concession Unpaved Parking Area SQFT	0
TOTAL CONCESSION PARKING AREA SQFT	0
Concession Manually Rated Routes SQFT	0

* CYCLE 5 PARKING AREA TOTALS

Paved Parking (SQFT)	306,125
Unpaved Parking (SQFT)	0
TOTAL PARKING (SQFT)	306,125

CYCLE 5 WEIGHTED AVERAGE PARK VALUES

DCV Driven PCR	69
**Manually Rated Routes PCR	70
**Parking PCR	87
***Total Equivalent Lane Miles	10.19

* - The Parking Area Totals SQFT value represents all parking areas collected in Cycle 5, both park and concessionaire.

** - Parking and Manually Rated Routes are assigned the following PCR values based on their observed condition: Construction=-1, Excellent=97, Good=90, Fair=73, and Poor=45.

*** - Equivalent Lane Miles are calculated by route using the following equations : DCV and Manually Rated Lines Routes=(PAVE_WIDTHxPAVED_MI)/11 foot lane. Parking Areas=SQ_FEET/5280/11. Manually Rated Polygons=SQ_FEET/5280/11.

Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 09/05/2013

(Numerical By Route #)

Page 5 of 5

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

** DCV - Data Collection Vehicle NC - Not Collected

General Park Road Functional Classification Table

- Class 1** Principal Park Road/Rural Parkway (Public Roads) Roads which constitute the main access route, circulatory tour, or thoroughfare for park visitors. Route Numbers 1 - 99. Note: Rural parkways (e.g. Natchez Trace) are numbered 1 - 9. State Routes Inventoried for Park. Route Numbers 5000-5999
- Class 2** Connector Park Road (Public Roads) - Roads which provide access within a park to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, etc. Route Numbers 100-199.
- Class 3** Special Purpose Park Road (Public Roads) - Roads which provide circulation within public areas, such as campgrounds, picnic areas, visitor center complexes, concessionaire facilities, etc. These roads generally serve low-speed traffic and are often designed for one-way circulation. Route Numbers 200-299.
- Class 4** Primitive Park Roads (Public Roads) - Roads which provide circulation through remote areas and/or access to primitive campgrounds and undeveloped areas. These roads frequently have no minimum design standards and their use may be limited to specially equipped vehicles. Route Numbers 200-299. Note: Functional Classes 3 and 4 have the same route numbers because, historically, they were numbered similarly.
- Class 5** Administrative Access Road (Administrative Roads) - All public roads intended for access to administrative developments or structures such as park offices, employee quarters, or utility areas. Route Numbers 400-499.
- Class 6** Restricted Road (Administrative Roads) - All roads normally closed to the public, including patrol roads, truck trails, and other similar roads. Route Numbers 400-499. Note: Functional Classes 5 and 6 have the same route numbers because historically they were numbered similarly and often there is little distinction between these routes. For example, because utility areas and employee housing are often closed to the public, this restriction would result in classification of FC 6 rather than FC 5.
- Class 7** Urban Parkway (Urban Parkways and City Streets) - These facilities serve high volumes of park and non-park related traffic and are restricted, limited-access facilities in an urban area. This category of roads primarily encompasses the major parkways which serve as gateways to our nation's capital. Other major park roads or portions thereof, however, may be included in this category. Route Numbers 1-9.
- Class 8** City Streets (Urban Parkways and City Streets) - City streets are usually extensions of the adjoining street system that are owned and maintained by the National Park Service. The construction and/or reconstruction should conform with accepted local engineering practice and local conditions. Route Numbers 600-699.

 A park road system contains those roads within or giving access to a park or other unit of the NPS which are administered by the NPS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a park road is not based on traffic volumes or design speed, but on the intended use or function of that road or route.

The historic route numbering system also included a 300 number series for interpretive roads, and a 500 series for one-way roads. There are approximately 250 roads nationwide which are designated by the 300 and 500 series. The numbers for these roads will be maintained for reporting consistency. However, since these interpretive and one-way routes are not as clearly tied to a specific functional class, the 300 and 500 series will be discontinued for future use.

5000 route numbers are assigned to Non-NPS Routes that are State, County or City owned which border, traverse, or provide access to Park Facilities or Locations. 5000 Routes are driven for GPS and Video Log only.

Surface Type Abbreviations:

- AS - Asphaltic Concrete Pavement**
- CO - Portland Cement Concrete Pavement**
- BR - Brick or Pavers Road Bed**
- CB - Cobble Stone Road Bed**
- GR - Gravel Road Bed**
- SA - Sand Road Bed**
- NV - Native or Dirt Material Road Bed**
- OT - Other Materials Road Bed**

ROUTE IDENTIFICATION CHANGES TO PAVED ROUTES FROM PREVIOUS CYCLE - FOWA

ROUTES ADDED FROM PREVIOUS INVENTORY:

Route #	Route Name	Reason for Addition	Comments
0411	D-3 PICNIC AREA ACCESS ROAD	OTHER	ROUTE ADDED TO INVENTORY IN CYCLE 5. FMSS NUMBER NOT AVAILABLE AT THE TIME OF THIS REPORT PUBLICATION.

OTHER CHANGES FROM PREVIOUS INVENTORY:

Route #	Route Name	Type of Change	Comments
0103	FOWA MARINA ACCESS ROAD (KING CHARLES TERRACE)	ROUTE NAME	ROUTE NAME CHANGED FROM "KING CHARLES TERRACE" FOR IMARS.
0407	FOWA PUMP STATION SERVICE ROAD	ROUTE NAME	ROUTE NAME CHANGED FROM "SERVICE ROAD" FOR IMARS.
0410	FOWA VISITORS CENTER HANDICAPPED DROPOFF	OTHER	THIS WAS A PARKING LOT IN CYCLE 4 (ROUTE 0914). IT WAS CHANGED TO A ROAD IN CYCLE 5 BECAUSE IT IS A DROP-OFF AREA NOT A PARKING AREA. ROUTE NAME CHANGED FROM "FORT WASHINGTON VISITORS CENTER HANDICAPPED PARKING".
0901	FOWA BIKE LANE / PICNIC AREA 1 PARKING	SQ FEET CHANGE	IMPROVED GPS COLLECTED TO ACCURATELY SHOW THE PARKING LOT SHAPE.
0902	FOWA PICNIC AREA 2 PARKING	SQ FEET CHANGE	IMPROVED GPS COLLECTED TO ACCURATELY SHOW THE PARKING LOT SHAPE.
0906	OLD QUARTERS PARKING	SQ FEET CHANGE	IMPROVED GPS COLLECTED TO ACCURATELY SHOW THE PARKING LOT SHAPE.
0910	FOWA PICNIC PARKING D-1	SQ FEET CHANGE	IMPROVED GPS COLLECTED TO ACCURATELY SHOW THE PARKING LOT SHAPE.
0913	MAINTENANCE / PARK POLICE PARKING	SQ FEET CHANGE	IMPROVED GPS COLLECTED TO ACCURATELY SHOW THE PARKING LOT SHAPE.

Section 3

Park Summary Information



Fort Washington Park



Federal Lands Highway
Road Inventory Program

FOWA: PAVED ROUTE MILES AND PERCENTAGES BY FUNCTIONAL CLASS AND PCR

F.C.	Pavement Condition Rating (PCR)								TOTAL MILES
	Poor (0-60)		Fair (61-84)		Good (85-94)		Excellent (95-100)		
	MILES	%	MILES	%	MILES	%	MILES	%	
1	0.38	13.06%	0.40	13.75%	0.46	15.81%	0.19	6.53%	1.43
2	0.08	2.75%	0.12	4.12%	0.26	8.93%	0.58	19.93%	1.04
3									
4									
5									
6	0.23	7.90%			0.17	5.84%	0.04	1.37%	0.44
7									
8									
Totals	0.69	23.71%	0.52	17.87%	0.89	30.58%	0.81	27.83%	2.91

Note: The information in this table is derived from the PMS_20 table in the Park database, which only contains processed data from routes collected with the Data Collection Vehicle (DCV). Information for Manually Rated Routes (MRR) and Parking Areas is not reported in this table. Only Functional Class 1, 2, & 7 routes, and any new routes not previously collected by RIP, are collected in Large Parks.


Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that have been implemented in Cycle 5, we will also aim to provide greater assistance in translating excellent/good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 0-60. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.


Condition Categories and Treatments

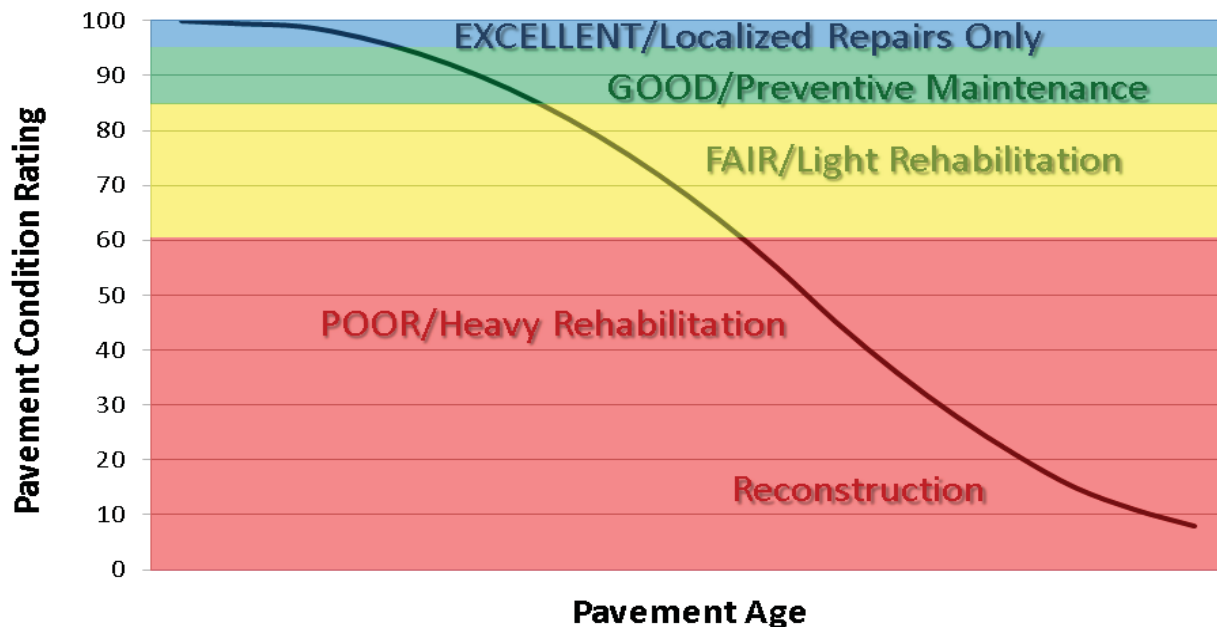

FOWA: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle


ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	PAVED LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0010	WASHINGTON DRIVE	1	0.82	ASPHALT	55	55
0011	WARBURTON DRIVE	1	0.61	ASPHALT	80	80
0100	L'ENFANT ROAD	2	0.38	ASPHALT	97	97
0101	OLD QUARTERS ACCESS	2	0.09	ASPHALT	94	94
0102	AINSWORTH DRIVE	2	0.15	ASPHALT	77	77

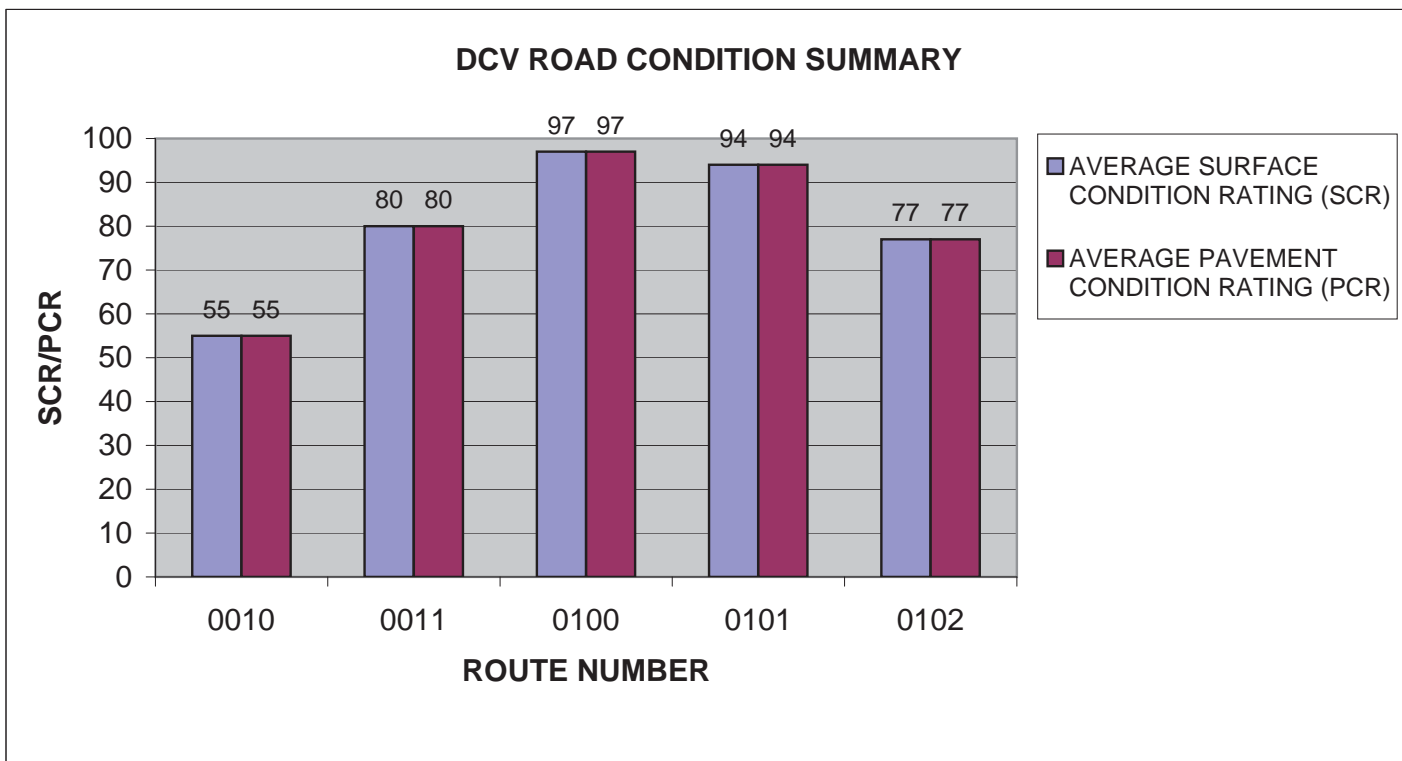

FOWA: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle

ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	PAVED LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0103	FOWA MARINA ACCESS ROAD (KING CHARLES TERRACE)	2	0.43	ASPHALT	84	84
0400	FORT WASHINGTON SERVICE ROAD	6	0.17	CONCRETE	NA	90
0401	CONNECTING SERVICE ROAD	6	0.13	ASPHALT	0	0
0403	LIGHTHOUSE SERVICE ROAD	6	0.14	ASPHALT	0	0

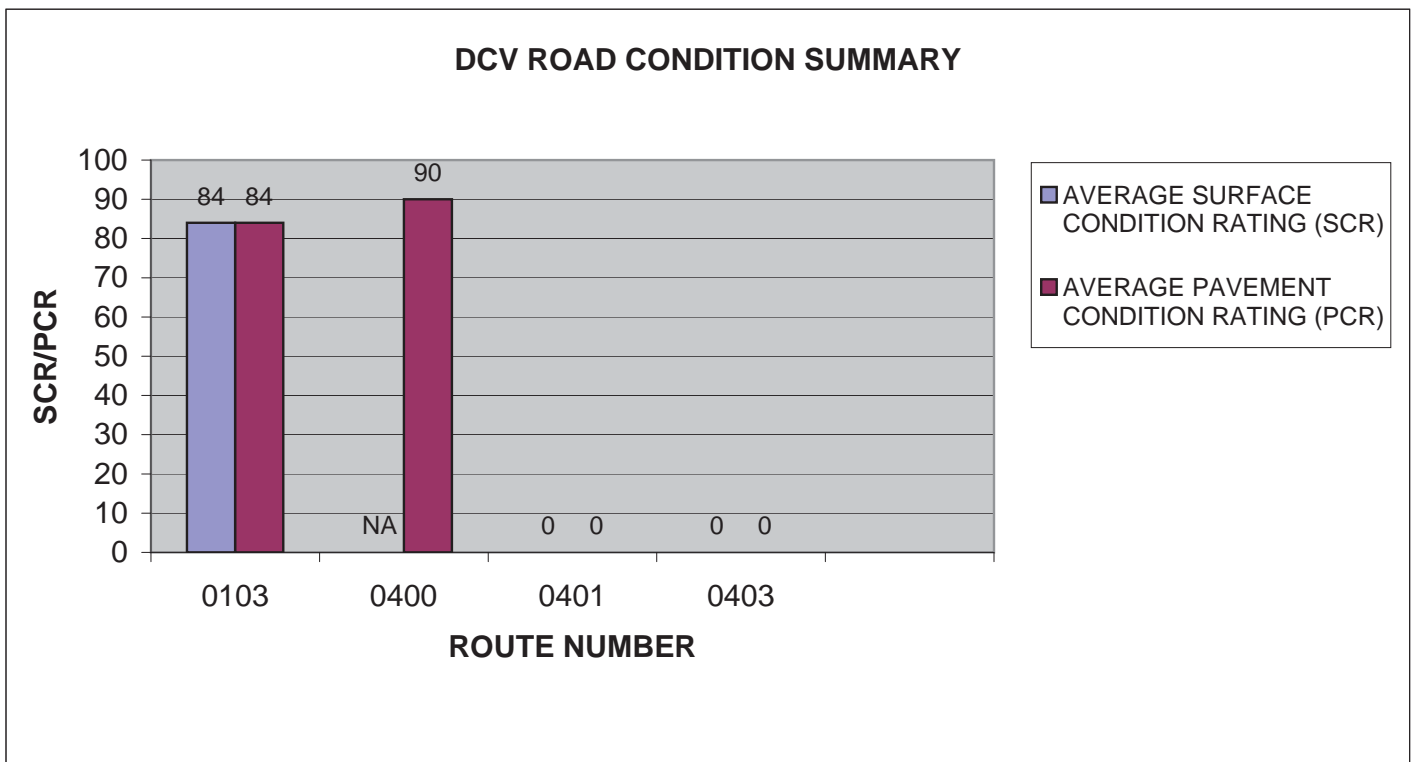


FOWA: PARKWIDE DCV CONDITION SUMMARY

AVERAGE PAVEMENT CONDITION RATING (PCR)	AVERAGE ROUGHNESS CONDITION INDEX (RCI)	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE RUT INDEX	AVERAGE ALLIGATOR CRACKING INDEX	AVERAGE LONGITUDINAL CRACKING INDEX	AVERAGE TRANSVERSE CRACKING INDEX	AVERAGE PATCHING INDEX
69	NA	68	97	71	97	94	100

All Index values are based on Data Collection Vehicle (DCV) driven roads that were collected in Cycle-5.

Roughness data is only collected on routes with lengths greater than 0.5 miles and a posted speed limit of 25 MPH or greater.

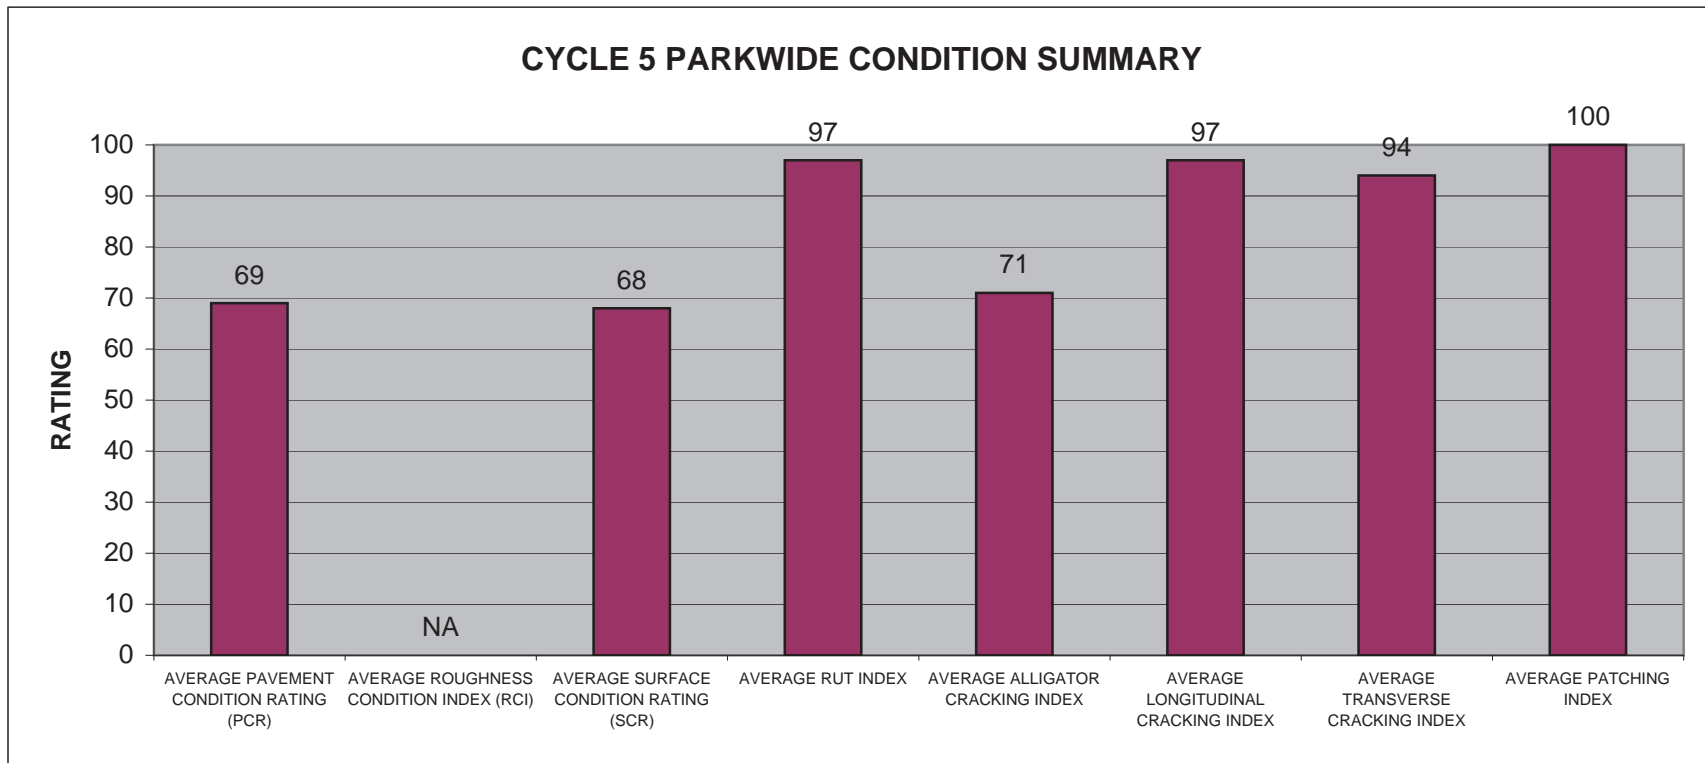

Section 4

Park Route Location Maps




Fort Washington Park




Federal Lands Highway
Road Inventory Program


Fort Washington Park
Route Location Map
Key Map




 Cycle 5 Collected Routes




Fort Washington Park Route Location Map Area 1

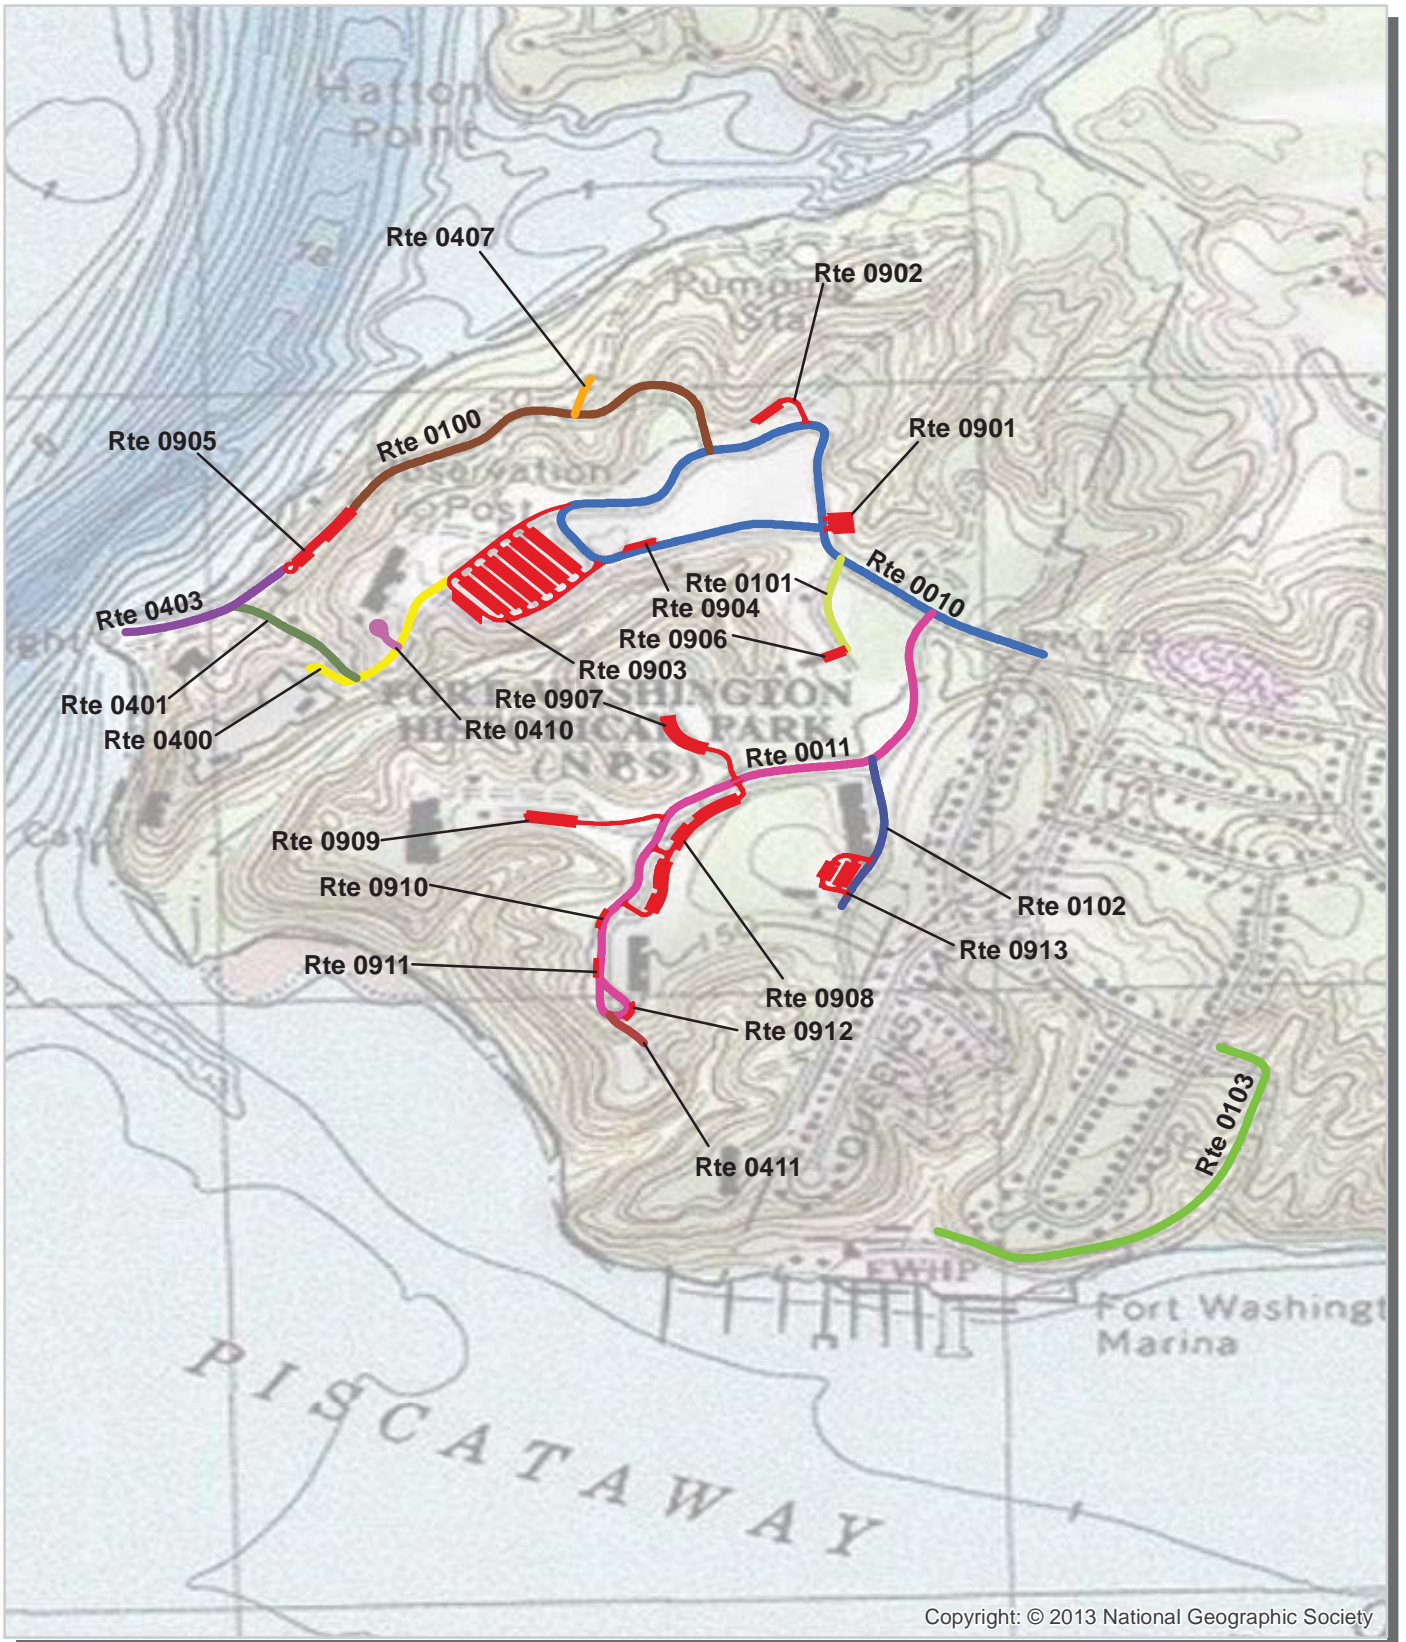

Unique colors used to differentiate routes



Fort Washington Park Route Condition Map PCR - Mile by Mile Key Map

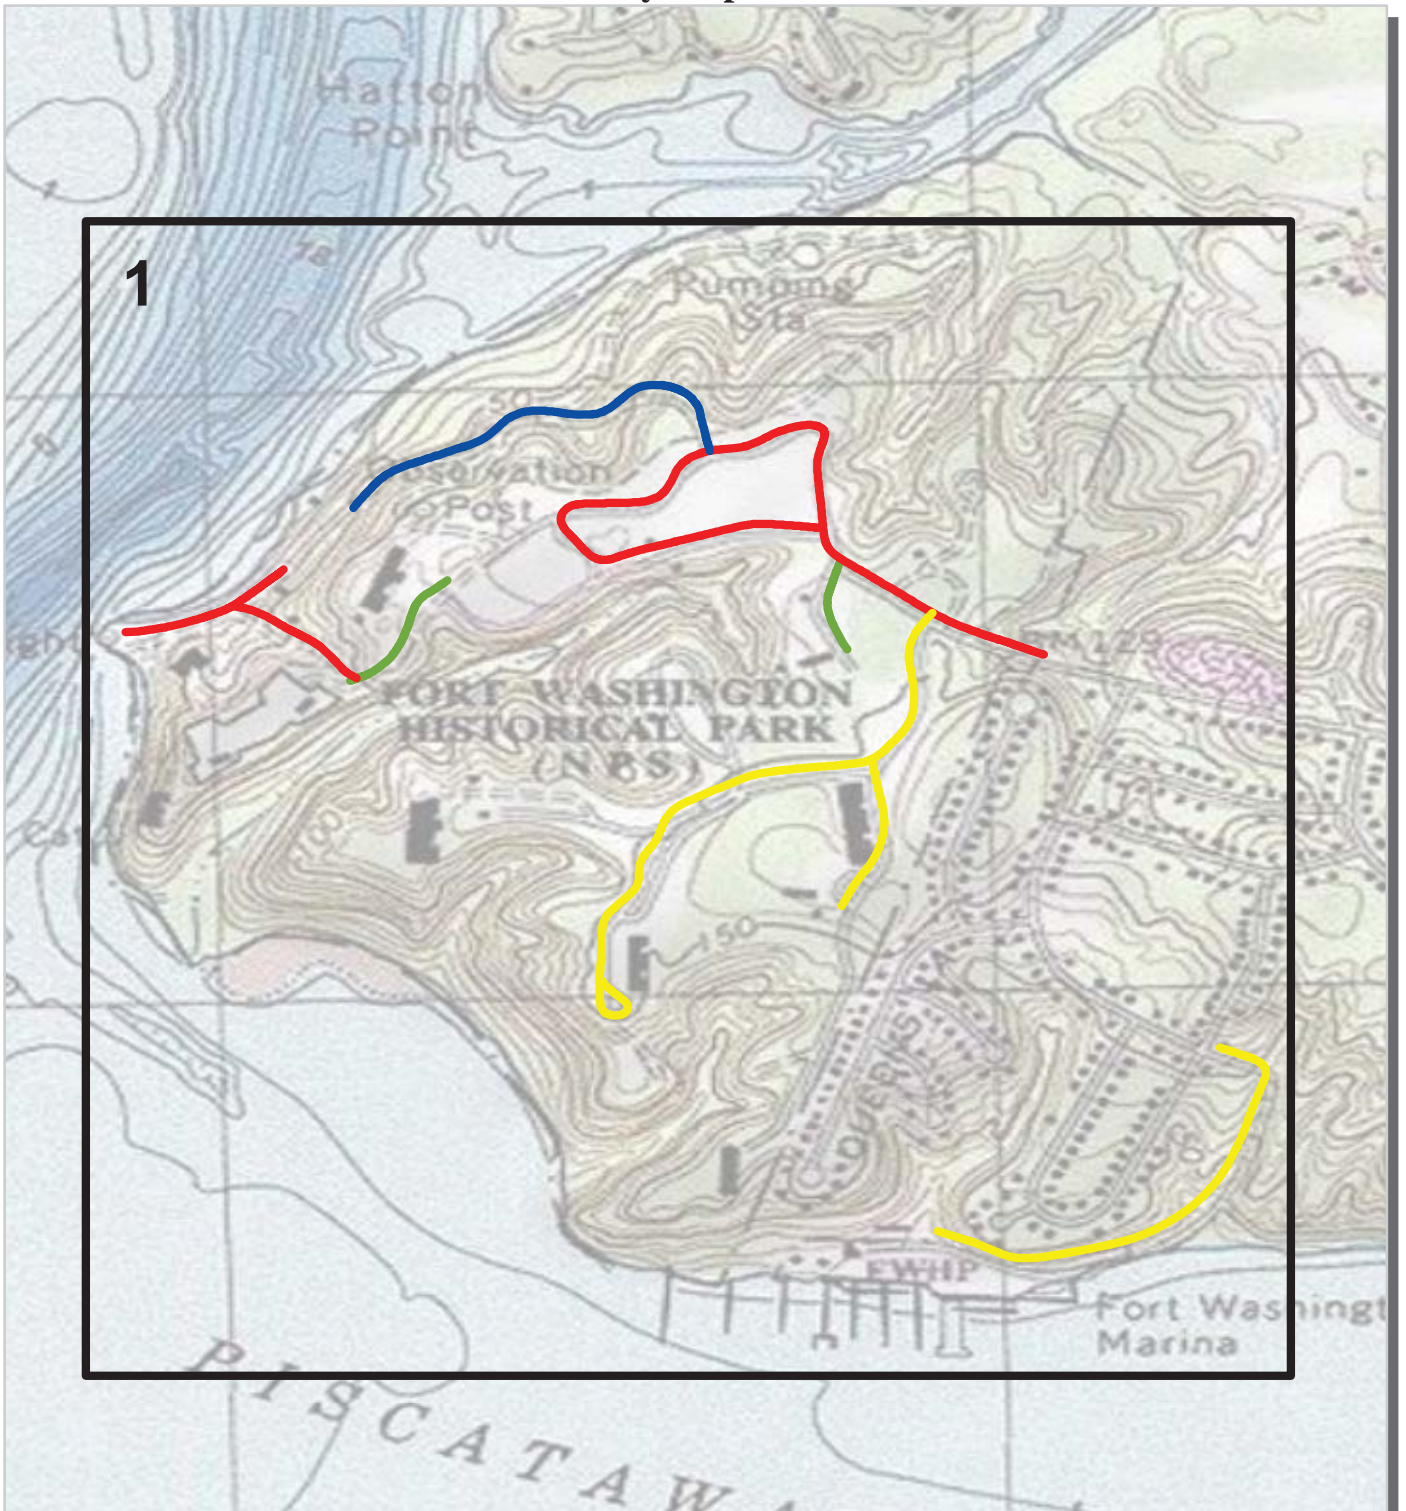

PCR	Poor	■	Fair	■	Good	■	Excellent	■	No Data	■
	(0 - 60)		(61 - 84)	(85 - 94)	(95 - 100)					

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

Note: Only routes collected by the DCV in Cycle-5 are displayed.




**Fort Washington Park
Route Condition Map
PCR - Mile by Mile
Area 1**



PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.



Section 5
Paved Route
Condition Rating Sheets



Fort Washington Park



Federal Lands Highway
Road Inventory Program



PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0010 WASHINGTON DRIVE
FOWA : FORT WASHINGTON PARK

COLLECTED: 2/17/2013
TOTAL LENGTH: 0.82 Miles

NATIONAL CAPITAL REGION

Section Number	0				
Section Length (mi)	0.82				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	19				
Lane Width (ft)	10				
Roadway Condition Information					
SCR (Surface Condition Rating)	55				
PCR (Pavement Condition Rating)	55				
Distress Index Values					
Structural Crack Index	55				
Transverse Cracking Index	92				
Patching Index	100				
Rutting Index	97				
Roughness Condition Index (RCI)	NC				

ROUTE: 0010 WASHINGTON DRIVE

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable



PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0011 WARBURTON DRIVE
FOWA : FORT WASHINGTON PARK

COLLECTED: 2/17/2013
TOTAL LENGTH: 0.61 Miles

NATIONAL CAPITAL REGION

Section Number	0				
Section Length (mi)	0.61				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	18				
Lane Width (ft)	10				
Roadway Condition Information					
SCR (Surface Condition Rating)	80				
PCR (Pavement Condition Rating)	80				
Distress Index Values					
Structural Crack Index	80				
Transverse Cracking Index	90				
Patching Index	100				
Rutting Index	99				
Roughness Condition Index (RCI)	NC				

ROUTE: 0011 WARBURTON DRIVE

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable



PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (0 - 60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0100 L'ENFANT ROAD
FOWA : FORT WASHINGTON PARK

COLLECTED: 2/17/2013
TOTAL LENGTH: 0.38 Miles

NATIONAL CAPITAL REGION

Section Number	0				
Section Length (mi)	0.38				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	20				
Lane Width (ft)	10				
Roadway Condition Information					
SCR (Surface Condition Rating)	97				
PCR (Pavement Condition Rating)	97				
Distress Index Values					
Structural Crack Index	97				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	98				
Roughness Condition Index (RCI)	NC				

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable



ROUTE: 0100 L'ENFANT ROAD



PCR Poor ■ Fair ■ Good ■ Excellent ■ No Data ■
 (0 - 60) (61 - 84) (85 - 94) (95 - 100)

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0101 OLD QUARTERS ACCESS
FOWA : FORT WASHINGTON PARK

COLLECTED: 2/17/2013
TOTAL LENGTH: 0.09 Miles

NATIONAL CAPITAL REGION

Section Number	0				
Section Length (mi)	0.09				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	19				
Lane Width (ft)	9				
Roadway Condition Information					
SCR (Surface Condition Rating)	94				
PCR (Pavement Condition Rating)	94				
Distress Index Values					
Structural Crack Index	98				
Transverse Cracking Index	94				
Patching Index	100				
Rutting Index	98				
Roughness Condition Index (RCI)	NC				

NOTES:
 Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.
 NC - Not Collected N/A - Not Applicable



ROUTE: 0101 OLD QUARTERS ACCESS



Copyright: © 2013 National Geographic Society



PCR	Poor		Fair		Good		Excellent		No Data	
		(0 - 60)		(61 - 84)		(85 - 94)		(95 - 100)		

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0102 AINSWORTH DRIVE
FOWA : FORT WASHINGTON PARK

COLLECTED: 2/17/2013
TOTAL LENGTH: 0.15 Miles

NATIONAL CAPITAL REGION

Section Number	0				
Section Length (mi)	0.15				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	19				
Lane Width (ft)	9				
Roadway Condition Information					
SCR (Surface Condition Rating)	77				
PCR (Pavement Condition Rating)	77				
Distress Index Values					
Structural Crack Index	77				
Transverse Cracking Index	87				
Patching Index	100				
Rutting Index	99				
Roughness Condition Index (RCI)	NC				

NOTES:
 Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.
 NC - Not Collected N/A - Not Applicable

ROUTE: 0102 AINSWORTH DRIVE



Copyright: © 2013 National Geographic Society



PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0103 FOWA MARINA ACCESS ROAD (KING CHARLES TERRACE)
FOWA : FORT WASHINGTON PARK

COLLECTED: 2/17/2013
TOTAL LENGTH: 0.43 Miles

NATIONAL CAPITAL REGION

Section Number	0				
Section Length (mi)	0.43				
Cross Section Information					
Number of Lanes	2				
Paved Width (ft)	20				
Lane Width (ft)	10				
Roadway Condition Information					
SCR (Surface Condition Rating)	84				
PCR (Pavement Condition Rating)	84				
Distress Index Values					
Structural Crack Index	84				
Transverse Cracking Index	98				
Patching Index	100				
Rutting Index	97				
Roughness Condition Index (RCI)	NC				

NOTES:
 Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.
 NC - Not Collected N/A - Not Applicable

ROUTE: 0103 FOWA MARINA ACCESS ROAD (KING CHARLES TERRACE)



PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0400 FORT WASHINGTON SERVICE ROAD
FOWA : FORT WASHINGTON PARK

COLLECTED: 2/17/2013
TOTAL LENGTH: 0.17 Miles

NATIONAL CAPITAL REGION

Section Number	0				
Section Length (mi)	0.17				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	12				
Lane Width (ft)	12				
Roadway Condition Information					
SCR (Surface Condition Rating)	NC				
PCR (Pavement Condition Rating)	90				
Distress Index Values					
Structural Crack Index	NC				
Transverse Cracking Index	NC				
Patching Index	NC				
Rutting Index	NC				
Roughness Condition Index (RCI)	NC				

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.


See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable



ROUTE: 0400 FORT WASHINGTON SERVICE ROAD

NOTE: Pavement condition data was not collected for the initial 0.040 miles of Route 0401 due to it being unpaved.

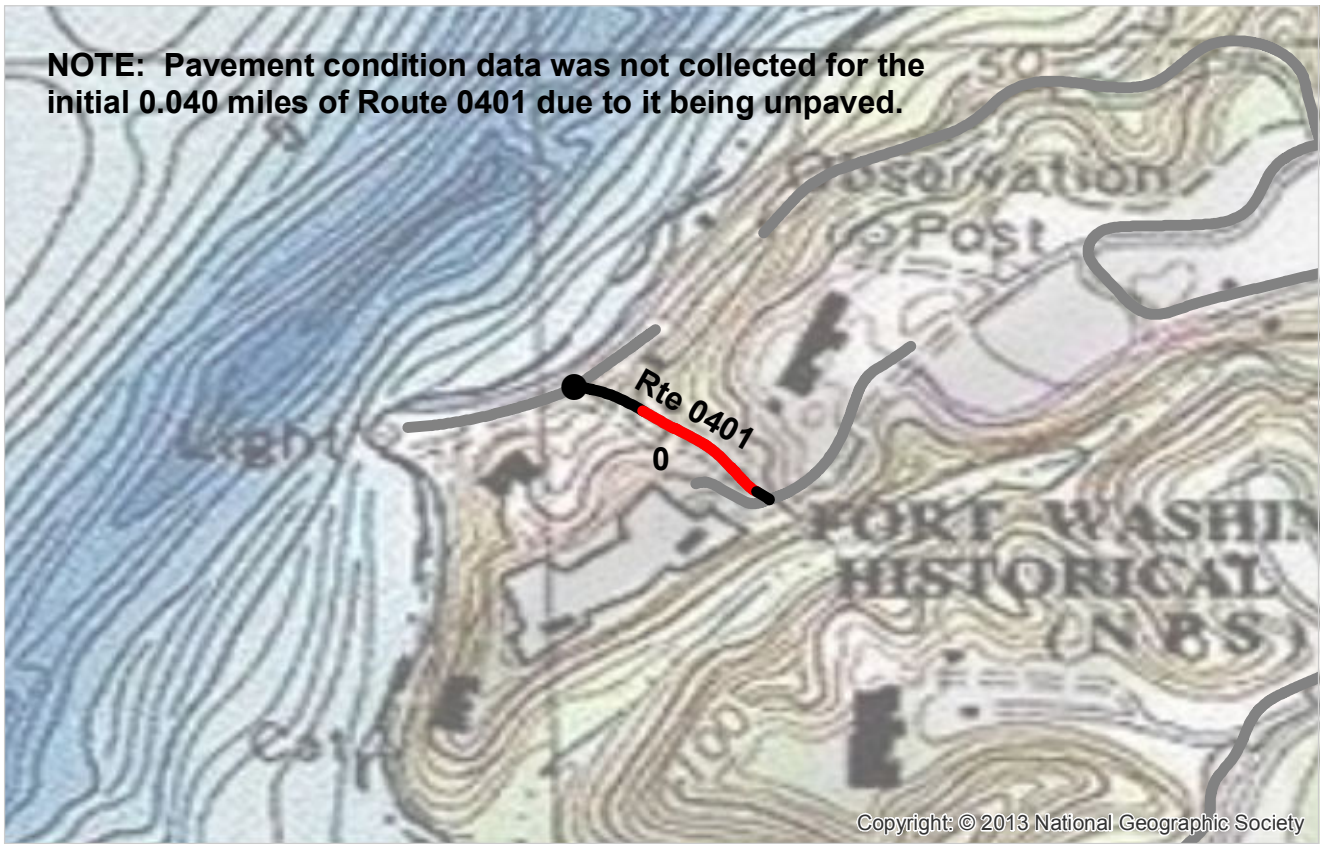

PCR	Poor	Fair	Good	Excellent	No Data
	■	■	■	■	■
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0401 CONNECTING SERVICE ROAD
FOWA : FORT WASHINGTON PARK**

**COLLECTED: 2/17/2013
TOTAL LENGTH: 0.13 Miles**

NATIONAL CAPITAL REGION

Section Number	0				
Section Length (mi)	0.13				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	14				
Lane Width (ft)	14				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	0				
Distress Index Values					
Structural Crack Index	0				
Transverse Cracking Index	97				
Patching Index	95				
Rutting Index	82				
Roughness Condition Index (RCI)	NC				

ROUTE: 0401 CONNECTING SERVICE ROAD


NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable

NOTE: Pavement condition data was not collected from Mile Post 0.040 to Mile Post 0.120 because that portion of Route 0403 was covered with gravel which hindered the data collection effort.

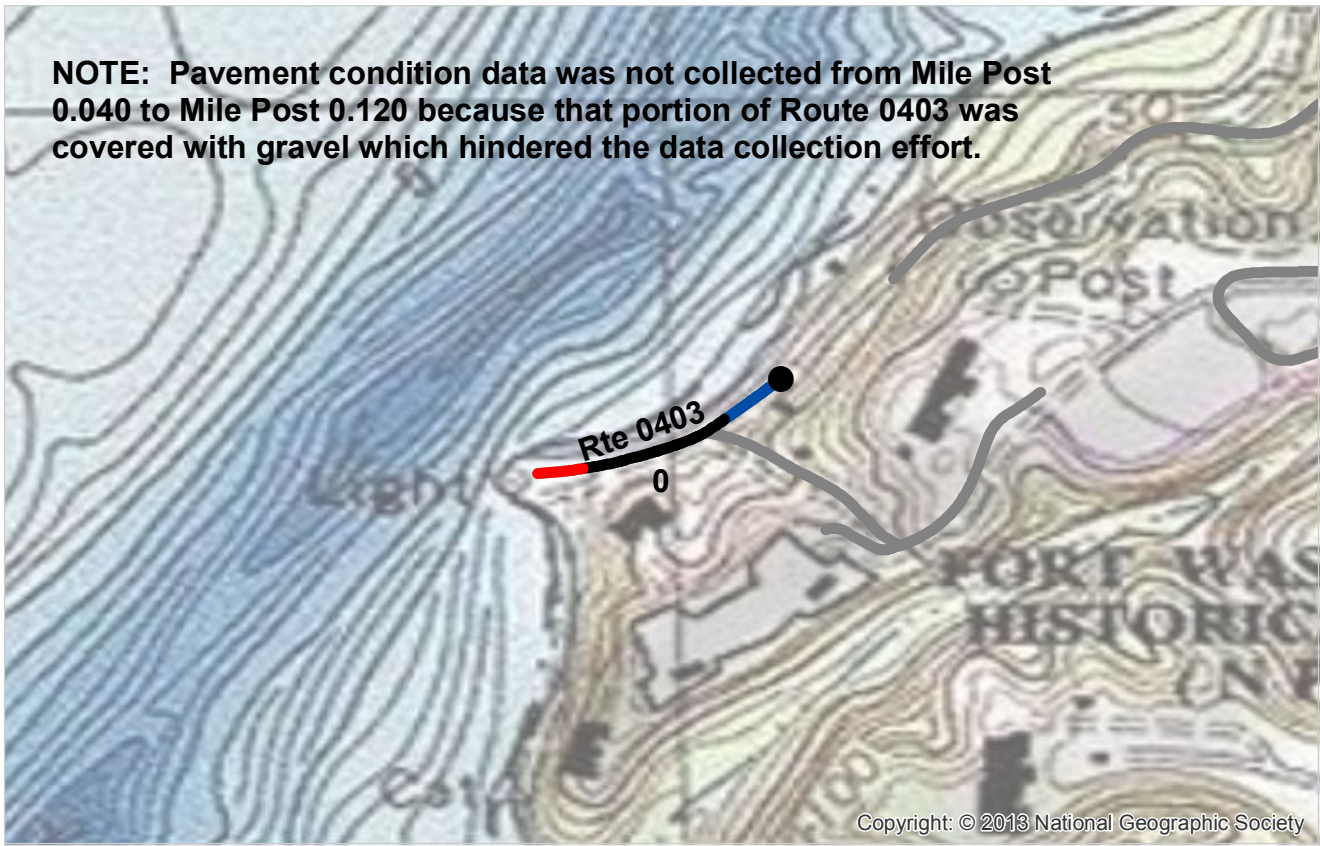

PCR	Poor		Fair		Good		Excellent		No Data	
		(0 - 60)		(61 - 84)		(85 - 94)		(95 - 100)		

* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

ROUTE: 0403 LIGHTHOUSE SERVICE ROAD
FOWA : FORT WASHINGTON PARK

COLLECTED: 2/17/2013
TOTAL LENGTH: 0.14 Miles

NATIONAL CAPITAL REGION

Section Number	0				
Section Length (mi)	0.14				
Cross Section Information					
Number of Lanes	1				
Paved Width (ft)	11				
Lane Width (ft)	11				
Roadway Condition Information					
SCR (Surface Condition Rating)	0				
PCR (Pavement Condition Rating)	0				
Distress Index Values					
Structural Crack Index	0				
Transverse Cracking Index	100				
Patching Index	97				
Rutting Index	94				
Roughness Condition Index (RCI)	NC				

ROUTE: 0403 LIGHTHOUSE SERVICE ROAD

NOTES:

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.

See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable

Section 6
Manually Rated Paved Route
Condition Rating Sheets



Fort Washington Park



Federal Lands Highway
Road Inventory Program

FORT WASHINGTON PARK

Route 0407



FOWA PUMP STATION SERVICE ROAD

FROM ROUTE 0100 (L'ENFANT ROAD)

TO END

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Paved Length (mi)	Paved Width (ft)
0407	NONPUBLIC	1/15/2013	2,577	0.04	0.04	12.2
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR	Surface Type
1	0	1	CONCRETE CURB AND GUTTER	NO CURB	FAIR/73	AS

* Lane miles are based on 11' lane widths

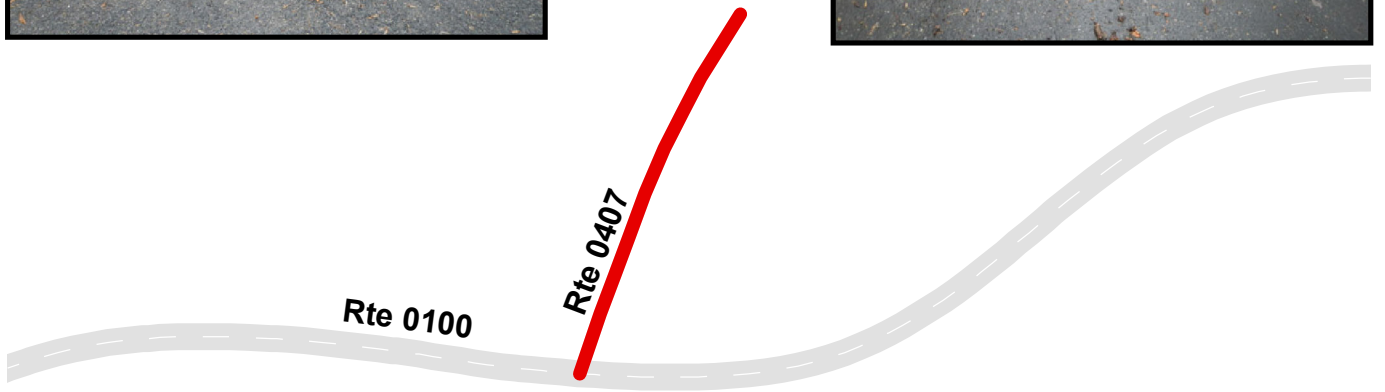



FORT WASHINGTON PARK

Route 0410

FOWA VISITORS CENTER HANDICAPPED DROPOFF
FROM ROUTE 0400 (FORT WASHINGTON SERVICE ROAD)
TO END OF LOOP

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Paved Length (mi)	Paved Width (ft)
0410	PUBLIC	1/15/2013	3,564	0.06	0.05	13.5
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR	Surface Type
0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90	CO

* Lane miles are based on 11' lane widths

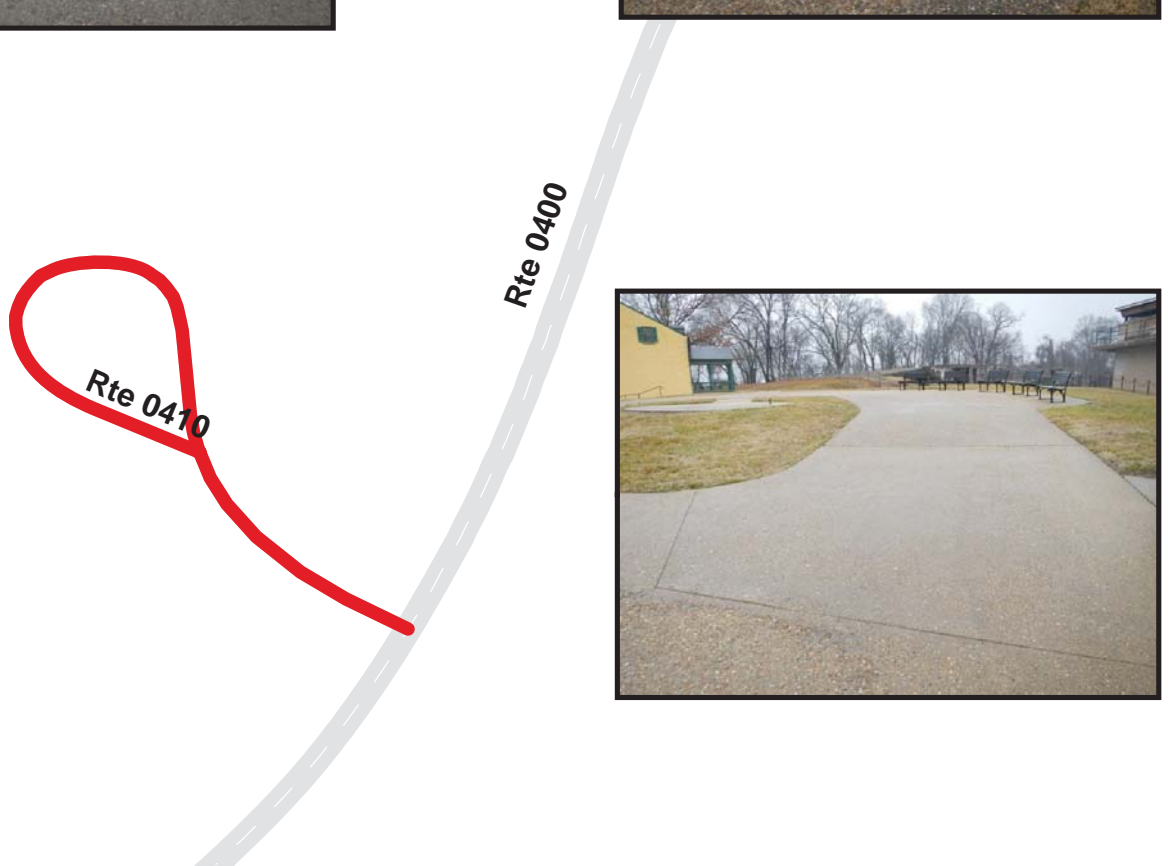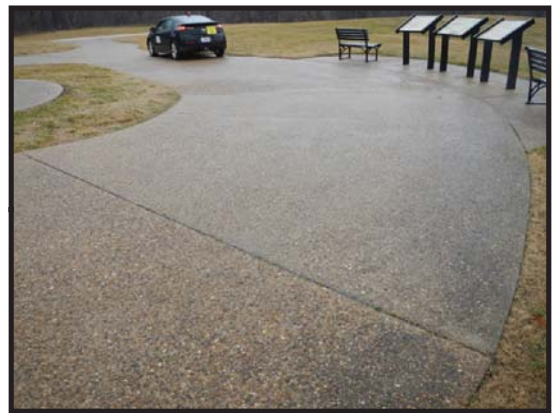


FORT WASHINGTON PARK

Route 0411

D-3 PICNIC AREA ACCESS ROAD
FROM ROUTE 0011 (WARBURTON DRIVE)
TO DEAD END

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Paved Length (mi)	Paved Width (ft)
0411	PUBLIC	1/15/2013	3,155	0.05	0.04	16.6
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR	Surface Type
0	0	1	NO CURB AND GUTTER	NO CURB	POOR/45	AS

* Lane miles are based on 11' lane widths

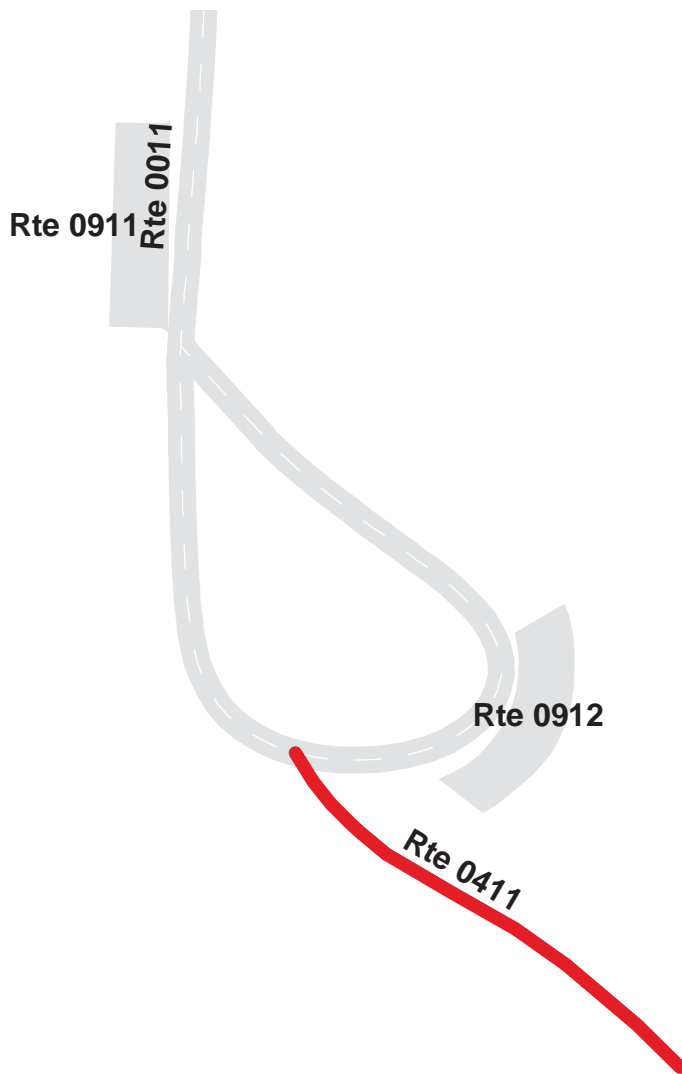

Section 7
Parking Area
Condition Rating Sheets



Fort Washington Park



Federal Lands Highway
Road Inventory Program

FORT WASHINGTON PARK

Route 0901


FOWA BIKE LANE / PICNIC AREA 1 PARKING

FROM ROUTE 0010 (WASHINGTON DRIVE)

TO ROUTE 0010 (WASHINGTON DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0901	PUBLIC	1/15/2013	11,691	0.20	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths




FORT WASHINGTON PARK

Route 0902

FOWA PICNIC AREA 2 PARKING
FROM ROUTE 0010 (WASHINGTON DRIVE)
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0902	PUBLIC	1/15/2013	10,179	0.18	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths

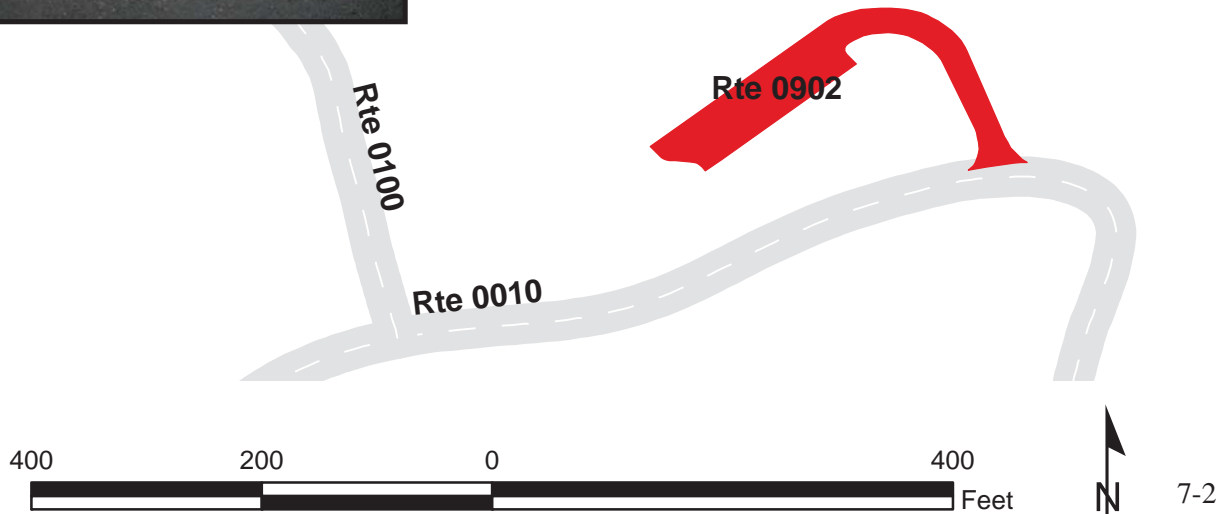


FORT WASHINGTON PARK

Route 0903

FORT WASHINGTON MAIN PARKING LOT
 FROM ROUTE 0010 (WASHINGTON DRIVE)
 TO ROUTE 0400 (FORT WASHINGTON SERVICE ROAD)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0903	PUBLIC	1/15/2013	139,187	2.40	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	22	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths

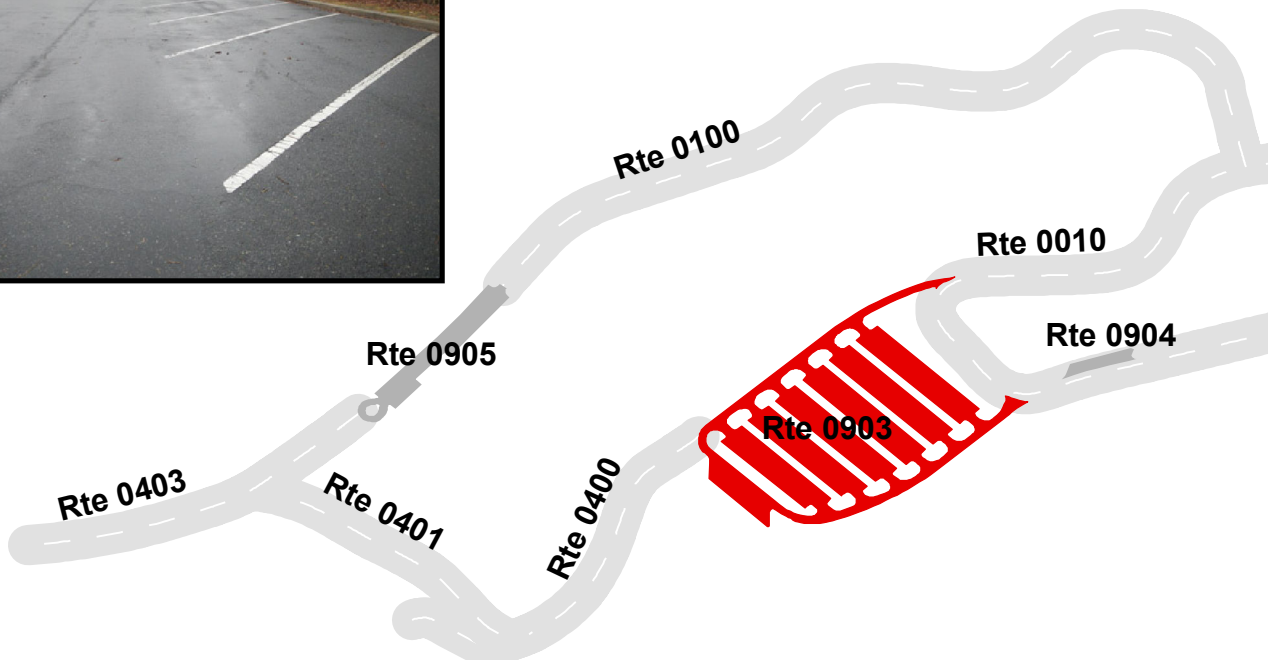



FORT WASHINGTON PARK

Route 0904

WARBURTON MANOR SITE PARKING
ADJACENT TO ROUTE 0010 (WASHINGTON DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0904	PUBLIC	1/15/2013	4,074	0.07	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	FAIR/73

* Lane miles are based on 11' lane widths

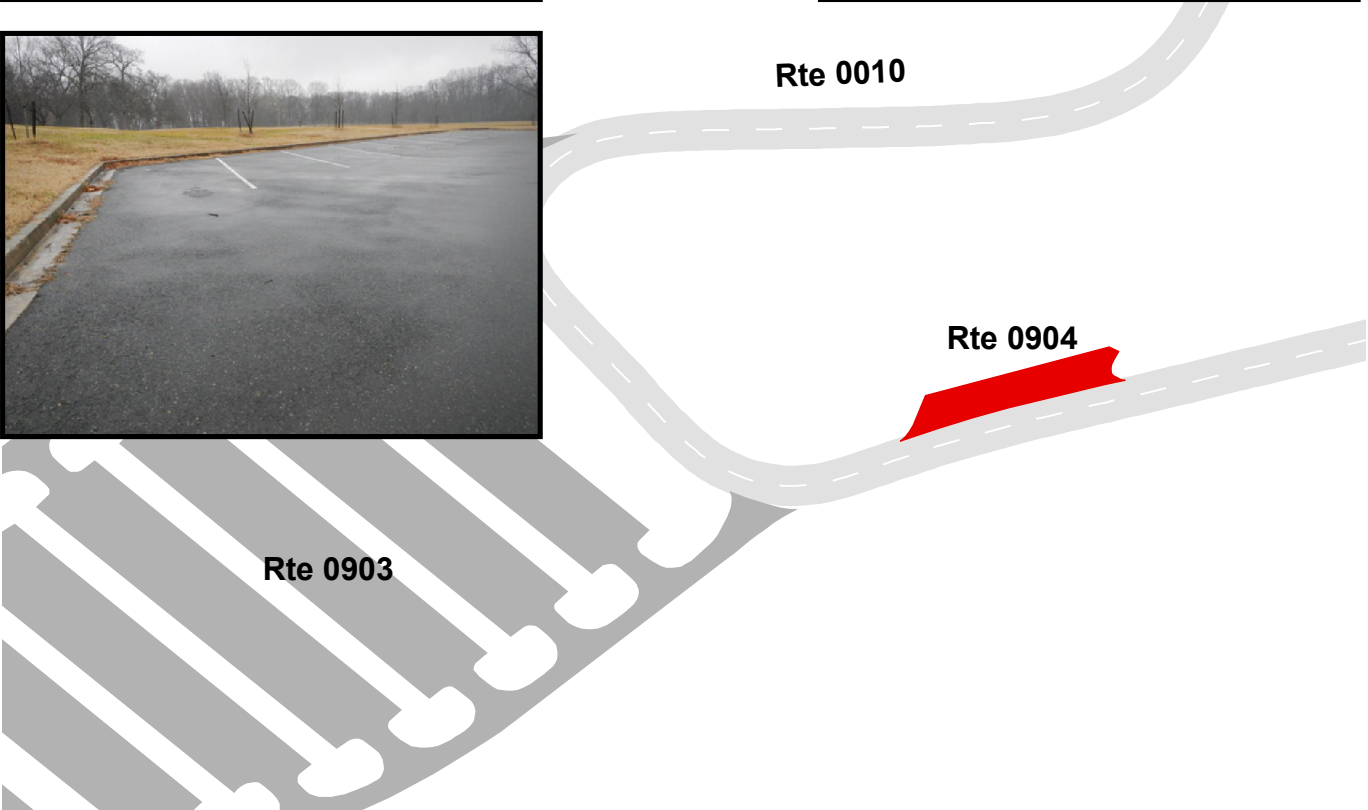

FORT WASHINGTON PARK

Route 0905


L'ENFANT ROAD PARKING AREA

FROM END OF ROUTE 0100 (L'ENFANT ROAD)

TO BEGINNING OF ROUTE 0403 (LIGHTHOUSE SERVICE ROAD)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0905	PUBLIC	1/15/2013	21,247	0.37	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	4	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths

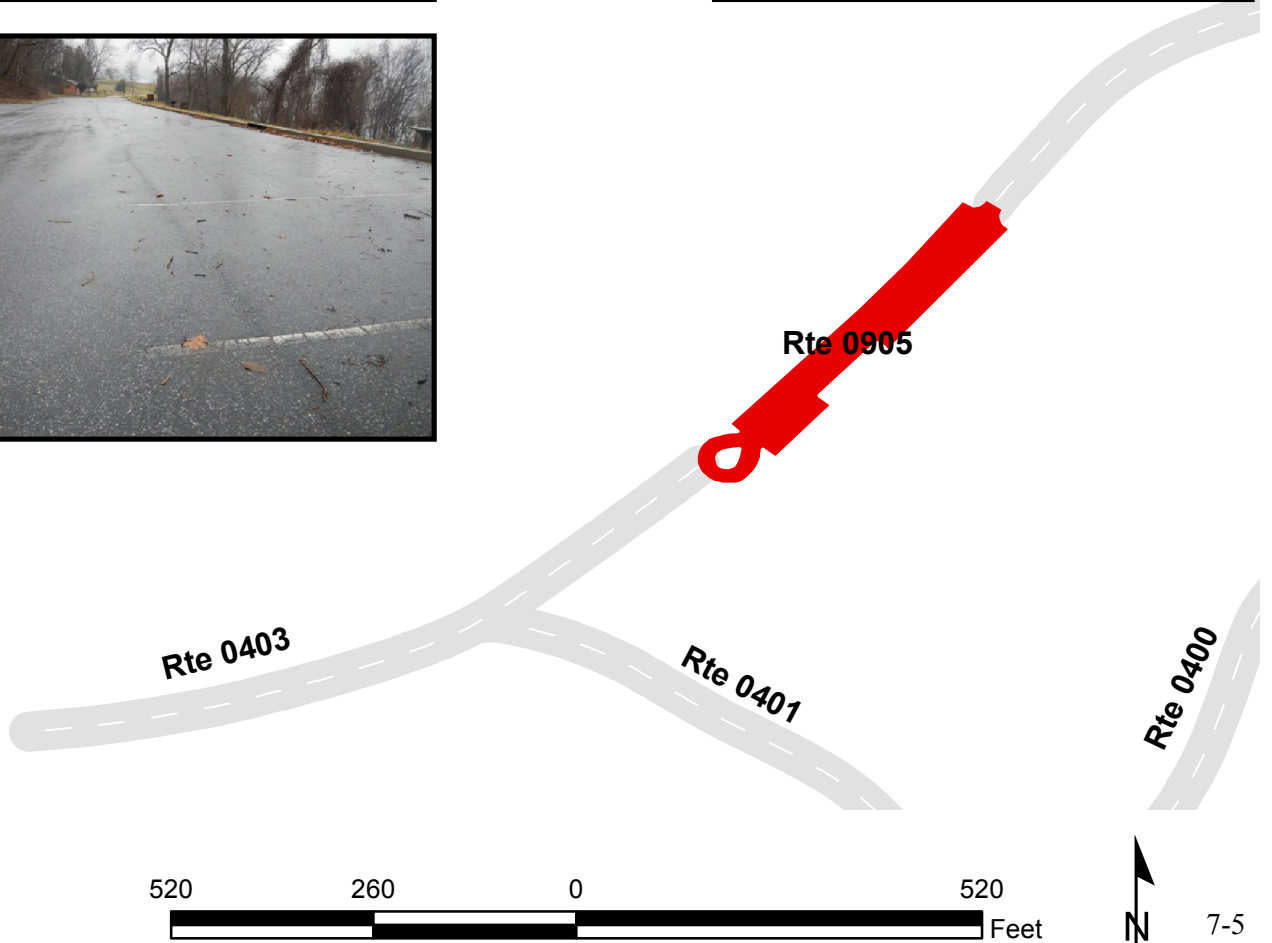



FORT WASHINGTON PARK

Route 0906

OLD QUARTERS PARKING
FROM ROUTE 0101 (OLD QUARTERS ACCESS)
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0906	PUBLIC	1/15/2013	4,717	0.08	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90



* Lane miles are based on 11' lane widths

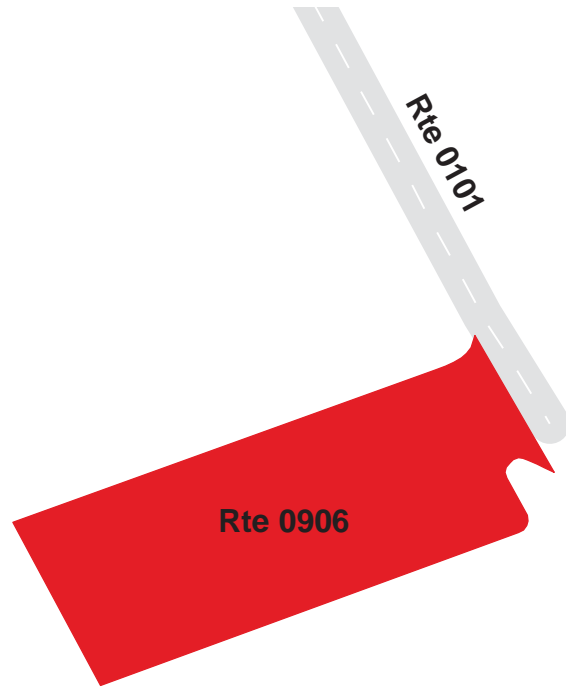

FORT WASHINGTON PARK
Route 0907
 FOWA PICNIC AREA A PARKING
 FROM ROUTE 0011 (WARBURTON DRIVE)
 TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0907	PUBLIC	1/15/2013	20,355	0.35	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	1	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths

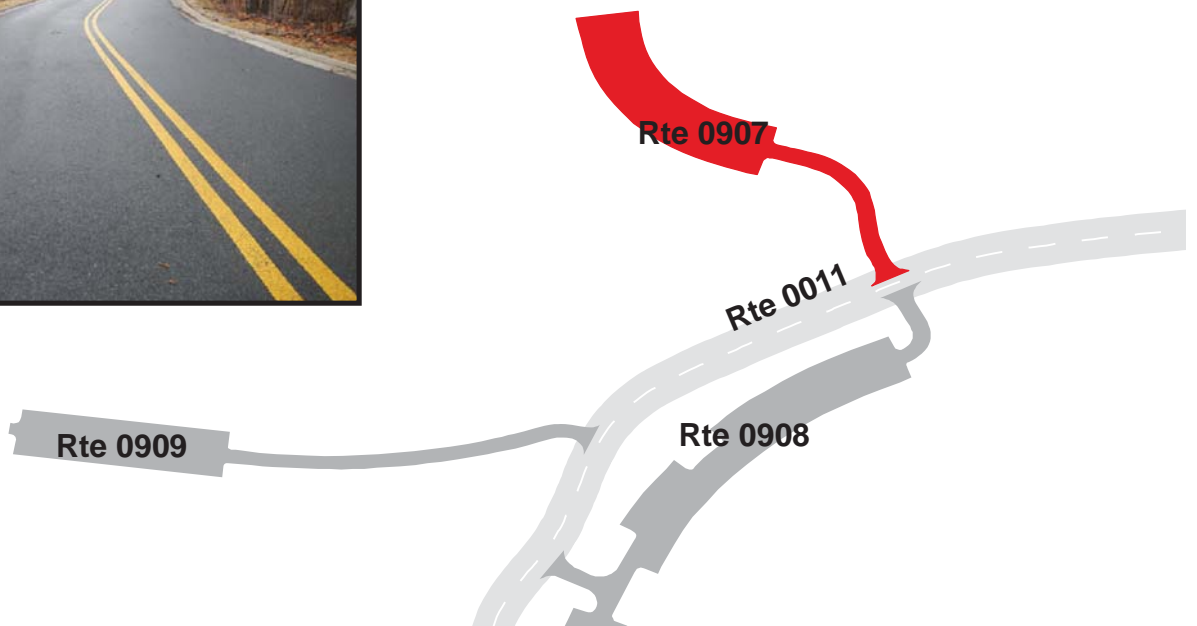

FORT WASHINGTON PARK

Route 0908



FOWA PICNIC AREA B PARKING
 FROM ROUTE 0011 (WARBURTON DRIVE)
 TO ROUTE 0011 (WARBURTON DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0908	PUBLIC	1/15/2013	46,112	0.79	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	4	0	CONCRETE CURB AND GUTTER	NO CURB	FAIR/73

* Lane miles are based on 11' lane widths



Rte 0903

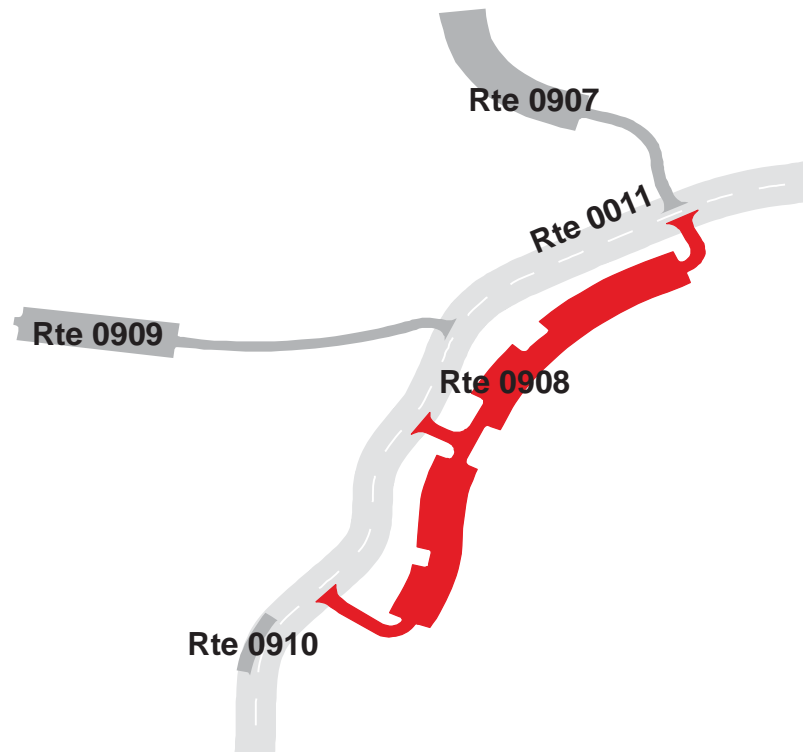

FORT WASHINGTON PARK

Route 0909


FOWA PICNIC AREA C PARKING
FROM ROUTE 0011 (WARBURTON DRIVE)
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0909	PUBLIC	1/15/2013	19,726	0.34	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	1	2	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths



Rte 0903

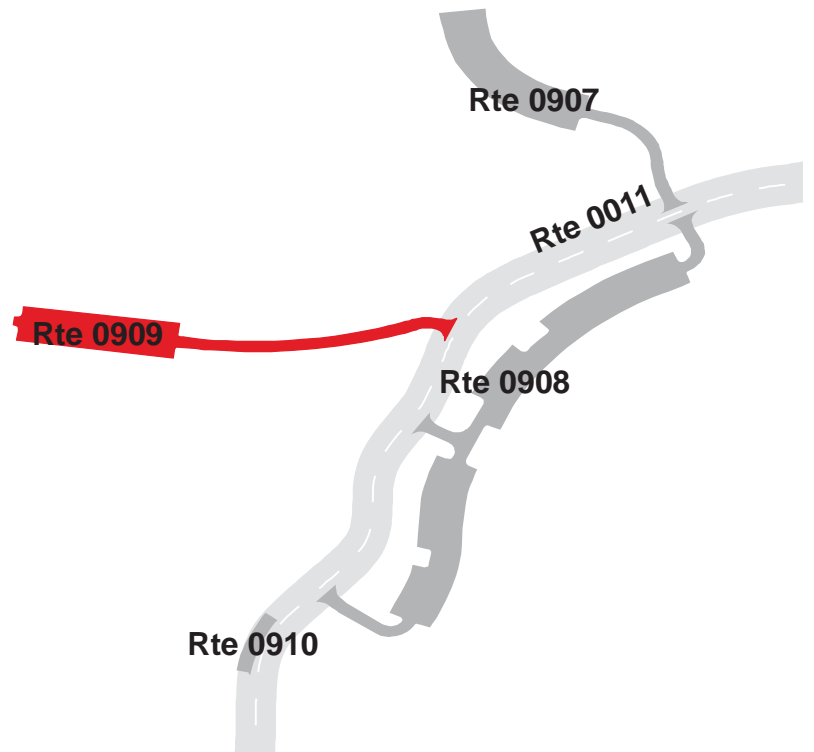

FORT WASHINGTON PARK



Route 0910

FOWA PICNIC PARKING D-1

ADJACENT TO ROUTE 0011 (WARBURTON DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0910	PUBLIC	1/15/2013	2,103	0.04	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths

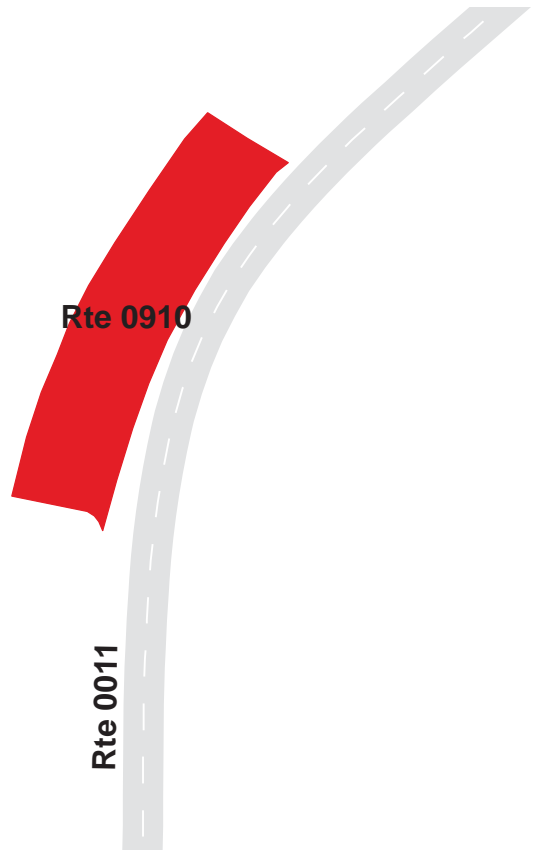

FORT WASHINGTON PARK



Route 0911

FOWA PICNIC PARKING D-2

ADJACENT TO ROUTE 0011 (WARBURTON DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0911	PUBLIC	1/15/2013	2,126	0.04	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths

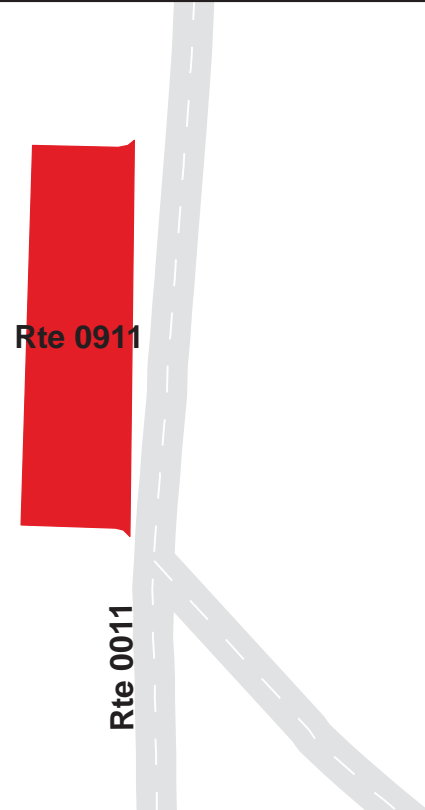

FORT WASHINGTON PARK



Route 0912

FOWA PICNIC PARKING D-3

ADJACENT TO ROUTE 0011 (WARBURTON DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0912	PUBLIC	1/15/2013	2,128	0.04	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths

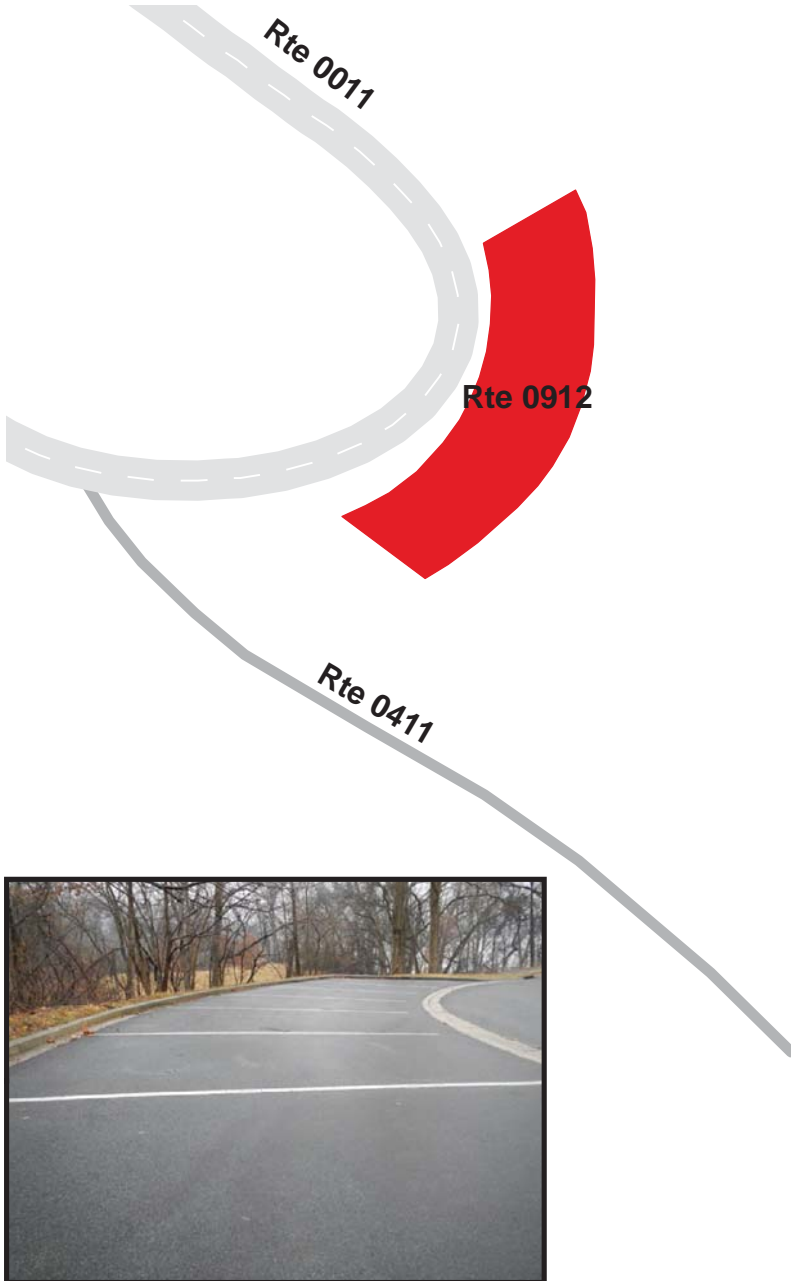

FORT WASHINGTON PARK

Route 0913

MAINTENANCE / PARK POLICE PARKING

FROM ROUTE 0102 (AINSWORTH DRIVE)

TO ROUTE 0102 (AINSWORTH DRIVE)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0913	PUBLIC	1/15/2013	22,480	0.39	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	2	CONCRETE CURB AND GUTTER	NO CURB	GOOD/90

* Lane miles are based on 11' lane widths



Section 8
Parkwide/Route
Maintenance Features Summaries



Fort Washington Park



**Federal Lands Highway
Road Inventory Program**

FOWA: PARKWIDE MAINTENANCE FEATURES SUMMARY

Includes DCV, MRL, MRP & PKG routes collected in Cycle-5

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all DCV driven routes. Culverts, drop inlets, and gates were also collected on all Manually Rated Routes and Paved Parking areas. Those totals are reflected below.

FEATURE	LINEAR FEET	COUNT
BRIDGE	--	0
CATTLE GUARD	--	0
CULVERT	--	1
CURB	20,032	--
DROP INLET	--	63
GATE	--	9
GUARD/GUIDE RAIL	639	--
CABLE	0	--
NON-CABLE	639	--
GUARD/GUIDE WALL	32	--
BOLLARD	32	--
TEMPORARY BARRIER	0	--
NON TEMP/BOLLARD	0	--
INTERSECTION	--	65
LOW WATER CROSSING	0	0
MILE MARKER	--	0
OVERPASS	--	0
PARK BOUNDARY	--	2
PAVED DITCH	0	--
PULLOUT	0	0
RAILROAD CROSSING	--	0
RETAINING WALL	0	0
SIGN	--	80
STATE BOUNDARY	--	0
TRAFFIC LIGHT	--	0
TUNNEL	0	0

FOWA: DCV ROUTE MAINTENANCE FEATURES SUMMARY

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5.

FEATURE	ROUTE 0010 WASHINGTON DRIVE	ROUTE 0011 WARBURTON DRIVE	ROUTE 0100 L'ENFANT ROAD	ROUTE 0101 OLD QUARTERS ACCESS	ROUTE 0102 AINSWORTH DRIVE	ROUTE 0103 FOWA MARINA ACCESS ROAD (KING CHARLES TERRACE)	UNIT
BRIDGE	0	0	0	0	0	0	EACH
CATTLE GUARD	0	0	0	0	0	0	EACH
CULVERT	0	0	0	0	0	0	EACH
CURB	7,910	5,836	3,859	871	1,446	110	LINEAR FEET
DROP INLET	13	10	7	0	2	0	EACH
GATE	2	0	0	0	0	0	EACH
GUARD/GUIDE RAIL	0	106	0	0	0	533	LINEAR FEET
CABLE	0	0	0	0	0	0	LINEAR FEET
NON-CABLE	0	106	0	0	0	533	LINEAR FEET
GUARD/GUIDE WALL	0	0	0	0	0	32	LINEAR FEET
BOLLARD	0	0	0	0	0	32	LINEAR FEET
TEMPORARY BARRIER	0	0	0	0	0	0	LINEAR FEET
NON TEMP/BOLLARD	0	0	0	0	0	0	LINEAR FEET
INTERSECTION	19	15	4	4	5	4	EACH
LOW WATER CROSSING	0	0	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	0	0	EACH
OVERPASS	0	0	0	0	0	0	EACH
PARK BOUNDARY	1	0	0	0	0	1	EACH
PAVED DITCH	0	0	0	0	0	0	LINEAR FEET
PULLOUT	0	0	0	0	0	0	EACH
PULLOUT	0	0	0	0	0	0	LINEAR FEET
RAILROAD CROSSING	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	LINEAR FEET
SIGN	46	10	3	1	3	13	EACH
STATE BOUNDARY	0	0	0	0	0	0	EACH
TRAFFIC LIGHT	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	LINEAR FEET

FOWA: DCV ROUTE MAINTENANCE FEATURES SUMMARY

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5.

FEATURE	ROUTE 0400 FORT WASHINGTON SERVICE ROAD	ROUTE 0401 CONNECTING SERVICE ROAD	ROUTE 0403 LIGHTHOUSE SERVICE ROAD	UNIT
BRIDGE	0	0	0	EACH
CATTLE GUARD	0	0	0	EACH
CULVERT	0	0	0	EACH
CURB	0	0	0	LINEAR FEET
DROP INLET	0	0	0	EACH
GATE	0	0	0	EACH
GUARD/GUIDE RAIL	0	0	0	LINEAR FEET
CABLE	0	0	0	LINEAR FEET
NON-CABLE	0	0	0	LINEAR FEET
GUARD/GUIDE WALL	0	0	0	LINEAR FEET
BOLLARD	0	0	0	LINEAR FEET
TEMPORARY BARRIER	0	0	0	LINEAR FEET
NON TEMP/BOLLARD	0	0	0	LINEAR FEET
INTERSECTION	4	4	6	EACH
LOW WATER CROSSING	0	0	0	EACH
LOW WATER CROSSING	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	EACH
OVERPASS	0	0	0	EACH
PARK BOUNDARY	0	0	0	EACH
PAVED DITCH	0	0	0	LINEAR FEET
PULLOUT	0	0	0	EACH
PULLOUT	0	0	0	LINEAR FEET
RAILROAD CROSSING	0	0	0	EACH
RETAINING WALL	0	0	0	EACH
RETAINING WALL	0	0	0	LINEAR FEET
SIGN	3	1	0	EACH
STATE BOUNDARY	0	0	0	EACH
TRAFFIC LIGHT	0	0	0	EACH
TUNNEL	0	0	0	EACH
TUNNEL	0	0	0	LINEAR FEET

STRUCTURE LIST

No data available for this section.

Section 9
Route Maintenance Features
Road Logs



Fort Washington Park



Federal Lands Highway
Road Inventory Program

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010: WASHINGTON DRIVE

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM PARK BOUNDARY AT INTERSECTION OF FORT WASHINGTON ROAD AND HAYLARD PLACE
0.000	0.000	INTERSECTION	RIGHT	PAVED ROUTE (HALYARD PLACE) / NON NPS
0.000	0.000	PARK BOUNDARY	N/A	N/A
0.000	0.000	SIGN	LEFT	REGULATORY, TRAFFIC CALMING AREA
0.000	0.000	SIGN	LEFT	WARNING, HUMPS
0.000	0.072	CURB-AND-GUTTER	LEFT	N/A
0.000	0.000	INTERSECTION	N/A	PAVED ROUTE (FORT WASHINGTON ROAD) / NON NPS
0.004	0.004	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.006	0.006	SIGN	LEFT	REGULATORY, NO PARKING ANY TIME
0.006	0.006	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
0.006	0.006	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
0.013	0.013	SIGN	RIGHT	GUIDE, FORT WASHINGTON PARK NATIONAL PARK SERVICE U.S. DEPARTMENT OF THE INTERIOR
0.033	0.058	CURB-AND-GUTTER	RIGHT	N/A
0.036	0.036	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.036	0.036	DROP INLET	RIGHT	N/A
0.040	0.040	GATE	N/A	N/A
0.040	0.040	DROP INLET	LEFT	N/A
0.041	0.041	SIGN	RIGHT	REGULATORY, STOP
0.060	0.060	INTERSECTION	RIGHT	ROUTE 0405 (FOWA SERVICE TURNAROUND)
0.061	0.223	CURB-AND-GUTTER	RIGHT	N/A
0.062	0.062	SIGN	RIGHT	REGULATORY, CAUTION SPEED BUMPS
0.062	0.062	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.072	0.079	CURB	N/A	N/A
0.082	0.093	CURB	N/A	N/A
0.083	0.083	SIGN	N/A	REGULATORY, STOP
0.084	0.084	SIGN	RIGHT	REGULATORY, STOP
0.085	0.085	GATE	N/A	N/A
0.085	0.085	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.085	0.085	SIGN	LEFT	REGULATORY, ONE WAY

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010: WASHINGTON DRIVE

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.085	0.085	SIGN	N/A	GUIDE, U.S. FEE AREA
0.086	0.086	INTERSECTION	LEFT	ROUTE 0010 (WASHINGTON DRIVE) CUT-THRU
0.086	0.086	SIGN	N/A	GUIDE, UNABLE TO READ FROM VIDEO
0.087	0.087	SIGN	RIGHT	GUIDE, AREA CLOSSES AT SUNSET
0.089	0.089	SIGN	N/A	GUIDE, U.S. PARK POLICE HISTORIC FORT VISITOR CENTER PICNIC AREAS RESERVED NON-RESERVED STOP-PAY FEE
0.096	0.096	SIGN	LEFT	GUIDE, WARBURTON DR
0.096	0.096	SIGN	LEFT	GUIDE, WASHINGTON DR
0.100	0.100	SIGN	LEFT	REGULATORY, STOP
0.101	0.101	INTERSECTION	LEFT	ROUTE 0011 (WARBURTON DRIVE)
0.102	0.180	CURB-AND-GUTTER	LEFT	N/A
0.115	0.115	SIGN	RIGHT	GUIDE, PETS MUST BE LEASHED NO ALCOHOLIC BEVERAGES PARK IN DESIGNATED AREAS ONLY
0.125	0.125	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.180	0.180	DROP INLET	LEFT	N/A
0.185	0.185	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.185	0.185	SIGN	LEFT	GUIDE, UNABLE TO READ FROM VIDEO
0.186	0.186	DROP INLET	RIGHT	N/A
0.195	0.195	INTERSECTION	LEFT	ROUTE 0101 (OLD QUARTERS ACCESS)
0.197	0.223	CURB-AND-GUTTER	LEFT	N/A
0.222	0.222	SIGN	LEFT	REGULATORY, DO NOT ENTER
0.223	0.228	CURB-AND-GUTTER	N/A	N/A
0.226	0.226	INTERSECTION	LEFT	ROUTE 0010 (WASHINGTON DRIVE) SPUR
0.229	0.231	CURB-AND-GUTTER	RIGHT	N/A
0.231	0.819	ONE-WAY	N/A	N/A
0.231	0.231	INTERSECTION	LEFT	ROUTE 0010 (WASHINGTON DRIVE)
0.231	0.231	INTERSECTION	RIGHT	ROUTE 0901 (FOWA BIKE LANE / PICNIC AREA 1 PARKING)
0.232	0.652	CURB-AND-GUTTER	LEFT	N/A
0.234	0.234	SIGN	LEFT	REGULATORY, DO NOT ENTER
0.237	0.237	SIGN	LEFT	REGULATORY, ONE WAY
0.238	0.238	INTERSECTION	RIGHT	ROUTE 0901 (FOWA BIKE LANE / PICNIC AREA 1 PARKING)

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010: WASHINGTON DRIVE

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.239	0.341	CURB-AND-GUTTER	RIGHT	N/A
0.255	0.255	DROP INLET	LEFT	N/A
0.255	0.255	DROP INLET	RIGHT	N/A
0.260	0.260	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15 MPH
0.316	0.316	DROP INLET	LEFT	N/A
0.346	0.346	INTERSECTION	RIGHT	ROUTE 0902 (FOWA PICNIC AREA 2 PARKING)
0.347	0.425	CURB-AND-GUTTER	RIGHT	N/A
0.376	0.376	DROP INLET	LEFT	N/A
0.428	0.428	SIGN	RIGHT	GUIDE, L'ENFANT RD.
0.428	0.428	SIGN	RIGHT	GUIDE, WASHINGTON DR
0.430	0.430	INTERSECTION	RIGHT	ROUTE 0100 (L'ENFANT ROAD)
0.431	0.573	CURB-AND-GUTTER	RIGHT	N/A
0.433	0.433	SIGN	RIGHT	GUIDE, FISHING AREA LIGHTHOUSE
0.546	0.546	DROP INLET	LEFT	N/A
0.567	0.567	DROP INLET	LEFT	N/A
0.568	0.568	DROP INLET	LEFT	N/A
0.574	0.574	INTERSECTION	RIGHT	ROUTE 0903 (FORT WASHINGTON MAIN PARKING LOT)
0.574	0.574	SIGN	RIGHT	GUIDE, FORT WASHINGTON PARK VISITOR CENTER NATIONAL PARK SERVICES U.S DEPARTMENT OF THE INTERIOR
0.575	0.634	CURB-AND-GUTTER	RIGHT	N/A
0.583	0.583	SIGN	RIGHT	REGULATORY, LEFT LANE ONLY
0.624	0.624	SIGN	LEFT	GUIDE, BIKE LANE
0.624	0.624	SIGN	LEFT	REGULATORY, GRAPHIC SIGN NO TEXT
0.631	0.631	SIGN	RIGHT	REGULATORY, DO NOT ENTER
0.631	0.631	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN NO TEXT
0.638	0.638	INTERSECTION	RIGHT	ROUTE 0903 (FORT WASHINGTON MAIN PARKING LOT)
0.639	0.812	CURB-AND-GUTTER	RIGHT	N/A
0.641	0.641	SIGN	N/A	REGULATORY, ONE WAY
0.668	0.668	INTERSECTION	LEFT	ROUTE 0904 (WARBURTON MANOR SITE PARKING)
0.683	0.815	CURB-AND-GUTTER	LEFT	N/A

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0010: WASHINGTON DRIVE

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.690	0.690	SIGN	RIGHT	REGULATORY, LEFT LANE ONLY
0.690	0.690	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15 MPH
0.742	0.742	DROP INLET	RIGHT	N/A
0.797	0.797	DROP INLET	RIGHT	N/A
0.809	0.809	SIGN	LEFT	REGULATORY, DO NOT ENTER
0.809	0.809	SIGN	LEFT	REGULATORY, GRAPHIC SIGN NO TEXT
0.809	0.809	SIGN	LEFT	GUIDE, BIKE LANE
0.813	0.813	INTERSECTION	RIGHT	ROUTE 0010 (WASHINGTON DRIVE) SPUR
0.815	0.819	CURB-AND-GUTTER	N/A	N/A
0.819	0.819	INTERSECTION	LEFT	ROUTE 0010 (WASHINGTON DRIVE)
0.819	0.819	INTERSECTION	N/A	ROUTE 0901 (FOWA BIKE LANE / PICNIC AREA 1 PARKING)
0.819	0.819	INTERSECTION	RIGHT	ROUTE 0010 (WASHINGTON DRIVE)
0.819	0.819	SIGN	RIGHT	GUIDE, BIKE LANE
0.819	0.819	ROUTE END	N/A	TO END OF LOOP

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0011: Warburton Drive

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0010 (WASHINGTON DRIVE)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0010 (WASHINGTON DRIVE)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0010 (WASHINGTON DRIVE)
0.000	0.272	CURB-AND-GUTTER	RIGHT	N/A
0.005	0.011	CURB-AND-GUTTER	LEFT	N/A
0.006	0.006	SIGN	LEFT	REGULATORY, YIELD
0.022	0.163	CURB-AND-GUTTER	LEFT	N/A
0.072	0.072	DROP INLET	RIGHT	N/A
0.072	0.072	DROP INLET	LEFT	N/A
0.158	0.158	SIGN	LEFT	REGULATORY, CAUTION
0.158	0.158	SIGN	LEFT	REGULATORY, SPEED LIMIT 15 MPH
0.159	0.159	DROP INLET	LEFT	N/A
0.167	0.167	INTERSECTION	LEFT	ROUTE 0102 (AINSWORTH DRIVE)
0.170	0.170	SIGN	LEFT	REGULATORY, GRAPHIC SIGN NO TEXT
0.170	0.170	SIGN	LEFT	GUIDE, PICNIC AREAS A, B, C, D, & C PAVILION THIS WAY
0.171	0.271	CURB-AND-GUTTER	LEFT	N/A
0.175	0.175	SIGN	LEFT	REGULATORY, STOP
0.175	0.175	DROP INLET	LEFT	N/A
0.176	0.176	DROP INLET	RIGHT	N/A
0.278	0.278	INTERSECTION	LEFT	ROUTE 0908 (FOWA PICNIC AREA B PARKING)
0.278	0.278	INTERSECTION	RIGHT	ROUTE 0907 (FOWA PICNIC AREA A PARKING)
0.278	0.341	CURB-AND-GUTTER	RIGHT	N/A
0.279	0.374	CURB-AND-GUTTER	LEFT	N/A
0.279	0.279	SIGN	RIGHT	GUIDE, UNABLE TO READ FROM VIDEO
0.328	0.328	DROP INLET	LEFT	N/A
0.328	0.328	DROP INLET	RIGHT	N/A
0.343	0.343	SIGN	RIGHT	GUIDE, RESERVED AREA C
0.349	0.349	INTERSECTION	RIGHT	ROUTE 0909 (FOWA PICNIC AREA C PARKING)
0.350	0.452	CURB-AND-GUTTER	RIGHT	N/A
0.380	0.439	CURB-AND-GUTTER	LEFT	N/A

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0011: WARBURTON DRIVE

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.380	0.380	INTERSECTION	LEFT	ROUTE 0908 (FOWA PICNIC AREA B PARKING)
0.437	0.437	DROP INLET	LEFT	N/A
0.437	0.437	DROP INLET	RIGHT	N/A
0.443	0.443	INTERSECTION	LEFT	ROUTE 0908 (FOWA PICNIC AREA B PARKING)
0.443	0.526	CURB-AND-GUTTER	LEFT	N/A
0.464	0.464	INTERSECTION	RIGHT	ROUTE 0910 (FOWA PICNIC PARKING D-1)
0.470	0.502	CURB-AND-GUTTER	RIGHT	N/A
0.514	0.514	INTERSECTION	RIGHT	ROUTE 0911 (FOWA PICNIC PARKING D-2)
0.521	0.561	CURB-AND-GUTTER	RIGHT	N/A
0.530	0.612	ONE-WAY	N/A	N/A
0.530	0.530	INTERSECTION	LEFT	ROUTE 0011 (WARBURTON DRIVE)
0.531	0.531	SIGN	N/A	REGULATORY, KEEP RIGHT
0.531	0.609	CURB-AND-GUTTER	LEFT	N/A
0.547	0.567	GUARD/GUIDE RAIL	RIGHT	N/A
0.561	0.561	SIGN	RIGHT	GUIDE, RESERVED AREA D
0.568	0.568	INTERSECTION	RIGHT	ROUTE 0411 (D-3 PICNIC AREA ACCESS ROAD)
0.569	0.575	CURB-AND-GUTTER	RIGHT	N/A
0.575	0.575	DROP INLET	RIGHT	N/A
0.580	0.580	INTERSECTION	RIGHT	ROUTE 0912 (FOWA PICNIC PARKING D-3)
0.584	0.612	CURB-AND-GUTTER	RIGHT	N/A
0.612	0.612	INTERSECTION	LEFT	ROUTE 0011 (WARBURTON DRIVE)
0.612	0.612	INTERSECTION	N/A	ROUTE 0011 (WARBURTON DRIVE)
0.612	0.612	ROUTE END	N/A	TO END OF LOOP

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0100: L'ENFANT ROAD

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0010 (WASHINGTON DRIVE)
0.000	0.000	SIGN	N/A	REGULATORY, ONE WAY
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0010 (WASHINGTON DRIVE)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0010 (WASHINGTON DRIVE)
0.005	0.152	CURB-AND-GUTTER	RIGHT	N/A
0.005	0.378	CURB-AND-GUTTER	LEFT	N/A
0.006	0.006	SIGN	LEFT	REGULATORY, STOP
0.016	0.016	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.092	0.092	DROP INLET	LEFT	N/A
0.146	0.146	DROP INLET	RIGHT	N/A
0.160	0.160	INTERSECTION	RIGHT	ROUTE 0407 (FOWA PUMP STATION SERVICE ROAD)
0.167	0.378	CURB-AND-GUTTER	RIGHT	N/A
0.180	0.180	DROP INLET	LEFT	N/A
0.180	0.180	DROP INLET	RIGHT	N/A
0.286	0.286	DROP INLET	LEFT	N/A
0.286	0.286	DROP INLET	RIGHT	N/A
0.355	0.355	DROP INLET	LEFT	N/A
0.378	0.378	INTERSECTION	N/A	ROUTE 0905 (L'ENFANT ROAD PARKING AREA)
0.378	0.378	ROUTE END	N/A	TO ROUTE 0905 (L'ENFANT ROAD PARKING AREA)

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0101: OLD QUARTERS ACCESS

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0010 (WASHINGTON DRIVE)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0010 (WASHINGTON DRIVE)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0010 (WASHINGTON DRIVE)
0.005	0.087	CURB-AND-GUTTER	RIGHT	N/A
0.005	0.088	CURB-AND-GUTTER	LEFT	N/A
0.006	0.006	SIGN	LEFT	REGULATORY, STOP
0.091	0.091	INTERSECTION	RIGHT	ROUTE 0906 (OLD QUARTERS PARKING)
0.093	0.093	INTERSECTION	N/A	DEAD END AT TURNAROUND
0.093	0.093	ROUTE END	N/A	TO END AT TURNAROUND

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0102: AINSWORTH DRIVE

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0011 (WARBURTON DRIVE)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0011 (WARBURTON DRIVE)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0011 (WARBURTON DRIVE)
0.004	0.004	SIGN	RIGHT	GUIDE, AINSWORTH DR
0.004	0.148	CURB-AND-GUTTER	LEFT	N/A
0.004	0.004	SIGN	RIGHT	GUIDE, WARBURTON DR
0.004	0.097	CURB-AND-GUTTER	RIGHT	N/A
0.058	0.058	DROP INLET	LEFT	N/A
0.058	0.058	DROP INLET	RIGHT	N/A
0.103	0.103	INTERSECTION	RIGHT	ROUTE 0913 (MAINTENANCE / PARK POLICE PARKING)
0.104	0.134	CURB-AND-GUTTER	RIGHT	N/A
0.138	0.138	INTERSECTION	RIGHT	ROUTE 0913 (MAINTENANCE / PARK POLICE PARKING)
0.141	0.148	CURB-AND-GUTTER	RIGHT	N/A
0.148	0.148	SIGN	RIGHT	GUIDE, RIVER TRAIL
0.148	0.148	INTERSECTION	N/A	END AT RIVER TRAIL
0.148	0.148	ROUTE END	N/A	TO END AT RIVER TRAIL

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0103: FOWA MARINA ACCESS ROAD (KING CHARLES TERRACE)

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM PARK BOUNDARY
0.000	0.016	CURB-AND-GUTTER	LEFT	N/A
0.000	0.000	INTERSECTION	N/A	PAVED ROUTE (KING CHARLES TERRACE) / NON NPS
0.000	0.000	PARK BOUNDARY	N/A	N/A
0.000	0.000	SIGN	LEFT	REGULATORY, STOP
0.011	0.011	SIGN	RIGHT	GUIDE, FORT WASHINGTON MARINA LAND / WINTER STORAGE BOAT RAMPS FUEL DOCK TRAIL LIFT SHIPS STORE
0.014	0.014	SIGN	RIGHT	REGULATORY, SPEED LIMIT 15
0.020	0.077	GUARD/GUIDE RAIL	RIGHT	N/A
0.023	0.023	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.034	0.078	GUARD/GUIDE RAIL	LEFT	N/A
0.177	0.177	SIGN	RIGHT	REGULATORY, 15 SLOW
0.196	0.196	INTERSECTION	LEFT	UNPAVED PARKING
0.355	0.355	SIGN	LEFT	REGULATORY, 15 SLOW
0.397	0.402	CURB-AND-GUTTER	LEFT	N/A
0.398	0.398	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
0.398	0.398	SIGN	LEFT	REGULATORY, NEW WINTER RAMP HOURS 1 AM TO 6 PM
0.416	0.416	INTERSECTION	LEFT	UNPAVED PARKING
0.419	0.425	GUARD/GUIDE WALL	RIGHT	N/A
0.422	0.422	SIGN	LEFT	REGULATORY, MARINA ENTRANCE
0.422	0.422	SIGN	RIGHT	REGULATORY, UNABLE TO READ FROM VIDEO
0.422	0.422	SIGN	LEFT	REGULATORY, WARNING
0.422	0.422	SIGN	LEFT	REGULATORY, PROUD MARY
0.422	0.422	SIGN	LEFT	REGULATORY, UNABLE TO READ FROM VIDEO
0.425	0.425	INTERSECTION	N/A	UNPAVED ROUTE (FORT WASHINGTON POOL AND BEACH CLUB) / NON NPS
0.425	0.425	ROUTE END	N/A	TO END OF PAVEMENT AT FORT WASHINGTON POOL AND BEACH CLUB

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0400: FORT WASHINGTON SERVICE ROAD

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0903 (FORT WASHINGTON MAIN PARKING LOT)
0.000	0.000	INTERSECTION	N/A	ROUTE 0903 (FORT WASHINGTON MAIN PARKING LOT)
0.003	0.003	SIGN	LEFT	REGULATORY, SERVICE VEHICLES ONLY
0.084	0.084	INTERSECTION	RIGHT	ROUTE 0410 (FOWA VISITORS CENTER HANDICAPPED DROPOFF)
0.135	0.135	INTERSECTION	RIGHT	ROUTE 0401 (CONNECTING SERVICE ROAD)
0.168	0.168	INTERSECTION	N/A	ROUTE 0400 (FORT WASHINGTON SERVICE ROAD) UNPAVED SECTION
0.168	0.168	SIGN	RIGHT	GUIDE, OLD HISTORIC FORT OPEN 9:00 - 4:00
0.168	0.168	SIGN	RIGHT	REGULATORY, NO PETS
0.168	0.168	ROUTE END	N/A	TO END OF UNPAVED SECTION INSIDE FORT AT MP 0.27

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0401: CONNECTING SERVICE ROAD

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0403 (LIGHTHOUSE SERVICE ROAD)
0.000	0.000	SIGN	N/A	GUIDE, GRAPHIC SIGN NO TEXT
0.000	0.000	INTERSECTION	LEFT	ROUTE 0403 (LIGHTHOUSE SERVICE ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0403 (LIGHTHOUSE SERVICE ROAD)
0.126	0.126	INTERSECTION	LEFT	ROUTE 0400 (FORT WASHINGTON SERVICE ROAD)
0.126	0.126	INTERSECTION	RIGHT	ROUTE 0400 (FORT WASHINGTON SERVICE ROAD)
0.126	0.126	ROUTE END	N/A	TO ROUTE 0400 (FORT WASHINGTON SERVICE ROAD)

FOWA: ROUTE MAINTENANCE FEATURES ROAD LOG

ROUTE 0403: LIGHTHOUSE SERVICE ROAD

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0905 (L'ENFANT ROAD PARKING AREA)
0.000	0.000	INTERSECTION	N/A	ROUTE 0905 (L'ENFANT ROAD PARKING AREA)
0.048	0.048	INTERSECTION	LEFT	ROUTE 0401 (CONNECTING SERVICE ROAD)
0.052	0.119	DEBRIS ON ROAD	N/A	N/A
0.115	0.115	INTERSECTION	RIGHT	ROUTE 0409 (PUMP STATION ROAD)
0.118	0.118	INTERSECTION	LEFT	ROUTE 0409 (PUMP STATION ROAD)
0.143	0.143	INTERSECTION	LEFT	ROUTE 0408 (LIGHTHOUSE LOOP ROAD)
0.143	0.143	INTERSECTION	RIGHT	ROUTE 0408 (LIGHTHOUSE LOOP ROAD)
0.143	0.143	ROUTE END	N/A	TO BEGINNING OF ROUTE 0408 (LIGHTHOUSE LOOP ROAD) AT END OF PAVEMENT

Section 10 Appendix



Fort Washington Park



Federal Lands Highway
Road Inventory Program

Explanation of Changes to the RIP Index Equations and Determination of PCR

In 2005, the FHWA began implementing the use of a Pavement Management System to assist the National Park Service in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Region, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA as well.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions in relation to the distresses and indexes that comprise the Pavement Condition Rating (PCR), an extensive study was completed throughout 2010 that resulted in changes to the Road Inventory Program condition reporting method and specifically, the calculation of PCR. It was determined that a better representation of PCR could be achieved by modifying the relative impact certain distresses would have on the overall rating.

Through the use of HPMA data, it was noted that false failure indicators existed with the existing PCR model, and that it would be necessary to reduce their impact. The distresses affected in this way were Rutting and Roughness. Conversely, experience showed that roadways with extensive cracking present were often shown to have a high PCR. Therefore, the crack index models were adjusted to be more sensitive to changes in crack severity or quantity. It was also determined that these issues were not due to a problem with data acquisition (i.e. the RIP “van”), but with the way the collected data was processed. The final change was to provide guidance on when to use the Roughness Condition Index (RCI) in the PCR calculation. Roughness data is of little value to determining overall condition on routes that, due to their length or geometrics, have lower vehicle operating speeds. Therefore, in Cycle 5, only routes that have lengths of one half mile or greater and posted speed limits of 25 mph or greater will have RCI reported and included in the PCR calculations.

The changes that were implemented were endorsed by management at both the FHWA and NPS. In order to show the effectiveness of these changes, several sites were ground truth tested to ensure that an improvement was achieved between the relationship of PCR and the actual Maintenance and Rehabilitation needs that were represented. These changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection.


Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that were implemented in Cycle 5, we will provide greater assistance in translating good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs.
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 60 or below. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

Specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.

Condition Categories and Treatments

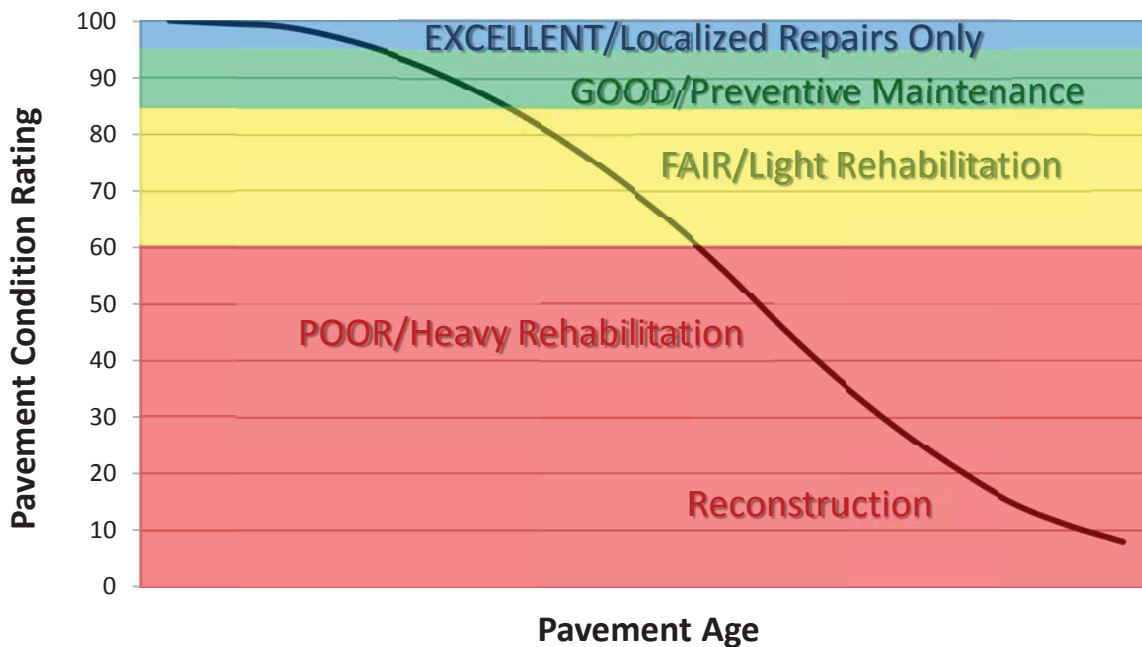

DESCRIPTION OF RATING SYSTEM

The Federal Highway Administration (FHWA), National Park Service Road Inventory Program (NPS-RIP), collects condition data on paved roads, parkways, and parking areas in park units nationwide. Road surface condition data is collected using an automated Data Collection Vehicle (DCV). Roads having brick, cobblestone, or wood surfaces are not normally surveyed with the DCV, but are manually rated for the purpose of assigning a condition rating. Unpaved roads, parkways, and parking areas are not currently being evaluated for condition. Paved campground pads and driveways are also not currently being evaluated for condition.

The FHWA RIP is implemented based on the premise that an accurate pavement surface condition assessment can be accomplished using automated crack detection technology as applied to digital images. Various methods of pavement condition assessment have been developed over the years with varying degrees of accuracy and acceptance. The use of digital photography to record pavement images and subsequent crack detection and classification has undergone continuous improvements over the past decade. Digital cameras with increasingly superior resolution and high definition have become more affordable, and the proprietary programming code and algorithms have been improved in crack detection software.

With the use of high quality digital photography and automated crack detection software, FHWA RIP is tasked with executing a pavement condition assessment on about 5000 miles of National Park Service roads and parkways. Foremost in setting up the basis of pavement distress identification is employing the distress identification protocols used by FHWA. There is no single distress identification system that is universal among entities conducting a program of distress identification. For the purpose of the NPS-RIP, FHWA employs distress identification protocols that are specific to this program.

FHWA has referenced the “*Distress Identification Manual for the Long-Term Pavement Performance Program*”, Publication No. FHWA-RD 03-031, June 2003, as the point-of-reference for distress types on NPS pavement. The FHWA RIP distress types are similar to those described in the LTPP manual with some modifications. The document, “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013*” was developed using the “*Distress Identification Manual for the Long-Term Pavement Performance Program*” as a guideline. Definitions of severity levels based on crack width contained in this document adhere to the LTPP Distress ID Manual. Modifications have been made to the definition of Alligator and Longitudinal Cracking and determination of Alligator Cracking severity. This manual also addresses Rutting and Roughness and its application to NPS-RIP.

In 2010, FHWA RIP began the fifth cycle of data collection in national parks. For Cycle 5, data will be collected in approximately 81 large parks (10 or more paved route miles) on Functional Class 1, 2, and 7 routes plus any new routes or parking areas previously not collected, totaling an estimated 4,459 paved route miles. Additionally, 231 small parks will be collected comprising approximately 529 paved route miles and associated paved parking areas. The data is used to support the National Park Service road maintenance program and Pavement Management System (PMS) developed and maintained by FHWA.

This “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013*” will be used as a reference resource in crack detection and classification, determination of distress severity and extent, and in the calculation of distress index values for the FHWA RIP Cycle 5.

SURFACE DISTRESSES

Surface Condition Rating - SCR

Surface distresses are measured in the primary lane only. In the classification and measurement of all paved surface condition data, results will be reported in the database in record intervals of 0.02 miles (105.6 feet) (smallest granularity) along the route.

Surface distresses determined from digital images

- Transverse Cracks
- Longitudinal Cracks
- Alligator Cracks
- Patching/Potholes

Surface distress measured by DCV (Data Collection Vehicle) LRMS (Laser Rut Measuring System)

- Rutting

Each of the five surface distresses is assigned a computed surface distress index

- Transverse Crack Index
- Longitudinal Crack Index
- Alligator Crack Index
- Patching/Pothole Index
- Rutting Index

Surface distress data are classified as listed above, measured for severity, and quantified for extent. Classification, severity, and extent of these five surface distresses comprise the three main elements for calculation of SCR (Surface Condition Rating).

In addition to the five surface distresses, a **Structural Crack Index** is computed, which is a combination of the Longitudinal Crack Index and the Alligator Crack Index. The Structural Crack Index is then used in lieu of the LC and AC indices to compute SCR.

Roughness Condition Index - RCI

Additional condition data measured by DCV (lasers and accelerometers)

- Roughness (IRI)

Roughness is measured by FHWA's DCV and reported as International Roughness Index (IRI) in inches/mile. Using IRI, the Roughness Condition Index (RCI) is computed.

Pavement Condition Rating - PCR

Using the SCR (computed from the five surface distresses) and the RCI, an overall Pavement Condition Rating (PCR) is computed. The formula for PCR is:

$$\text{Asphalt PCR} = (0.60 * \text{SCR}) + (0.40 * \text{RCI})$$

$$\text{Concrete PCR} = \text{RCI}$$

A detailed description of each distress index formula, roughness index formula, SCR and PCR is provided in this document beginning on page 8.

Each classified surface distress will fall into one or more *severity*...LOW, MEDIUM, or HIGH based on criteria listed. For each severity, an *extent* is established based on the measured quantity of the distress within that severity. Within each *severity* individual distresses are assigned a *Maximum Allowable Extent* (MAE). For example, LOW severity transverse cracking may be allowed up to 21.1 cracks within a 0.02 interval before it reaches MAE and fails.

The index formulas are based on a scale of 0-100. A PCR index value of 100 would indicate a “new” road with no measurable distresses or rough ride. A PCR value of 60 is determined to be *terminable serviceability* and the road is considered failed. The range of index values with condition descriptors is:

POOR (<=60), FAIR (61 - 84), GOOD (85 - 94), EXCELLENT (95 - 100)

Index values are generally computed based on cumulative deducts of the measured severities. As shown in the index formulas below, as any single severity reaches or exceeds MAE, the index computes to a value of 60 or less, and the road fails for that 0.02 interval.

Note: As a result of a unique combination of measured surface distresses and IRI, index values occasionally compute to less than 0 or greater than 100. In this instance, an index value < 0 defaults to 0. Index values > 100 default to 100. For all indices, a higher value indicates a better road condition, and a lower value indicates a poorer road condition.

On the following page, Table 1 summarizes the different types of distresses measured.

TABLE 1: Distress Summary

ASPHALT-SURFACED PAVEMENT DISTRESS TYPES with RUTTING and ROUGHNESS				
DISTRESS TYPE	UNIT OF MEASURE...	...CONVERTED TO	DEFINED SEVERITY LEVELS?	MEASURED BY
Alligator Cracking	Square Feet	Percent of Lane Per 0.02 Mile	Yes	Digital Image Crack Detection Software
Transverse Cracking	Linear Feet	Number of Cracks Per 0.02 Mile	Yes	Digital Image Crack Detection Software
Longitudinal Cracking	Linear feet	Percent of Lane Length Per 0.02 Mile	Yes	Digital Image Crack Detection Software
Patching/Potholes	Square Feet	Percent of Lane Per 0.02 Mile	No	Digital Image Crack Detection Software
Rutting	Inches	Rut Depth Per 0.02 Mile	Yes	DCV – Laser Rut Measuring System (LRMS)
Roughness	IRI	*RCI Per 0.02 Mile	No	DCV – Lasers /Accelerometers

***Note: Roughness is measured on concrete roadways, but surface distresses and rutting are not measured. For concrete, PCR = RCI**

ALLIGATOR CRACKING

Description

Alligator cracking is considered a combination of fatigue and block cracking. It is a series of interconnected cracks in various stages of development. Alligator cracking develops into a many-sided pattern that resembles chicken wire or alligator skin. It can occur anywhere in the road lane. Alligator cracking must have a quantifiable area.

Severity Levels

LOW

An area of cracks with no or very few interconnecting cracks and the cracks are not spalled. Cracks are ≤ 0.25 in (6mm) in mean width. Cracks in the pattern are no further apart than 1 foot (0.328 m). May be sealed cracks with sealant in good condition and a crack width that cannot be determined.

MEDIUM

An area of interconnected cracks that form a complete pattern. Cracks may be slightly spalled. Cracks are >0.25 in. (6 mm) and ≤ 0.75 in. (19 mm) or any crack with a mean width ≤ 19 mm and adjacent low severity cracking. Cracks in the pattern are no further apart than 6 in. (150 mm).

HIGH

An area of interconnected cracks forming a complete pattern. Cracks are moderately or severely spalled. Cracks are >0.75 in (19mm) or any crack with a mean width ≤ 0.75 in (19mm) and adjacent medium to high severity random cracking.

A combination of observed crack width and crack pattern is used to determine overall severity of alligator cracking. Based on above description of each severity, the highest level of crack width and crack pattern determines overall severity. Table 2 illustrates this.

TABLE 2: Alligator Crack Severity Levels

ALLIGATOR CRACKING SEVERITY LEVELS		Crack Pattern		
		LOW	MED	HIGH
Crack Width	LOW	L	M	H
	MED	M	M	H
	HI	H	H	H

LONGITUDINAL CRACKING

Description

Longitudinal cracking occurs predominantly parallel to the pavement centerline. It can occur anywhere within the lane. Longitudinal cracks occurring in the wheelpath may be noteworthy.

Severity Levels

LOW

Cracks with a mean width of < 0.25 in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

MED

Cracks with a mean width > 0.25 in. (6 mm) and ≤ 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random low severity cracking.

HIGH

Cracks with a mean width > 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random medium to high severity cracking.

TRANSVERSE CRACKING

Description

Transverse cracking occurs predominantly perpendicular to the pavement centerline. It can occur anywhere within the lane.

Severity Levels

LOW

Cracks with a mean width of < 0.25 in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

MED

Cracks with a mean width > 0.25 in. (6 mm) and ≤ 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random low severity cracking.

HIGH

Cracks with a mean width > 0.75 in. (19 mm). Also, any crack with a mean width < 0.75 in. (19 mm) and adjacent random medium to high severity cracking.

PATCHING AND POTHOLES

Description

Patching is an area of pavement surface that has been removed and replaced with patching material or an area of pavement surface that has had additional patching material applied. Patching may encompass partial-lane or full-lane width. On full-lane width patching; the total, contiguous length of a patch may not exceed 0.30 mi. (0.48 km). Any full-lane width patch exceeding 0.30 mi. in length is considered a pavement change, not a patch for the purposes of distress analysis. Patching must have a quantifiable area.

Potholes are bowl-shaped holes of various sizes occurring in the pavement surface.

Severity Levels

There are no stratified severities for Patching/Potholes. They either are present or they are not.

RUTTING

Description

Rutting is a longitudinal surface depression in the wheelpath.

Severity Levels

LOW

Ruts with a measured depth $\geq 0.20''$ and $\leq 0.49''$

MED

Ruts with a measured depth $\geq 0.50''$ and $\leq 0.99''$

HIGH

Ruts with a measured depth $\geq 1.00''$

Ruts $< 0.20''$ are not included in the distress calculations.

ROUGHNESS

Description

Roughness is the measurement of the unevenness of the pavement in the direction of travel. It is measured in units of IRI (International Roughness Index), inches per mile, and is indicative of ride comfort.

Severity Levels

There are no stratified severity levels for roughness. The roughness (or smoothness) of a road surface can be defined by IRI in the following table.

TABLE 3: IRI

IRI Descriptions	
Type of Road	Typical IRI (in/mile)
New Road, no noticeable roughness	<90
Small level of roughness	90 – 126
Road of average roughness	126 – 190
Road with above average roughness	190 – 253
Road with severe roughness	253 – 380
Nearly impassable	>380

INDEX FORMULAS

Note: All index formulas listed below contain MAE applicable to 0.02 mile (105.6 feet) interval.

Alligator Crack Index

$$AC_INDEX = 100 - 40 * [(\%LOW / 35) + (\%MED / 15) + (\%HI / 5)]$$

Where:

The values *%LOW*, *%MED* and *%HI* report the percentage of the observed pavement (0.02 mile, primary lane) that contains alligator cracking within the respective severities. These values range from 0 to 100.

%LOW = Percent of total area (primary lane, 0.02 in length), low severity

%MED = Percent of total area (primary lane, 0.02 in length), medium severity

%HI = Percent of total area (primary lane, 0.02 in length), high severity

Percent of total area is computed as:

$$\frac{\text{square foot area of alligator crack severity}}{0.02 \text{ mile} * \text{lane width}}$$

In AC_INDEX, the denominators 35, 15, and 5 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 35% of low severity alligator cracking for a 0.02 interval before failure, 15% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Longitudinal Crack Index

$$LC_INDEX = 100 - 40 * [(\%LOW / 175) + (\%MED / 75) + (\%HI / 25)]$$

Where:

The values *%LOW*, *%MED*, and *%HI* report the length of longitudinal cracking within each severity as a percent of the section length (0.02 mile, primary lane).

These values are ≥ 0 and can exceed 100.

%LOW = Percent of interval length (primary lane, 0.02 in length), low severity

%MED = Percent of interval length (primary lane, 0.02 in length), medium severity

%HI = Percent of interval length (primary lane, 0.02 in length), high severity

Percent of interval length is computed as:

$$\frac{\text{length of respective longitudinal cracking}}{0.02 \text{ mile (105.6 feet)}}$$

In LC_INDEX, the denominators 175, 75, and 25 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 175% of low severity alligator cracking for a 0.02 interval before failure, 75% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Structural Crack Index

$$SC_INDEX = [100 - ((100 - AC_INDEX) + (100 - LC_INDEX))]$$

Structural Crack Index is a combination of Alligator Cracking and Longitudinal Cracking, and is used in the SCR formula in lieu of AC and LC separately.

Transverse Crack Index

$$TC_INDEX = 100 - 40 * [(LOW / 21.1) + (MED / 4.4) + (HI / 2.6)]$$

Where:

The values *LOW*, *MED* and *HI* report a count of the total number of transverse cracks (reported to three decimals) within each severity level, where one transverse crack is equal to the lane width. These values are ≥ 0 .

LOW = Number of cracks in interval (primary lane, 0.02 in length), low severity

MED = Number of cracks in interval (primary lane, 0.02 in length), medium severity

HI = Number of cracks in interval (primary lane, 0.02 in length), high severity

Number of cracks is computed as:

$$\frac{\text{Total length of transverse cracks}}{\text{Lane width}}$$

In TC_INDEX, the denominators 21.1, 4.4, and 2.6 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 21.1 low severity transverse cracks for a 0.02 interval before failure, 4.4 cracks for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

Patching Index

$$\text{PATCH_INDEX} = 100 - 40 * (\% \text{PATCHING} / 80)$$

Where:

The value *%PATCHING* reports the percentage of the observed pavement (0.02 mile, primary lane) that contains patching/potholes. This value ranges from 0 to 100.

%PATCHING = Percent of total area (primary lane, 0.02 in length)

Percent of total area is computed as:

$$\frac{\text{square foot area of patching/potholes}}{0.02 \text{ mile} * \text{lane width}}$$

There are no severity levels for patching. It either exists or does not.

In PATCH_INDEX, the denominator 80 is the Maximum Allowable Extent (MAE) for each severity. In other words, we will allow up to 80% patching for a 0.02 interval before failure. As you can see, if patching/potholes reaches MAE the resulting index value is 60, or failure.

Rutting Index

$$\text{RUT_INDEX} = 100 - 40 * [(\% \text{LOW} / 535) + (\% \text{MED} / 205) + (\% \text{HI} / 40)]$$

Where:

20 rut depth measurements are taken per 0.02 interval for each of 2 wheel paths (left and right), resulting in a total of 40 measurements taken for both wheel paths. *Each wheelpath is analyzed independently for rut severities.* The values *%LOW*, *%MED* and *%HI* are a *total percentage* of left wheelpath percentage and right wheelpath percentage added together for the respective severity. These values range from 0 to 200.

%LOW = Percent of LOW ruts in left wheelpath based on 20 ruts, plus percent of LOW ruts in right wheelpath based on 20 ruts.

%MED = Percent of MED ruts in left wheelpath based on 20 ruts, plus percent of MED ruts in right wheelpath based on 20 ruts.

%HI = Percent of HI ruts in left wheelpath based on 20 ruts, plus percent of HI ruts in right wheelpath based on 20 ruts.

Percent of rut measurements within each severity can also be computed as:

$$\frac{\text{total number of ruts within each severity in both wheelpaths}}{20} * 100$$

In RUT_INDEX, the denominators 535, 205, and 40 are the Maximum Allowable Extents for each severity. In other words, the formula allows up to 535% low severity

ruts for a 0.02 interval before. However, since 200 is the highest measurable percentage allowed, 535% is unattainable and therefore, no amount of LOW severity rutting will cause the RUT_INDEX to fail a road. Similarly, since the MAE for MED severity rutting is 205, no amount of MED severity rutting will cause the RUT_INDEX to reach 60 and fail the road. As you can see, LOW severity rutting reaches MAE the resulting index value is 60, or failure. This formula was intentionally designed to minimize the impact of LOW and MED severity rutting on RUT_INDEX.

Roughness Condition Index (Asphalt)

$$RCI = 32 * [5 * (2.718282 ^ {(-0.0041 * AVG IRI)})]$$

Where:

The value *AVG IRI* reports the average value of the Left IRI and Right IRI measurements for the interval (0.02 mile, primary lane). This value can range from approximately 40 to 999.0.

Average IRI is computed as:

$$\frac{\text{Left wheelpath IRI} + \text{Right wheelpath IRI}}{2}$$

There is no applicable threshold for failure for this index.

Roughness Condition Index (Concrete)

$$RCI = -0.0012(IRI^2) + 0.0499(IRI) + 99.542$$

For concrete, PCR = RCI

Surface Condition Rating Index

SCR = *Lowest* Index Value Of: [SC_INDEX, TC_INDEX, PATCH_INDEX, RUT_INDEX]

Note: The modified SCR equation above combines AC_INDEX and LC_INDEX, and considers that a single AC/LC index value of the Structural Crack Index (SC_INDEX). The lowest of the four computed index values (SC_INDEX, TC_INDEX, PATCH_INDEX, or RUT_INDEX) becomes the SCR.

Where:

See above for determinations of SC_INDEX, TC_INDEX, PATCH_INDEX and RUT_INDEX.

The threshold for failure for this index is SCR = 60.

Data Collection Vehicle Subsystems

Data on paved roads in Cycle 5 is collected by FHWA using a Pathway Services Inc. Data Collection Vehicle (DCV), called PathRunner. The DCV is driven in the primary-direction lane at posted speed limits and less.

CAMERAS

Forward-facing and rear-facing video is collected as .jpg digital imagery at a frequency of 26.4 feet.

Two forward-facing cameras are mounted above the vehicle cab, one pointed straight ahead and the other to the right shoulder providing seamless 120 degree viewing.

CAMERA SPECIFICATIONS	
Two Forward/ One Rear Facing	
Camera lens/type	FUJINON CCTV LENS H16x10B-Y41
Focal length	10 mm – 160 mm
Image size	8.8 mm x 6.6mm
Image format	*.jpg
Image resolution	HD 2000 X 1200
Image pixel size	depends on distance
Zoom ratio	16x
Max Relative Aperture	1:2.5
Iris range	F25-T800 (Equivalent to F800)

Pavement images are created using a Laser Scan Imaging System. This system is composed of a single high resolution line-scan camera and two lasers configured to image an approximate 11-foot wide lane with 1 mm resolution.

CAMERA SPECIFICATIONS	
Pavement Line Scan	
Image size	4280 pixels/line
Image width	4 meters (3950 mm nominal)
Laser class	3B
Power	250W
Vehicle speed limitations	62 mph
Environment	Dry pavement, day or night
Sensor size (approx)	300 mm(H) x 375 mm(L) x 200 mm(D)
Image frame length	26.4 feet

DMI (Distance Measuring Instrument)

The DMI (Distance Measuring Instrument) obtains road length measurements that are accurate to 0.1% for speeds up to 60 mph. The DMI is connected to the hub of the rear wheel on the driver's side, and is calibrated to the revolutions of the rear vehicle axle on a regular basis.

ROUGHNESS (IRI)

The collection system includes a South Dakota type laser profiler manufactured based on active Class 1 ASTM E950 standards. The dynamic profile of the pavement surface is collected from which the IRI roughness data is computed. The sensors include one accelerometer on each wheelpath, one height sensor (laser) on each wheelpath, and a distance transducer.

IRI SPECIFICATIONS	
Reported IRI units	Inches/mile
Vehicle speed limitations	12-62 mph
IRI equipment certification	Texas Transportation Institute (TTI)
Wavelengths accommodated	6 in. – 300 feet
IRI computed & reported	World Bank Technical Paper Number 46
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E950-98 (2004), ASTM E 1926-08, AASHTO MP 11-08, AASHTO PP 49-08

RUTTING

Rutting depths are measured using an INO Laser Rut Measurement System (LRMS). This system is a transverse profiling device that detects and characterizes pavement rutting. The LRMS can acquire full 4 meter width profiles of a pavement lane at normal traffic speeds and uses two laser profilers that digitize transverse sections of the pavement.

RUTTING SPECIFICATIONS	
Reported rut depth units	Inches
Vehicle speed limitations	Up to 62 mph
Sampling rate	30-150 profiles/second
Transverse resolution	1280 points/profile
Transverse field-of-view	4 m
Depth accuracy (nominal)	+/- 1 mm
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E1703M-95 (reapproved 2005)

GPS & INERTIAL SYSTEMS

GPS is collected by an onboard system employing OmniSTAR real-time correction and a gyroscope (spin-type) to provide accurate positioning data (pitch/roll/heading) in instances of satellite obstruction. All GPS coordinates are tied to image and linear distance measurements.

GPS SPECIFICATIONS	
Static accuracy	Sub-meter
Dynamic accuracy	2-3 meters
Receiver	12 satellite tracking
Coordinate system	Lat Lon WGS 84
Environment	Day or night
Cross-slope	+ - 0.5 degrees
Grade	+ - 0.5 degrees

GPS on Manually Rated Roads (MRR)

Parking areas, some roads, and other paved areas that are not fully drivable with the DCV are collected manually by field technicians. GPS is collected for these routes using portable Trimble GPS backpack units. Paved campground pads and driveways are not typically included in the inventory or GPS.

Geodatabase – Background and Metadata

In addition to this park report, a *geodatabase* containing both tabular and spatial data specific to this park has been provided. All data disseminated in the preceding report has been obtained from the tables and fields within said geodatabase. The geodatabase can be referenced for tabular data via Microsoft Access or for both tabular and spatial data via ESRI's ArcGIS Suite of software which consists of; ArcMap, ArcCatalog and ArcExplorer. Consolidating the RIP data into one database creates a seamless relationship of tabular and geographic data. It will allow RIP to facilitate easier updates and enhancements in the future.

A geodatabase can be thought of as simply a database containing spatial data. Many different tables are contained with the park's geodatabase. A complete and thorough description of the tables and fields contained within this geodatabase can be found in the *metadata*. The metadata is attached directly within the geodatabase and can be accessed via ESRI's ArcCatalog. The metadata portion of the geodatabase also includes data dictionary report functionality that formats the metadata into an easy to read report.

GLOSSARY OF TERMS AND ABBREVIATIONS

<u>TERM OR ABBREVIATION</u>	<u>DESCRIPTION OR DEFINITION</u>
AC	Alligator Cracking
CRS	Condition Rating Sheets (Section 5)
DCV	Data Collection Vehicle
Excellent	Excellent rating with an index value of 95 to 100
Fair	Fair rating with an index value from 61 to 84
FUNCT_CLASS	Functional Classification (see Route ID, Section 2)
Good	Good rating with an index value from 85 to 94
IRI	International Roughness Index
Lane Width	Width from road centerline to fogline, or from centerline to edge-of-pavement when no fogline exists
LC	Longitudinal Cracking
MRR	Manually Rated Route
MRL	Manually Rated Line
MRP	Manually Rated Polygon
N/A	Not Applicable
NC	Not Collected
PATCH	Patching and Potholes
Paved Width	Width from edge-of-pavement to edge-of-pavement
PCR	Pavement Condition Rating
PKG	Parking Area
Poor	Poor rating with an index value of 0 to 60
RCI	Roughness Condition Index
SC	Structural Cracking
SCR	Surface Condition Rating
TC	Transverse Cracking