



# Federal Lands Highway Road Inventory Program

Road Inventory and Condition Assessment




## Wilson's Creek National Battlefield WICR - 6370

### Cycle 5 Report

**Prepared By: Federal Highway Administration  
Road Inventory Program (RIP)  
Data Collected: 12/2011  
Report Date: 07/2012**

# Wilson's Creek National Battlefield in Missouri

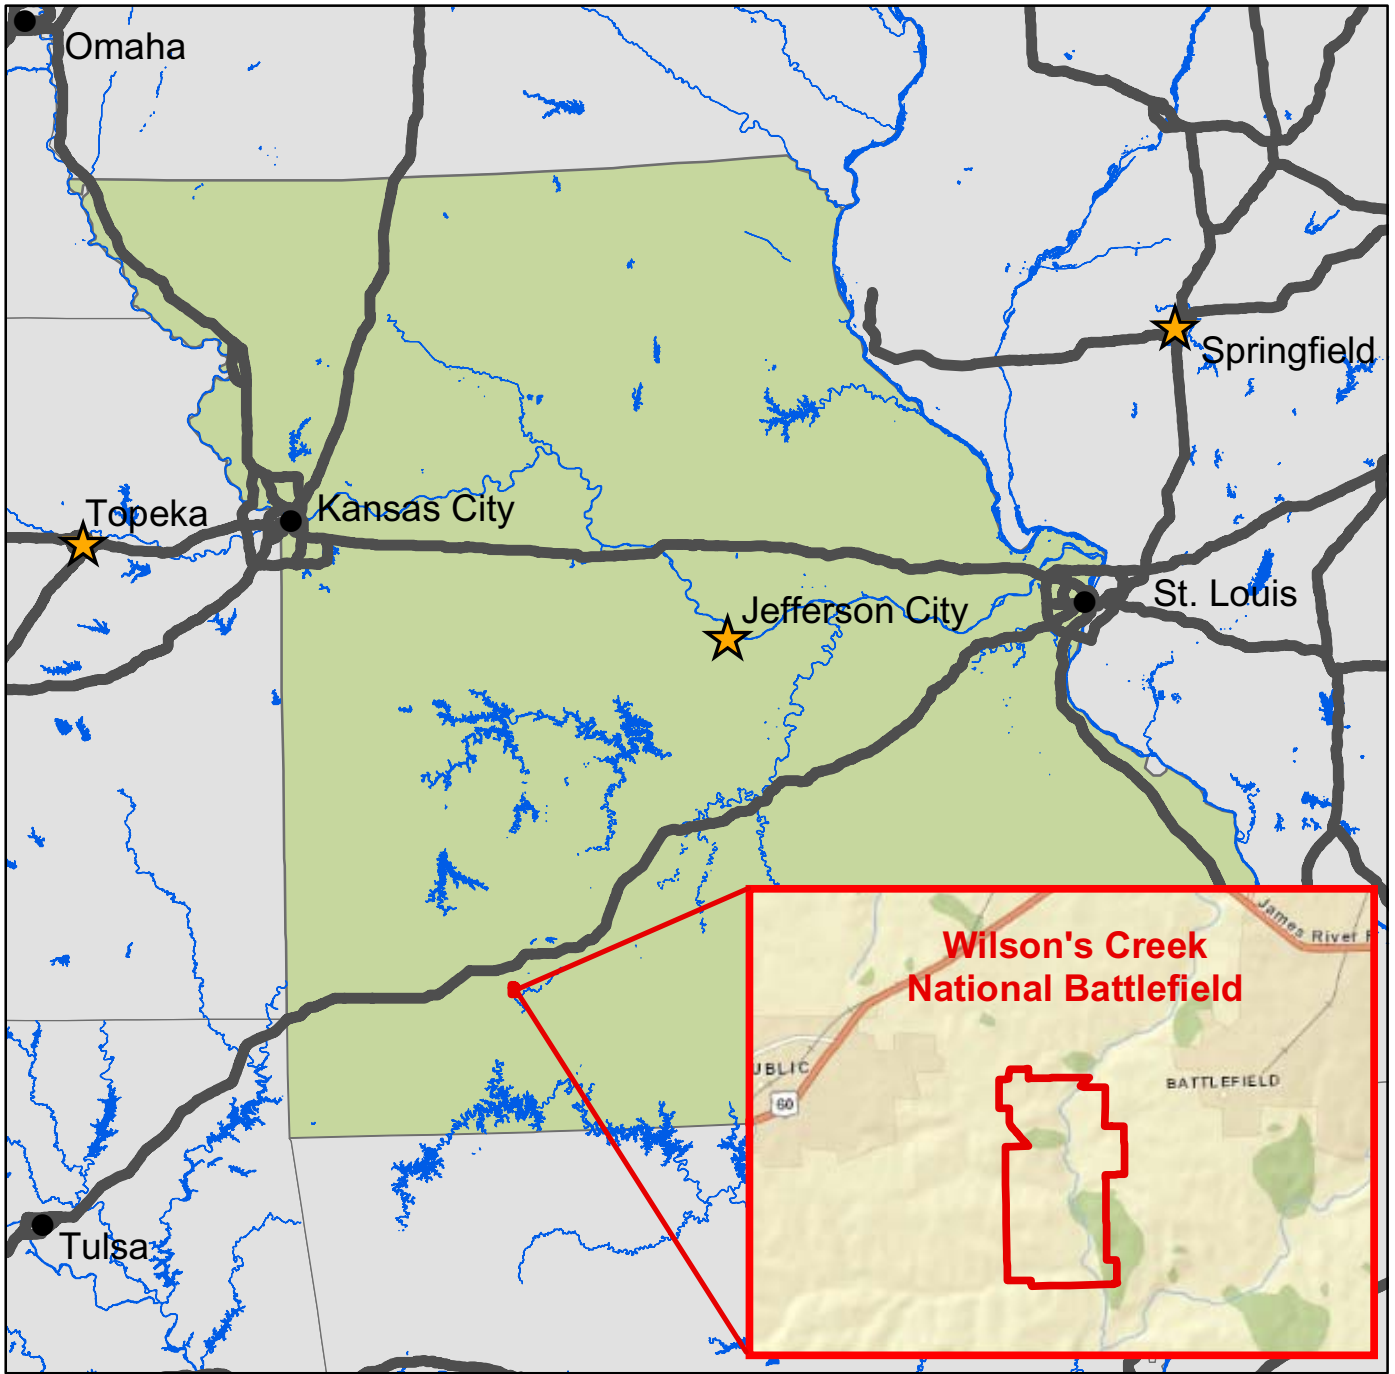



DCV = Data Collection Vehicle

## TABLE OF CONTENTS

<b><u>SECTION</u></b>	<b><u>PAGE</u></b>
<b>1. INTRODUCTION</b>	<b>1 - 1</b>
<b>2. PARK ROUTE INVENTORY</b> Route IDs, Subcomponents & Changes Report (As Applicable)	<b>2 - 1</b>
<b>3. PARK SUMMARY INFORMATION</b> Paved Route Miles and Percentages by Functional Class and PCR DCV Road Condition Summary Parkwide DCV Condition Summary	<b>3 - 1</b> <b>3 - 3</b> <b>3 - 4</b>
<b>4. PARK ROUTE LOCATION MAPS</b> Route Location Key Map Route Location Area Map Route Condition Key Map – PCR Mile by Mile Route Condition Area Map – PCR Mile by Mile	<b>4 - 1</b> <b>4 - 2</b> <b>4 - 3</b> <b>4 - 4</b>
<b>5. PAVED ROUTE CONDITION RATING SHEETS</b> CRS Pages	<b>5 - 1</b>
<b>6. MANUALLY RATED PAVED ROUTE CONDITION RATING SHEETS</b> MRR Pages	<b>6 - 1</b>
<b>7. PARKING AREA CONDITION RATING SHEETS</b> Paved Parking Area Pages	<b>7 - 1</b>
<b>8. PARKWIDE / ROUTE MAINTENANCE FEATURES SUMMARIES</b> Parkwide Maintenance Features Summary DCV Route Maintenance Features Summary Structure List	<b>8 - 1</b> <b>8 - 2</b> <b>8 - 3</b>
<b>9. ROUTE MAINTENANCE FEATURES ROAD LOGS</b> Route Maintenance Features Road Logs	<b>9 - 1</b>
<b>10. APPENDIX</b> Explanation of Changes to the RIP Index Equations and Determination of PCR Explanation of the Excellent, Good, Fair and Poor Condition Descriptions Description of Rating System Surface Distresses Index Formulas Data Collection Vehicle Subsystems Geodatabase – Background and Metadata Glossary of Terms and Abbreviations	<b>10 - 1</b> <b>10 - 2</b> <b>10 - 3</b> <b>10 - 5</b> <b>10 - 12</b> <b>10 - 16</b> <b>10 - 19</b> <b>10 - 20</b>

# Section 1 Introduction



## Wilson's Creek National Battlefield



Federal Lands Highway  
Road Inventory Program

## INTRODUCTION

The Federal Highway Administration, (FHWA), in the mid 1970s, was charged with the task of identifying surface condition deficiencies and corrective priorities on National Park Service (NPS) roads and parkways. Additionally, FHWA was tasked with establishing an integrated maintenance features inventory, locating features such as culverts, guardrails, and signs, among others, along NPS roads and parkways. As a result, in 1976 the NPS and FHWA entered into an MOA (Memorandum Of Agreement) which established the RIP (Road Inventory Program). This MOA was terminated and revised in 1980 to establish a new MOA aiming to update RIP data and develop a long-range program to improve and maintain NPS roads to designated condition standards and establish a maintenance management program.

The FHWA completed this initial phase of the RIP in the early 1980s. As a result of this effort, each NPS site included in the study received a RIP Report known as the “Brown Book” which included the information collected during this first RIP phase.

In the 1990s, the effort was again renewed to update and maintain the RIP data. By this time the computer age was upon us and a process was employed that relied heavily on electronic data collection and computer technology. A cyclical program was developed and the RIP completed two cycles of data collection from 1994 to 2001. Cycle 1, starting in 1994, was conducted in 44 “large parks” (parks containing 10 or more paved route miles). Cycle 2 began in 1997 and comprised 79 large parks and 5 small parks totaling 4,874 paved route miles. Each of these parks received a RIP Report known as the “Blue Book”. Cycle 3, from 2001 to 2004, was conducted in all parks, large and small, that contained any paved routes, including parking areas and, again, each park received a RIP Report and associated electronic files.

Cycle 4 was initiated in the spring of 2006 covering 86 large parks and several associated small parks consisting of 5,553 paved route miles and 6,232 paved parking areas. Data collection has been completed for Cycle 4 and all data has been delivered to the NPS.

In 2005, the FHWA began implementing the use of a Pavement Management System (PMS) to assist the NPS in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Regional, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions, an extensive study was completed throughout 2010 that has resulted in changes to the RIP condition reporting method, specifically the distresses and indexes that comprise the Pavement Condition Rating (PCR). It was determined that a better representation of PCR could

be achieved by modifying the relative impact certain distresses would have on the overall rating. The changes that were implemented were endorsed by management at both the FHWA and NPS in October 2010. These changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection. Because of these changes, the PCR Condition ratings reported in Cycle 5 do not directly relate to the condition ratings reported in previous cycle RIP Reports. For more detailed information about the changes, see Section 3 and Section 10 in this RIP Report.

Cycle 5 has launched in the summer of 2010 and will again comprise all parks, large and small, that are served by paved roads and/or parking areas. For Cycle 5, the decision was made to collect condition data in large parks on Functional Class 1, 2, and 7 paved routes only, as well as any new routes that were previously not collected. In small parks, all paved routes and parking areas will be collected. As a result, this will include 81 large parks with 4,459 paved route miles and 168 small parks with 529 paved route miles and associated paved parking areas.

Since 1984, the Road Inventory Program has been funded through the Federal Lands Highway Park Roads and Parkways (PRP) Program. Currently, coordination of the RIP with FLH is under the NPS Washington Headquarters Park Facility Management Division. The FLH Washington office coordinates policy and prepares national reports and needs assessment studies for Congress.

In 1998, the Transportation Equity Act for the 21<sup>st</sup> Century (TEA-21) amended Title 23 U.S.C., and inserted Section 204(a)(6) requiring the FHWA and NPS, to develop by rule, a Pavement Management System (PMS) applied to park roads and parkways serving the National Park System.

FLH is responsible for the accuracy of all data presented in this report. Any questions or comments concerning the contents of this report should be directed to the national RIP Coordinator located in Sterling, Virginia.

Respectfully,

FHWA RIP Team

FHWA/Eastern Federal Lands  
21400 Ridgetop Circle  
Sterling, VA 20166  
(703) 404-6371

FHWA/Central Federal Lands  
12300 West Dakota Ave  
Lakewood, CO 80228  
(720) 963-3560

## Section 2

# Park Route Inventory



Wilson's Creek National Battlefield



Federal Lands Highway  
Road Inventory Program

# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 07/11/2012

(Numerical By Route #)

Page 1 of 4

Shading Color Key:

White = Paved Routes, DCV Driven

Yellow = Unpaved Routes, DCV not Driven

Blue = All Paved Parking Areas

Green = All Unpaved Parking Areas

Red text denotes approx. mileage

Grey = Paved Routes, DCV not Driven

Black = State, Local or Private non-NPS Routes

■ = Concession Route Flag ON

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle NC - Not Collected

## WICR

WILSON'S CREEK NATIONAL BATTLEFIELD

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description From To	Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
0010	5	64535		TOUR ROAD	FROM ROUTE 0900 (VISITOR CENTER PARKING) TO END OF LOOP	N/A	4.95	0.00	4.95	1	-1	AS	1
0011	5	64536		HIGHWAY 182	FROM WEST PARK BOUNDARY TO PAVEMENT CHANGE	N/A	0.30	0.00	0.30	2	-1	AS	1
0200	5	65314		WASTEWATER PLANT ROAD	FROM ROUTE 0010 (TOUR ROAD) TO END AT BUILDING	N/A	0.08	0.00	0.08	6	-1	AS	1
0201	5	65312		OLD FARM ROAD (190)	FROM ROUTE 0010 (TOUR ROAD) TO EAST PARK BOUNDARY	N/A	0.20	0.04	0.24	4	-1	AS	1
0202	5	75204		DOUBLE SPRINGS ROAD	FROM MISSOURI STATE HIGHWAY ZZ TO UNNAMED ROAD	N/A	0.11	0.15	0.26	4	-1	AS	1
0400	5	75222		MCELHANEY FARM ENTRANCE ROAD	FROM ROUTE 0201 (OLD FARM ROAD (190)) TO END OF PAVEMENT	N/A	0.09	0.00	0.09	5	-1	AS	1
0402	5	65313		MAINTENANCE AREA ROAD	FROM ROUTE 0011 (HIGHWAY 182) TO ROUTE 0906 (MAINTENANCE PARKING AREA)	N/A	0.13	0.00	0.13	6	-1	AS	1
0900	5	65300		VISITOR CENTER PARKING	FROM ROUTE 0011 (HIGHWAY 182) TO ROUTE 0010 (TOUR ROAD)	N/A	0.00	0.00	0.00		60,603	AS	1
0901	5	65301		GIBSON MILL PARKING (TOUR STOP 1)	FROM ROUTE 0010 (TOUR ROAD) TO ROUTE 0010 (TOUR ROAD)	N/A	0.00	0.00	0.00		15,023	AS	1
0902	5	65302		RAY HOUSE PARKING (TOUR STOP 2)	FROM ROUTE 0010 (TOUR ROAD) TO ROUTE 0010 (TOUR ROAD)	N/A	0.00	0.00	0.00		21,419	AS	1
0903	5	65303		PRICE PULASKI PARKING (TOUR STOP 3)	FROM ROUTE 0010 (TOUR ROAD) TO ROUTE 0010 (TOUR ROAD)	N/A	0.00	0.00	0.00		23,102	AS	1
0904	5	65308		SIGEL'S FINAL PARKING (TOUR STOP 5)	FROM ROUTE 0010 (TOUR ROAD) TO ROUTE 0010 (TOUR ROAD)	N/A	0.00	0.00	0.00		16,091	AS	1
0905	5	65310		BLOODY HILL PARKING (TOUR STOP 7)	FROM ROUTE 0010 (TOUR ROAD) TO ROUTE 0010 (TOUR ROAD)	N/A	0.00	0.00	0.00		21,231	AS	1
0906	5	103211		MAINTENANCE PARKING AREA	FROM END OF ROUTE 0402 (MAINTENANCE AREA ROAD) TO PARKING	N/A	0.00	0.00	0.00		8,349	AS	1
0907	5	103182		MAINTENANCE OFFICE PARKING	FROM ROUTE 0402 (MAINTENANCE AREA ROAD) TO PARKING	N/A	0.00	0.00	0.00		6,987	CO	1
0908	5	103175		EMPLOYEE PARKING	FROM ROUTE 0402 (MAINTENANCE AREA ROAD) TO PARKING	N/A	0.00	0.00	0.00		12,163	AS	1



# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 07/11/2012

(Numerical By Route #)

Page 2 of 4

Shading Color Key:  
 Red text denotes approx. mileage

White = Paved Routes, DCV Driven	Yellow = Unpaved Routes, DCV not Driven	Blue = All Paved Parking Areas	Green = All Unpaved Parking Areas
Grey = Paved Routes, DCV not Driven	Black = State, Local or Private non-NPS Routes	<span style="background-color: #a52a2a; display: inline-block; width: 15px; height: 10px;"></span> = Concession Route Flag ON	

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle      NC - Not Collected

## WICR

### WILSON'S CREEK NATIONAL BATTLEFIELD

Rte. No.	Cycle Collected	FMSS No.	Concess Route	Route Name	Route Description From    To	Maint. District	Paved Miles	Un-Paved Miles	Total Route Length	Func. Class	Manual Rated SQ/FT	Surf. Type	Area Maps
0909	NC	65304		MCELHANEY FARM PARKING	FROM ROUTE 0400 (MCELHANEY FARM ENTRANCE ROAD)    TO PARKING	N/A	0.00	0.00	0.00		500	GR	
0910	5	103218		VISITOR CENTER REAR PARKING	FROM MISSOURI STATE HIGHWAY ZZ    TO PARKING	N/A	0.00	0.00	0.00		12,947	AS	1
0916	5	102744		CIVIL WAR MUSEUM PARKING	FROM MISSOURI STATE HIGHWAY ZZ    TO MISSOURI STATE HIGHWAY ZZ	N/A	0.00	0.00	0.00		21,167	AS	1
0917	NC	65311		DOUBLE SPRINGS PARKING	FROM COUNTY ROAD (UNNAMED)    TO COUNTY ROAD (UNNAMED)	N/A	0.00	0.00	0.00		-1	GR	
0918	NC	65309		HORSE OVERFLOW PARKING	FROM ROUTE 0201 (OLD FARM ROAD (190))    TO ROUTE 0201 (OLD FARM ROAD (190))	N/A	0.00	0.00	0.00		-1	GR	

# Cycle 5 NPS/RIP Route ID Report

Road Inventory Program 07/11/2012

(Numerical By Route #)

Page 3 of 4

Shading Color Key:  
Red text denotes approx. mileage

White = Paved Routes, DCV Driven
Grey = Paved Routes, DCV not Driven

Yellow = Unpaved Routes, DCV not Driven
Black = State, Local or Private non-NPS Routes

Blue = All Paved Parking Areas
■ = Concession Route Flag ON

Green = All Unpaved Parking Areas
-----------------------------------

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle      NC - Not Collected

## CYCLE 5 SUMMARY TOTALS FOR WILSON'S CREEK NATIONAL BATTLEFIELD

<b>CYCLE 5 ROUTE TOTALS</b>	
DCV Driven Route Miles	5.85
Manually Rated Route Miles	0.00
<b>TOTAL PARK ROUTE MILES COLLECTED IN CYCLE 5</b>	<b>5.85</b>
Manually Rated Routes (SQFT)	0
<b>TOTAL UNPAVED PARK ROUTE MILES</b>	<b>0.19</b>

<b>CYCLE 5 CONCESSION TOTALS</b>	
Concession Paved Route Miles	0.00
Concession Unpaved Route Miles	0.00
<b>TOTAL CONCESSION ROUTE MILES</b>	<b>0.00</b>
Concession Paved Parking Area SQFT	0
Concession Unpaved Parking Area SQFT	0
<b>TOTAL CONCESSION PARKING AREA SQFT</b>	<b>0</b>
Concession Manually Rated Rotes SQFT	0

<b>* CYCLE 5 PARKING AREA TOTALS</b>	
Paved Parking (SQFT)	219,082
Unpaved Parking (SQFT)	500
<b>TOTAL PARKING (SQFT)</b>	<b>219,582</b>

<b>CYCLE 5 WEIGHTED AVERAGE PARK VALUES</b>	
DCV Driven PCR	88
**Manually Rated Routes PCR	N/A
**Parking PCR	69
<b>***Total Equivalent Lane Miles</b>	<b>14.48</b>

\* - The Parking Area Totals SQFT value represents all parking areas collected in Cycle 5, both park and concessionaire.

\*\* - Parking and Manually Rated Routes are assigned the following PCR values based on their observed condition: Construction=-1, Excellent=97, Good=90, Fair=73, and Poor=45.

\*\*\* - Equivalent Lane Miles are calculated by route using the following equations : DCV and Manually Rated Lines Routes=(PAVE\_WIDTHxPAVED\_MI)/11 foot lane. Parking Areas=SQ\_FEET/5280/11. Manually Rated Polygons=SQ\_FEET/5280/11.

# Cycle 5 NPS/RIP Route ID Report

Shading Color Key:  
Red text denotes approx. mileage

White = Paved Routes, DCV Driven
Grey = Paved Routes, DCV not Driven

Yellow = Unpaved Routes, DCV not Driven
Black = State, Local or Private non-NPS Routes

Blue = All Paved Parking Areas
■ = Concession Route Flag ON

Green = All Unpaved Parking Areas
-----------------------------------

\*Unpaved route data was obtained from NPS and was not inventoried by the Road Inventory Program (RIP).

\*\* DCV - Data Collection Vehicle      NC - Not Collected

## General Park Road Functional Classification Table

- Class 1** Principal Park Road/Rural Parkway (Public Roads) Roads which constitute the main access route, circulatory tour, or thoroughfare for park visitors. Route Numbers 1 - 99. Note: Rural parkways (e.g. Natchez Trace) are numbered 1 - 9. State Routes Inventoried for Park. Route Numbers 5000-5999
- Class 2** Connector Park Road (Public Roads) - Roads which provide access within a park to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, etc. Route Numbers 100-199.
- Class 3** Special Purpose Park Road (Public Roads) - Roads which provide circulation within public areas, such as campgrounds, picnic areas, visitor center complexes, concessionaire facilities, etc. These roads generally serve low-speed traffic and are often designed for one-way circulation. Route Numbers 200-299.
- Class 4** Primitive Park Roads (Public Roads) - Roads which provide circulation through remote areas and/or access to primitive campgrounds and undeveloped areas. These roads frequently have no minimum design standards and their use may be limited to specially equipped vehicles. Route Numbers 200-299. Note: Functional Classes 3 and 4 have the same route numbers because, historically, they were numbered similarly.
- Class 5** Administrative Access Road (Administrative Roads) - All public roads intended for access to administrative developments or structures such as park offices, employee quarters, or utility areas. Route Numbers 400-499.
- Class 6** Restricted Road (Administrative Roads) - All roads normally closed to the public, including patrol roads, truck trails, and other similar roads. Route Numbers 400-499. Note: Functional Classes 5 and 6 have the same route numbers because historically they were numbered similarly and often there is little distinction between these routes. For example, because utility areas and employee housing are often closed to the public, this restriction would result in classification of FC 6 rather than FC 5.
- Class 7** Urban Parkway (Urban Parkways and City Streets) - These facilities serve high volumes of park and non-park related traffic and are restricted, limited-access facilities in an urban area. This category of roads primarily encompasses the major parkways which serve as gateways to our nation's capital. Other major park roads or portions thereof, however, may be included in this category. Route Numbers 1-9.
- Class 8** City Streets (Urban Parkways and City Streets) - City streets are usually extensions of the adjoining street system that are owned and maintained by the National Park Service. The construction and/or reconstruction should conform with accepted local engineering practice and local conditions. Route Numbers 600-699.

\*\*\*\*\*

A park road system contains those roads within or giving access to a park or other unit of the NPS which are administered by the NPS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a park road is not based on traffic volumes or design speed, but on the intended use or function of that road or route.

The historic route numbering system also included a 300 number series for interpretive roads, and a 500 series for one-way roads. There are approximately 250 roads nationwide which are designated by the 300 and 500 series. The numbers for these roads will be maintained for reporting consistency. However, since these interpretive and one-way routes are not as clearly tied to a specific functional class, the 300 and 500 series will be discontinued for future use.

5000 route numbers are assigned to Non-NPS Routes that are State, County or City owned which border, traverse, or provide access to Park Facilities or Assets. 5000 Routes are driven for GPS and Video Log only.

## Surface Type Abbreviations:

- AS - Asphaltic Concrete Pavement**
- CO - Portland Cement Concrete Pavement**
- BR - Brick or Pavers Road Bed**
- CB - Cobble Stone Road Bed**
- GR - Gravel Road Bed**
- SA - Sand Road Bed**
- NV - Native or Dirt Material Road Bed**
- OT - Other Materials Road Bed**

**ROUTE IDENTIFICATION CHANGES TO PAVED ROUTES FROM PREVIOUS CYCLE - WICR**

**ROUTES ADDED FROM PREVIOUS INVENTORY:**

Route #	Route Name	Reason for Addition	Comments
0202	DOUBLE SPRINGS ROAD	OTHER	NEW ROUTE ADDED IN CYCLE 5.
0916	CIVIL WAR MUSEUM PARKING	OTHER	NEW ROUTE ADDED IN CYCLE 5.

**ROUTES MODIFIED FROM PREVIOUS INVENTORY:**

Route #	Route Name	Type of Modification	Comments
0011	HIGHWAY 182	LENGTH CHANGE	THERE WAS A SMALL DECREASE IN ROUTE LENGTH BECAUSE COLLECTION STARTED AT THE PARK BOUNDARY IN CYCLE 5; IN CYCLE 3 COLLECTION STARTED BEFORE THE PARK BOUNDARY.
0200	WASTEWATER PLANT ROAD	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS (FC) CHANGED FROM FC 5 TO FC 6 PER PARKS REQUEST.
0402	MAINTENANCE AREA ROAD	FUNCTIONAL CLASS CHANGE	FUNCTIONAL CLASS (FC) CHANGED FROM FC 5 TO FC 6 PER PARKS REQUEST.

**OTHER CHANGES FROM PREVIOUS INVENTORY:**

Route #	Route Name	Type of Change	Comments
0908	EMPLOYEE PARKING	SURFACE TYPE CHANGE	ROUTE HAS BEEN PAVED SINCE CYCLE 3 DATA COLLECTION.
0910	VISITOR CENTER REAR PARKING	SURFACE TYPE CHANGE	ROUTE HAS BEEN PAVED SINCE CYCLE 3 DATA COLLECTION.

# Section 3

## Park Summary Information



## Wilson's Creek National Battlefield



Federal Lands Highway  
Road Inventory Program

## WICR: PAVED ROUTE MILES AND PERCENTAGES BY FUNCTIONAL CLASS AND PCR

F.C.	Pavement Condition Rating (PCR)								TOTAL MILES
	Poor (0-60)		Fair (61-84)		Good (85-94)		Excellent (95-100)		
	MILES	%	MILES	%	MILES	%	MILES	%	
1	0.02	0.34%	0.74	12.65%	3.42	58.46%	0.76	12.99%	4.94
2			0.06	1.03%	0.20	3.42%	0.04	0.68%	0.30
3									
4	0.09	1.54%	0.12	2.05%	0.06	1.03%	0.04	0.68%	0.31
5	0.03	0.51%	0.04	0.68%	0.02	0.34%			0.09
6			0.05	0.85%	0.06	1.03%	0.10	1.71%	0.21
7									
8									
<b>Totals</b>	<b>0.14</b>	<b>2.39%</b>	<b>1.01</b>	<b>17.26%</b>	<b>3.76</b>	<b>64.27%</b>	<b>0.94</b>	<b>16.07%</b>	<b>5.85</b>

**Note:** The information in this table is derived from the PMS\_20 table in the Park database, which only contains processed data from routes collected with the Data Collection Vehicle (DCV). Information for Manually Rated Routes (MRR) and Parking Areas is not reported in this table. Only Functional Class 1, 2, & 7 routes, and any new routes not previously collected by RIP, are collected in Large Parks.


### Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that have been implemented in Cycle 5, we will also aim to provide greater assistance in translating excellent/good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 0-60. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.


### Condition Categories and Treatments

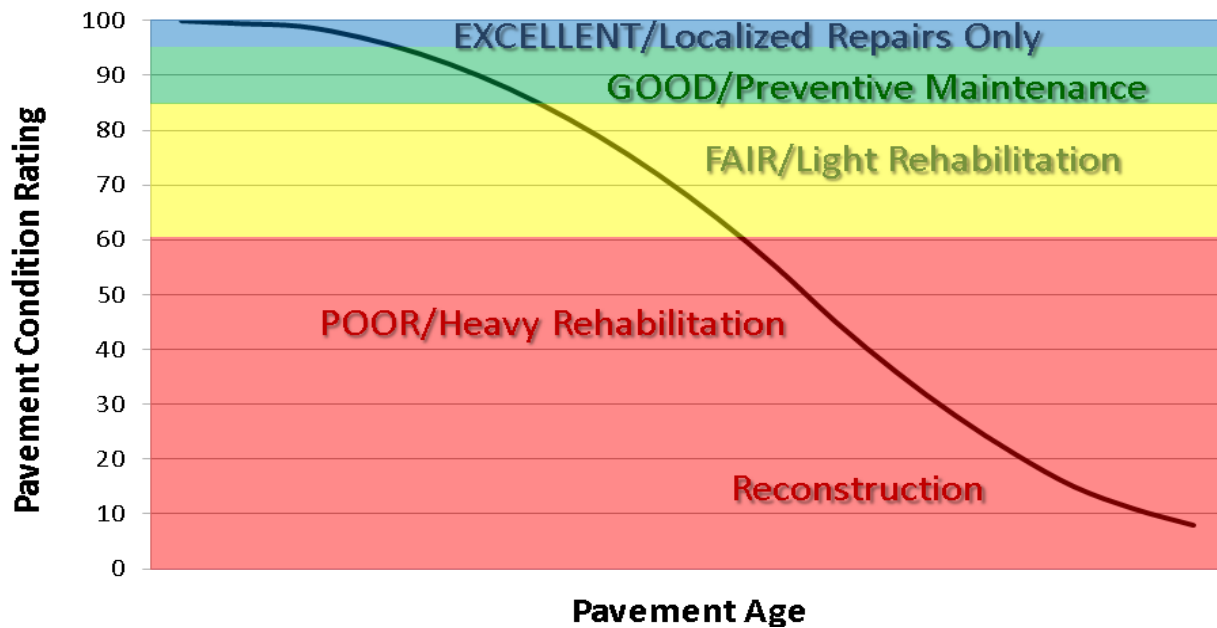

# WICR: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle

ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	PAVED LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0010	TOUR ROAD	1	4.95	ASPHALT	87	91
0011	HIGHWAY 182	2	0.30	ASPHALT	91	91
0200	WASTEWATER PLANT ROAD	6	0.08	ASPHALT	99	99
0201	OLD FARM ROAD (190)	4	0.20	ASPHALT	25	25
0202	DOUBLE SPRINGS ROAD	4	0.11	ASPHALT	88	88

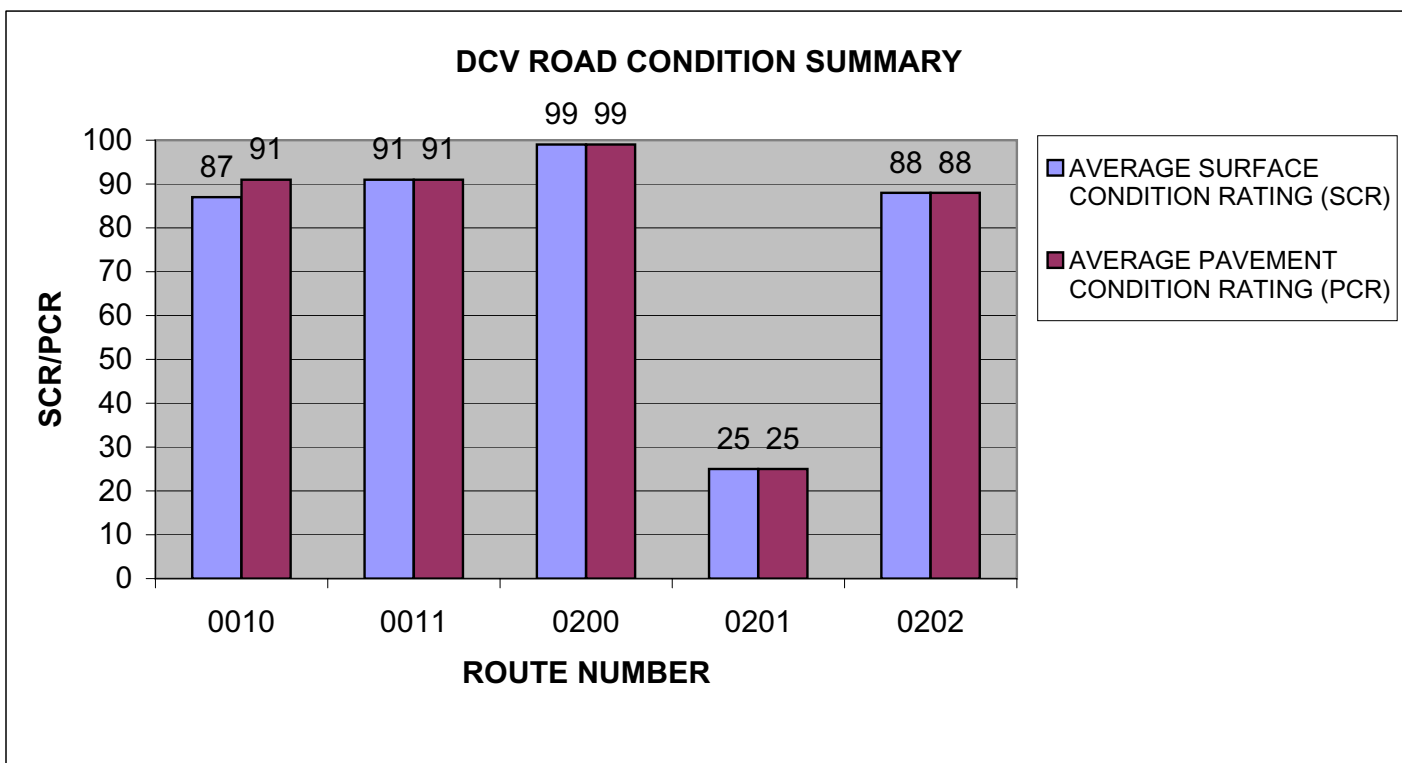




# WICR: DCV ROAD CONDITION SUMMARY

DCV - Data Collection Vehicle


ROUTE NUMBER	ROUTE NAME	FUNCT CLASS	PAVED LENGTH	SURFACE TYPE	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE PAVEMENT CONDITION RATING (PCR)
0400	MCELHANEY FARM ENTRANCE ROAD	5	0.09	ASPHALT	66	66
0402	MAINTENANCE AREA ROAD	6	0.13	ASPHALT	92	92

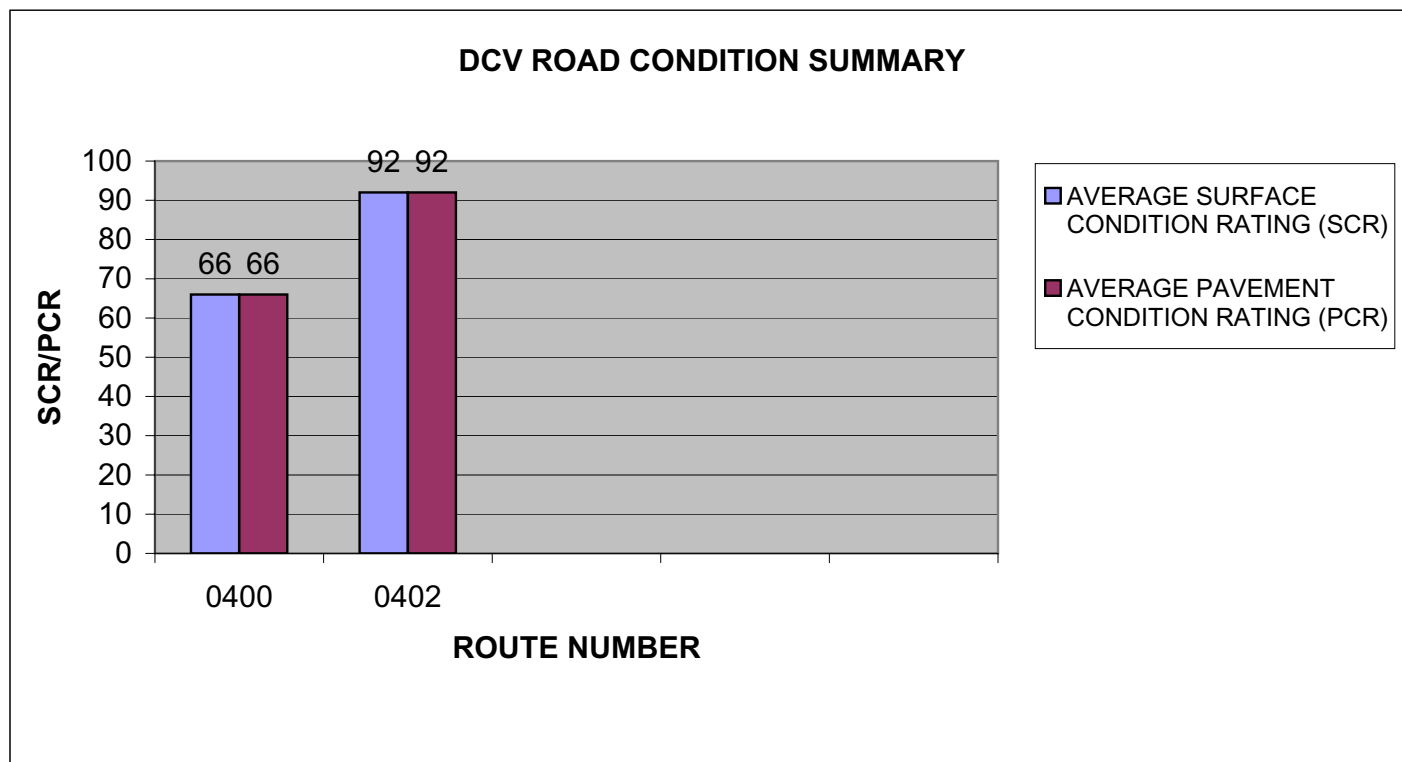

# WICR: PARKWIDE DCV CONDITION SUMMARY

AVERAGE PAVEMENT CONDITION RATING (PCR)	AVERAGE ROUGHNESS CONDITION INDEX (RCI)	AVERAGE SURFACE CONDITION RATING (SCR)	AVERAGE RUT INDEX	AVERAGE ALLIGATOR CRACKING INDEX	AVERAGE LONGITUDINAL CRACKING INDEX	AVERAGE TRANSVERSE CRACKING INDEX	AVERAGE PATCHING INDEX
88	96	85	99	97	88	91	100

All Index values are based on Data Collection Vehicle (DCV) driven roads that were collected in Cycle-5.  
 Roughness data is only collected on routes with lengths greater than 0.5 miles and a posted speed limit of 25 MPH or greater.

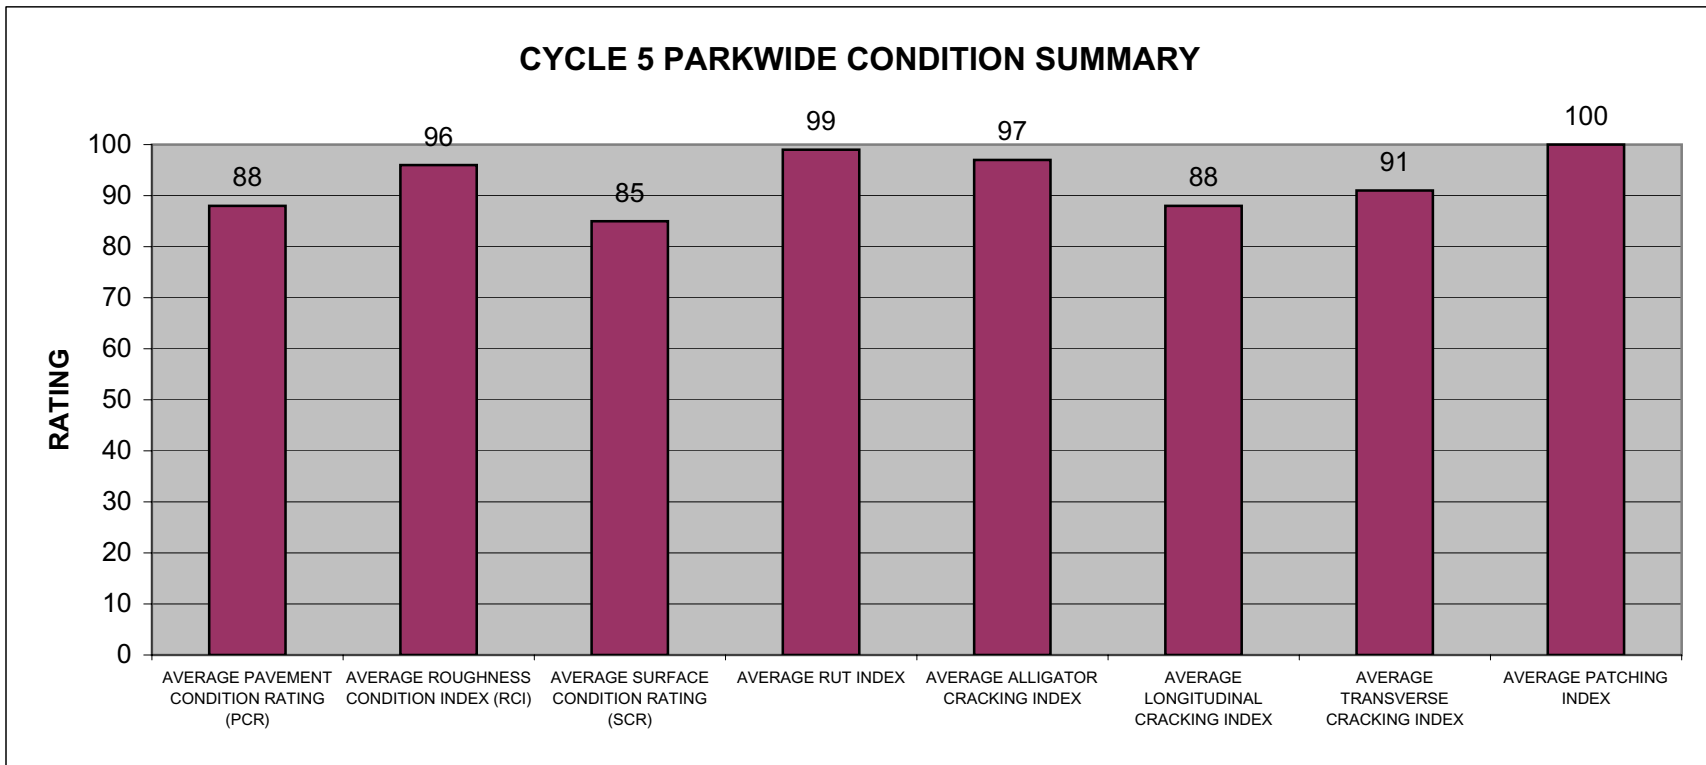

# Section 4

## Park Route Location Maps





Wilson's Creek National Battlefield




Federal Lands Highway  
Road Inventory Program


**Wilson's Creek National Battlefield**  
**Route Location Map**  
**Key Map**

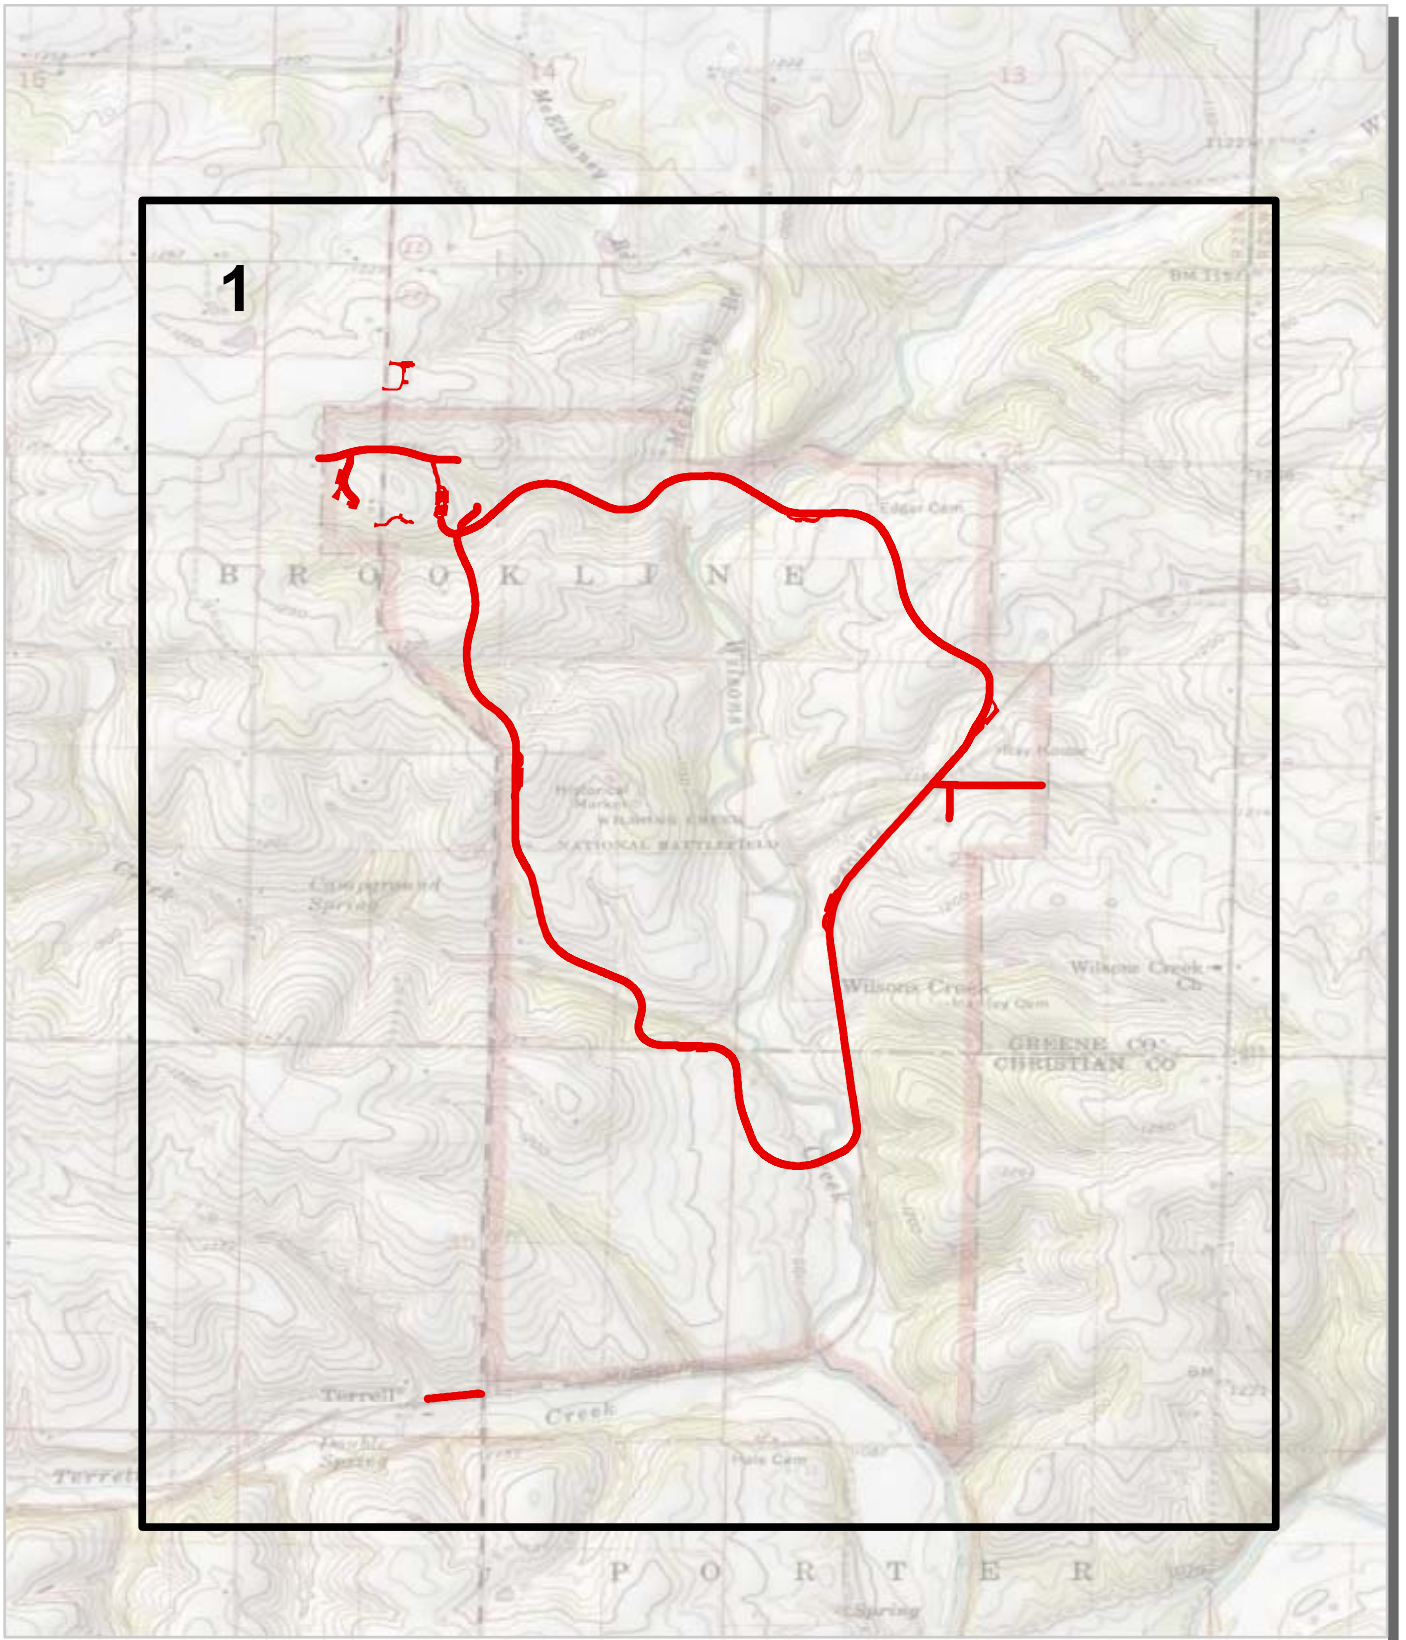

 Cycle 5 Collected Routes



# Wilson's Creek National Battlefield Route Location Map Area 1

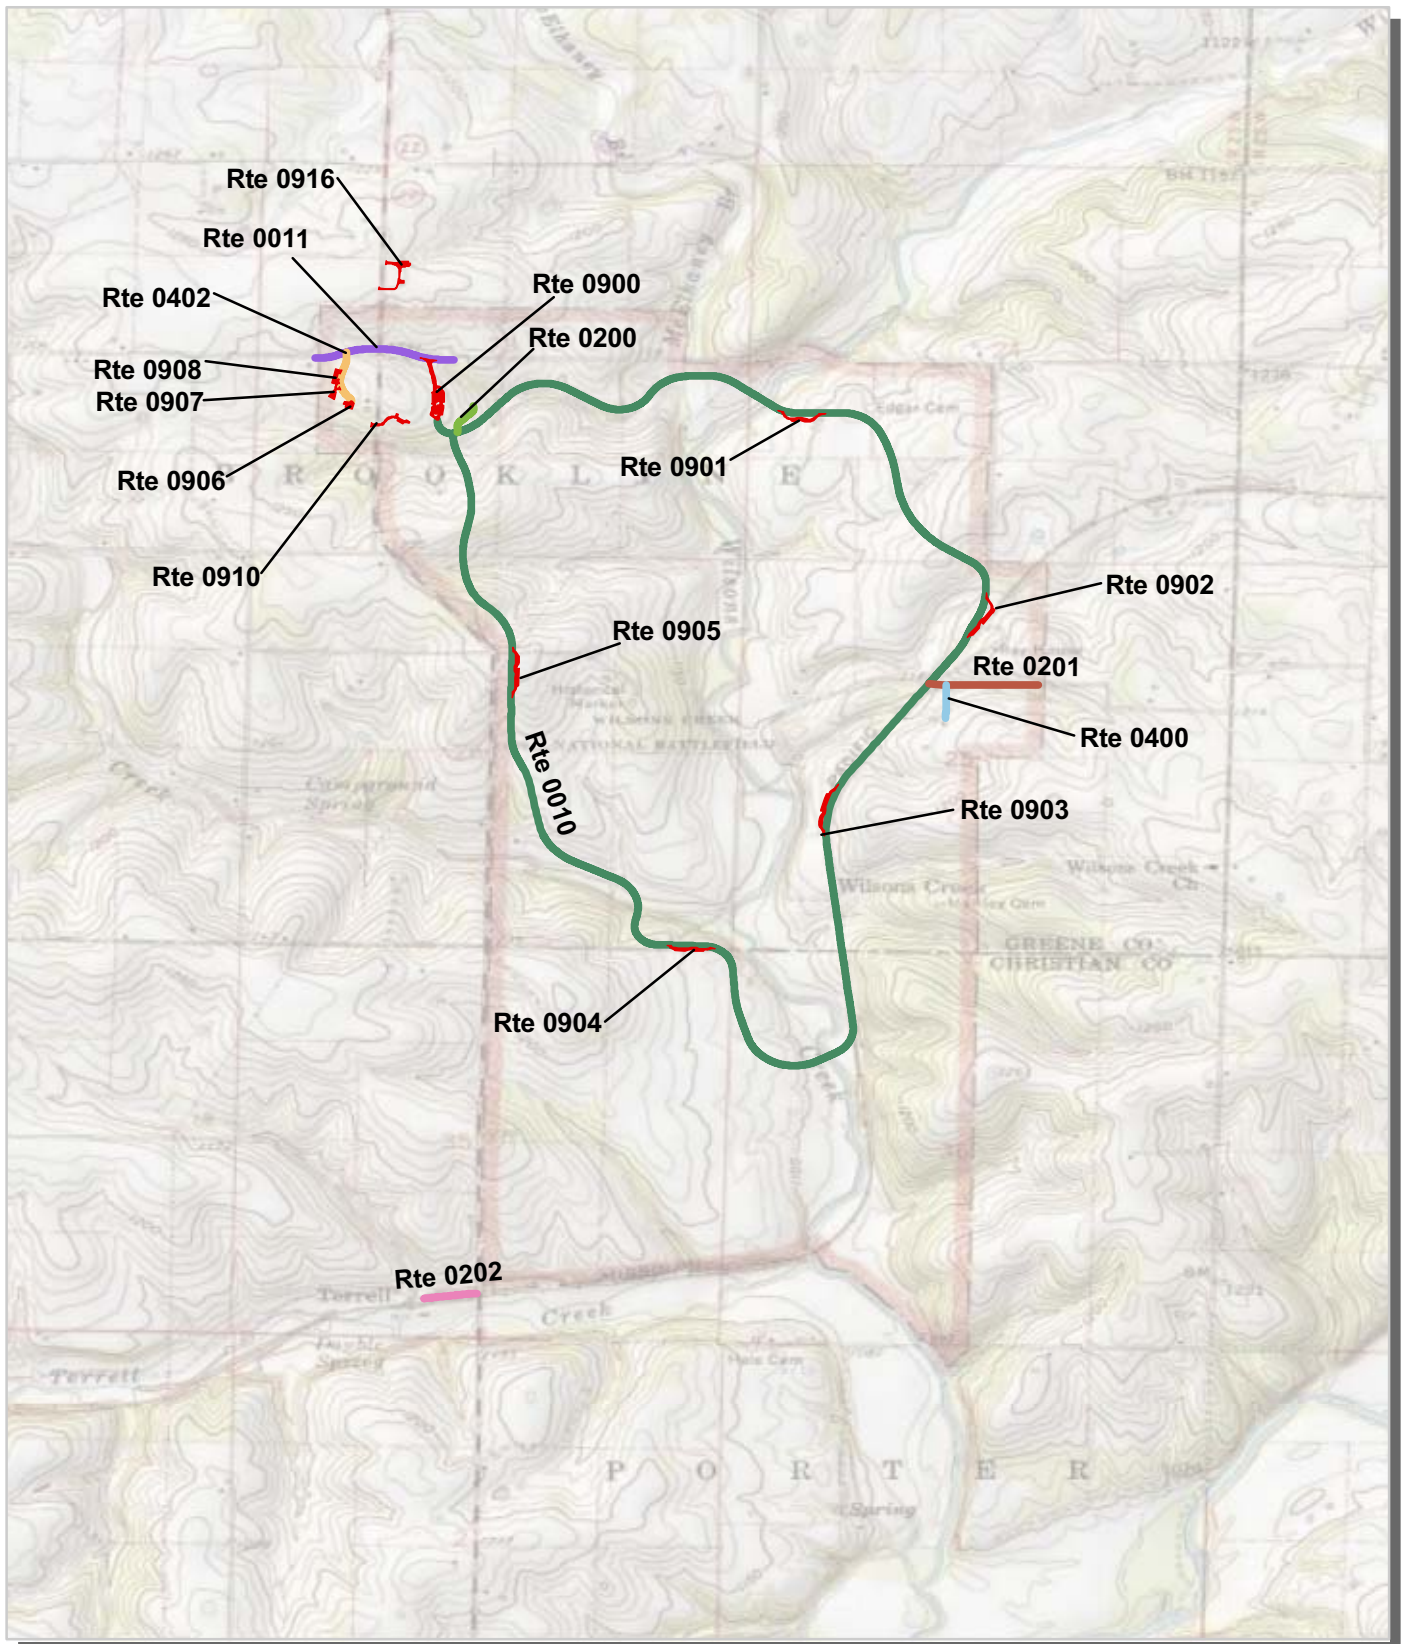

Unique colors used to differentiate routes




# Wilson's Creek National Battlefield

## Route Condition Map

### PCR - Mile by Mile

### Key Map

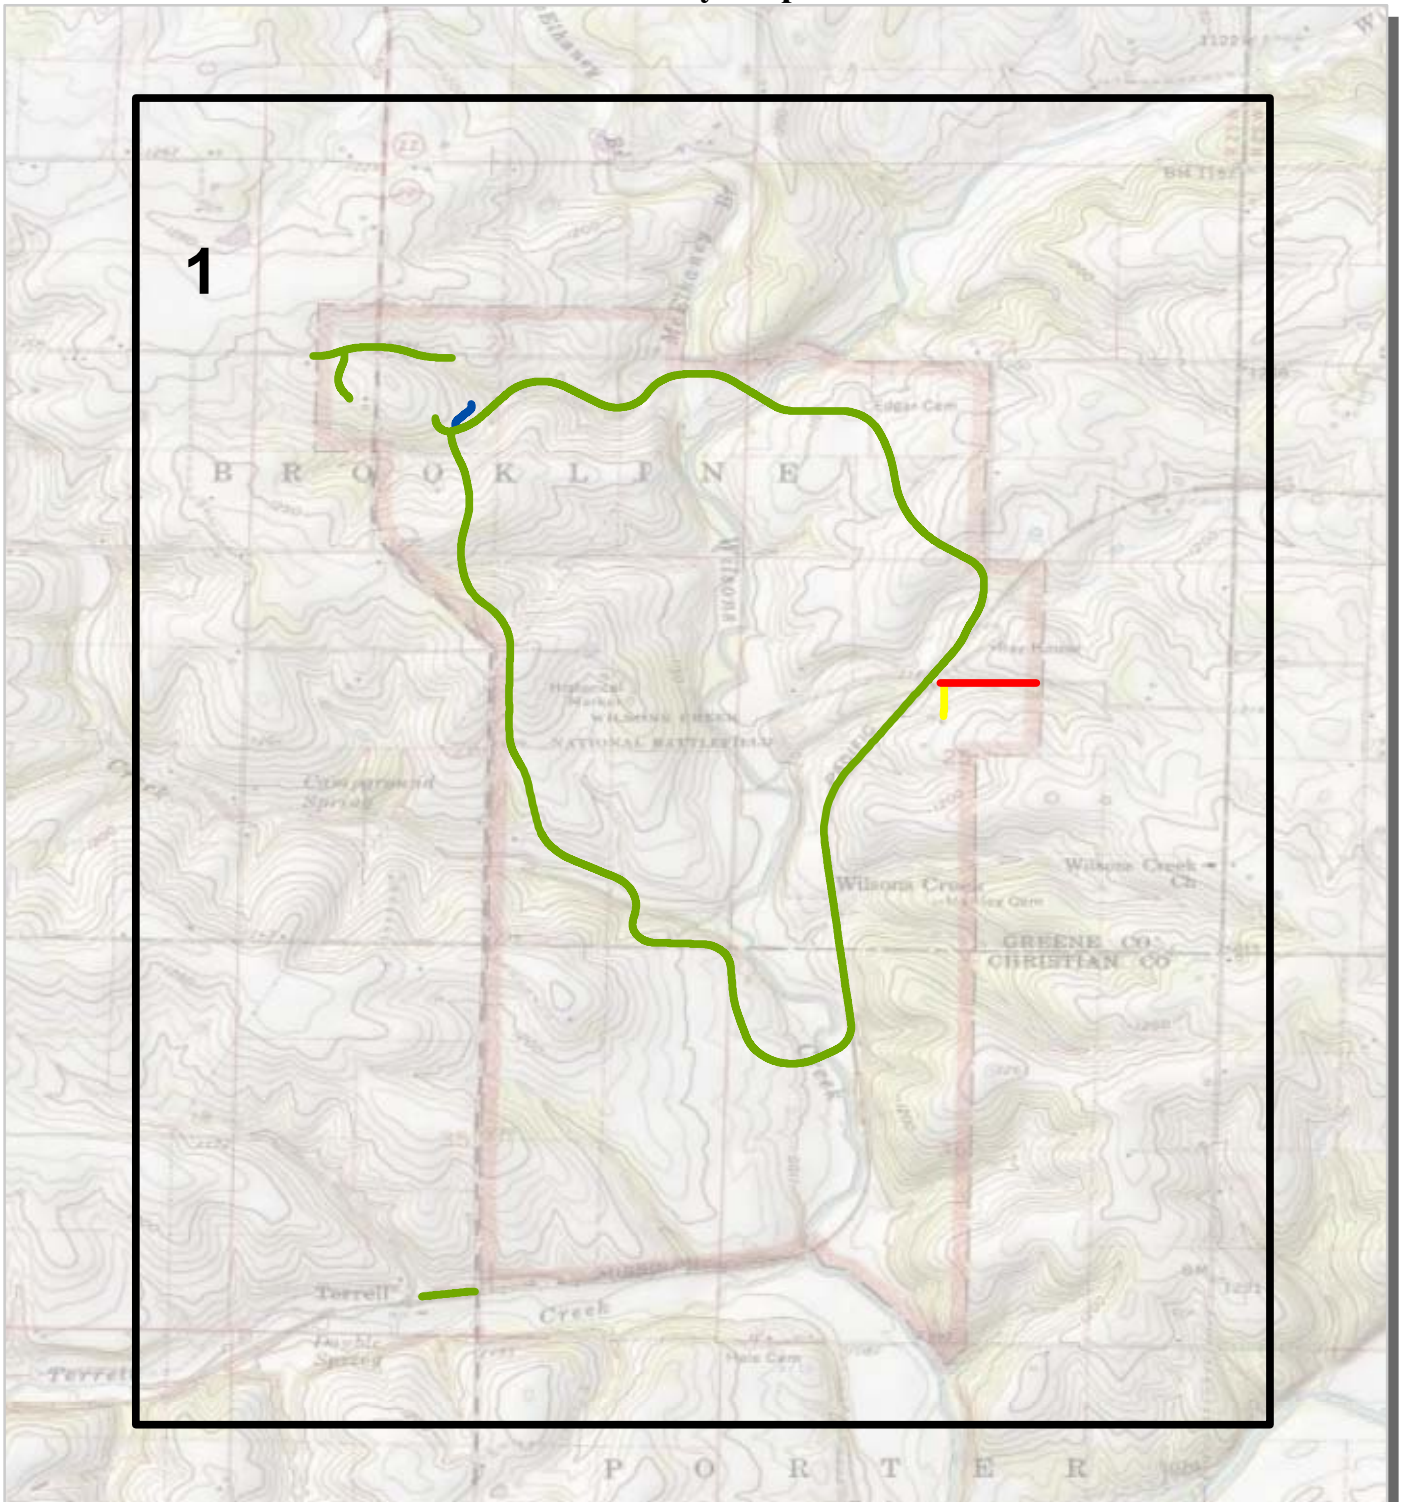

PCR	Poor	<span style="display: inline-block; width: 15px; height: 15px; background-color: red; border: 1px solid black;"></span>	Fair	<span style="display: inline-block; width: 15px; height: 15px; background-color: yellow; border: 1px solid black;"></span>	Good	<span style="display: inline-block; width: 15px; height: 15px; background-color: green; border: 1px solid black;"></span>	Excellent	<span style="display: inline-block; width: 15px; height: 15px; background-color: blue; border: 1px solid black;"></span>	No Data	<span style="display: inline-block; width: 15px; height: 15px; background-color: black; border: 1px solid black;"></span>
	(0 - 60)		(61 - 84)	(85 - 94)		(95 - 100)				

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

Note: Only routes collected by the DCV in Cycle-5 are displayed.




# Wilson's Creek National Battlefield

## Route Condition Map

### PCR - Mile by Mile

#### Area 1

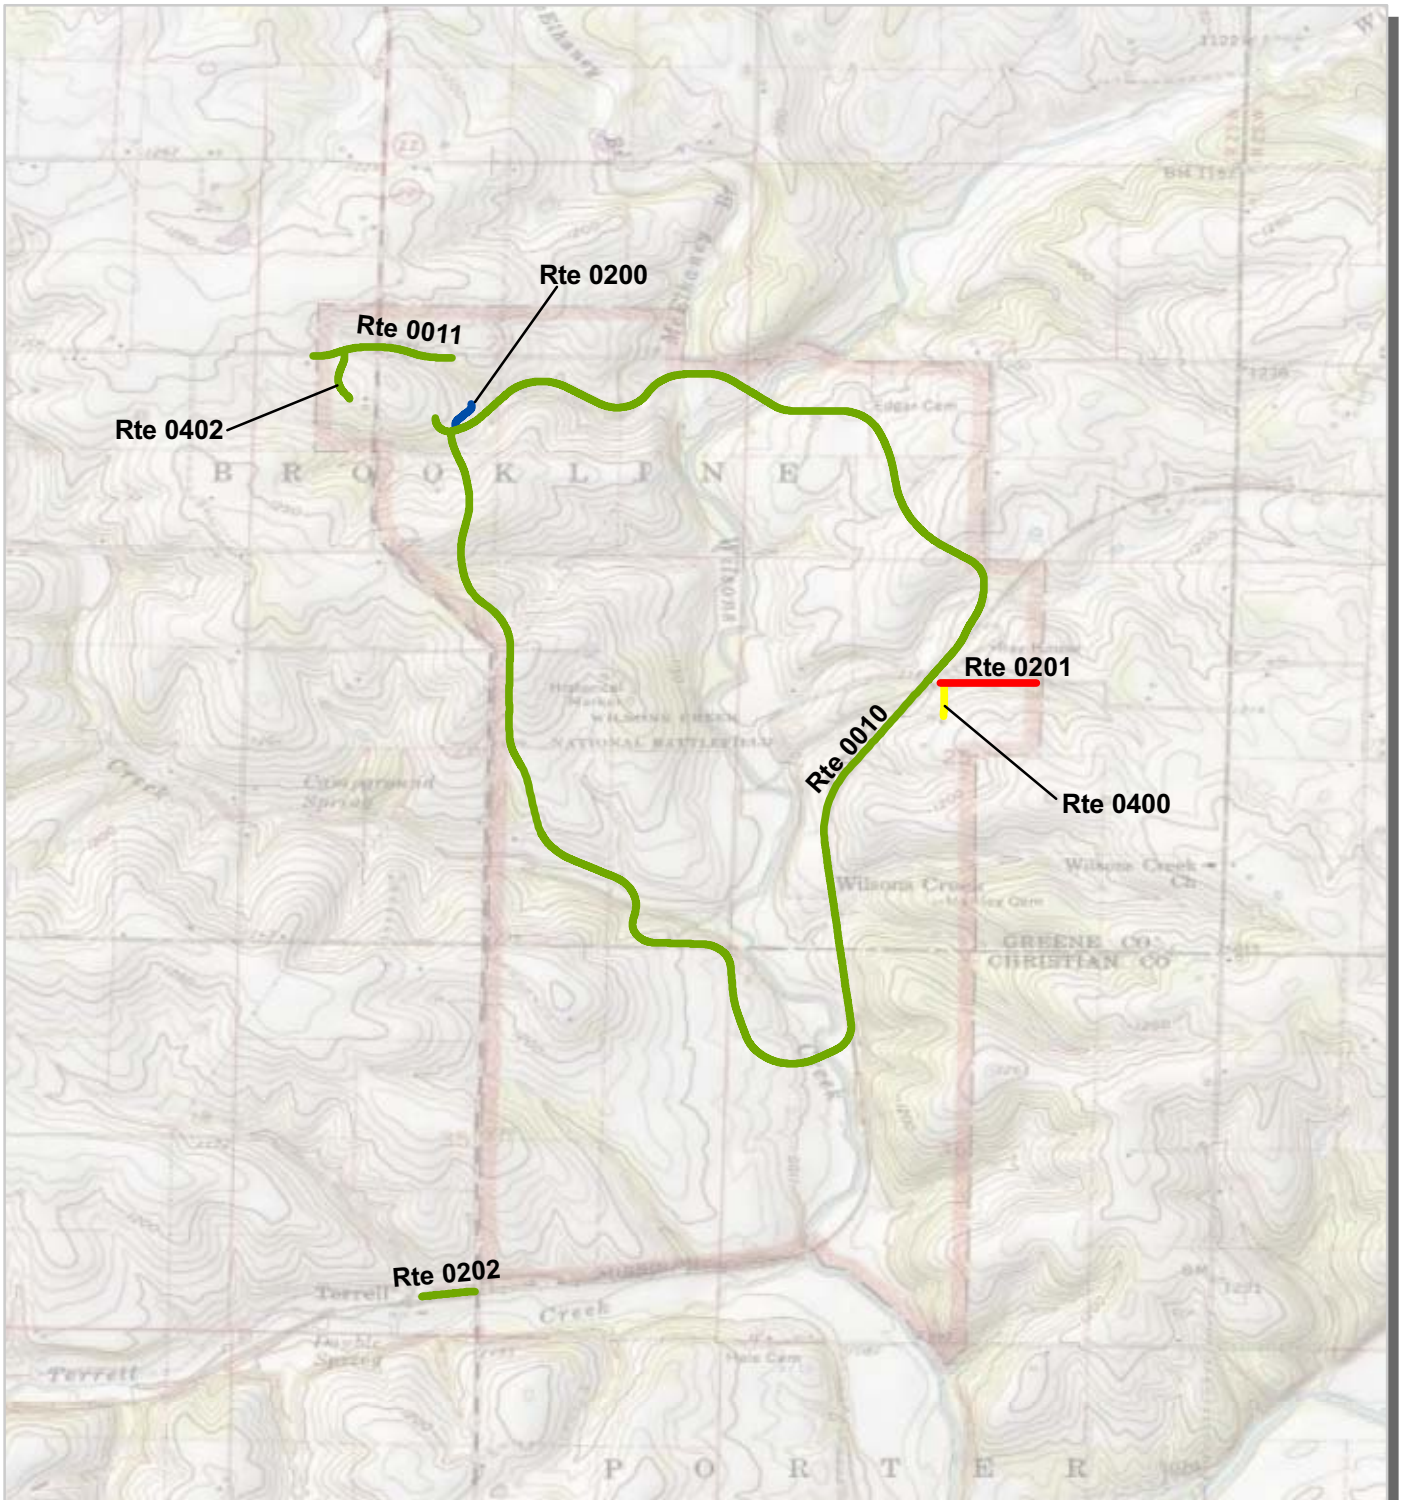

PCR	Poor	<span style="display: inline-block; width: 15px; height: 15px; background-color: red; border: 1px solid black;"></span>	Fair	<span style="display: inline-block; width: 15px; height: 15px; background-color: yellow; border: 1px solid black;"></span>	Good	<span style="display: inline-block; width: 15px; height: 15px; background-color: green; border: 1px solid black;"></span>	Excellent	<span style="display: inline-block; width: 15px; height: 15px; background-color: blue; border: 1px solid black;"></span>	No Data	<span style="display: inline-block; width: 15px; height: 15px; background-color: black; border: 1px solid black;"></span>
	(0 - 60)		(61 - 84)	(85 - 94)		(95 - 100)				

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.



# Section 5 Paved Route Condition Rating Sheets




Wilson's Creek National Battlefield



Federal Lands Highway  
Road Inventory Program



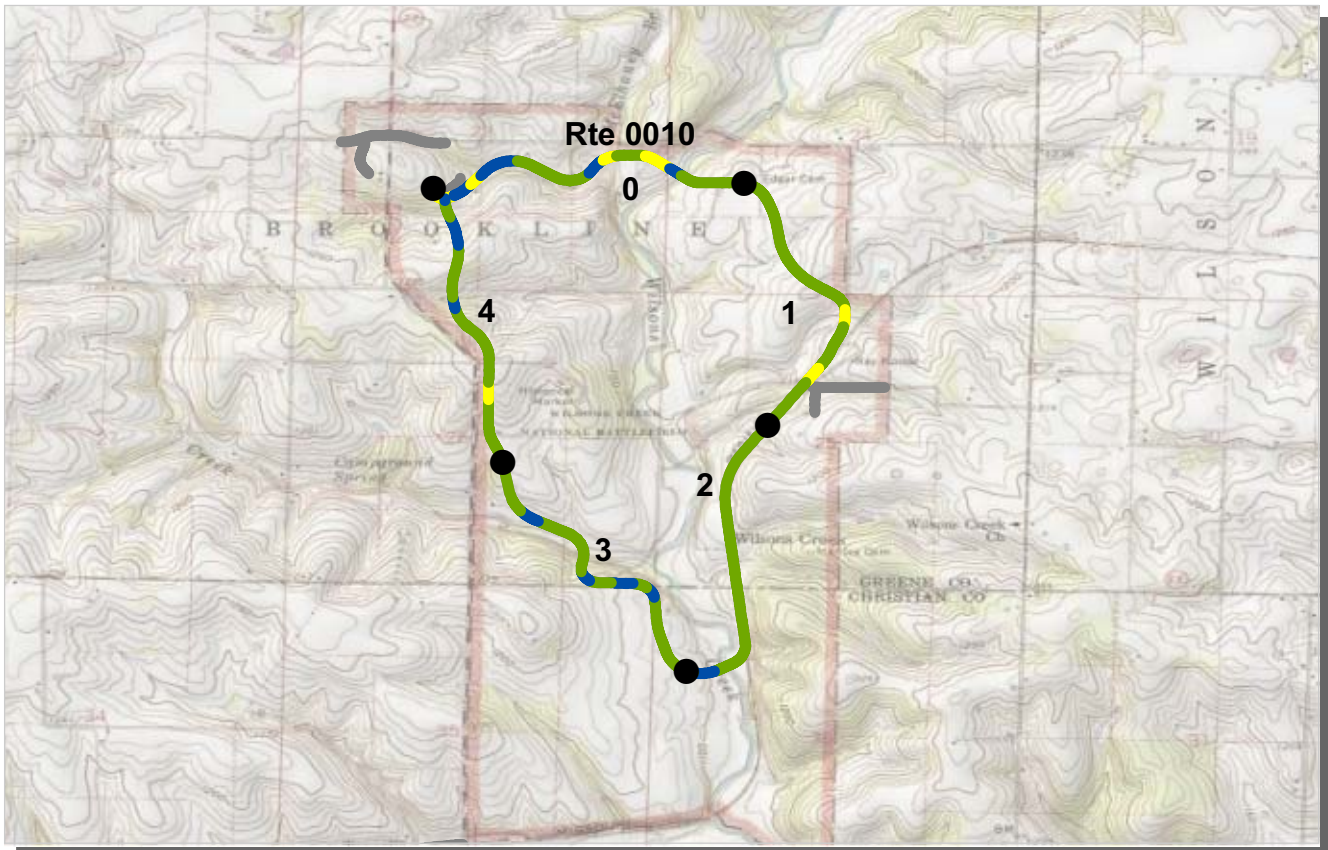

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0010 TOUR ROAD**  
**WICR : WILSON'S CREEK NATIONAL BATTLEFIELD**

**COLLECTED: 12/8/2011**  
**TOTAL LENGTH: 4.95 Miles**

**MIDWEST REGION**


<i>Section Number</i>	0	1	2	3	4
<i>Section Length (mi)</i>	1.00	1.00	1.00	1.00	0.95
<i>Cross Section Information</i>					
Number of Lanes	1	1	1	1	1
Paved Width (ft)	20	19	19	20	20
Lane Width (ft)	13	12	12	13	12
<i>Roadway Condition Information</i>					
SCR (Surface Condition Rating)	89	82	87	89	86
PCR (Pavement Condition Rating)	90	89	90	92	90
<i>Distress Index Values</i>					
Structural Crack Index	89	82	87	89	86
Transverse Cracking Index	92	88	90	92	95
Patching Index	100	100	100	100	100
Rutting Index	100	99	99	99	100
Roughness Condition Index (RCI)	91	100	95	96	97

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable

**ROUTE: 0010 TOUR ROAD**

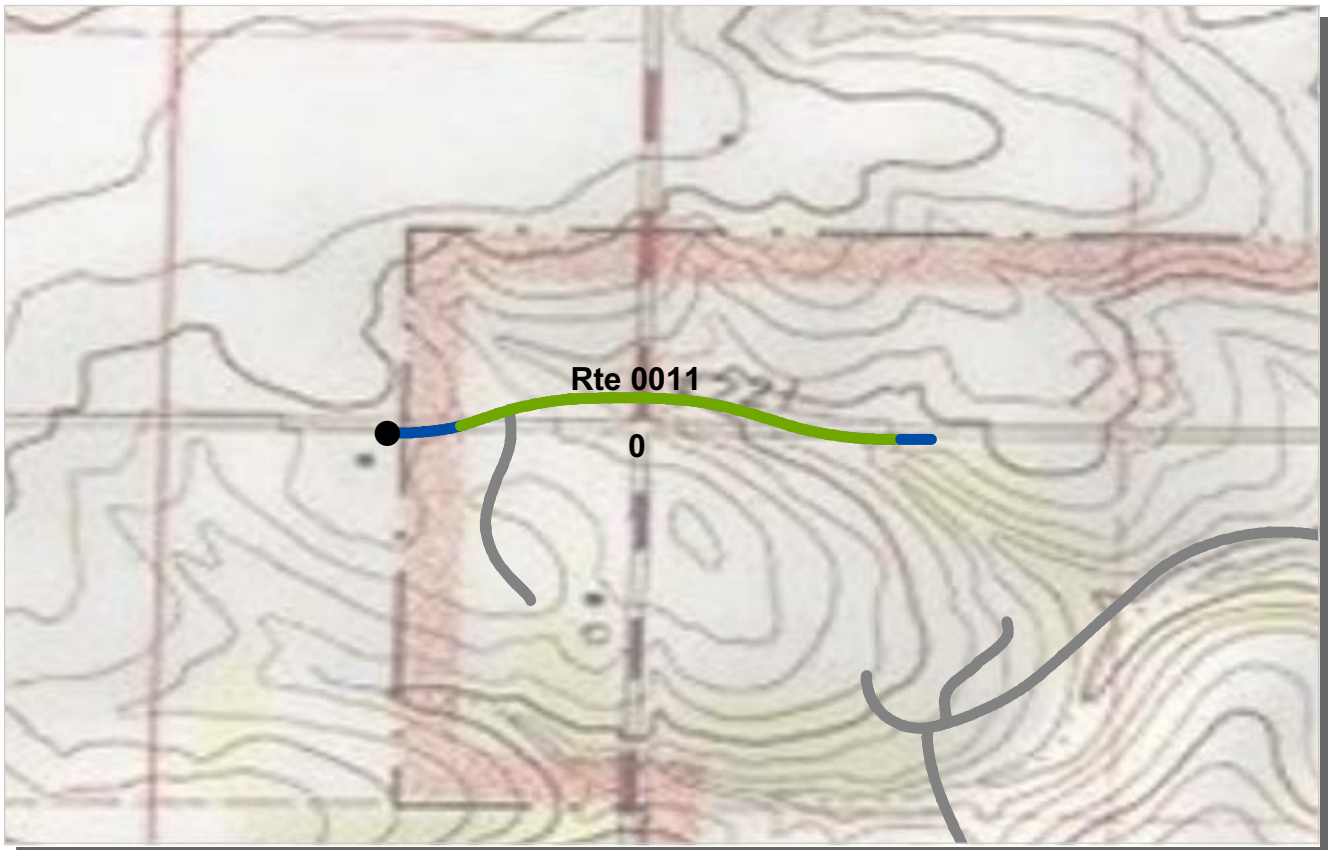

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0011 HIGHWAY 182**  
**WICR : WILSON'S CREEK NATIONAL BATTLEFIELD**

**COLLECTED: 12/8/2011**  
**TOTAL LENGTH: 0.30 Miles**

**MIDWEST REGION**


<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.30				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	35				
Lane Width (ft)	13				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	91				
PCR (Pavement Condition Rating)	91				
<b>Distress Index Values</b>					
Structural Crack Index	91				
Transverse Cracking Index	92				
Patching Index	100				
Rutting Index	97				
Roughness Condition Index (RCI)	NC				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable

**ROUTE: 0011 HIGHWAY 182**

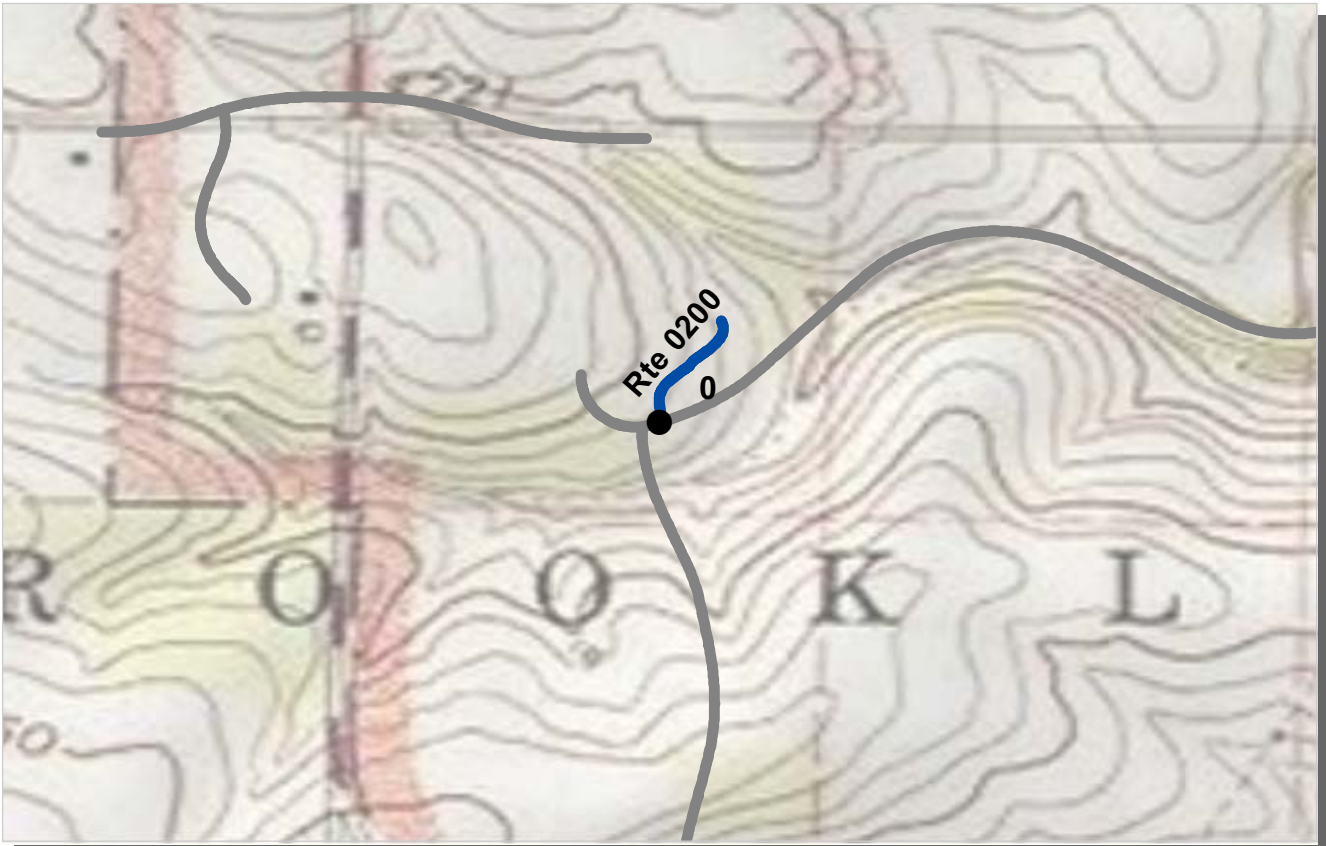

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0200 WASTEWATER PLANT ROAD**  
**WICR : WILSON'S CREEK NATIONAL BATTLEFIELD**

**COLLECTED: 12/8/2011**  
**TOTAL LENGTH: 0.08 Miles**

**MIDWEST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.08				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	23				
Lane Width (ft)	11				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	99				
PCR (Pavement Condition Rating)	99				
<b>Distress Index Values</b>					
Structural Crack Index	100				
Transverse Cracking Index	99				
Patching Index	100				
Rutting Index	99				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0200 WASTEWATER PLANT ROAD**

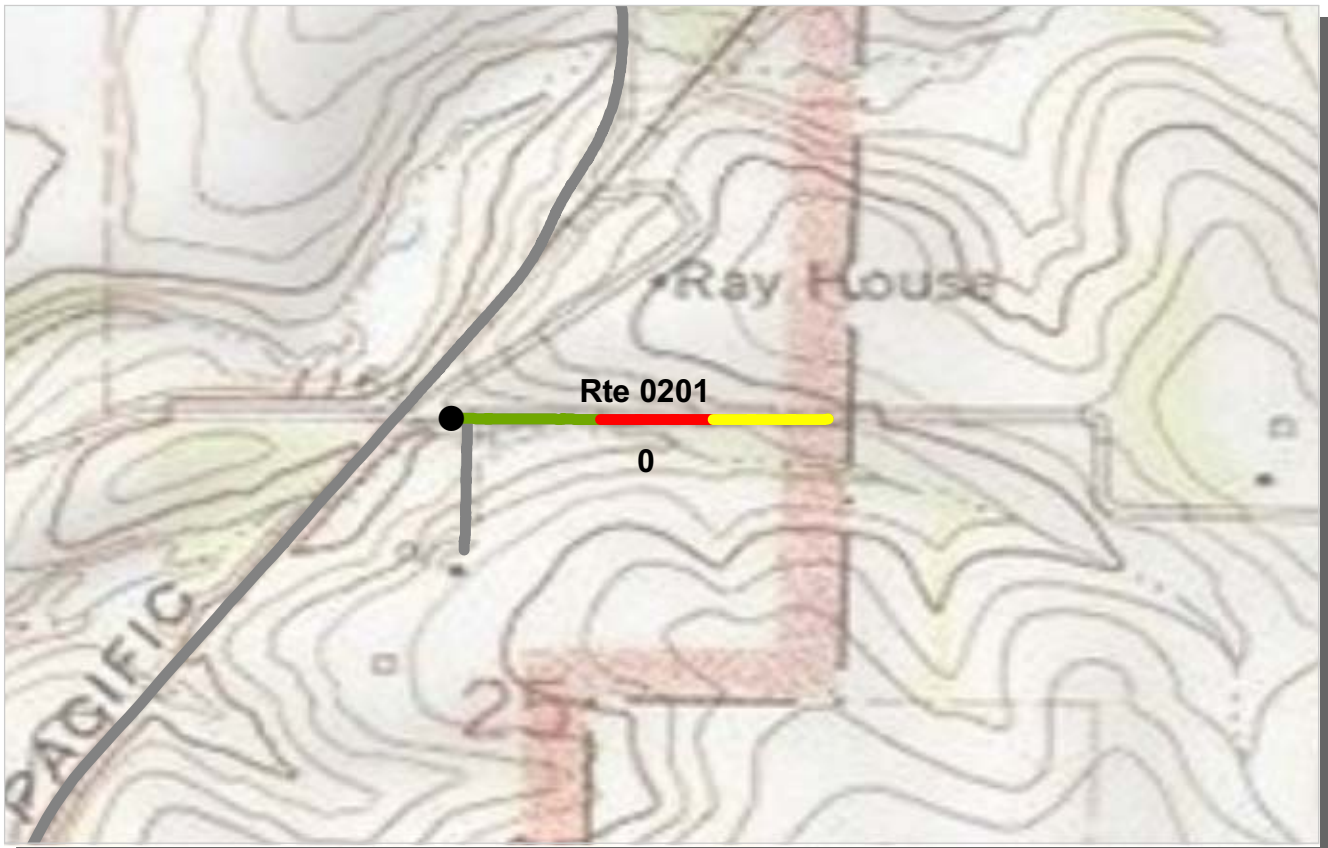

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0201 OLD FARM ROAD (190)**  
**WICR : WILSON'S CREEK NATIONAL BATTLEFIELD**

**COLLECTED: 12/8/2011**  
**TOTAL LENGTH: 0.20 Miles**

**MIDWEST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.20				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	17				
Lane Width (ft)	8				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	25				
PCR (Pavement Condition Rating)	25				
<b>Distress Index Values</b>					
Structural Crack Index	25				
Transverse Cracking Index	89				
Patching Index	100				
Rutting Index	93				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0201 OLD FARM ROAD (190)**

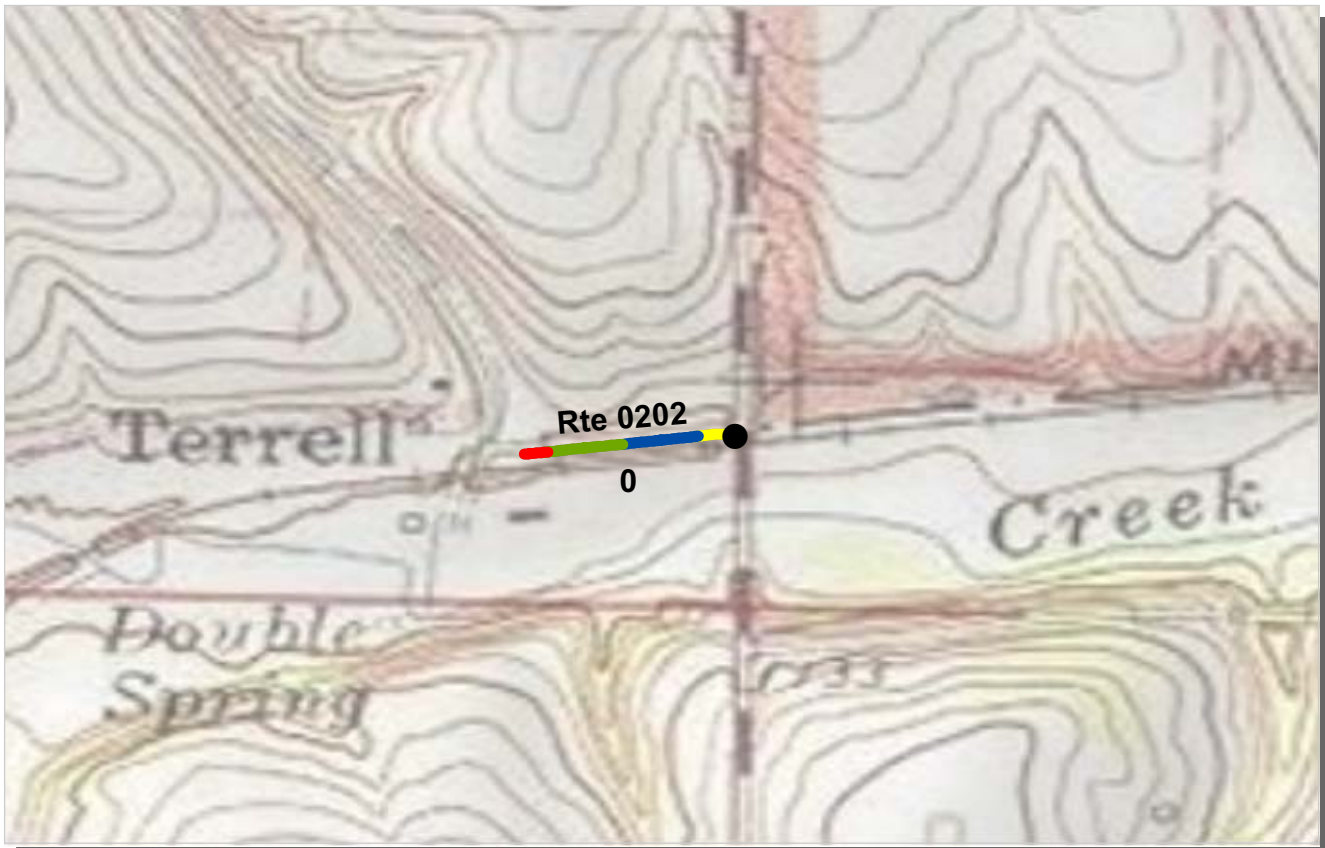

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0202 DOUBLE SPRINGS ROAD**  
**WICR : WILSON'S CREEK NATIONAL BATTLEFIELD**

**COLLECTED: 12/8/2011**  
**TOTAL LENGTH: 0.11 Miles**

**MIDWEST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.11				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	16				
Lane Width (ft)	8				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	88				
PCR (Pavement Condition Rating)	88				
<b>Distress Index Values</b>					
Structural Crack Index	93				
Transverse Cracking Index	89				
Patching Index	100				
Rutting Index	88				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0202 DOUBLE SPRINGS ROAD**

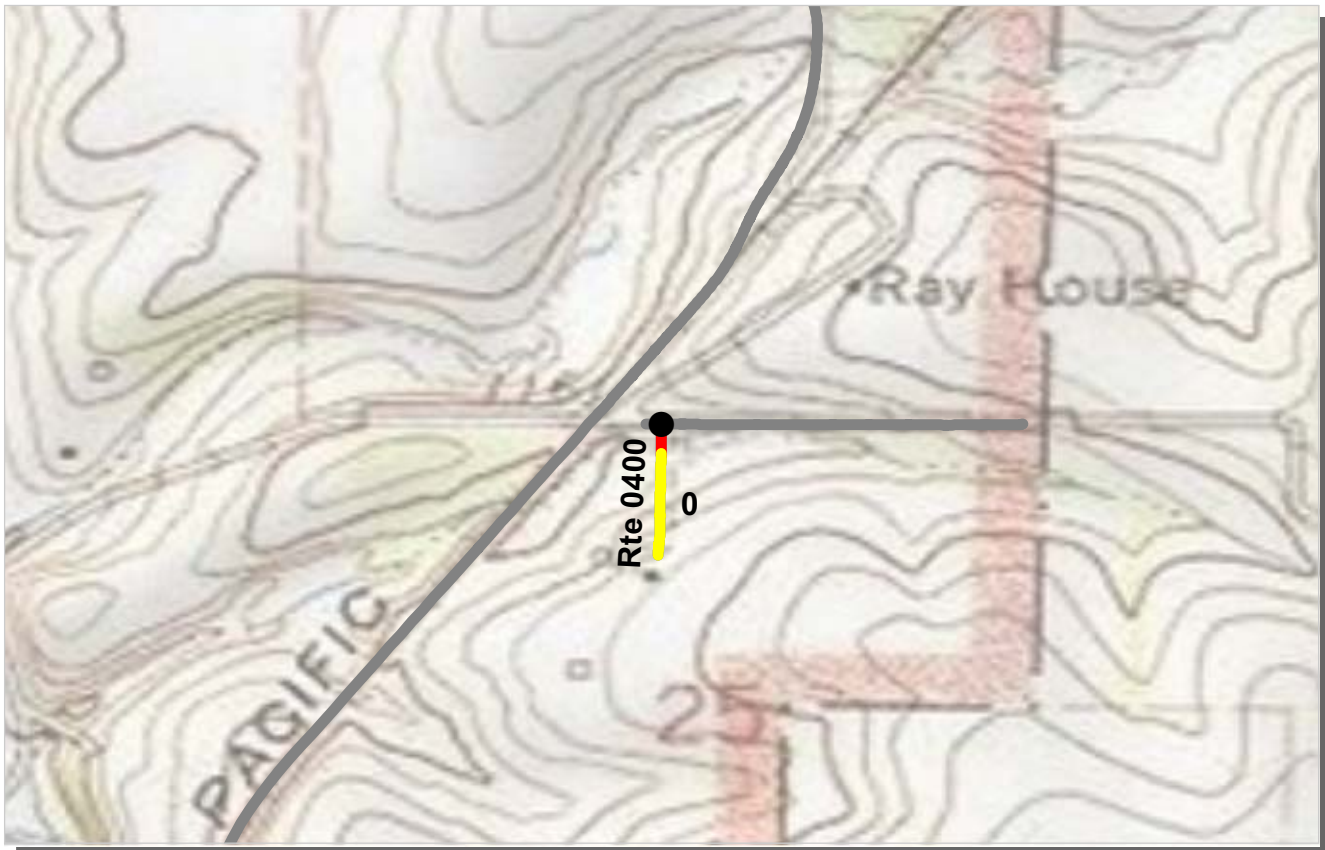

PCR	Poor	Fair	Good	Excellent	No Data
	(0 - 60)	(61 - 84)	(85 - 94)	(95 - 100)	

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0400 MCELHANEY FARM ENTRANCE ROAD**  
**WICR : WILSON'S CREEK NATIONAL BATTLEFIELD**

**COLLECTED: 12/8/2011**  
**TOTAL LENGTH: 0.09 Miles**

**MIDWEST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.09				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	15				
Lane Width (ft)	8				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	66				
PCR (Pavement Condition Rating)	66				
<b>Distress Index Values</b>					
Structural Crack Index	66				
Transverse Cracking Index	96				
Patching Index	100				
Rutting Index	86				
Roughness Condition Index (RCI)	NC				


**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected N/A - Not Applicable



**ROUTE: 0400 MCELHANEY FARM ENTRANCE ROAD**

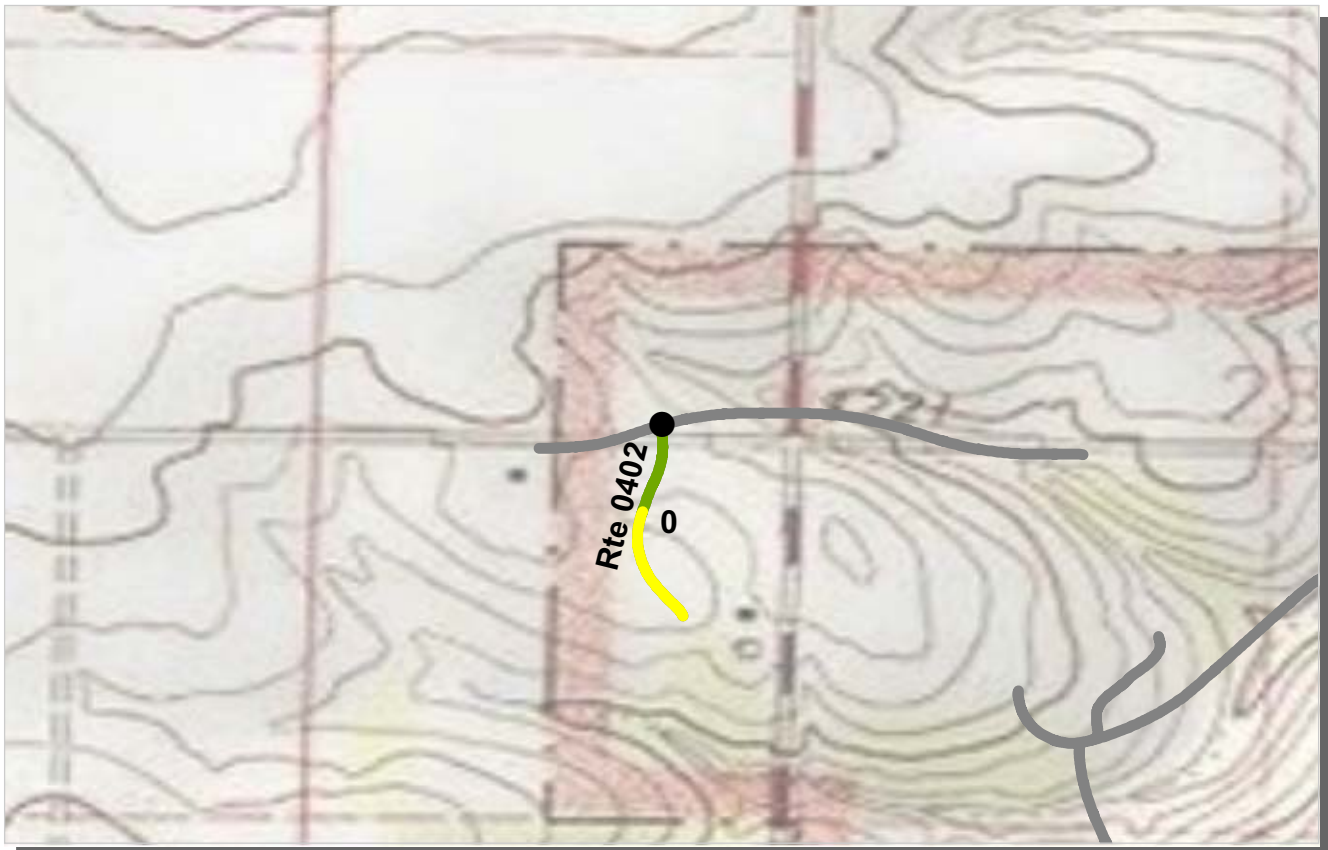

PCR    Poor ■    Fair ■    Good ■    Excellent ■    No Data ■  
           (0 - 60)           (61 - 84)           (85 - 94)           (95 - 100)

\* If the PCR rating is not available for a section, the SCR rating will be displayed. See appendix for definitions and formulas.

**ROUTE: 0402 MAINTENANCE AREA ROAD**  
**WICR : WILSON'S CREEK NATIONAL BATTLEFIELD**

**COLLECTED: 12/8/2011**  
**TOTAL LENGTH: 0.13 Miles**

**MIDWEST REGION**

<b>Section Number</b>	0				
<b>Section Length (mi)</b>	0.13				
<b>Cross Section Information</b>					
Number of Lanes	2				
Paved Width (ft)	26				
Lane Width (ft)	13				
<b>Roadway Condition Information</b>					
SCR (Surface Condition Rating)	92				
PCR (Pavement Condition Rating)	92				
<b>Distress Index Values</b>					
Structural Crack Index	93				
Transverse Cracking Index	92				
Patching Index	100				
Rutting Index	96				
Roughness Condition Index (RCI)	NC				

**NOTES:**

Structural Crack Index is a combination of the Longitudinal Cracking Index and Alligator Cracking Index.  
 See Section 10 for explanation of SCR, PCR, & all Distress Index Values.

NC - Not Collected    N/A - Not Applicable



**ROUTE: 0402 MAINTENANCE AREA ROAD**

**Section 6**  
**Manually Rated Paved Route  
Condition Rating Sheets**



Wilson's Creek National Battlefield



**Federal Lands Highway  
Road Inventory Program**



## **MANUALLY RATED ROUTE CONDITION RATING SHEETS**

No data available for this section.

**Section 7**  
**Parking Area**  
**Condition Rating Sheets**



Wilson's Creek National Battlefield



Federal Lands Highway  
Road Inventory Program



# WILSON'S CREEK NATIONAL BATTLEFIELD

## Route 0900

VISITOR CENTER PARKING  
FROM ROUTE 0011 (HIGHWAY 182)  
TO ROUTE 0010 (TOUR ROAD)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0900	PUBLIC	3/17/2011	60,603	1.04	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	3	1	CONCRETE CURB AND GUTTER	NO CURB	FAIR/73

\* Lane miles are based on 11' lane widths

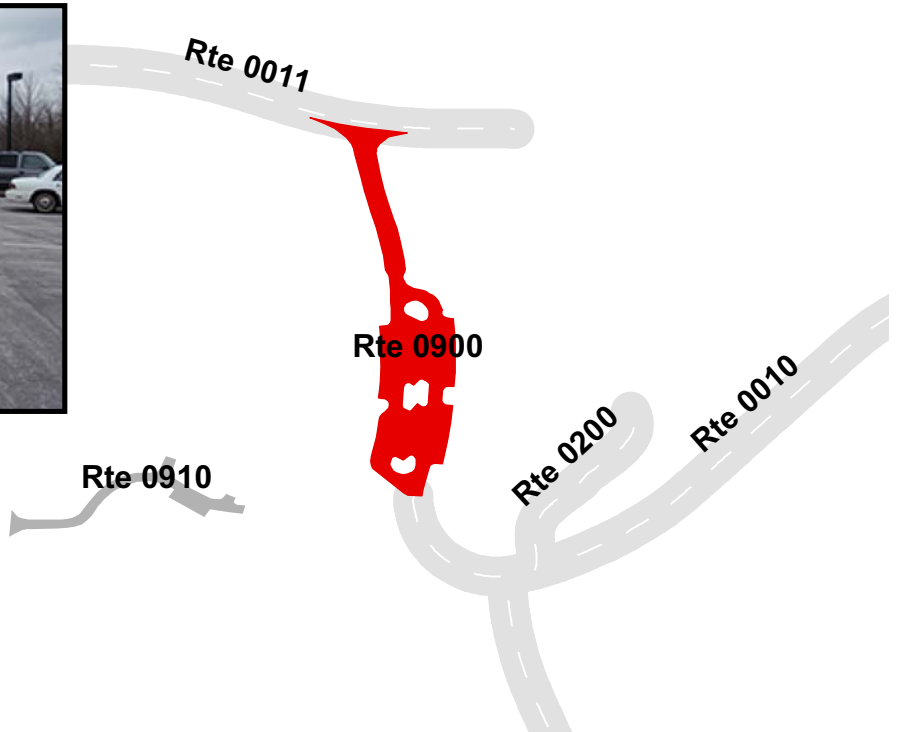

# WILSON'S CREEK NATIONAL BATTLEFIELD

## Route 0901


GIBSON MILL PARKING (TOUR STOP 1)

FROM ROUTE 0010 (TOUR ROAD)

TO ROUTE 0010 (TOUR ROAD)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0901	PUBLIC	3/17/2011	15,023	0.26	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
3	0	0	NO CURB AND GUTTER	NO CURB	POOR/45

\* Lane miles are based on 11' lane widths

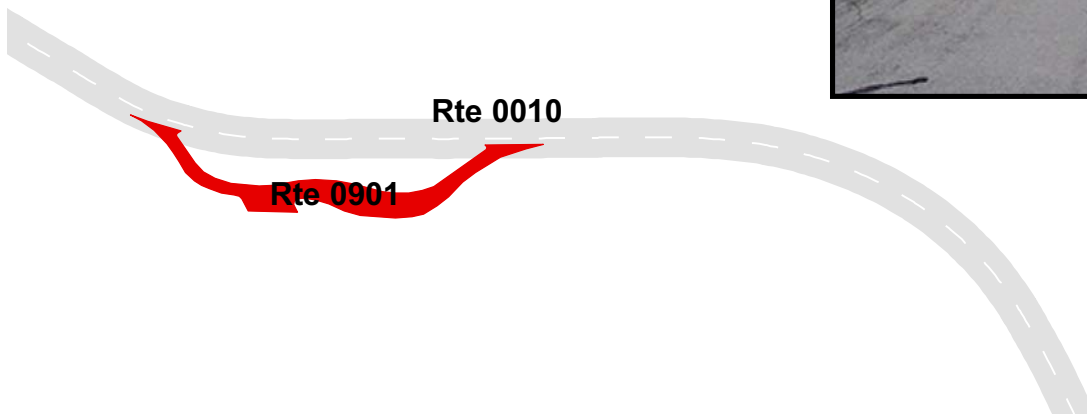

# WILSON'S CREEK NATIONAL BATTLEFIELD

## Route 0902



RAY HOUSE PARKING (TOUR STOP 2)

FROM ROUTE 0010 (TOUR ROAD)

TO ROUTE 0010 (TOUR ROAD)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0902	PUBLIC	3/17/2011	21,419	0.37	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
1	0	0	NO CURB AND GUTTER	NO CURB	FAIR/73

\* Lane miles are based on 11' lane widths

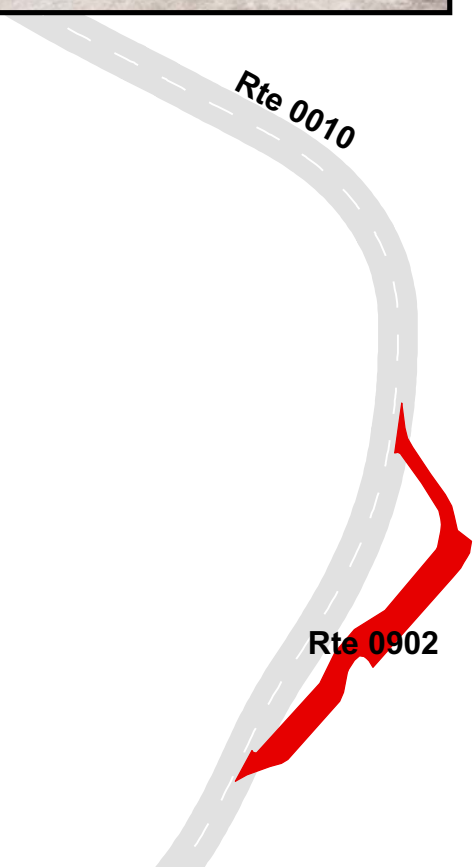

# WILSON'S CREEK NATIONAL BATTLEFIELD

## Route 0903


PRICE PULASKI PARKING (TOUR STOP 3)

FROM ROUTE 0010 (TOUR ROAD)

TO ROUTE 0010 (TOUR ROAD)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0903	PUBLIC	3/17/2011	23,102	0.40	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	NO CURB AND GUTTER	NO CURB	FAIR/73

\* Lane miles are based on 11' lane widths

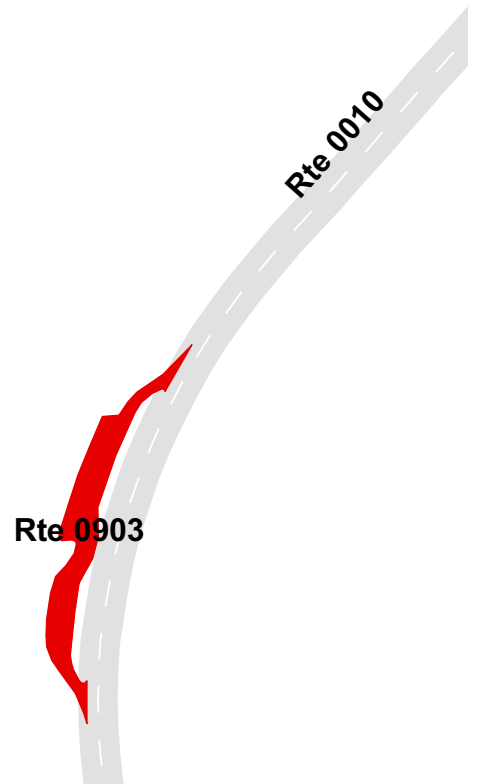

# WILSON'S CREEK NATIONAL BATTLEFIELD

## Route 0904



SIGEL'S FINAL PARKING (TOUR STOP 5)

FROM ROUTE 0010 (TOUR ROAD)

TO ROUTE 0010 (TOUR ROAD)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0904	PUBLIC	3/17/2011	16,091	0.28	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	NO CURB AND GUTTER	NO CURB	FAIR/73

\* Lane miles are based on 11' lane widths

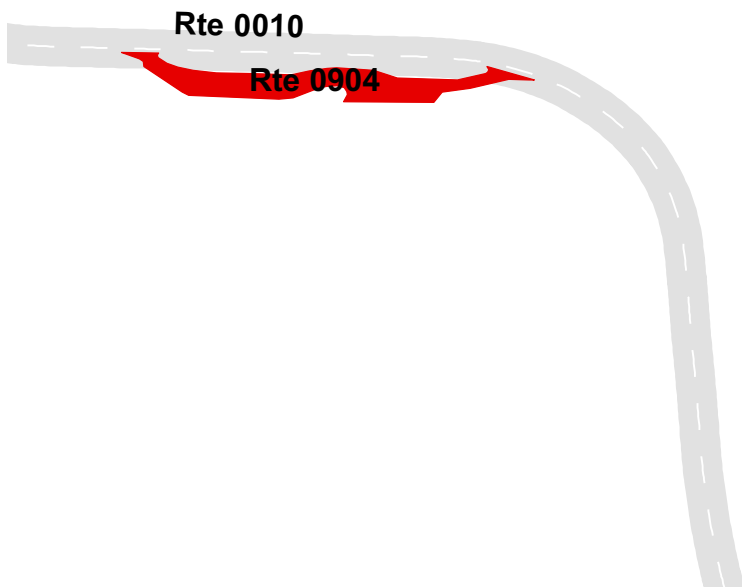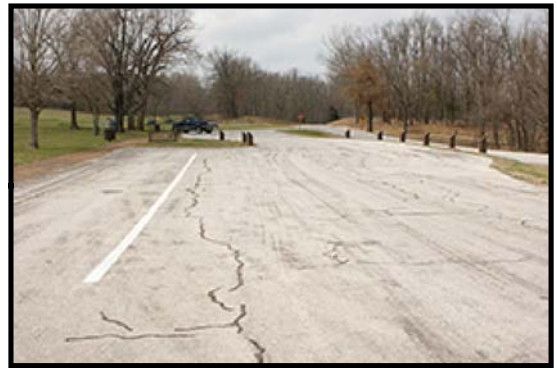

# WILSON'S CREEK NATIONAL BATTLEFIELD

## Route 0905



BLOODY HILL PARKING (TOUR STOP 7)

FROM ROUTE 0010 (TOUR ROAD)

TO ROUTE 0010 (TOUR ROAD)

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0905	PUBLIC	3/17/2011	21,231	0.37	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	NO CURB AND GUTTER	NO CURB	FAIR/73

\* Lane miles are based on 11' lane widths

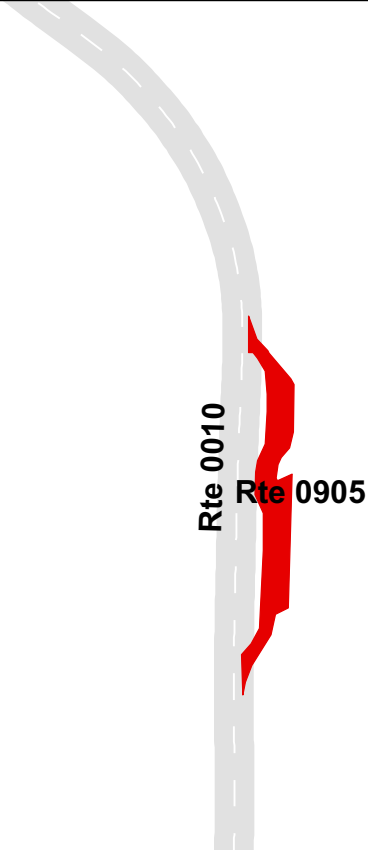



# WILSON'S CREEK NATIONAL BATTLEFIELD



## Route 0906

### MAINTENANCE PARKING AREA

FROM END OF ROUTE 0402 (MAINTENANCE AREA ROAD)  
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0906	NONPUBLIC	3/17/2011	8,349	0.14	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	1	NO CURB AND GUTTER	NO CURB	POOR/45

\* Lane miles are based on 11' lane widths

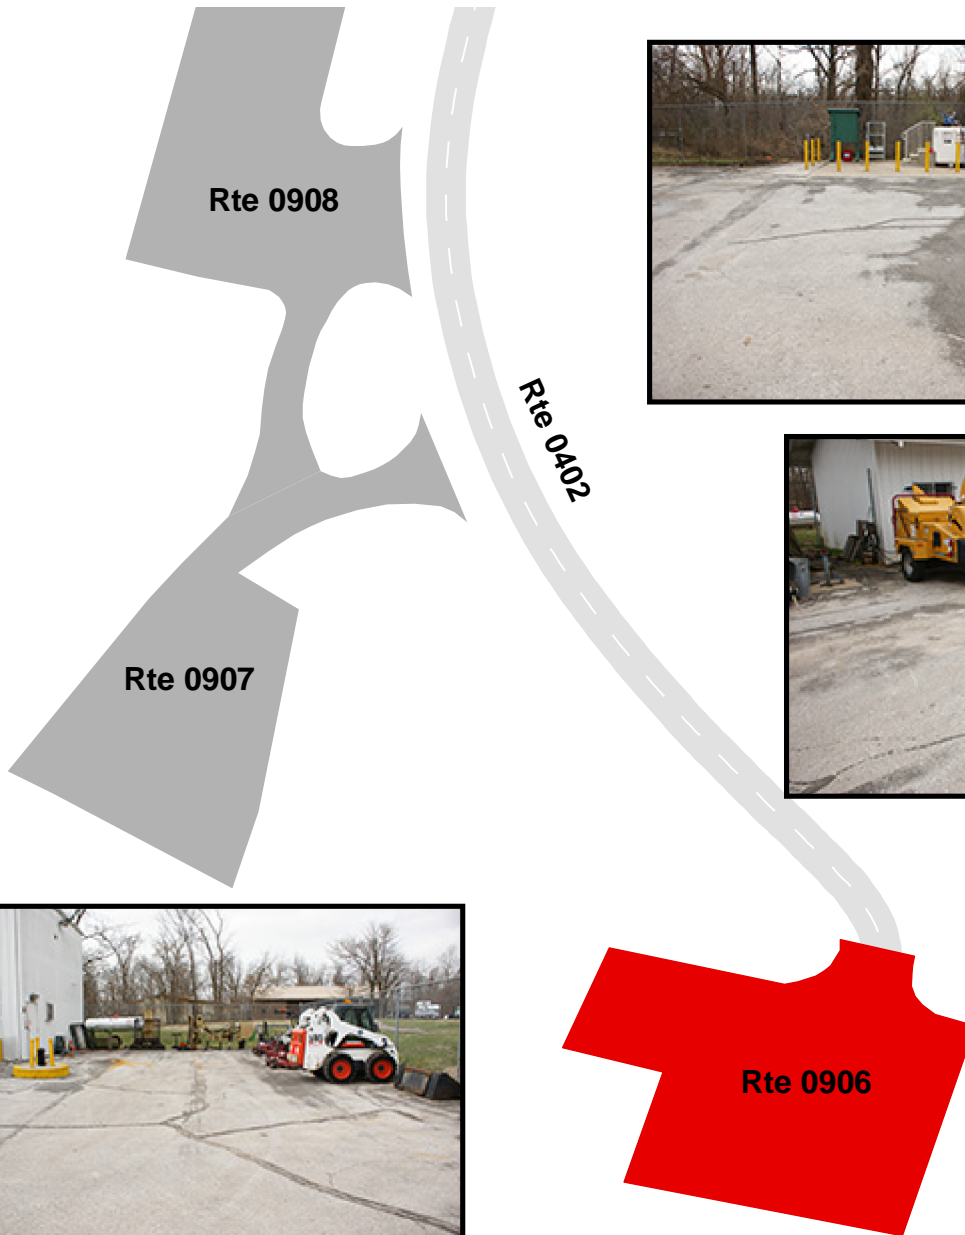

0



# WILSON'S CREEK NATIONAL BATTLEFIELD

## Route 0907

MAINTENANCE OFFICE PARKING  
FROM ROUTE 0402 (MAINTENANCE AREA ROAD)  
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0907	NONPUBLIC	3/17/2011	6,987	0.12	CO
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

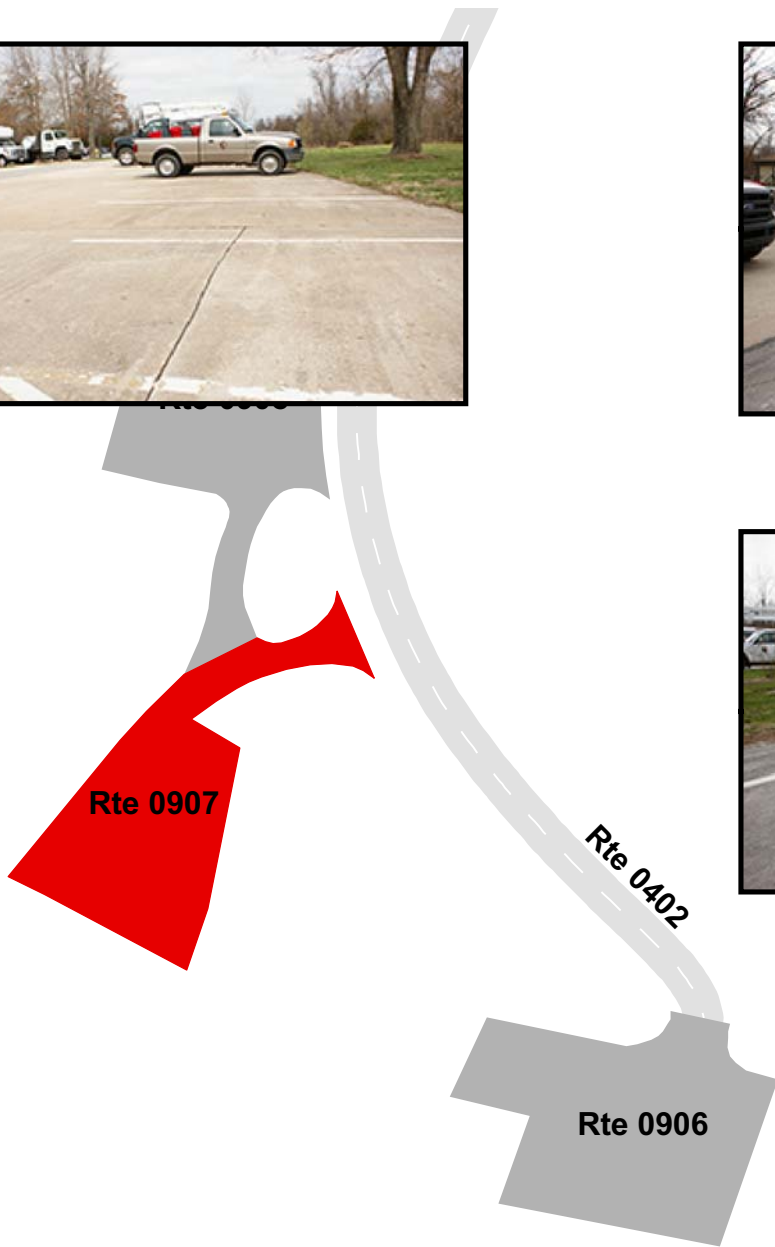

# WILSON'S CREEK NATIONAL BATTLEFIELD



## Route 0908

### EMPLOYEE PARKING

FROM ROUTE 0402 (MAINTENANCE AREA ROAD)  
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0908	NONPUBLIC	3/17/2011	12,163	0.21	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
0	0	0	NO CURB AND GUTTER	NO CURB	GOOD/90

\* Lane miles are based on 11' lane widths

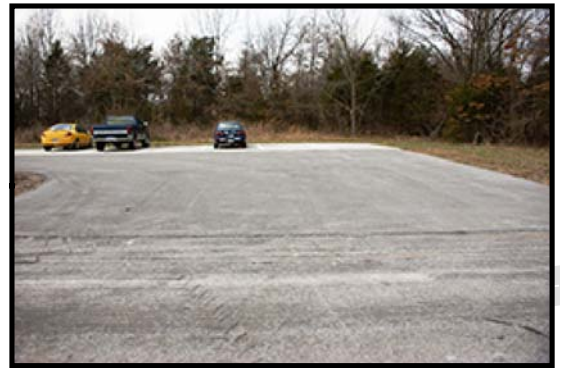





# WILSON'S CREEK NATIONAL BATTLEFIELD

## Route 0910

VISITOR CENTER REAR PARKING  
FROM MISSOURI STATE HIGHWAY ZZ  
TO PARKING

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0910	NONPUBLIC	3/17/2011	12,947	0.22	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
1	0	1	NO CURB AND GUTTER	NO CURB	FAIR/73

\* Lane miles are based on 11' lane widths

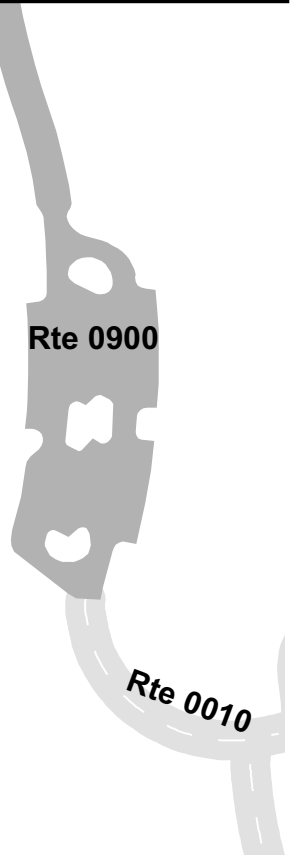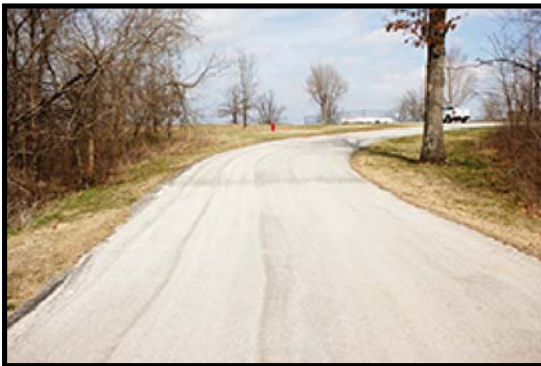



# WILSON'S CREEK NATIONAL BATTLEFIELD

## Route 0916

CIVIL WAR MUSEUM PARKING  
FROM MISSOURI STATE HIGHWAY ZZ  
TO MISSOURI STATE HIGHWAY ZZ

Route Number	Public / NonPublic	Date Visited	Area (sq ft)	Lane Miles *	Surface Type
0916	PUBLIC	3/17/2011	21,167	0.36	AS
Culverts	Drop Inlets	Gates	Curb & Gutter	Curb	PCR
2	0	2	NO CURB AND GUTTER	ASPHALT CURB	POOR/45

\* Lane miles are based on 11' lane widths

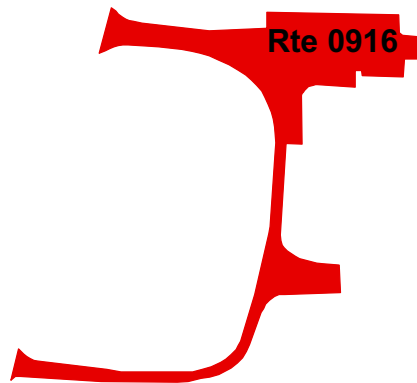

**Section 8**  
**Parkwide/Route**  
**Maintenance Features Summaries**



Wilson's Creek National Battlefield



**WICR: PARKWIDE MAINTENANCE FEATURES SUMMARY**  
**Includes DCV, MRL, MRP & PKG routes collected in Cycle-5**

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all DCV driven routes. Culverts, drop inlets, and gates were also collected on all Manually Rated Routes and Paved Parking areas. Those totals are reflected below.

<b>FEATURE</b>	<b>LINEAR FEET</b>	<b>COUNT</b>
BRIDGE	--	4
CATTLE GUARD	--	0
CULVERT	--	31
CURB	74	--
DROP INLET	--	5
GATE	--	8
GUARD/GUIDE RAIL	1,633	--
CABLE	0	--
NON-CABLE	1,633	--
GUARD/GUIDE WALL	0	--
BOLLARD	0	--
TEMPORARY BARRIER	0	--
NON TEMP/BOLLARD	0	--
INTERSECTION	--	43
LOW WATER CROSSING	0	0
MILE MARKER	--	0
OVERPASS	--	0
PARK BOUNDARY	--	2
PAVED DITCH	9,455	--
PULLOUT	1,045	4
RAILROAD CROSSING	--	0
RETAINING WALL	0	0
SIGN	--	95
STATE BOUNDARY	--	0
TRAFFIC LIGHT	--	0
TUNNEL	0	0

# WICR: DC ROUTE MAINTENANCE FEATURES SUMMARY

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5.

FEATURE	ROUTE 0010 TOUR ROAD	ROUTE 0011 HIGHWAY 182	ROUTE 0200 WASTEWATER PLANT ROAD	ROUTE 0201 OLD FARM ROAD (190)	ROUTE 0202 DOUBLE SPRINGS ROAD	ROUTE 0400 MCELHANEY FARM ENTRANCE ROAD	UNIT
BRIDGE	4	0	0	0	0	0	EACH
CATTLE GUARD	0	0	0	0	0	0	EACH
CULVERT	21	0	0	1	0	0	EACH
CURB	42	32	0	0	0	0	LINEAR FEET
DROP INLET	2	0	0	0	0	0	EACH
GATE	1	0	0	0	1	0	EACH
GUARD/GUIDE RAIL	1,617	0	0	0	16	0	LINEAR FEET
CABLE	0	0	0	0	0	0	LINEAR FEET
NON-CABLE	1,617	0	0	0	16	0	LINEAR FEET
GUARD/GUIDE WALL	0	0	0	0	0	0	LINEAR FEET
BOLLARD	0	0	0	0	0	0	LINEAR FEET
TEMPORARY BARRIER	0	0	0	0	0	0	LINEAR FEET
NON TEMP/BOLLARD	0	0	0	0	0	0	LINEAR FEET
INTERSECTION	16	6	3	5	3	4	EACH
LOW WATER CROSSING	0	0	0	0	0	0	EACH
LOW WATER CROSSING	0	0	0	0	0	0	LINEAR FEET
MILE MARKER	0	0	0	0	0	0	EACH
OVERPASS	0	0	0	0	0	0	EACH
PARK BOUNDARY	0	1	0	1	0	0	EACH
PAVED DITCH	9,455	0	0	0	0	0	LINEAR FEET
PULLOUT	4	0	0	0	0	0	EACH
PULLOUT	1,045	0	0	0	0	0	LINEAR FEET
RAILROAD CROSSING	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	EACH
RETAINING WALL	0	0	0	0	0	0	LINEAR FEET
SIGN	67	10	2	2	6	0	EACH
STATE BOUNDARY	0	0	0	0	0	0	EACH
TRAFFIC LIGHT	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	EACH
TUNNEL	0	0	0	0	0	0	LINEAR FEET



# WICR: DCROUTE MAINTENANCE FEATURES SUMMARY

Notice: Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5.

FEATURE	ROUTE 0402 MAINTENANCE AREA ROAD	UNIT
BRIDGE	0	EACH
CATTLE GUARD	0	EACH
CULVERT	2	EACH
CURB	0	LINEAR FEET
DROP INLET	0	EACH
GATE	1	EACH
GUARD/GUIDE RAIL	0	LINEAR FEET
CABLE	0	LINEAR FEET
NON-CABLE	0	LINEAR FEET
GUARD/GUIDE WALL	0	LINEAR FEET
BOLLARD	0	LINEAR FEET
TEMPORARY BARRIER	0	LINEAR FEET
NON TEMP/BOLLARD	0	LINEAR FEET
INTERSECTION	6	EACH
LOW WATER CROSSING	0	EACH
LOW WATER CROSSING	0	LINEAR FEET
MILE MARKER	0	EACH
OVERPASS	0	EACH
PARK BOUNDARY	0	EACH
PAVED DITCH	0	LINEAR FEET
PULLOUT	0	EACH
PULLOUT	0	LINEAR FEET
RAILROAD CROSSING	0	EACH
RETAINING WALL	0	EACH
RETAINING WALL	0	LINEAR FEET
SIGN	8	EACH
STATE BOUNDARY	0	EACH
TRAFFIC LIGHT	0	EACH
TUNNEL	0	EACH
TUNNEL	0	LINEAR FEET

## WICR: STRUCTURE LIST

<b>ROUTE NUMBER</b>	<b>FUNCTIONAL CLASS</b>	<b>MILEPOST START</b>	<b>MILEPOST END</b>	<b>FEATURE</b>	<b>STRUCTURE NUMBER</b>
0010	1	0.614	0.628	BRIDGE	6370-002
0010	1	0.777	0.828	BRIDGE	6370-003
0010	1	1.556	1.566	BRIDGE	6370-004
0010	1	2.870	2.900	BRIDGE	6370-005
0010	1	3.566	3.574	CULVERT	6370-006

**Section 9**  
**Route Maintenance Features**  
**Road Logs**



Wilson's Creek National Battlefield



# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: TOUR ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0900 (VISITOR CENTER PARKING)
0.000	0.000	SIGN	RIGHT	GUIDE, 8TH ANNUAL MEMORIAL ILLUMINATION DRIVING TOUR DECEMBER 10,2011 - 4:30 P.M. - VOLUNTEERS NEEDED-
0.000	0.000	SIGN	RIGHT	GUIDE, ENTRANCE FEE REQUIRED PLEASE PURCHASE PERMIT IN VISITOR CENTER
0.000	0.000	SIGN	RIGHT	REGULATORY, HEALTH ADVISORY THE WATER IN WILSON'S CREEK IS UNSAFE FOR CONSUMPTION OR RECREATION
0.000	0.004	CURB	N/A	N/A
0.000	0.004	CURB	RIGHT	N/A
0.000	0.000	INTERSECTION	N/A	ROUTE 0900 (VISITOR CENTER PARKING)
0.006	0.006	GATE	N/A	N/A
0.008	0.008	SIGN	LEFT	REGULATORY, KEEP RIGHT
0.015	0.015	DROP INLET	RIGHT	N/A
0.029	0.029	DROP INLET	RIGHT	N/A
0.043	0.043	SIGN	RIGHT	REGULATORY, GRAPHIC SIGN NO TEXT
0.053	4.945	ONE-WAY	N/A	N/A
0.053	0.053	INTERSECTION	RIGHT	ROUTE 0010 (TOUR ROAD)
0.059	0.059	SIGN	RIGHT	GUIDE, BEGIN ONE WAY
0.069	0.069	INTERSECTION	LEFT	ROUTE 0200 (WASTEWATER PLANT ROAD)
0.079	0.079	SIGN	RIGHT	GUIDE, PARKING IN DESIGNATED AREAS ONLY
0.097	0.097	SIGN	RIGHT	GUIDE, PEDESTRIANS AND BICYCLES RIGHT LANE
0.105	0.165	PAVED DITCH	LEFT	N/A
0.106	0.106	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
0.106	0.106	SIGN	RIGHT	REGULATORY, YIELD TO PEDS
0.179	0.179	CULVERT	N/A	N/A
0.321	0.321	CULVERT	N/A	N/A
0.386	0.386	SIGN	LEFT	REGULATORY, NO
0.442	0.520	PAVED DITCH	LEFT	N/A
0.613	0.613	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.614	0.628	BRIDGE	N/A	6370-002 (TOUR ROAD BRIDGE #1)
0.614	0.627	GUARD/GUIDE RAIL	RIGHT	N/A

# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: TOUR ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.614	0.627	GUARD/GUIDE RAIL	LEFT	N/A
0.614	0.614	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.627	0.627	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.627	0.627	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.770	0.770	SIGN	RIGHT	GUIDE, WILSONS CREEK
0.776	0.776	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.776	0.776	SIGN	RIGHT	REGULATORY, HEALTH ADVISORY
0.776	0.776	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.776	0.828	GUARD/GUIDE RAIL	LEFT	N/A
0.776	0.828	GUARD/GUIDE RAIL	RIGHT	N/A
0.777	0.828	BRIDGE	N/A	6370-003 (TOUR ROAD BRIDGE #2)
0.827	0.827	SIGN	LEFT	REGULATORY, HEALTH ADVISORY
0.827	0.827	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.828	0.828	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.830	0.854	PAVED DITCH	RIGHT	N/A
0.851	0.851	SIGN	RIGHT	GUIDE, 1
0.851	0.851	SIGN	RIGHT	GUIDE, GIBSON'S MILL
0.854	0.854	INTERSECTION	RIGHT	ROUTE 0901 (GIBSON MILL PARKING (TOUR STOP 1))
0.859	0.923	PAVED DITCH	RIGHT	N/A
0.885	0.927	PAVED DITCH	LEFT	N/A
0.938	0.938	INTERSECTION	RIGHT	ROUTE 0901 (GIBSON MILL PARKING (TOUR STOP 1))
1.045	1.045	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
1.047	1.047	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
1.049	1.049	SIGN	RIGHT	GUIDE, NO VEHICLES
1.232	1.252	PAVED DITCH	LEFT	N/A
1.270	1.270	CULVERT	N/A	N/A
1.280	1.393	PAVED DITCH	LEFT	N/A
1.422	1.549	PAVED DITCH	LEFT	N/A
1.423	1.548	PAVED DITCH	RIGHT	N/A
1.550	1.569	GUARD/GUIDE RAIL	LEFT	N/A

# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: TOUR ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
1.550	1.569	GUARD/GUIDE RAIL	RIGHT	N/A
1.556	1.566	BRIDGE	N/A	6370-004 (TOUR ROAD BRIDGE #3)
1.580	1.580	INTERSECTION	LEFT	ROUTE 0902 (RAY HOUSE PARKING (TOUR STOP 2))
1.586	1.623	PAVED DITCH	LEFT	N/A
1.587	1.587	SIGN	LEFT	GUIDE, RAY HOUSE
1.636	1.636	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
1.688	1.688	INTERSECTION	LEFT	ROUTE 0902 (RAY HOUSE PARKING (TOUR STOP 2))
1.824	1.824	SIGN	RIGHT	GUIDE, HORSE TRAILER PARKING
1.824	1.824	SIGN	RIGHT	GUIDE, USE OVERFLOW
1.836	1.836	INTERSECTION	LEFT	ROUTE 0201 (OLD FARM ROAD (190))
1.850	1.850	SIGN	RIGHT	GUIDE, WIRE ROAD
1.853	1.853	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
1.853	1.853	SIGN	RIGHT	GUIDE, HIKING AND HORSES ONLY
1.905	1.905	CULVERT	N/A	N/A
2.057	2.057	CULVERT	N/A	N/A
2.149	2.149	SIGN	RIGHT	GUIDE, PRICE'S HQ PULASKI BATTERY
2.149	2.149	SIGN	RIGHT	GUIDE, 3
2.165	2.165	INTERSECTION	RIGHT	ROUTE 0903 (PRICE PULASKI PARKING (TOUR STOP 3))
2.221	2.221	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
2.273	2.273	CULVERT	N/A	N/A
2.280	2.280	INTERSECTION	RIGHT	ROUTE 0903 (PRICE PULASKI PARKING (TOUR STOP 3))
2.288	2.288	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
2.498	2.498	CULVERT	N/A	N/A
2.665	2.665	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
2.702	2.774	PULLOUT	LEFT	N/A
2.716	2.716	SIGN	LEFT	GUIDE, HORSE TRAILERS ONLY
2.718	2.756	GUARD/GUIDE RAIL	LEFT	N/A
2.864	2.864	SIGN	RIGHT	GUIDE, WILSONS CREEK
2.868	2.868	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
2.868	2.900	GUARD/GUIDE RAIL	RIGHT	N/A

# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: TOUR ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
2.868	2.900	GUARD/GUIDE RAIL	LEFT	N/A
2.868	2.868	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
2.868	2.868	SIGN	RIGHT	REGULATORY, HEALTH ADVISORY
2.870	2.900	BRIDGE	N/A	6370-005 (TOUR ROAD BRIDGE #4)
2.900	2.900	SIGN	LEFT	REGULATORY, HEALTH ADVISORY
2.900	2.900	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
2.900	2.900	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
2.980	2.980	SIGN	RIGHT	GUIDE, 4
2.980	2.980	SIGN	RIGHT	GUIDE, SIGEL'S SECOND POSITION
2.983	3.024	PULLOUT	LEFT	N/A
3.106	3.106	CULVERT	N/A	N/A
3.257	3.257	CULVERT	N/A	N/A
3.327	3.327	SIGN	RIGHT	GUIDE, 5
3.327	3.327	SIGN	RIGHT	GUIDE, SIGEL'S FINAL POSITION
3.340	3.340	INTERSECTION	LEFT	ROUTE 0904 (SIGEL'S FINAL PARKING (TOUR STOP 5))
3.368	3.368	CULVERT	N/A	N/A
3.423	3.423	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
3.429	3.429	INTERSECTION	LEFT	ROUTE 0904 (SIGEL'S FINAL PARKING (TOUR STOP 5))
3.435	3.435	SIGN	RIGHT	GUIDE, GRAPHIC SIGN NO TEXT
3.435	3.435	SIGN	RIGHT	GUIDE, HIKING AND HORSES ONLY
3.437	3.437	SIGN	LEFT	GUIDE, GRAPHIC SIGN NO TEXT
3.437	3.437	SIGN	LEFT	GUIDE, HIKING AND HORSES ONLY
3.468	3.547	PAVED DITCH	RIGHT	N/A
3.472	3.525	PAVED DITCH	LEFT	N/A
3.538	3.567	PAVED DITCH	LEFT	N/A
3.539	3.539	CULVERT	N/A	N/A
3.543	3.543	SIGN	RIGHT	GUIDE, SKEGG'S DRANCH
3.561	3.578	GUARD/GUIDE RAIL	RIGHT	N/A
3.565	3.584	GUARD/GUIDE RAIL	LEFT	N/A
3.566	3.574	CULVERT	N/A	6370-006 (SKEGGS BRANCH CULVERT)

# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: TOUR ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
3.657	3.657	CULVERT	N/A	N/A
3.802	3.870	PAVED DITCH	RIGHT	N/A
3.805	3.805	CULVERT	N/A	N/A
3.898	3.898	CULVERT	N/A	N/A
3.900	3.969	PAVED DITCH	RIGHT	N/A
3.951	3.951	SIGN	RIGHT	GUIDE, 6
3.951	3.951	SIGN	RIGHT	GUIDE, GUIBOR'S BATTERY
3.957	3.999	PULLOUT	RIGHT	N/A
4.002	4.002	CULVERT	N/A	N/A
4.112	4.112	CULVERT	N/A	N/A
4.180	4.269	PAVED DITCH	LEFT	N/A
4.187	4.187	CULVERT	N/A	N/A
4.189	4.234	PAVED DITCH	RIGHT	N/A
4.214	4.214	SIGN	RIGHT	GUIDE, 7
4.214	4.214	SIGN	RIGHT	GUIDE, BLOODY HILL
4.234	4.234	INTERSECTION	RIGHT	ROUTE 0905 (BLOODY HILL PARKING (TOUR STOP 7))
4.336	4.478	PAVED DITCH	LEFT	N/A
4.354	4.354	INTERSECTION	RIGHT	ROUTE 0905 (BLOODY HILL PARKING (TOUR STOP 7))
4.354	4.399	PAVED DITCH	RIGHT	N/A
4.422	4.422	CULVERT	N/A	N/A
4.506	4.555	PAVED DITCH	RIGHT	N/A
4.507	4.563	PAVED DITCH	LEFT	N/A
4.583	4.697	PAVED DITCH	LEFT	N/A
4.588	4.588	CULVERT	N/A	N/A
4.603	4.650	PAVED DITCH	RIGHT	N/A
4.687	4.687	SIGN	RIGHT	GUIDE, 8
4.687	4.687	SIGN	RIGHT	GUIDE, WEST BATTLEFIELD OVERLOOK
4.694	4.737	PULLOUT	RIGHT	N/A
4.764	4.839	PAVED DITCH	RIGHT	N/A
4.765	4.885	PAVED DITCH	LEFT	N/A



# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0010: TOUR ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

<b>FROM MILEPOST</b>	<b>TO MILEPOST</b>	<b>FEATURE</b>	<b>SIDE</b>	<b>COMMENT</b>
4.898	4.898	CULVERT	N/A	N/A
4.899	4.919	PAVED DITCH	LEFT	N/A
4.926	4.926	SIGN	LEFT	REGULATORY, DO NOT ENTER
4.926	4.926	SIGN	LEFT	REGULATORY, WRONG WAY
4.936	4.936	SIGN	RIGHT	REGULATORY, STOP
4.945	4.945	INTERSECTION	LEFT	ROUTE 0010 (TOUR ROAD)
4.945	4.945	INTERSECTION	RIGHT	ROUTE 0010 (TOUR ROAD)
4.945	4.945	SIGN	N/A	GUIDE, VISITOR CENTER
4.945	4.945	ROUTE END	N/A	TO END OF LOOP

# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0011: HIGHWAY 182

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM WEST PARK BOUNDARY
0.000	0.000	INTERSECTION	N/A	PAVED ROUTE (WEST FARM ROAD 182 (ELM STREET) / NON NPS)
0.000	0.000	PARK BOUNDARY	N/A	N/A
0.013	0.013	SIGN	RIGHT	REGULATORY, SPEED LIMIT 25
0.021	0.021	SIGN	RIGHT	GUIDE, ENTERING WILSON'S CREEK NATIONAL BATTLEFIELD
0.027	0.027	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.064	0.064	INTERSECTION	RIGHT	ROUTE 0402 (MAINTENANCE AREA ROAD)
0.109	0.109	SIGN	RIGHT	REGULATORY, STOP
0.114	0.114	SIGN	LEFT	GUIDE, FARM ROAD 182 6500
0.114	0.114	SIGN	LEFT	GUIDE, STATE ZZ S 5400
0.116	0.116	INTERSECTION	LEFT	PAVED ROUTE (HIGHWAY ZZ / NON NPS)
0.118	0.118	INTERSECTION	RIGHT	PAVED ROUTE (HIGHWAY ZZ / NON NPS)
0.126	0.129	CURB	LEFT	N/A
0.126	0.129	CURB	RIGHT	N/A
0.127	0.127	SIGN	LEFT	REGULATORY, STOP
0.129	0.129	SIGN	LEFT	REGULATORY, YIELD
0.149	0.149	SIGN	LEFT	GUIDE, SPRINGFIELD 60 60 REPUBLIC
0.212	0.212	SIGN	RIGHT	GUIDE, WILSON'S CREEK NATIONAL BATTLEFIELD
0.239	0.239	INTERSECTION	RIGHT	ROUTE 0900 (VISITOR CENTER PARKING)
0.295	0.295	INTERSECTION	N/A	PAVED ROUTE (WEST FARM ROAD 182 (ELM STREET) / NON NPS)
0.295	0.295	ROUTE END	N/A	TO PAVEMENT CHANGE

# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0200: WASTEWATER PLANT ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

<b>FROM MILEPOST</b>	<b>TO MILEPOST</b>	<b>FEATURE</b>	<b>SIDE</b>	<b>COMMENT</b>
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0010 (TOUR ROAD)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0010 (TOUR ROAD)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0010 (TOUR ROAD)
0.005	0.005	SIGN	LEFT	REGULATORY, STOP
0.005	0.005	SIGN	RIGHT	GUIDE, NO VEHICLES
0.079	0.079	INTERSECTION	LEFT	TO END AT BUILDING
0.079	0.079	ROUTE END	N/A	TO END AT BUILDING

# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0201: OLD FARM ROAD (190)

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0010 (TOUR ROAD)
0.000	0.000	INTERSECTION	LEFT	UNPAVED ROUTE (OLD WIRE ROAD / NON NPS)
0.000	0.000	INTERSECTION	N/A	ROUTE 0201 (OLD FARM ROAD (190)) UNPAVED SECTION
0.003	0.003	CULVERT	N/A	N/A
0.005	0.005	INTERSECTION	RIGHT	ROUTE 0400 (MCELHANEY FARM ENTRANCE ROAD)
0.129	0.129	INTERSECTION	RIGHT	NPS GRAVEL ROAD
0.136	0.136	SIGN	RIGHT	REGULATORY, ONE WAY
0.195	0.195	INTERSECTION	RIGHT	NPS GRAVEL ROAD
0.200	0.200	PARK BOUNDARY	N/A	N/A
0.200	0.200	SIGN	RIGHT	REGULATORY, ONE WAY
0.200	0.200	ROUTE END	N/A	TO EAST PARK BOUNDARY AT MP 0.24

# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0202: DOUBLE SPRINGS ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

<b>FROM MILEPOST</b>	<b>TO MILEPOST</b>	<b>FEATURE</b>	<b>SIDE</b>	<b>COMMENT</b>
0.000	0.000	ROUTE BEGIN	N/A	FROM MISSOURI STATE HIGHWAY ZZ
0.000	0.000	INTERSECTION	LEFT	PAVED ROUTE (HIGHWAY ZZ / NON NPS)
0.000	0.000	INTERSECTION	RIGHT	PAVED ROUTE (HIGHWAY ZZ / NON NPS)
0.006	0.009	GUARD/GUIDE RAIL	LEFT	N/A
0.018	0.018	SIGN	LEFT	REGULATORY, BOUNDARY
0.019	0.019	SIGN	N/A	REGULATORY, NOTICE NO HUNTING OR TRAPPING
0.019	0.019	SIGN	RIGHT	REGULATORY, BOUNDARY
0.019	0.019	SIGN	N/A	REGULATORY, U.S. PROPERTY NO TRESPASSING
0.019	0.019	GATE	N/A	N/A
0.019	0.019	SIGN	RIGHT	REGULATORY, BOUNDARY
0.019	0.019	SIGN	LEFT	REGULATORY, BOUNDARY
0.111	0.111	INTERSECTION	N/A	ROUTE 0202 (DOUBLE SPRINGS ROAD) UNPAVED SECTION
0.111	0.111	ROUTE END	N/A	TO UNNAMED ROAD AT MP 0.26

# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0400: MCELHANEY FARM ENTRANCE ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

<b>FROM MILEPOST</b>	<b>TO MILEPOST</b>	<b>FEATURE</b>	<b>SIDE</b>	<b>COMMENT</b>
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0201 (OLD FARM ROAD (190))
0.000	0.000	INTERSECTION	LEFT	ROUTE 0201 (OLD FARM ROAD (190))
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0201 (OLD FARM ROAD (190))
0.080	0.080	INTERSECTION	RIGHT	UNPAVED ROUTE
0.087	0.087	INTERSECTION	N/A	END OF PAVEMENT
0.087	0.087	ROUTE END	N/A	TO END OF PAVEMENT

# WICR: ROUTE MAINTENANCE FEATURES ROAD LOG

## ROUTE 0402: MAINTENANCE AREA ROAD

**Notice:** Culverts and drop inlets were marked by NPS and inventoried by RIP in Cycle 5 on all paved routes.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.000	0.000	ROUTE BEGIN	N/A	FROM ROUTE 0011 (HIGHWAY 182)
0.000	0.000	INTERSECTION	LEFT	ROUTE 0011 (HIGHWAY 182)
0.000	0.000	INTERSECTION	RIGHT	ROUTE 0011 (HIGHWAY 182)
0.005	0.005	SIGN	LEFT	REGULATORY, STOP
0.008	0.008	CULVERT	N/A	N/A
0.013	0.013	SIGN	RIGHT	REGULATORY, NO PARKING
0.013	0.013	GATE	N/A	N/A
0.014	0.014	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.014	0.014	SIGN	RIGHT	REGULATORY, U.S. PROPERTY NO TRESPASSING
0.014	0.014	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.015	0.015	SIGN	LEFT	WARNING, GRAPHIC SIGN NO TEXT
0.015	0.015	SIGN	RIGHT	WARNING, GRAPHIC SIGN NO TEXT
0.020	0.020	SIGN	RIGHT	GUIDE, SERVICE ROAD
0.045	0.045	CULVERT	N/A	N/A
0.056	0.056	INTERSECTION	RIGHT	ROUTE 0908 (EMPLOYEE PARKING)
0.078	0.078	INTERSECTION	RIGHT	ROUTE 0908 (EMPLOYEE PARKING)
0.095	0.095	INTERSECTION	RIGHT	ROUTE 0907 (MAINTENANCE OFFICE PARKING)
0.134	0.134	INTERSECTION	N/A	ROUTE 0906 (MAINTENANCE PARKING AREA)
0.134	0.134	ROUTE END	N/A	TO ROUTE 0906 (MAINTENANCE PARKING AREA)

# Section 10 Appendix



Wilson's Creek National Battlefield





## **Explanation of Changes to the RIP Index Equations and Determination of PCR**

---

In 2005, the FHWA began implementing the use of a Pavement Management System to assist the National Park Service in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) and this software has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Region, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA as well.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions vis a vis the distresses and indexes that comprise the Pavement Condition Rating (PCR), an extensive study was completed throughout 2010 that has resulted in changes to the Road Inventory Program condition reporting method and specifically, the calculation of PCR. It was determined that a better representation of PCR could be achieved by modifying the relative impact certain distresses would have on the overall rating.

Through the use of HPMA data, it was noted that false failure indicators existed with the existing PCR model, and that it would be necessary to reduce their impact. The distresses affected in this way were Rutting and Roughness. Conversely, experience showed that roadways with extensive cracking present were often shown to have a high PCR. Therefore, the crack index models were adjusted to be more sensitive to changes in crack severity or quantity. It was also determined that these issues were not due to a problem with data acquisition (i.e. the RIP “van”), but with the way the collected data was processed. The final change was to provide guidance on when to use the Roughness Condition Index (RCI) in the PCR calculation. Roughness data is of little value to determining overall condition on routes that, due to their length or geometrics, have lower vehicle operating speeds. Therefore, in Cycle 5, only routes that have lengths of one half mile or greater and posted speed limits of 25 mph or greater will have RCI reported and included in the PCR calculations.

The changes that were implemented were endorsed by management at both the FHWA and NPS. In order to show the effectiveness of these changes, several sites were ground truth tested to ensure that an improvement was achieved between the relationship of PCR and the actual Maintenance and Rehabilitation needs that were represented. The changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection.


# Explanation of the Excellent, Good, Fair and Poor Condition Descriptions

In addition to the RIP Index changes that will be implemented in Cycle 5, we will also aim to provide greater assistance in translating good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 60 or below. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.

## Condition Categories and Treatments

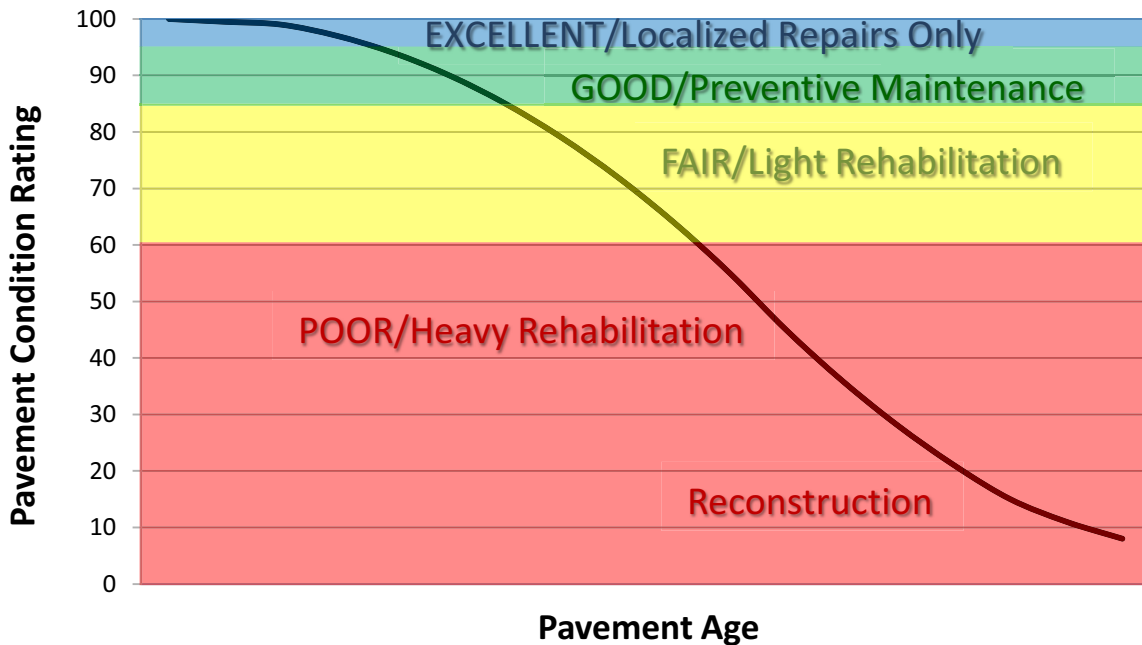

## DESCRIPTION OF RATING SYSTEM

---

The Federal Highway Administration (FHWA), Road Inventory Program (RIP) for the National Park Service (NPS), collects roadway condition data on paved surfaces (asphalt, concrete, brick, and cobblestone) on roads, parkways, and parking areas in national parks nationwide. The road surface condition data is collected using an automated Data Collection Vehicle (DCV). Roads having brick or cobblestone surfacing are not normally surveyed with the DCV, but are manually rated for condition rating.

The FHWA RIP is implemented based on the premise that an accurate pavement surface condition assessment can be accomplished using automated crack detection technology as applied to digital images. Various methods of pavement condition assessment have been developed over the years with varying degrees of accuracy and acceptance. The use of digital photography to record pavement images and subsequent crack detection and classification has undergone continuous improvements over the past decade. Digital cameras with increasingly superior resolution and high definition have become more affordable, and the proprietary programming code and algorithms have been improved in crack detection software.

With the use of quality digital photography and automated crack detection software, FHWA RIP is tasked with executing a pavement condition assessment on about 5000 miles of National Park Service roads and parkways. Foremost in setting up the basis of pavement distress identification is employing the distress identification protocols used by FHWA. There is no single distress identification system that is universal among entities conducting a program of distress identification. For the purpose of the NPS RIP, FHWA employs distress identification protocols that are specific to this program.

FHWA has referenced the “*Distress Identification Manual for the Long-Term Pavement Performance Program*”, Publication No. FHWA-RD 03-031, June 2003, as the point-of-reference for distress types on NPS pavement. In truth, the FHWA RIP distress types are similar to those described in the LTPP manual with some modifications. This document, “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013*” was developed using the “*Distress Identification Manual for the Long-Term Pavement Performance Program*” as a guideline. Definitions of severity levels based on crack width contained in this document adhere to the LTPP Distress ID Manual. Modifications have been made to the definition of Alligator and Longitudinal Cracking and determination of Alligator Cracking severity. This manual also addresses Rutting and Roughness and its application to RIP.

In 2010, FHWA RIP began the fifth cycle of data collection in national parks. For Cycle 5, data will be collected in approximately 81 large parks (10 or more paved route miles) on Functional Class 1, 2, and 7 routes plus any new routes or parking areas previously not collected, totaling an estimated 4,459 paved route miles. Additionally, 168 small parks will be collected comprising approximately 529 paved route miles and associated paved parking areas. The data is used to support the National Park Service road maintenance program and Pavement Management System (PMS) developed and maintained by FHWA.

This “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 5, 2010-2013*” will be used as a reference resource in crack detection and classification, determination of distress severity and extent, and in the calculation of distress index values for the FHWA RIP Cycle 5.

# **SURFACE DISTRESSES**

---

## **Surface Condition Rating - SCR**

Surface distresses are measured in the primary lane only. In the classification and measurement of all paved surface condition data, results will be reported in the database in record intervals of 0.02 miles (105.6 feet) (smallest granularity) along the route.

### **Surface distresses determined from digital images**

- Transverse Cracks
- Longitudinal Cracks
- Alligator Cracks
- Patching/Potholes

### **Surface distress measured by DCV (Data Collection Vehicle) LRMS (Laser Rut Measuring System)**

- Rutting

### **Each of the five surface distresses is assigned a computed surface distress index**

- Transverse Crack Index
- Longitudinal Crack Index
- Alligator Crack Index
- Patching/Pothole Index
- Rutting Index

Surface distress data are classified as listed above, measured for severity, and quantified for extent. Classification, severity, and extent of these five surface distresses comprise the three main elements for calculation of SCR (Surface Condition Rating).

In addition to the five surface distresses, a **Structural Crack Index** is computed, which is a combination of the Longitudinal Crack Index and the Alligator Crack Index. The Structural Crack Index is then used in lieu of the LC and AC indices to compute SCR.

## **Roughness Condition Index - RCI**

### **Additional condition data measured by DCV (lasers and accelerometers)**

- Roughness (IRI)

Roughness is measured by FHWA's DCV and reported as International Roughness Index (IRI) in inches/mile. Using IRI, the Roughness Condition Index (RCI) is computed.

## **Pavement Condition Rating - PCR**

Using the SCR (computed from the five surface distresses) and the RCI, an overall Pavement Condition Rating (PCR) is computed. The formula for PCR is:

$$\text{Asphalt PCR} = (0.60 * \text{SCR}) + (0.40 * \text{RCI})$$

$$\text{Concrete PCR} = \text{RCI}$$

A detailed description of each distress index formula, roughness index formula, SCR and PCR is provided in this document beginning on page 23.

Each classified surface distress will fall into one or more *severity*...LOW, MEDIUM, or HIGH based on criteria listed. For each severity, an *extent* is established based on the measured quantity of the distress within that severity. Within each *severity* individual distresses are assigned a *Maximum Allowable Extent* (MAE). For example, LOW severity transverse cracking may be allowed up to 21.1 cracks within a 0.02 interval before it reaches MAE and fails.

The index formulas are based on a scale of 0-100. A PCR index value of 100 would indicate a “new” road with no measurable distresses or rough ride. A PCR value of 60 is determined to be *terminable serviceability* and the road is considered failed. The range of index values with condition descriptors is:

POOR (<=60), FAIR (61 - 84), GOOD (85 - 94), EXCELLENT (95 - 100)

Index values are generally computed based on cumulative deducts of the measured severities. As shown in the index formulas below, as any single severity reaches or exceeds MAE, the index computes to a value of 60 or less, and the road fails for that 0.02 interval.

**Note:** As a result of a unique combination of measured surface distresses and IRI, index values occasionally compute to less than 0 or greater than 100. In this instance, an index value < 0 defaults to 0. Index values > 100 default to 100. For all indices, a higher value indicates a better road condition, and a lower value indicates a poorer road condition.

On the following page, Table 1 summarizes the different types of distresses measured.

**TABLE 1: Distress Summary**

<b>ASPHALT-SURFACED PAVEMENT DISTRESS TYPES with RUTTING and ROUGHNESS</b>				
<b>DISTRESS TYPE</b>	<b>UNIT OF MEASURE...</b>	<b>...CONVERTED TO</b>	<b>DEFINED SEVERITY LEVELS?</b>	<b>MEASURED BY</b>
<b>Alligator Cracking</b>	<b>Square Feet</b>	<b>Percent of Lane Per 0.02 Mile</b>	<b>Yes</b>	<b>Digital Image Crack Detection Software</b>
<b>Transverse Cracking</b>	<b>Linear Feet</b>	<b>Number of Cracks Per 0.02 Mile</b>	<b>Yes</b>	<b>Digital Image Crack Detection Software</b>
<b>Longitudinal Cracking</b>	<b>Linear feet</b>	<b>Percent of Lane Length Per 0.02 Mile</b>	<b>Yes</b>	<b>Digital Image Crack Detection Software</b>
<b>Patching/Potholes</b>	<b>Square Feet</b>	<b>Percent of Lane Per 0.02 Mile</b>	<b>No</b>	<b>Digital Image Crack Detection Software</b>
<b>Rutting</b>	<b>Inches</b>	<b>Rut Depth Per 0.02 Mile</b>	<b>Yes</b>	<b>DCV – Laser Rut Measuring System (LRMS)</b>
<b>Roughness</b>	<b>IRI</b>	<b>*RCI Per 0.02 Mile</b>	<b>No</b>	<b>DCV – Lasers /Accelerometers</b>

**\*Note: Roughness is measured on concrete roadways, but surface distresses and rutting are not measured. For concrete, PCR = RCI**

# ALLIGATOR CRACKING

## Description

Alligator cracking is considered a combination of fatigue and block cracking. It is a series of interconnected cracks in various stages of development. Alligator cracking develops into a many-sided pattern that resembles chicken wire or alligator skin. It can occur anywhere in the road lane. Alligator cracking must have a quantifiable area.

## Severity Levels

### **LOW**

An area of cracks with no or very few interconnecting cracks and the cracks are not spalled. Cracks are  $\leq 0.25$  in (6mm) in mean width. Cracks in the pattern are no further apart than 1 foot (0.328 m). May be sealed cracks with sealant in good condition and a crack width that cannot be determined.

### **MEDIUM**

An area of interconnected cracks that form a complete pattern. Cracks may be slightly spalled. Cracks are  $>0.25$  in. (6 mm) and  $\leq 0.75$  in. (19 mm) or any crack with a mean width  $\leq 19$  mm and adjacent low severity cracking. Cracks in the pattern are no further apart than 6 in. (150 mm).

### **HIGH**

An area of interconnected cracks forming a complete pattern. Cracks are moderately or severely spalled. Cracks are  $>0.75$  in (19mm) or any crack with a mean width  $\leq 0.75$  in (19mm) and adjacent medium to high severity random cracking.

A combination of observed crack width and crack pattern is used to determine overall severity of alligator cracking. Based on above description of each severity, the highest level of crack width and crack pattern determines overall severity. Table 2 illustrates this.

**TABLE 2: Alligator Crack Severity Levels**

<b>ALLIGATOR CRACKING SEVERITY LEVELS</b>		<b>Crack Pattern</b>		
		<b>LOW</b>	<b>MED</b>	<b>HIGH</b>
<b>Crack Width</b>	<b>LOW</b>	L	M	H
	<b>MED</b>	M	M	H
	<b>HI</b>	H	H	H



## **LONGITUDINAL CRACKING**

### **Description**

Longitudinal cracking occurs predominantly parallel to the pavement centerline. It can occur anywhere within the lane. Longitudinal cracks occurring in the wheelpath may be noteworthy.

### **Severity Levels**

#### **LOW**

Cracks with a mean width of  $< 0.25$  in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

#### **MED**

Cracks with a mean width  $> 0.25$  in. (6 mm) and  $\leq 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random low severity cracking.

#### **HIGH**

Cracks with a mean width  $> 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random medium to high severity cracking.

## **TRANSVERSE CRACKING**

### **Description**

Transverse cracking occurs predominantly perpendicular to the pavement centerline. It can occur anywhere within the lane.

### **Severity Levels**

#### **LOW**

Cracks with a mean width of  $< 0.25$  in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

#### **MED**

Cracks with a mean width  $> 0.25$  in. (6 mm) and  $\leq 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random low severity cracking.

#### **HIGH**

Cracks with a mean width  $> 0.75$  in. (19 mm). Also, any crack with a mean width  $< 0.75$  in. (19 mm) and adjacent random medium to high severity cracking.

## **PATCHING AND POTHOLES**

### **Description**

Patching is an area of pavement surface that has been removed and replaced with patching material or an area of pavement surface that has had additional patching material applied. Patching may encompass partial lane or full lane width. On full lane width patching; the total, contiguous length of patch may not exceed 0.30 mi. (0.48 km). (Any full-lane patch exceeding 0.30 mi. in length is considered a pavement change). Patching must have a quantifiable area.

Potholes are bowl-shaped holes of various sizes occurring in the pavement surface.

### **Severity Levels**

There are no stratified severities for Patching/Potholes. They either are present or they are not.

## **RUTTING**

### **Description**

Rutting is a longitudinal surface depression in the wheelpath.

### **Severity Levels**

#### **LOW**

Ruts with a measured depth  $\geq 0.20''$  and  $\leq 0.49''$

#### **MED**

Ruts with a measured depth  $\geq 0.50''$  and  $\leq 0.99''$

#### **HIGH**

Ruts with a measured depth  $\geq 1.00''$

Ruts  $< 0.20''$  are not included in the distress calculations.

## **ROUGHNESS**

### **Description**

Roughness is the measurement of the unevenness of the pavement in the direction of travel. It is measured in units of IRI (International Roughness Index), inches per mile, and is indicative of ride comfort.

### **Severity Levels**

There are no stratified severity levels for roughness. The roughness (or smoothness) of a road surface can be defined by IRI in the following table.

**TABLE 3: IRI**

<b>IRI Descriptions</b>	
<b>Type of Road</b>	<b>Typical IRI ( in/mile )</b>
New Road, no noticeable roughness	<90
Small level of roughness	90 – 126
Road of average roughness	126 – 190
Road with above average roughness	190 – 253
Road with severe roughness	253 – 380
Nearly impassable	>380

## INDEX FORMULAS

---

Note: All index formulas listed below contain MAE applicable to 0.02 mile (105.6 feet) interval.

### Alligator Crack Index

$$AC\_INDEX = 100 - 40 * [(\%LOW / 35) + (\%MED / 15) + (\%HI / 5)]$$

Where:

The values *%LOW*, *%MED* and *%HI* report the percentage of the observed pavement (0.02 mile, primary lane) that contains alligator cracking within the respective severities. These values range from 0 to 100.

*%LOW* = Percent of total area (primary lane, 0.02 in length), low severity

*%MED* = Percent of total area (primary lane, 0.02 in length), medium severity

*%HI* = Percent of total area (primary lane, 0.02 in length), high severity

Percent of total area is computed as:

$$\frac{\text{square foot area of alligator crack severity}}{0.02 \text{ mile} * \text{lane width}}$$

In AC\_INDEX, the denominators 35, 15, and 5 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 35% of low severity alligator cracking for a 0.02 interval before failure, 15% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

### Longitudinal Crack Index

$$LC\_INDEX = 100 - 40 * [(\%LOW / 175) + (\%MED / 75) + (\%HI / 25)]$$

Where:

The values *%LOW*, *%MED*, and *%HI* report the length of longitudinal cracking within each severity as a percent of the section length (0.02 mile, primary lane).

These values are  $\geq 0$  and can exceed 100.

*%LOW* = Percent of interval length (primary lane, 0.02 in length), low severity

*%MED* = Percent of interval length (primary lane, 0.02 in length), medium severity

*%HI* = Percent of interval length (primary lane, 0.02 in length), high severity

Percent of interval length is computed as:

$$\frac{\text{length of respective longitudinal cracking}}{0.02 \text{ mile (105.6 feet)}}$$

In LC\_INDEX, the denominators 175, 75, and 25 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 175% of low severity alligator cracking for a 0.02 interval before failure, 75% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

### **Structural Crack Index**

$$SC\_INDEX = [100 - ((100 - AC\_INDEX) + (100 - LC\_INDEX))]$$

**Structural Crack Index** is a combination of Alligator Cracking and Longitudinal Cracking, and is used in the SCR formula in lieu of AC and LC separately.

### **Transverse Crack Index**

$$TC\_INDEX = 100 - 40 * [(LOW / 21.1) + (MED / 4.4) + (HI / 2.6)]$$

Where:

The values *LOW*, *MED* and *HI* report a count of the total number of transverse cracks (reported to three decimals) within each severity level, where one transverse crack is equal to the lane width. These values are  $\geq 0$ .

LOW = Number of cracks in interval (primary lane, 0.02 in length), low severity

MED = Number of cracks in interval (primary lane, 0.02 in length), medium severity

HI = Number of cracks in interval (primary lane, 0.02 in length), high severity

Number of cracks is computed as:

$$\frac{\text{Total length of transverse cracks}}{\text{Lane width}}$$

In TC\_INDEX, the denominators 21.1, 4.4, and 2.6 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 21.1 low severity transverse cracks for a 0.02 interval before failure, 4.4 cracks for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

## Patching Index

$$\text{PATCH\_INDEX} = 100 - 40 * (\% \text{PATCHING} / 80)$$

Where:

The value *%PATCHING* reports the percentage of the observed pavement (0.02 mile, primary lane) that contains patching/potholes. This value ranges from 0 to 100.

*%PATCHING* = Percent of total area (primary lane, 0.02 in length)

Percent of total area is computed as:

$$\frac{\text{square foot area of patching/potholes}}{0.02 \text{ mile} * \text{lane width}}$$

There are no severity levels for patching. It either exists or does not.

In *PATCH\_INDEX*, the denominator 80 is the Maximum Allowable Extent (MAE) for each severity. In other words, we will allow up to 80% patching for a 0.02 interval before failure. As you can see, if patching/potholes reaches MAE the resulting index value is 60, or failure.

## Rutting Index

$$\text{RUT\_INDEX} = 100 - 40 * [(\% \text{LOW} / 535) + (\% \text{MED} / 205) + (\% \text{HI} / 40)]$$

Where:

20 rut depth measurements are taken per 0.02 interval for each of 2 wheel paths (left and right), resulting in a total of 40 measurements taken for both wheel paths. *Each wheelpath is analyzed independently for rut severities.* The values *%LOW*, *%MED* and *%HI* are a *total percentage* of left wheelpath percentage and right wheelpath percentage added together for the respective severity. These values range from 0 to 200.

*%LOW* = Percent of LOW ruts in left wheelpath based on 20 ruts, plus percent of LOW ruts in right wheelpath based on 20 ruts.

*%MED* = Percent of MED ruts in left wheelpath based on 20 ruts, plus percent of MED ruts in right wheelpath based on 20 ruts.

*%HI* = Percent of HI ruts in left wheelpath based on 20 ruts, plus percent of HI ruts in right wheelpath based on 20 ruts.

Percent of rut measurements within each severity can also be computed as:

$$\frac{\text{total number of ruts within each severity in both wheelpaths}}{20} * 100$$

In *RUT\_INDEX*, the denominators 535, 205, and 40 are the Maximum Allowable Extents for each severity. In other words, the formula allows up to 535% low severity

ruts for a 0.02 interval before. However, since 200 is the highest measurable percentage allowed, 535% is unattainable and therefore, no amount of LOW severity rutting will cause the RUT\_INDEX to fail a road. Similarly, since the MAE for MED severity rutting is 205, no amount of MED severity rutting will cause the RUT\_INDEX to reach 60 and fail the road. As you can see, LOW severity rutting reaches MAE the resulting index value is 60, or failure. This formula was intentionally designed to minimize the impact of LOW and MED severity rutting on RUT\_INDEX.

### **Roughness Condition Index (Asphalt)**

$$RCI = 32 * [5 * (2.718282 ^ {(-0.0041 * AVG IRI)})]$$

Where:

The value *AVG IRI* reports the average value of the Left IRI and Right IRI measurements for the interval (0.02 mile, primary lane). This value can range from approximately 40 to 999.0.

Average IRI is computed as:

$$\frac{\text{Left wheelpath IRI} + \text{Right wheelpath IRI}}{2}$$

There is no applicable threshold for failure for this index.

### **Roughness Condition Index (Concrete)**

$$RCI = -0.0012(IRI^2) + 0.0499(IRI) + 99.542$$

For concrete, PCR = RCI

### **Surface Condition Rating Index**

**SCR** = *Lowest* Index Value Of: [SC\_INDEX, TC\_INDEX, PATCH\_INDEX, RUT\_INDEX]

*Note: The modified SCR equation above combines AC\_INDEX and LC\_INDEX, and considers that a single AC/LC index value of the Structural Crack Index (SC\_INDEX). The lowest of the four computed index values (SC\_INDEX, TC\_INDEX, PATCH\_INDEX, or RUT\_INDEX) becomes the SCR.*

Where:

See above for determinations of SC\_INDEX, TC\_INDEX, PATCH\_INDEX and RUT\_INDEX.

The threshold for failure for this index is SCR = 60.

## Data Collection Vehicle Subsystems

---

Data on paved roads in Cycle 5 is collected by FHWA using a Pathway Services Inc. Data Collection Vehicle (DCV), called PathRunner. The DCV is driven in the primary-direction lane at posted speed limits and less.

### CAMERAS

Forward-facing and rear-facing video is collected as .jpg digital imagery at a frequency of 26.4 feet.

Two forward-facing cameras are mounted above the vehicle cab, one pointed straight ahead and the other to the right shoulder providing seamless 120 degree viewing.

<b>CAMERA SPECIFICATIONS</b>	
<b>Two Forward/ One Rear Facing</b>	
Camera lens/type	FUJINON CCTV LENS H16x10B-Y41
Focal length	10 mm – 160 mm
Image size	8.8 mm x 6.6mm
Image format	*.jpg
Image resolution	HD 2000 X 1200
Image pixel size	depends on distance
Zoom ratio	16x
Max Relative Aperture	1:2.5
Iris range	F25-T800 (Equivalent to F800)

Pavement images are created using a Laser Scan Imaging System. This system is composed of a single high resolution line-scan camera and two lasers configured to image an approximate 11-foot wide lane with 1 mm resolution.

<b>CAMERA SPECIFICATIONS</b>	
<b>Pavement Line Scan</b>	
Image size	4280 pixels/line
Image width	4 meters (3950 mm nominal)
Laser class	3B
Power	250W
Vehicle speed limitations	62 mph
Environment	Dry pavement, day or night
Sensor size (approx)	300 mm(H) x 375 mm(L) x 200 mm(D)
Image frame length	26.4 feet



### **DMI (Distance Measuring Instrument)**

The DMI (Distance Measuring Instrument) obtains road length measurements that are accurate to 0.1% for speeds up to 60 mph. The DMI is connected to the hub of the rear wheel on the driver's side, and is calibrated to the revolutions of the rear vehicle axle on a regular basis.

### **ROUGHNESS (IRI)**

The collection system includes a South Dakota type laser profiler manufactured based on active Class 1 ASTM E950 standards. The dynamic profile of the pavement surface is collected from which the IRI roughness data is computed. The sensors include one accelerometer on each wheelpath, one height sensor (laser) on each wheelpath, and a distance transducer.

<b>IRI SPECIFICATIONS</b>	
Reported IRI units	Inches/mile
Vehicle speed limitations	12-62 mph
IRI equipment certification	Texas Transportation Institute (TTI)
Wavelengths accommodated	6 in. – 300 feet
IRI computed & reported	World Bank Technical Paper Number 46
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E950-98 (2004), ASTM E 1926-08, AASHTO MP 11-08, AASHTO PP 49-08

### **RUTTING**

Rutting depths are measured using an INO Laser Rut Measurement System (LRMS). This system is a transverse profiling device that detects and characterizes pavement rutting. The LRMS can acquire full 4 meter width profiles of a pavement lane at normal traffic speeds and uses two laser profilers that digitize transverse sections of the pavement.

<b>RUTTING SPECIFICATIONS</b>	
Reported rut depth units	Inches
Vehicle speed limitations	Up to 62 mph
Sampling rate	30-150 profiles/second
Transverse resolution	1280 points/profile
Transverse field-of-view	4 m
Depth accuracy (nominal)	+/- 1 mm
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E1703M-95 (reapproved 2005)

## **GPS & INERTIAL SYSTEMS**

GPS is collected by an onboard system employing Omnistar real time correction and a gyroscope Inertial Measuring Unit (IMU) to provide accurate positioning data in instances of satellite obstruction. All GPS coordinates are tied to image and linear distance measurements.

<b>GPS SPECIFICATIONS</b>	
Static accuracy	Sub-meter
Dynamic accuracy	2-3 meters
Receiver	12 satellite tracking
Coordinate system	Lat Lon WGS 84
Environment	Day or night
Cross-slope	+ - 0.1 degrees
Grade	+ - 0.1 degrees

### GPS on Manually Rated Roads (MRR)

Parking areas, some roads, and other paved areas that are not fully drivable with the DCV are collected manually by field technicians. GPS is collected for these routes using portable Trimble GPS backpack units.

## Geodatabase – Background and Metadata

---

In addition to this park report, a *geodatabase* containing both tabular and spatial data specific to this park has been provided. All data disseminated in the preceding report has been obtained from the tables and fields within said geodatabase. The geodatabase can be referenced for tabular data via Microsoft Access or for both tabular and spatial data via ESRI's ArcGIS Suite of software which consists of; ArcMap, ArcCatalog and ArcExplorer. Consolidating the RIP data into one database creates a seamless relationship of tables and geographic data. It will allow RIP to facilitate easier updates and enhancements in the future.

A geodatabase can be thought of as simply a database containing spatial data. Many different tables are contained with the park's geodatabase. A complete and thorough description of the tables and fields contained within this geodatabase can be found in the *metadata*. The metadata is attached directly within the geodatabase and can be accessed via ESRI's ArcCatalog.

## **GLOSSARY OF TERMS AND ABBREVIATIONS**

<b><u>TERM OR ABBREVIATION</u></b>	<b><u>DESCRIPTION OR DEFINITION</u></b>
AC	Alligator Cracking
CRS	Condition Rating Sheets (Section 5)
DCV	Data Collection Vehicle
Excellent	Excellent rating with an index value of 95 to 100
Fair	Fair rating with an index value from 61 to 84
FUNCT_CLASS	Functional Classification (see Route ID, Section 2)
Good	Good rating with an index value from 85 to 94
IRI	International Roughness Index
Lane Width	Width from road centerline to fogline, or from centerline to edge-of-pavement when no fogline exists
LC	Longitudinal Cracking
MRR	Manually Rated Route
MRL	Manually Rated Line
MRP	Manually Rated Polygon
N/A	Not Applicable
NC	Not Collected
PATCH	Patching and Potholes
Paved Width	Width from edge-of-pavement to edge-of-pavement
PCR	Pavement Condition Rating
PKG	Parking Area
Poor	Poor rating with an index value of 0 to 60
RCI	Roughness Condition Index
SC	Structural Cracking
SCR	Surface Condition Rating
TC	Transverse Cracking