

# INDU Cycle 6

## Final Report

### Road Inventory and Condition Assessment of Paved Routes Indiana Dunes National Park




**Federal Lands Highway  
Road Inventory Program**

**Prepared By:**

**Federal Highway Administration  
Eastern Federal Lands Highway Division  
Road Inventory Program (RIP)**

**Report Date: January 2021**

# Indiana Dunes National Park in Indiana

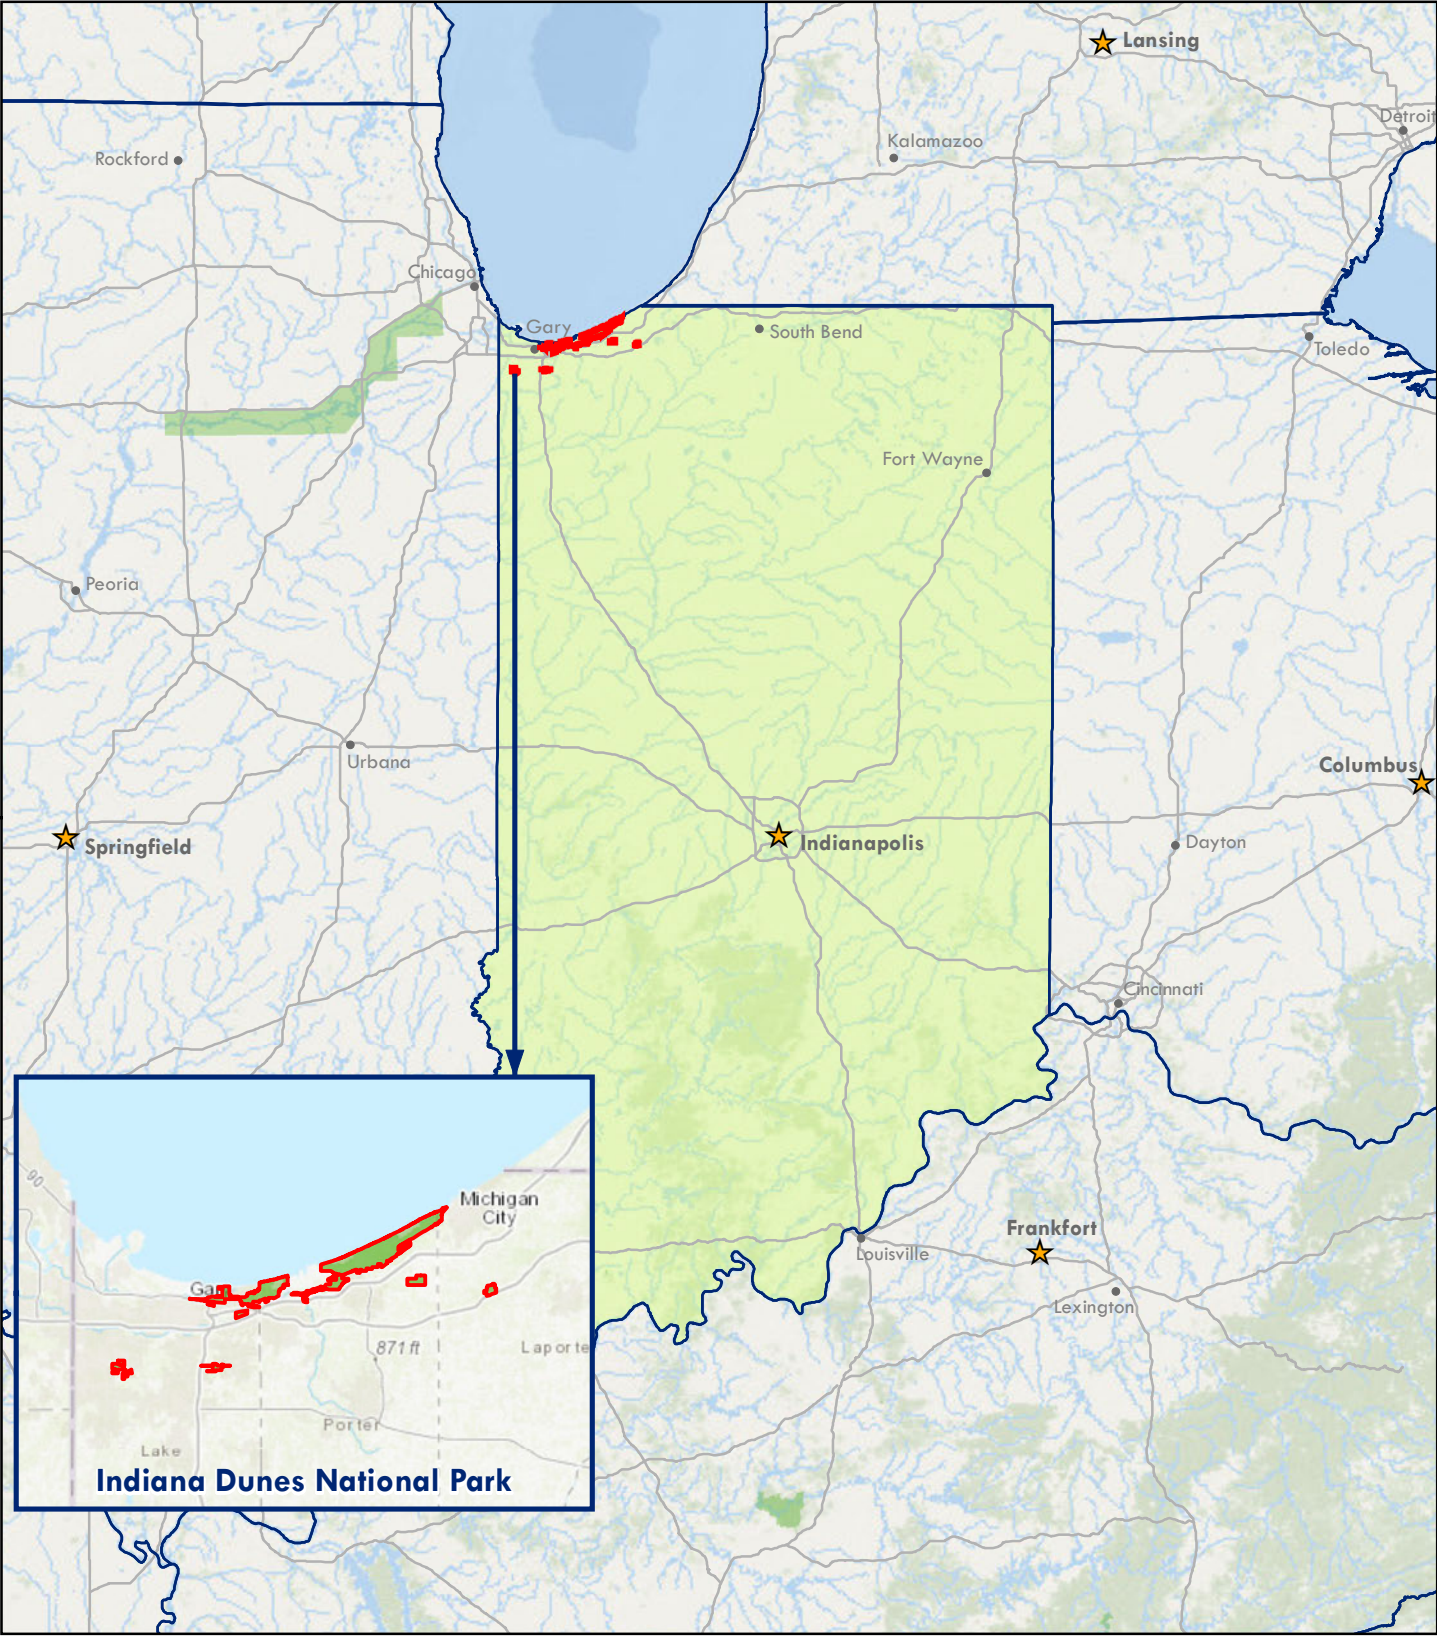

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community  
Esri, Garmin, GEBCO, NOAA NGDC, and other contributors



# Table of Contents

<b>SECTION</b>	<b>PAGE NO.</b>
<b>1. INTRODUCTION</b>	<b>1 - 1</b>
<b>2. PARK ROUTE INVENTORY</b> Route ID Report, Subcomponent Report, and Changes Report (As Applicable)	<b>2 - 1</b>
<b>3. PARK SUMMARY INFORMATION</b> Parkwide Paved Route Condition Summary	<b>3 - 1</b>
Explanation of Condition Descriptions	<b>3 - 2</b>
Route-Level Condition Summary Reports for Data Collection Vehicle, Manually Rated, and Parking Area Routes (As Applicable)	<b>3 - 3</b>
<b>4. PARK ROUTE LOCATION MAPS</b> Route Location Key Map	<b>4 - 1</b>
Route Location Area Map(s)	<b>4 - 2</b>
Route Condition Key Map – PCR Mile by Mile	<b>4 - 6</b>
Route Condition Area Map(s) – PCR Mile by Mile	<b>4 - 7</b>
<b>5. PAVED ROAD CONDITION RATING SHEETS</b> Paved Road Pages	<b>5 - 1</b>
<b>6. PAVED PARKING AREA CONDITION RATING SHEETS</b> Paved Parking Area Pages	<b>6 - 1</b>
<b>7. ROAD MILEPOST INFORMATION</b> Road Milepost Information and Logs	<b>7 - 1</b>
<b>8. APPENDIX</b> Improvements to the RIP Index Equations and Determination of PCR	<b>8 - 1</b>
Description of the Rating System	<b>8 - 2</b>
Explanation of the Condition Descriptions	<b>8 - 3</b>
Description of Pavement Treatment Types	<b>8 - 4</b>
Appendix A: Methodology for Determining Condition Ratings with the Data Collection Vehicle (DCV)	<b>8 - 5</b>
Appendix B: Methodology for Determining Condition Ratings Using Manual Rating Procedures	<b>8 - 20</b>
Appendix C: Description of Cycle 6 Deliverables	<b>8 - 29</b>
Appendix D: Glossary of Terms and Abbreviations	<b>8 - 32</b>

# Section 1 Introduction



**Indiana Dunes National Park**



**Federal Lands Highway  
Road Inventory Program**

# Introduction

The Federal Highway Administration’s (FHWA), Road Inventory Program (RIP) inventories all roads and parking areas in the National Park System, and performs condition inspections on all paved roads and parking areas for the National Park Service (NPS). This report contains the results of the Cycle 6 condition assessment of paved roads and parking lots for this park unit. This assessment was done using an automated, state-of-the-art pavement inspection vehicle as well as manual ratings. This information represents the condition of the paved assets at the time of the inspection. The pavement management system utilized by FHWA and the NPS uses these assessments to estimate future conditions and help prioritize pavement maintenance and rehabilitation projects. Further information about RIP data and its role in managing paved roads and bridges can be obtained by contacting the NPS Regional Transportation Program Manager.

### ***A History of the Road Inventory Program:***

The FHWA, in the mid-1970s, was charged with the task of identifying surface condition deficiencies and corrective priorities on NPS roads and parkways. Additionally, FHWA was tasked with establishing an integrated maintenance features inventory, locating features such as culverts, guardrails, and signs, among others, along NPS roads and parkways. As a result, in 1976 the NPS and FHWA entered into a Memorandum of Agreement (MOA) which established the RIP. This MOA was revised in 1980 to update RIP data collection standards and develop a long-range program to improve and maintain NPS roads to designated condition standards and establish a pavement management program.

The FHWA completed the initial phase of inventory in the early 1980s. As a result of this effort, each NPS unit included in the collection received a RIP Report known as the “Brown Book” which contained information that was inventoried during this first RIP phase. In the 1990s, a cyclical program was developed, and since then five cycles of collection have been completed. Cycle 6 is currently in progress. A summary of the RIP collection cycles is shown in the table below.

<b>Cycle</b>	<b>Years</b>	<b>Parks Collected</b>
Cycle 1	1994 - 1997	◦ 44 Large Parks
Cycle 2	1997 - 2001	◦ 79 Large Parks ◦ 5 Small Parks
Cycle 3	2001 - 2004	◦ All Large Parks ◦ All Small Parks
Cycle 4	2006 - 2010	◦ 86 Large Parks ◦ Several Small Parks
Cycle 5	2010 - 2014	◦ All Large Parks (Only functional class 1, 2, 7, and new/modified routes collected) ◦ All Small Parks (all roads and parking areas collected)
Cycle 6	2014 – 2020 (±)	◦ All roads and parking areas collected at all Parks ◦ Additional partial collections of functional class 1, 2, and 7 roads at Large Parks ◦ Cycle 6 is expected to last 6 years

Note: Large Parks have ≥ 10 Paved Miles; Small Parks have < 10 Paved Miles

Since 1984, the Road Inventory Program has been funded through the Federal Lands Highway Park Roads and Parkways (PRP) Program. Currently, coordination of the RIP with Federal Lands Highway (FLH) is under the NPS Washington Headquarters Park Facility Management Division. The FLH Washington office coordinates policy and prepares national reports and needs assessment studies for Congress.

In 1998, the Transportation Equity Act for the 21st Century (TEA-21) amended Title 23 U.S.C., and inserted Section 204(a)(6) requiring the FHWA and NPS, to develop by rule, a Pavement Management System (PMS) applied to park roads and parkways serving the National Park System.

In 2012, the Moving Ahead for Progress in the 21st Century Act (MAP-21) amended Title 23 U.S.C., and under Section 203(c)(1-2) stated that the National Park Service in cooperation with the DOT/FHWA, shall maintain a comprehensive national inventory of their transportation facilities, with the goal of quantifying transportation infrastructure needs within the National Park System.

***A History of the Pavement Management System:***

In 2005, the FHWA began implementing the use of a pavement management system to assist the NPS in prioritizing Pavement Maintenance and Rehabilitation activities. The system used by FHWA is the Highway Pavement Management Application (HPMA), which has the ability to store inventory and condition data from RIP and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Regional, Park, or Route level. Regional prioritized lists and optimizations have been produced for most regions, and the Service's overall roadway Deferred Maintenance is calculated via the HPMA.

***Overview of Cycle 6:***

Cycle 6 launched in the spring of 2014 and will again comprise all NPS park units that are served by paved roads and/or parking areas. For Cycle 6, all paved roads (approximately 5,700 miles) and parking areas will be collected in all parks at least once, while the primary routes (functional class 1, 2, and 7 roads) at Large Parks will have additional collections. These multiple collections will provide updated condition data on a majority of the NPS's primary road network and help build a better pavement management system, allowing for more accurate pavement performance prediction models.

FLH is responsible for the accuracy of all data presented in this report. Any questions or comments concerning the contents of this report should be directed to the national RIP Coordinator located in Ashburn, Virginia.

Respectfully,

FHWA RIP Team

FHWA/Eastern Federal Lands  
22001 Loudoun County Parkway  
Building E-2, Suite 200  
Ashburn, VA 20147  
(571) 434-1574

FHWA/Central Federal Lands  
12300 West Dakota Ave  
Lakewood, CO 80228  
(720) 963-3556

## Section 2 Park Route Inventory



Indiana Dunes National Park



Federal Lands Highway  
Road Inventory Program

# Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### ROAD INVENTORY (1100 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Name	Route Description		Maintenance District	FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)	Surf. Type	Area Map
						From	To									
0014ZZ	6	1	48894		WEST BEACH ACCESS ROADS	FROM ROUTE 5215 (COUNTY LINE ROAD)	TO ROUTE 0923 (WEST BEACH VISITOR PARKING)	WEST UNIT	YES	1.55	0.00	1.55	1		AS	1
0016A	6	1	114280		PORTAGE LAKEFRONT ENTRANCE ROAD	FROM U.S. STEEL COMPANY FRONTAGE ROAD	TO BEGINNING OF ROUTE 0016B (PORTAGE LAKEFRONT TURNAROUND)	WEST UNIT	YES	0.63	0.00	0.63	1		AS	2
0016B	6	1	231592		PORTAGE LAKEFRONT TURNAROUND	FROM END OF ROUTE 0016A (PORTAGE LAKEFRONT ENTRANCE ROAD)	TO END OF LOOP	WEST UNIT	YES	0.06	0.00	0.06	1		CO	2
0206	NC		25903		CHELLBERG FARM ENTRANCE ROAD	FROM ROUTE 5216 (MINERAL SPRINGS ROAD)	TO FARM	WEST UNIT	NO	0.00	0.07	0.07	6		GR	
0207ZZ	6	1	25512		GOOD FELLOW CAMP ROADS DLC	FROM ROUTE 5218 (HOWE ROAD)	TO ROUTE 0927ZZ (DLC (GOOD FELLOW CAMP) PARKING AREAS) AND ROUTE 0411 (GOOD FELLOW GRAVEL SERVICE ROAD)	CENTRAL UNIT	YES	0.62	0.00	0.62	2		AS	2
0208	NC		25904		BAILLY HOMESTEAD ENTRANCE ROAD	FROM ROUTE 5218 (HOWE ROAD)	TO HOMESTEAD	CENTRAL UNIT	NO	0.00	0.10	0.10	6		GR	
0210	6	1	24757		CENTRAL AVENUE	FROM ROUTE 5209 (BEVERLY DRIVE)	TO U.S. HIGHWAY 12	EAST UNIT	YES	0.54	0.00	0.54	2		AS	4
0212	6	1	48911		KEMIL ROAD (300 EAST ROAD)	FROM U.S. HIGHWAY 20	TO ROUTE 5211 (EAST STATE PARK ROAD (300 EAST ROAD))	EAST UNIT	YES	0.81	0.00	0.81	2		AS	3
0213	6	1	48912		FURNESSVILLE ROAD (1500 NORTH ROAD)	FROM INTERSECTION OF ROUTE 5220 (SCHOOL HOUSE ROAD (275 E)) AND ROUTE 5213 (FURNESSVILLE ROAD / NON NPS)	TO U.S. HIGHWAY 12	EAST UNIT	YES	1.30	0.00	1.30	2		AS	3
0222ZZ	6	1	24752		DUNEWOOD CAMPGROUND ACCESS ROADS	FROM ROUTE 5219 (DUNEWOOD AMPHITHEATER ACCESS ROAD / BROADWAY)	TO THROUGH CAMPGROUND	EAST UNIT	YES	1.40	0.00	1.40	3		AS	4



# Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### ROAD INVENTORY (1100 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Name	Route Description		Maintenance District	FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)	Surf. Type	Area Map
						From	To									
0226	6	1	24761		SOUTH STATE PARK ROAD (1500 NORTH ROAD)	FROM NORTH TREMONT ROAD	TO WAVERLY ROAD	EAST UNIT	YES	0.95	0.00	0.95	2		AS	2
0240	6	1	114938		WAHL FARM ACCESS ROAD	FROM ROUTE 5218 (HOWE ROAD) AT MP 0.6 ON RIGHT	TO ROUTE 5218 (HOWE ROAD) AT MP 0.7	CENTRAL UNIT	YES	0.12	0.00	0.12	3		AS	2
0400	NC		25902		GUN RANGE ROAD	FROM ROUTE 0212 (KEMIL ROAD (300 EAST ROAD)) AT MP 0.37 ON LEFT	TO END	EAST UNIT	NO	0.00	0.14	0.14	6		GR	
0404	6	1	56012		WEST BEACH SERVICE ACCESS ROAD	FROM ROUTE 0014ZZ (WEST BEACH ACCESS ROADS) ON RIGHT AND ROUTE 0923 (WEST BEACH VISITOR PARKING)	TO END OF LOOP	WEST UNIT	NO	0.32	0.00	0.32	6		AS	1
0406	6	1	25797		WEST BEACH SERVICE ROAD	FROM ROUTE 0014ZZ (WEST BEACH ACCESS ROADS)	TO ROUTE 0925 (WEST BEACH MAINTENANCE BUILDING PARKING)	WEST UNIT	NO	0.12	0.00	0.12	6		AS	1
0409	NC		24753		DUNEWOOD WATER STORAGE ROAD	FROM ROUTE 0410 (DUNEWOOD SERVICE ROAD) AT MP 0.01 ON RIGHT	TO END	EAST UNIT	NO	0.00	0.04	0.04	6		GR	
0410	6	1	25514		DUNEWOOD SERVICE ROAD	FROM ROUTE 0222ZZ (DUNEWOOD CAMPGROUND ACCESS ROADS)	TO END OF PAVEMENT	EAST UNIT	NO	0.10	0.00	0.10	6		AS	4
0411	NC		25905		GOOD FELLOW GRAVEL SERVICE ROAD	FROM END OF ROUTE 0207ZZ (GOOD FELLOW CAMP ROADS DLC)	TO END	CENTRAL UNIT	NO	0.00	0.30	0.30	6		GR	

# Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### NON-NPS ROADS INVENTORY

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Name	Route Description		Maintenance District	FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)	Surf. Type	Area Map
						From	To									
5209	5	1			BEVERLY DRIVE	FROM U.S. HIGHWAY 12	TO ROUTE 5211 (EAST STATE PARK ROAD (300 EAST ROAD))	EAST UNIT	NO	4.88	0.00	4.88			AS	3,4
5211	5	1			EAST STATE PARK ROAD (300 EAST ROAD)	FROM U.S. HIGHWAY 12 AND ROUTE 0212 (KEMIL ROAD (300 EAST ROAD))	TO ROUTE 5224 (LAKE FRONT DRIVE)	EAST UNIT	NO	1.24	0.00	1.24			AS	3
5213	5	1			FURNESSVILLE ROAD / NON NPS	FROM ROUTE 0212 (KEMIL ROAD (300 EAST ROAD))	TO INTERSECTION OF ROUTE 5220 (SCHOOL HOUSE ROAD (275 E)) AND BEGINNING OF ROUTE 0213 (FURNESSVILLE ROAD (1500 NORTH ROAD))	EAST UNIT	NO	0.25	0.00	0.25			AS	3
5215	5	1			COUNTY LINE ROAD	FROM U.S. HIGHWAY 12 AT PARK SIGN	TO PARK BOUNDARY AT INTERSECTION WITH INDIAN BOUNDARY ROAD ON LEFT	WEST UNIT	NO	0.94	0.00	0.94			AS	1
5216	5	1			MINERAL SPRINGS ROAD	FROM U.S. HIGHWAY 20	TO U.S. HIGHWAY 12	CENTRAL UNIT	NO	0.84	0.00	0.84			AS	2
5217	5	1			OAK HILL ROAD	FROM WAGNER ROAD	TO U.S. HIGHWAY 12	CENTRAL UNIT	NO	1.50	0.00	1.50			AS	2
5218	5	1			HOWE ROAD	FROM ROUTE 5217 (OAK HILL ROAD)	TO END OF PAVEMENT AT ROUTE 0208 (BAILLY HOMESTEAD ENTRANCE ROAD)	CENTRAL UNIT	NO	0.73	0.00	0.73			AS	2
5219	5	1			DUNEWOOD AMPHITHEATER ACCESS ROAD / BROADWAY	FROM INTERSECTION OF ROUTE 5221 (BROADWAY) AND U.S. HIGHWAY 12	TO END	EAST UNIT	NO	0.21	0.00	0.21			AS	4
5220	5	1			SCHOOL HOUSE ROAD (275 E)	FROM INTERSECTION OF ROUTE 0213 (FURNESSVILLE ROAD (1500 NORTH ROAD)) AND ROUTE 5213 (FURNESSVILLE ROAD / NON NPS)	TO U.S. HIGHWAY 20	EAST UNIT	NO	0.22	0.00	0.22			AS	3

# Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### NON-NPS ROADS INVENTORY

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Name	Route Description		Maintenance District	FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)	Surf. Type	Area Map
						From	To									
5221	5	1			BROADWAY	FROM U.S. HIGHWAY 12 AND ROUTE 5219 (DUNEWOOD AMPHITHEATER ACCESS ROAD / BROADWAY)	TO ROUTE 5224 (LAKE FRONT DRIVE) AT MP 0.90 ON RIGHT	EAST UNIT	NO	1.08	0.00	1.08			AS	3,4
5224	5	1			LAKE FRONT DRIVE	FROM ROUTE 5211 (EAST STATE PARK ROAD (300 EAST ROAD)) AT END	TO END OF PAVEMENT	EAST UNIT	NO	2.77	0.00	2.77			AS	3,4
5225	5	1			NORTH TREMONT ROAD	FROM U.S. HIGHWAY 12	TO SOUTH PARK BOUNDARY SIGN NEAR CANONIE ROAD	EAST UNIT	NO	0.66	0.00	0.66			AS	2
5405	5	1			WEST BEACH MAINTENANCE ROAD	FROM ROUTE 5215 (COUNTY LINE ROAD) AT MP 0.75 ON RIGHT	TO END OF PAVEMENT AT GATE	WEST UNIT	NO	0.18	0.00	0.18			AS	1

### PARKING AREA INVENTORY (1300 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Name	Route Description		Maintenance District	FLTP	Access Level	Area (SQ FT)	Surf. Type	Area Map
						From	To						
0900ZZ	6	1	56393		DUNEWOOD CAMPGROUND PARKING	FROM ROUTE 0222ZZ (DUNEWOOD CAMPGROUND ACCESS ROADS)	TO PARKING	EAST UNIT	YES	PUBLIC	7,208	AS	4
0904	6	1	24732		CALUMET DUNES INTERPRETER CENTER PARKING	FROM ROUTE 0212 (KEMIL ROAD (300 EAST ROAD)) AT MP 0.75 ON LEFT AND ROUTE 0905 (CALUMET DUNES INTERPRETER CENTER OVERFLOW PARKING)	TO ROUTE 0212 (KEMIL ROAD (300 EAST ROAD)) AT MP 0.78 ON LEFT	EAST UNIT	YES	PUBLIC	17,752	AS	3
0905	6	1	25516		CALUMET DUNES INTERPRETER CENTER OVERFLOW PARKING	FROM ROUTE 0212 (KEMIL ROAD (300 EAST ROAD)) AT MP 0.78 ON RIGHT AND ROUTE 0904 (CALUMET DUNES INTERPRETER CENTER PARKING)	TO PARKING	EAST UNIT	NO	NONPUBLIC	6,568	AS	3

# Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### PARKING AREA INVENTORY (1300 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Description		Maintenance District	FLTP	Access Level	Area (SQ FT)	Surf. Type	Area Map
					Route Name	From To						
0906	6	1	24734		KEMIL BEACH PARKING	FROM ROUTE 5211 (EAST STATE PARK ROAD (300 EAST ROAD)) AT MP 1.00 ON RIGHT TO ROUTE 5211 (EAST STATE PARK ROAD (300 EAST ROAD)) AT MP 1.05 ON RIGHT	EAST UNIT	YES	PUBLIC	36,947	AS	3
0907	6	1	56219		BAILLY/CHELLBERG VISITOR PARKING	FROM ROUTE 5216 (MINERAL SPRINGS ROAD) AT MP 0.11 ON LEFT TO PARKING	CENTRAL UNIT	YES	PUBLIC	38,724	AS	2
0908	NC		59792		BAILLY/CHELLBERG OVERFLOW PARKING	ADJACENT TO ROUTE 5216 (MINERAL SPRINGS ROAD)	CENTRAL UNIT	NO	PUBLIC	216,150	GR	
0913	6	1	24725		LAKE VIEW BEACH PARKING	ADJACENT TO ROUTE 5224 (LAKE FRONT DRIVE )	EAST UNIT	YES	PUBLIC	9,143	AS	3
0914	6	1	56223		LAKE FRONT DRIVE 15 MINUTES PARKING	ADJACENT TO ROUTE 5224 (LAKE FRONT DRIVE )	EAST UNIT	YES	PUBLIC	999	AS	3
0915	6	1	24727		CENTRAL BEACH PARKING	FROM VALLEY AVENUE AND CENTRAL AVENUE NON NPS SECTION TO PARKING	EAST UNIT	YES	PUBLIC	31,510	AS	4
0916ZZ	6	1	24729		MT. BALDY PARKING AREAS	FROM U.S. HIGHWAY 12 TO PARKING	EAST UNIT	YES	PUBLIC	66,739	AS	4
0917	6	1	24726		GLENWOOD DUNES PARKING	FROM ROUTE 5220 (SCHOOL HOUSE ROAD (275 E)) TO PARKING	EAST UNIT	YES	PUBLIC	42,731	AS	3
0918ZZ	6	1	24760		HQ PARKING AREAS	FROM ROUTE 5216 (MINERAL SPRINGS ROAD) TO PARKING	CENTRAL UNIT	YES	PUBLIC	133,446	AS	2
0920	6	1	25510		DOUGLAS CENTER PARKING	FROM LAKE STREET TO PARKING	WEST UNIT	YES	PUBLIC	28,224	AS	KEY
0921	6	1	52955		TOLLESTON DUNES OVERLOOK PARKING	ADJACENT TO U.S. HIGHWAY 12	WEST UNIT	YES	PUBLIC	1,667	AS	1
0922	6	1	24748		TOLLESTON DUNES TRAILHEAD PARKING	FROM U.S. HIGHWAY 12 TO PARKING	WEST UNIT	YES	PUBLIC	23,424	AS	1
0923	6	1	24754		WEST BEACH VISITOR PARKING	FROM ROUTE 0014ZZ (WEST BEACH ACCESS ROADS) TO ROUTE 0014ZZ (WEST BEACH ACCESS ROADS) AND ROUTE 0404 (WEST BEACH SERVICE ACCESS ROAD)	WEST UNIT	YES	PUBLIC	303,237	AS	1

# Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### PARKING AREA INVENTORY (1300 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Description		Maintenance District	FLTP	Access Level	Area (SQ FT)	Surf. Type	Area Map	
					Route Name	From							To
0925	6	1	56225		WEST BEACH MAINTENANCE BUILDING PARKING	FROM ROUTE 5405 (WEST BEACH MAINTENANCE ROAD)	TO ROUTE 0406 (WEST BEACH SERVICE ROAD)	WEST UNIT	NO	NONPUBLIC	17,128	AS	1
0927ZZ	6	1	56228		DLC (GOOD FELLOW CAMP) PARKING AREAS	FROM ROUTE 0207ZZ (GOOD FELLOW CAMP ROADS DLC) ON LEFT	TO PARKING	CENTRAL UNIT	YES	PUBLIC	10,183	AS	2
0928	NC		46987		COWLES BOG TRAIL PARKING	ADJACENT TO ROUTE 5216 (MINERAL SPRINGS ROAD)		CENTRAL UNIT	NO	PUBLIC	23,544	GR	
0929	NC		46972		PORTER BEACH SOUTH PARKING	ADJACENT TO WABASH AVENUE		EAST UNIT	NO	PUBLIC	15,615	GR	
0930	6	1	24730		TREMONT COMFORT AREA PARKING	FROM U.S. HIGHWAY 12	TO U.S. HIGHWAY 12	EAST UNIT	NO	PUBLIC	8,721	AS	2
0936	6	1	46984		LONG LAKE TRAIL PARKING	FROM ROUTE 0014ZZ (WEST BEACH ACCESS ROADS)	TO PARKING	WEST UNIT	YES	PUBLIC	6,937	AS	1
0938	6	1	25906		DUNBAR PARKING AREA	FROM DUNBAR AVENUE	TO PARKING	EAST UNIT	YES	PUBLIC	12,933	AS	3
0939	NC		24737		ROADS AND TRAILS PARKING	ADJACENT TO ROUTE 0213 ((FURNESVILLE ROAD (1 500 NORTH ROAD)) AT MP 0.29 ON RIGHT		EAST UNIT	NO	NONPUBLIC	37,800	GR	
0940	6	1	111768		PINHOOK BOG PARKING	FROM WOZNIAK ROAD	TO PARKING	EAST UNIT	YES	PUBLIC	16,378	AS	KEY
0941	NC		24743		HERON ROOKERY PARKING AREA (EAST AND WEST)	ADJACENT TO COUNTY ROAD 600 EAST		EAST UNIT	NO	PUBLIC	10,305	GR	
0943	6	1	104538		MARQUETTE TRAIL PARKING	ADJACENT TO ROUTE 5405 (WEST BEACH MAINTENANCE ROAD)		WEST UNIT	YES	PUBLIC	1,799	AS	1
0944	6	1	104580		WEST BEACH SERVICE PARKING	ADJACENT TO ROUTE 0406 (WEST BEACH SERVICE ROAD) ON RIGHT		WEST UNIT	NO	NONPUBLIC	1,539	AS	1
0945	NC		25517		DOUGLAS CENTER WEST PARKING	ADJACENT TO LAKE STREET		WEST UNIT	NO	PUBLIC	7,400	GR	

# Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### PARKING AREA INVENTORY (1300 SERIES FMSS LOCATIONS)

Route No.	Cycle Collected	Iteration Collected	FMSS Number	Concession	Route Description		Maintenance District	FLTP	Access Level	Area (SQ FT)	Surf. Type	Area Map
					Route Name	From						
0946	NC		82345		GENERAL CENTER / CARETAKERS PARKING	ADJACENT TO ROUTE 5218 (HOWE ROAD) ON LEFT	CENTRAL UNIT	NO	PUBLIC	10,150	GR	
0950	6	1	100346		PORTER BEACH NORTH PARKING	FROM WABASH AVENUE	EAST UNIT	YES	PUBLIC	14,021	AS	2
0951	NC		25513		IDELC OVERFLOW PARKING	FROM ROUTE 0207ZZ (GOOD FELLOW CAMP ROADS DLC)	CENTRAL UNIT	NO	PUBLIC	29,324	GR	
0952	6	1	82346		CALUMET RIVER TRAIL PARKING	FROM ROUTE 0240 (WAHL FARM ACCESS ROAD)	CENTRAL UNIT	YES	PUBLIC	6,729	AS	2
0953	6	1	114273		PORTAGE LAKEFRONT NORTH PARKING AREA	FROM ROUTE 0016A (PORTAGE LAKEFRONT ENTRANCE ROAD)	WEST UNIT	YES	PUBLIC	23,035	AS	2
0954	6	1	114274		PORTAGE LAKEFRONT EAST PARKING AREA	FROM ROUTE 0016A (PORTAGE LAKEFRONT ENTRANCE ROAD)	WEST UNIT	YES	PUBLIC	7,115	AS	2
0955	6	1	114283		PORTAGE LAKEFRONT WEST PARKING AREA	FROM ROUTE 0016A (PORTAGE LAKEFRONT ENTRANCE ROAD)	WEST UNIT	YES	PUBLIC	7,553	AS	2
0956	6	1	87732		BEVERLY DRIVE SPRING PARKING AREA	ADJACENT TO ROUTE 5209 (BEVERLY DRIVE)	EAST UNIT	YES	PUBLIC	861	AS	3
0957ZZ	NC		227120		GREAT MARSH PARKING AREA (NORTH AND SOUTH)	FROM ROUTE 5221 (BROADWAY)	EAST UNIT	NO	PUBLIC	9,740	GR	
0958	6	1	46990		HAWLEYWOOD BUILDING #504 DRIVEWAY / PARKING	FROM HAWLEYWOOD ROAD	EAST UNIT	YES	PUBLIC	1,035	AS	2
0959	NC		110979		HQ ANNEX	FROM ROUTE 5217 (OAK HILL ROAD)	CENTRAL UNIT	NO	NONPUBLIC	11,352	GR	
0960	6	1	58102		U.S. HIGHWAY 12 DORM DRIVE/PARKING	FROM U.S. HIGHWAY 12	EAST UNIT	YES	PUBLIC	6,177	AS	2
0961	6	1	98098		#106 RM ANNEX DRIVEWAY	FROM ROUTE 5217 (OAK HILL ROAD)	CENTRAL UNIT	YES	PUBLIC	1,422	AS	2
0962	6	1	58534		US 20 DORM ENTRANCE PARKING	FROM U.S. HIGHWAY 20	EAST UNIT	YES	PUBLIC	6,912	AS	3

# Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## Cycle 6 Summary Totals for Indiana Dunes National Park

Cycle 6 Route Totals			
	NPS Maintained	Concessionaire Maintained	Park Totals
Paved Roads, Data Collection Vehicle Rated (Miles)	7.37	0	7.37
Paved Roads, Manually Rated Length (Miles)	1.15	0	1.15
Paved Roads, Manually Rated Area (Sq. Ft.)	0	0	0
Unpaved Roads (Miles)	0.65	0	0.65
Paved Parking (Sq. Ft.)	897,297	0	897,297
Unpaved Parking (Sq. Ft.)	372,880	0	372,880

Cycle 6 Lane Miles and Overall Pavement Condition		
	Lanes Miles*	Pavement Condition Rating**
Data Collection Vehicle Routes	13.27	86
Manually Rated Roads	1.15	90
Parking Areas	15.45	88

\* Equivalent Lane Miles are calculated by route using the following equations:  
 - DCV and MRLs = (PAVE\_WIDTH x PAVED\_MI) / 11 foot lane  
 - MRPs and PKGs = SQ\_FEET / 5280 / 11 foot lane

\*\*Parking and Manually Rated Routes are assigned the following PCR values based on the type of observed distresses:  
 -Excellent = 97 -Good = 90 -Fair = 73  
 -Poor = 53, 30, or 0 -Construction / Not Rated = -1

# Cycle 6 NPS / RIP Route ID Report

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Non-NPS Routes

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## General Park Road Functional Classification (FC) Table

FC	Type	User Access	Description	Route Numbers	Surface Types
1	Principal Park Road Rural Parkway	Public	Roads which constitute the main access route, circulatory tour, or thoroughfare for park visitors. Rural Parkways (e.g. Natchez Trace) are numbered 0001 - 0009.	0001 - 0009 0010 - 0099	AS - Asphaltic Concrete Pavement
2	Connector Park Road	Public	Roads which provide access within a park to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, etc.	0100 - 0199	BR - Brick or Pavers Road Bed CB - Cobble Stone Road Bed
3	Special Purpose Park Road	Public	Roads which provide circulation within public areas, such as campgrounds, picnic areas, visitor center complexes, concessionaire facilities, etc. These roads generally serve low-speed traffic and are often designed for one-way circulation.	0200 - 0299	CO - Portland Cement Concrete Pavement GR - Gravel Road Bed
4	Primitive Park Road	Public	Roads which provide circulation through remote areas and/or access to primitive campgrounds and undeveloped areas. These roads frequently have no minimum design standards and their use may be limited to specially equipped vehicles. Note: Functional Classes 3 and 4 have the same route numbers because, historically, they were numbered similarly.	0200 - 0299	NV - Native or Dirt Material Road Bed
5	Administrative Park Road	Public	All public roads intended for access to administrative developments or structures such as park offices, employee quarters, or utility areas.	0400 - 0499	OT - Other Materials Road Bed
6	Administrative Park Road (Restricted Access)	Nonpublic	All roads normally closed to the public, including patrol roads, truck trails, and other similar roads. Note: Functional Classes 5 and 6 have the same route numbers because historically they were numbered similarly and often there is little distinction between these routes. For example, because utility areas and employee housing are often closed to the public, this restriction would result in classification of FC 6 rather than FC 5.	0400 - 0499	
7	Urban Parkway	Public	These facilities serve high volumes of park and non-park related traffic and are restricted, limited-access facilities in an urban area. This category of roads primarily encompasses the major parkways which serve as gateways to our nation's capital. Other major park roads or portions thereof, however, may be included in this category.	0001 - 0009	
8	City Street	Public	City streets are usually extensions of the adjoining street system that are owned and maintained by the National Park Service. The construction and/or reconstruction should conform with accepted local engineering practice and local conditions.	0600 - 0699	
N/A	Non-NPS Roads	Public	State, County, or City owned roads which border, traverse, or provide access to Park Facilities or Locations. Non-NPS roads are not assigned functional classes and are driven for GPS and Video Log only.	5000 - 5999	

A park road system contains those roads within or giving access to a park or other unit of the NPS which are administered by the NPS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a park road is not based on traffic volumes or design speed, but on the intended use or function of that road or route.

The historic route numbering system also included a 300 series for interpretive roads, and a 500 series for one-way roads. There are approximately 250 roads nationwide which are designated by the 300 and 500 series. The numbers for these roads will be maintained for reporting consistency. However, since these interpretive and one-way routes are not as clearly tied to a specific functional class, the 300 and 500 series will be discontinued for future use.



# NPS / RIP Subcomponent Details for INDU

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Paved Routes, Non-NPS

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### SUMMARY ROUTE INVENTORY FOR ROADS (1100 SERIES FMSS LOCATIONS)

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)
						From	To						
0014ZZ	48894	6	1		WEST BEACH ACCESS ROADS	FROM ROUTE 5215 (COUNTY LINE ROAD)	TO ROUTE 0923 (WEST BEACH VISITOR PARKING)	YES	1.55	0.00	1.55	1	
0207ZZ	25512	6	1		GOOD FELLOW CAMP ROADS DLC	FROM ROUTE 5218 (HOWE ROAD)	TO ROUTE 0927ZZ (DLC (GOOD FELLOW CAMP) PARKING AREAS) AND ROUTE 0411 (GOOD FELLOW GRAVEL SERVICE ROAD)	YES	0.62	0.00	0.62	2	
0222ZZ	24752	6	1		DUNEWOOD CAMPGROUND ACCESS ROADS	FROM ROUTE 5219 (DUNEWOOD AMPHITHEATER ACCESS ROAD / BROADWAY)	TO THROUGH CAMPGROUND	YES	1.40	0.00	1.40	3	

### SUMMARY ROUTE INVENTORY FOR PARKING AREAS (1300 SERIES FMSS LOCATIONS)

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0900ZZ	56393	6	1		DUNEWOOD CAMPGROUND PARKING	FROM ROUTE 0222ZZ (DUNEWOOD CAMPGROUND ACCESS ROADS)	TO PARKING	YES	PUBLIC	7,208
0916ZZ	24729	6	1		MT. BALDY PARKING AREAS	FROM U.S. HIGHWAY 12	TO PARKING	YES	PUBLIC	66,739
0918ZZ	24760	6	1		HQ PARKING AREAS	FROM ROUTE 5216 (MINERAL SPRINGS ROAD)	TO PARKING	YES	PUBLIC	133,446
0927ZZ	56228	6	1		DLC (GOOD FELLOW CAMP) PARKING AREAS	FROM ROUTE 0207ZZ (GOOD FELLOW CAMP ROADS DLC) ON LEFT	TO PARKING	YES	PUBLIC	10,183
0957ZZ	227120	NC			GREAT MARSH PARKING AREA (NORTH AND SOUTH)	FROM ROUTE 5221 (BROADWAY)	TO PARKING	NO	PUBLIC	9,740

# NPS / RIP Subcomponent Details for INDU

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Paved Routes, Non-NPS

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### INDU-0014ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)
						From	To						
0014Z	48894	6	1		WEST BEACH ACCESS ROAD	FROM ROUTE 5215 (COUNTY LINE ROAD) ON LEFT	TO ROUTE 0923 (WEST BEACH VISITOR PARKING)	YES	1.37	0.00	1.37	1	
0015Z	48894	6	1		WEST BEACH ENTRY ROAD	FROM ROUTE 5215 (COUNTY LINE ROAD) AT MP 0.5 ON RIGHT	TO ROUTE 0014Z (WEST BEACH ACCESS ROAD)	YES	0.19	0.00	0.19	1	

### INDU-0207ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)
						From	To						
0207AZ	25512	6	1		GOOD FELLOW CAMP ROAD DLC	FROM ROUTE 5218 (HOWE ROAD)	TO ROUTE 0927AZ (DLC (GOOD FELLOW CAMP) PARKING A) AND ROUTE 0411 (GOOD FELLOW GRAVEL SERVICE ROAD)	YES	0.44	0.00	0.44	2	
0207BZ	25512	6	1		GOOD FELLOW CAMP EXIT ROAD DLC	FROM ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)	TO ROUTE 5218 (HOWE ROAD)	YES	0.05	0.00	0.05	2	
0207CZ	25512	6	1		GOOD FELLOW CAMP ROAD TURNAROUND DLC	ADJACENT TO ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC) ON LEFT		YES	0.03	0.00	0.03	2	
0207DZ	25512	6	1		GOOD FELLOW CAMP LOOP DLC	FROM ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)	TO ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC) AND ROUTE 0927AZ (DLC (GOOD FELLOW CAMP) PARKING A)	YES	0.10	0.00	0.10	2	

# NPS / RIP Subcomponent Details for INDU

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Paved Routes, Non-NPS

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### INDU-0222ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	Paved Miles	Unpaved Miles	Total Mileage	Functional Class	Area (SQ FT)
						From	To						
0222AZ	24752	6	1		DUNEWOOD CAMPGROUND ACCESS ROAD LOOP AZ	FROM ROUTE 5219 (DUNEWOOD AMPHITHEATER ACCESS ROAD / BROADWAY)	TO ROUTE 0223Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C)	YES	0.06	0.00	0.06	3	
0222BZ	24752	6	1		DUNEWOOD CAMPGROUND ACCESS ROAD LOOP BZ	FROM INTERSECTION OF ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A) AND ROUTE 0223Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C)	TO ROUTE 0222AZ (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP AZ)	YES	0.04	0.00	0.04	3	
0222Z	24752	6	1		DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A	FROM ROUTE 0222BZ (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP BZ) AND ROUTE 0223Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C)	TO ROUTE 0238Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP B (MATHER LOOP))	YES	0.29	0.00	0.29	3	
0223Z	24752	6	1		DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C	FROM ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A) AND ROUTE 0222BZ (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP BZ)	TO END OF LOOP	YES	0.29	0.00	0.29	3	
0237Z	24752	6	1		DUNEWOOD CAMPGROUND ACCESS ROAD LOOP D (DOUGLAS LOOP)	FROM ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A)	TO END OF LOOP	YES	0.32	0.00	0.32	3	
0238Z	24752	6	1		DUNEWOOD CAMPGROUND ACCESS ROAD LOOP B (MATHER LOOP)	FROM END OF ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A)	TO END OF LOOP	YES	0.41	0.00	0.41	3	

# NPS / RIP Subcomponent Details for INDU

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Paved Routes, Non-NPS

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### INDU-0900ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0900AZ	56393	NC			DUNEWOOD CAMPGROUND PARKING 1	ADJACENT TO ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A) AT MP 0.54 ON LEFT		NO	PUBLIC	1,500
0900Z	56393	6	1		DUNEWOOD CAMPGROUND ACCESS PARKING	ADJACENT TO ROUTE 0222AZ (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP AZ) AT MP 0.04 ON RIGHT		YES	PUBLIC	1,280
0903Z	56393	6	1		DUNEWOOD WALK-IN PARKING	ADJACENT TO ROUTE 0237Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP D (DOUGLAS LOOP)) AT MP 0.19 ON RIGHT		YES	PUBLIC	4,428

### INDU-0916ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0916Z	24729	6	1		MT. BALDY PARKING	FROM U.S. HIGHWAY 12	TO PARKING	YES	PUBLIC	57,792
0937Z	24729	6	1		MT. BALDY BUS PARKING	FROM ROUTE 0916Z (MT. BALDY PARKING)	TO ROUTE 0916Z (MT. BALDY PARKING)	YES	PUBLIC	8,947

# NPS / RIP Subcomponent Details for INDU

(Numerical By Summary Route and Subcomponent #)



Shading Color Key

White = Paved Routes, DCV Driven

Grey = Paved Routes, DCV not Driven

Black = Paved Routes, Non-NPS

■ = Concession Route

Yellow = Unpaved Routes, DCV not Driven

Blue = Paved Parking Areas

Green = Unpaved Parking Areas

Red text denotes:

\*Unpaved route data (mileages and square footage) were collected by the Road Inventory Program (RIP) only when the Cycle Collected is "6", otherwise the unpaved information was provided by NPS.

DCV = Data Collection Vehicle  
 MRL = Manually Rated Line  
 MRP = Manually Rated Polygon  
 PKG = Parking Areas  
 NC = Not Collected

## INDU Indiana Dunes National Park

### INDU-0918ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0918Z	24760	6	1		HQ ADMINISTRATIVE PARKING A	FROM ROUTE 5216 (MINERAL SPRINGS ROAD)	TO PARKING	YES	PUBLIC	86,162
0919Z	24760	6	1		HQ ADMINISTRATIVE PARKING B	FROM ROUTE 5216 (MINERAL SPRINGS ROAD)	TO PARKING	YES	PUBLIC	47,284

### INDU-0927ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0927AZ	56228	6	1		DLC (GOOD FELLOW CAMP) PARKING A	ADJACENT TO ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC) ON LEFT AND ROUTE 0207DZ (GOOD FELLOW CAMP LOOP DLC)		YES	PUBLIC	6,034
0927CZ	56228	6	1		DLC (GOOD FELLOW CAMP) PARKING C	FROM ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)	TO PARKING	YES	PUBLIC	4,149

### INDU-0957ZZ Subcomponent Breakdown

Route Number	FMSS Number	Cycle Collected	Iteration Collected	Concession	Route Name	Route Description		FLTP	User Access	Area (SQ FT)
						From	To			
0957AZ	227120	NC			GREAT MARSH PARKING AREA NORTH	FROM ROUTE 5221 (BROADWAY)	TO PARKING	YES	PUBLIC	1,000
0957BZ	227120	NC			GREAT MARSH PARKING AREA SOUTH	FROM ROUTE 5221 (BROADWAY)	TO PARKING	NO	PUBLIC	8,740

## Route Identification Changes to Paved Routes from Previous Cycle Indiana Dunes National Park

### ROUTES REMOVED FROM PREVIOUS INVENTORY:

Route No.	Route Name	Type of Change	Comments
0214	TEALE ROAD	OTHER	REMOVED; NPS DOES NOT OWN ROAD.

### ROUTES ADDED FROM PREVIOUS INVENTORY:

Route No.	Route Name	Type of Change	Comments
0962	US 20 DORM ENTRANCE PARKING	OTHER	PAVED PARKING AREA ADDED IN CYCLE 6

### ROUTES MODIFIED FROM PREVIOUS INVENTORY:

Route No.	Route Name	Type of Change	Comments
0016A	PORTAGE LAKEFRONT ENTRANCE ROAD	ROUTE SPLIT	ROUTE 0016AZ CHANGED TO 0016A IN ORDER TO ALIGN WITH FMSS DATABASE.
0016B	PORTAGE LAKEFRONT TURNAROUND	ROUTE SPLIT	ROUTE 0016BZ CHANGED TO 0016B IN ORDER TO ALIGN WITH FMSS DATABASE. FMSS NUMBER CHANGED FROM 114280 TO 231592.
0914	LAKE FRONT DRIVE 15 MINUTES PARKING	ROUTE NAME	ROUTE NAME CHANGED FROM "LAKE FRONT DRIVE HANDICAPPED PARKING" TO "LAKE FRONT DRIVE 15 MINUTES PARKING".
0917	GLENWOOD DUNES PARKING	ROUTE NAME	ROUTE NAME CHANGED FROM "LY-CO-KI-WE PARKING" TO "GLENWOOD DUNES PARKING".
0930	TREMONT COMFORT AREA PARKING	SURFACE TYPE CHANGE	SURFACE TYPE CHANGED FROM GRAVEL TO ASPHALT.
0940	PINHOOK BOG PARKING	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.
0959	HQ ANNEX	OTHER	USER ACCESS CHANGED FROM PUBLIC TO NONPUBLIC IN CYCLE 6.
0961	#106 RM ANNEX DRIVEWAY	SQ FEET CHANGE	IMPROVED GPS AND SQUARE FOOTAGE COLLECTED IN CYCLE 6.

# Section 3 Park Summary Information



Indiana Dunes National Park



Federal Lands Highway  
Road Inventory Program

# Parkwide Paved Route Condition Summary

## Indiana Dunes National Park

Table 1: Paved Route Miles and Parking Area Square Footages by Access Level and PCR

### Breakdown of Pavement Condition Rating (PCR) Based on Access Level

	POOR (PCR of 0 - 60)	FAIR (PCR of 61 - 84)	GOOD (PCR of 85 - 94)	EXCELLENT (PCR of 95 -100)	
<b>PAVED ROADS</b>					
Functional Class	Length (miles)	Length (miles)	Length (miles)	Length (miles)	Total Mileage by FC
1	0.21	1.13	0.79	0.12	2.24
2	0.22	0.39	0.88	1.77	3.26
3	0.02	0.06	0.35	1.09	1.52
4					
5					
6	0.26	0.08	0.12	0.02	0.48
7					
8					
<b>Total Mileage by PCR</b>	<b>0.71</b>	<b>1.66</b>	<b>2.14</b>	<b>3.00</b>	<b>7.51</b>
<b>PAVED PARKING</b>					
Access Level	Area (sq. ft.)	Area (sq. ft.)	Area (sq. ft.)	Area (sq. ft.)	Total Area
PUBLIC	2,283	65,703	792,521	8,721	869,228
NONPUBLIC		17,128		8,107	25,235
<b>Total Area by PCR</b>	<b>2,283</b>	<b>82,831</b>	<b>792,521</b>	<b>16,828</b>	<b>894,463</b>

**NOTES:**

1. Data are reported in the table only for paved roads and parking lots that received a condition rating.
2. Non-linear roads (MRP collected routes) are measured by area and converted to equivalent route miles based on a 22-ft pavement width in order to be included in the mileage totals for paved roads shown above.
3. Quantities in the table above are derived from the route condition data within the PMS\_20, PMS\_MRL, PMS\_MRP, and PMS\_PKG tables in the Park geodatabase.

### Parkwide Condition Percentages

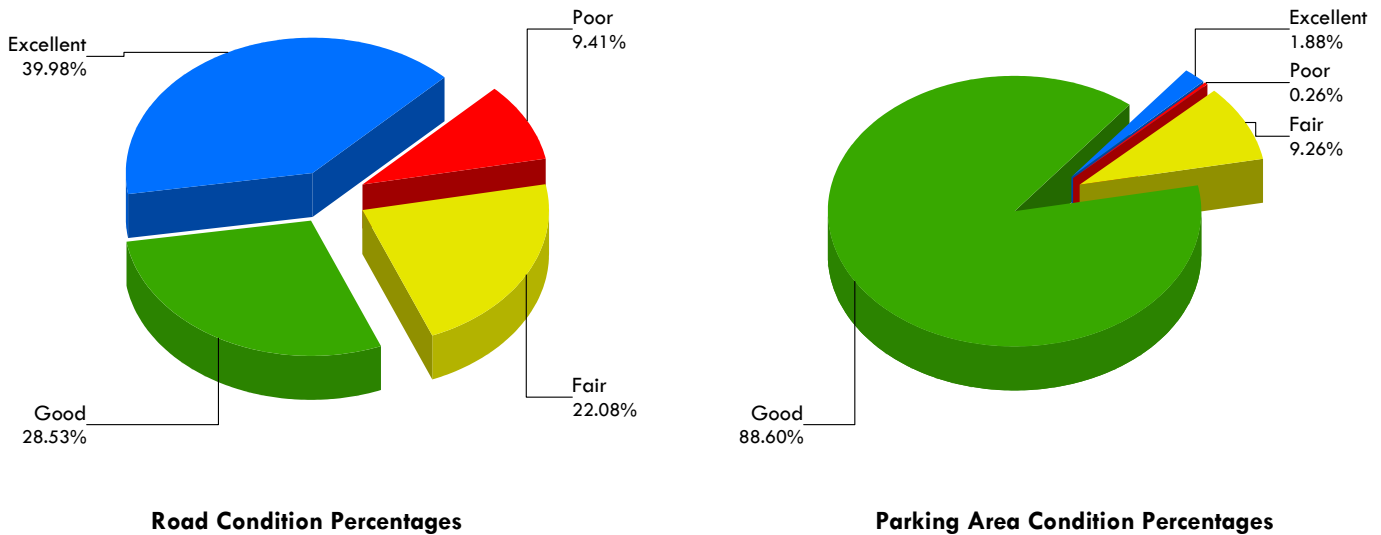



Figure 1: Pavement Condition Rating Breakdown for Paved Roads and Parking Areas



## Explanation of the Excellent, Good, Fair, and Poor Condition Descriptions

The Road Inventory Program aims to provide assistance in translating the excellent / good / fair / poor rating categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the type of treatments that should be considered now and into the future.

- Excellent / New: PCR of 95-100
  - Pavements in this range will require only spot repairs
- Good: PCR of 85-94
  - Pavements in this range will likely be candidates for Preventive Maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84
  - Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include singlelift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 0-60
  - Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

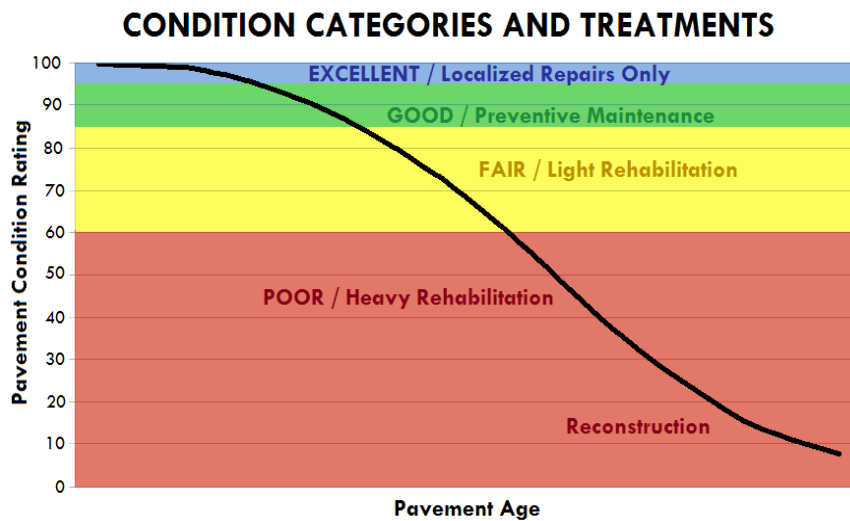

At this time, specific Maintenance and Rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions at the time in which the data were collected. For further information or to obtain additional Pavement Management System's data from our Highway Pavement Management Application (HPMA) please contact the Eastern Federal Lands pavement team.



Federal Lands Highway  
Road Inventory Program

# Cycle 6 - Road Inventory Program

## Road Condition Summary Report for Data Collection Vehicle (DCV) Rated Roads

**Condition (Rating / Index) Legend**

<b>EXCELLENT (95 - 100)</b>
<b>GOOD (85 - 94)</b>
<b>FAIR (61 - 84)</b>
<b>POOR (0 - 60)</b>
<b>NR = NOT RATED</b>

### Indiana Dunes National Park

**Notes:**

- This condition summary report contains only the roads rated with the Data Collection Vehicle (DCV).
- Condition on roads that were manually rated and parking areas are shown in separate reports.
- Route-level scores shown on this page may not represent scores at smaller intervals (due to rollup calculations).
- Additional details on individual road ratings at 0.10-mile and 1-mile intervals can be found in Section 5 of the Cycle 6 RIP Report.
- Refer to the RIP Report Appendix for an explanation of the rating system and rating methods.

#### Route-Level Condition for Roads Rated with the Data Collection Vehicle (DCV)

Route No.	FMSS No.	Route Name	Functional Class	Surf. Type	Paved Length (Miles)	Pavement Condition Rating (PCR)	Roughness Condition Index (RCI)	Surface Condition Rating (SCR)	Structural Crack Index	Alligator Crack Index	Longitudinal Cracking Index	Transverse Cracking Index	Patch / Pothole Index	Rutting Index
INDU-0014Z	48894	WEST BEACH ACCESS ROAD	1	AS	1.37	78	100	63	100	100	100	63	100	100
INDU-0015Z	48894	WEST BEACH ENTRY ROAD	1	AS	0.19	66	NR	66	98	100	98	66	100	100
INDU-0016A	114280	PORTAGE LAKEFRONT ENTRANCE ROAD	1	AS	0.63	91	92	90	99	100	99	90	100	99
INDU-0207AZ	25512	GOOD FELLOW CAMP ROAD DLC	2	AS	0.44	98	NR	98	99	100	99	98	100	100
INDU-0207BZ	25512	GOOD FELLOW CAMP EXIT ROAD DLC	2	AS	0.05	97	NR	97	99	100	99	100	100	97
INDU-0207DZ	25512	GOOD FELLOW CAMP LOOP DLC	2	AS	0.10	98	NR	98	100	100	100	99	100	98
INDU-0210	24757	CENTRAL AVENUE	2	AS	0.54	73	59	82	93	100	93	82	100	98
INDU-0212	48911	KEMIL ROAD (300 EAST ROAD)	2	AS	0.81	87	95	82	93	100	93	82	100	99
INDU-0213	48912	FURNESSVILLE ROAD (1500 NORTH ROAD)	2	AS	1.30	96	92	99	99	100	99	100	100	100
INDU-0222AZ	24752	DUNEWOOD CAMPGROUND ACCESS ROAD LOOP AZ	3	AS	0.06	95	NR	95	98	100	98	95	100	98
INDU-0222BZ	24752	DUNEWOOD CAMPGROUND ACCESS ROAD LOOP BZ	3	AS	0.04	98	NR	98	100	100	100	99	100	98
INDU-0222Z	24752	DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A	3	AS	0.29	98	NR	98	100	100	100	98	100	100
INDU-0223Z	24752	DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C	3	AS	0.29	97	NR	97	100	100	100	97	100	100
INDU-0237Z	24752	DUNEWOOD CAMPGROUND ACCESS ROAD LOOP D (DOUGLAS LOOP)	3	AS	0.32	93	NR	93	99	100	99	93	100	100
INDU-0238Z	24752	DUNEWOOD CAMPGROUND ACCESS ROAD LOOP B (MATHER LOOP)	3	AS	0.41	99	NR	99	100	100	100	99	99	99
INDU-0240	114938	WAHL FARM ACCESS ROAD	3	AS	0.12	76	NR	76	76	95	81	89	99	89
INDU-0404	56012	WEST BEACH SERVICE ACCESS ROAD	6	AS	0.32	47	NR	47	99	100	99	47	100	99
INDU-0406	25797	WEST BEACH SERVICE ROAD	6	AS	0.12	88	NR	88	99	100	99	88	100	99



## Cycle 6 - Road Inventory Program Road Condition Summary Report for Manually Rated Roads

### Indiana Dunes National Park

**Condition (Rating / Index) Legend**

<b>EXCELLENT (95 - 100)</b>
<b>GOOD (85 - 94)</b>
<b>FAIR (61 - 84)</b>
<b>POOR (0 - 60)</b>
<b>NR = NOT RATED</b>

**Notes:**

- This condition summary report contains only the roads that were manually rated.
  - MRL: Manually Rated Line (a linear road)
  - MRP: Manually Rated Polygon (a non-linear road)
- Condition on roads that were rated with the Data Collection Vehicle (DCV) are shown in a separate report.
- A road is manually rated when it is determined to be unsuitable for the DCV to drive.
- Additional details on individual road ratings at 0.10-mile and 1-mile intervals can be found in Section 5 of the Cycle 6 RIP Report.
- Refer to the RIP Report Appendix for an explanation of the rating system and rating methods.

#### Route-Level Condition for Manually Rated Line (MRL) Roads

Route No.	FMSS No.	Route Name	Functional Class	Surf. Type	Paved Length (Miles)	Pavement Condition Rating (PCR)	Roughness Condition Index (RCI)	Surface Condition Rating (SCR)	Structural Crack Index	Alligator Crack Index	Longitudinal Cracking Index	Transverse Cracking Index	Patch / Pothole Index	Rutting Index
INDU-0016B	231592	PORTAGE LAKEFRONT TURNAROUND	1	CO	0.06	90	NR	90	NR	NR	NR	NR	NR	NR
INDU-0207CZ	25512	GOOD FELLOW CAMP ROAD TURNAROUND DLC	2	AS	0.03	90	NR	90	NR	97	90	90	97	97
INDU-0226	24761	SOUTH STATE PARK ROAD (1500 NORTH ROAD)	2	AS	0.95	NR	NR	NR	NR	NR	NR	NR	NR	NR
INDU-0410	25514	DUNEWOOD SERVICE ROAD	6	AS	0.10	90	NR	90	NR	90	90	90	90	90



# Cycle 6 - Road Inventory Program

## Parking Area Condition Summary Report

**Condition (Rating / Index) Legend**

<b>EXCELLENT (97)</b>
<b>GOOD (90)</b>
<b>FAIR (73)</b>
<b>POOR* (0, 30, 53)</b>
<b>NR = NOT RATED</b>

### Indiana Dunes National Park

- Notes:
- A PCR of 0 indicates a paved parking area in very poor condition. Individual distresses could not be identified.
  - Additional details on individual parking areas can be found in Section 6 of the Cycle 6 RIP Report.
  - Refer to the RIP Report Appendix for an explanation of the rating system and rating methods.

#### Condition Rating Details for Paved Parking Areas

Route No.	FMSS No.	Route Name	User Access	Surf. Type	Area (Sq. Ft.)	Pavement Condition Rating (PCR)	Asphalt Surface Distresses					Concrete Surface Distresses						
							Alligator Cracking	Longitudinal / Transverse Cracking	Rutting / Distortions	Potholes / Patching	HMA Patching	Surface Raveling / Bleeding	Joint Faulting	Slab Cracking	Joint Distresses	Delamination / Pop-Outs	Potholes / Patching	
INDU-0900Z	56393	DUNEWOOD CAMPGROUND ACCESS PARKING	PUBLIC	AS	1,280	90	97	97	90	97	97	97						
INDU-0903Z	56393	DUNEWOOD WALK-IN PARKING	PUBLIC	AS	4,428	90	97	90	97	97	97	97						
INDU-0904	24732	CALUMET DUNES INTERPRETER CENTER PARKING	PUBLIC	AS	17,752	90	97	90	97	97	97	90						
INDU-0905	25516	CALUMET DUNES INTERPRETER CENTER OVERFLOW PARKING	NONPUBLIC	AS	6,568	97	97	97	97	97	97	97						
INDU-0906	24734	KEMIL BEACH PARKING	PUBLIC	AS	36,947	90	97	90	90	97	97	97						
INDU-0907	56219	BAILLY/CHELLBERG VISITOR PARKING	PUBLIC	AS	38,724	90	97	90	90	90	97	90						
INDU-0913	24725	LAKE VIEW BEACH PARKING	PUBLIC	AS	9,143	90	97	90	90	97	90	90						
INDU-0914	56223	LAKE FRONT DRIVE 15 MINUTES PARKING	PUBLIC	AS	999	73	97	90	73	97	97	97						
INDU-0915	24727	CENTRAL BEACH PARKING	PUBLIC	AS	31,510	90	97	90	90	97	97	90						
INDU-0916Z	24729	MT. BALDY PARKING	PUBLIC	AS	57,792	73	90	90	73	90	97	90						
INDU-0917	24726	GLENWOOD DUNES PARKING	PUBLIC	AS	42,731	90	97	90	90	97	97	97						
INDU-0918Z	24760	HQ ADMINISTRATIVE PARKING A	PUBLIC	AS	86,162	90	97	90	97	97	97	97						
INDU-0919Z	24760	HQ ADMINISTRATIVE PARKING B	PUBLIC	AS	47,284	90	97	90	97	97	97	97						
INDU-0920	25510	DOUGLAS CENTER PARKING	PUBLIC	AS	28,224	90	90	90	97	97	97	97						
INDU-0921	52955	TOLLESTON DUNES OVERLOOK PARKING	PUBLIC	AS	1,667	90	97	90	97	97	97	97						
INDU-0922	24748	TOLLESTON DUNES TRAILHEAD PARKING	PUBLIC	AS	23,424	90	97	90	90	97	97	97						
INDU-0923	24754	WEST BEACH VISITOR PARKING	PUBLIC	AS	303,237	90	97	90	97	97	97	97						
INDU-0925	56225	WEST BEACH MAINTENANCE BUILDING PARKING	NONPUBLIC	AS	17,128	73	90	90	97	97	97	73						
INDU-0927AZ	56228	DLC (GOOD FELLOW CAMP) PARKING A	PUBLIC	AS	6,034	90	97	97	97	97	97	90						
INDU-0927CZ	56228	DLC (GOOD FELLOW CAMP) PARKING C	PUBLIC	AS	4,149	90	97	97	97	97	97	90						
INDU-0930	24730	TREMONT COMFORT AREA PARKING	PUBLIC	AS	8,721	97	97	97	97	97	97	97						
INDU-0936	46984	LONG LAKE TRAIL PARKING	PUBLIC	AS	6,937	90	90	90	97	97	97	97						
INDU-0937Z	24729	MT. BALDY BUS PARKING	PUBLIC	AS	8,947	90	97	90	97	97	97	90						
INDU-0938	25906	DUNBAR PARKING AREA	PUBLIC	AS	12,933	90	97	90	97	97	97	97						
INDU-0940	111768	PINHOOK BOG PARKING	PUBLIC	AS	16,378	90	97	90	90	97	97	90						
INDU-0943	104538	MARQUETTE TRAIL PARKING	PUBLIC	AS	1,799	NR												



## Cycle 6 - Road Inventory Program Parking Area Condition Summary Report

### Indiana Dunes National Park

**Condition (Rating / Index) Legend**

<b>EXCELLENT (97)</b>
<b>GOOD (90)</b>
<b>FAIR (73)</b>
<b>POOR* (0, 30, 53)</b>
<b>NR = NOT RATED</b>

- Notes:
- A PCR of 0 indicates a paved parking area in very poor condition. Individual distresses could not be identified.
  - Additional details on individual parking areas can be found in Section 6 of the Cycle 6 RIP Report.
  - Refer to the RIP Report Appendix for an explanation of the rating system and rating methods.

#### Condition Rating Details for Paved Parking Areas

Route No.	FMSS No.	Route Name	User Access	Surf. Type	Area (Sq. Ft.)	Pavement Condition Rating (PCR)	Asphalt Surface Distresses					Concrete Surface Distresses						
							Alligator Cracking	Longitudinal / Transverse Cracking	Rutting / Distortions	Potholes / Patching	HMA Patching	Surface Raveling / Bleeding	Joint Faulting	Slab Cracking	Joint Distresses	Delamination / Pop-Outs	Potholes / Patching	
INDU-0944	104580	WEST BEACH SERVICE PARKING	NONPUBLIC	AS	1,539	97	97	97	97	97	97	97						
INDU-0950	100346	PORTER BEACH NORTH PARKING	PUBLIC	AS	14,021	90	97	90	90	97	97	90						
INDU-0952	82346	CALUMET RIVER TRAIL PARKING	PUBLIC	AS	6,729	90	97	90	97	97	97	90						
INDU-0953	114273	PORTAGE LAKEFRONT NORTH PARKING AREA	PUBLIC	AS	23,035	90	97	90	97	97	97	90						
INDU-0954	114274	PORTAGE LAKEFRONT EAST PARKING AREA	PUBLIC	AS	7,115	90	97	90	97	97	97	97						
INDU-0955	114283	PORTAGE LAKEFRONT WEST PARKING AREA	PUBLIC	AS	7,553	90	97	90	97	97	97	90						
INDU-0956	87732	BEVERLY DRIVE SPRING PARKING AREA	PUBLIC	AS	861	53	73	53	90	97	97	73						
INDU-0958	46990	HAWLEYWOOD BUILDING #504 DRIVEWAY / PARKING	PUBLIC	AS	1,035	NR												
INDU-0960	58102	U.S. HIGHWAY 12 DORM DRIVE/PARKING	PUBLIC	AS	6,177	90	97	97	97	97	97	90						
INDU-0961	98098	#106 RM ANNEX DRIVEWAY	PUBLIC	AS	1,422	30	30	53	30	97	97	97						
INDU-0962	58534	US 20 DORM ENTRANCE PARKING	PUBLIC	AS	6,912	73	97	90	73	97	97	73						

# Section 4 Park Route Location Maps



Indiana Dunes National Park




Federal Lands Highway  
Road Inventory Program

# Indiana Dunes National Park


## ROUTE LOCATION MAP


### Key Map

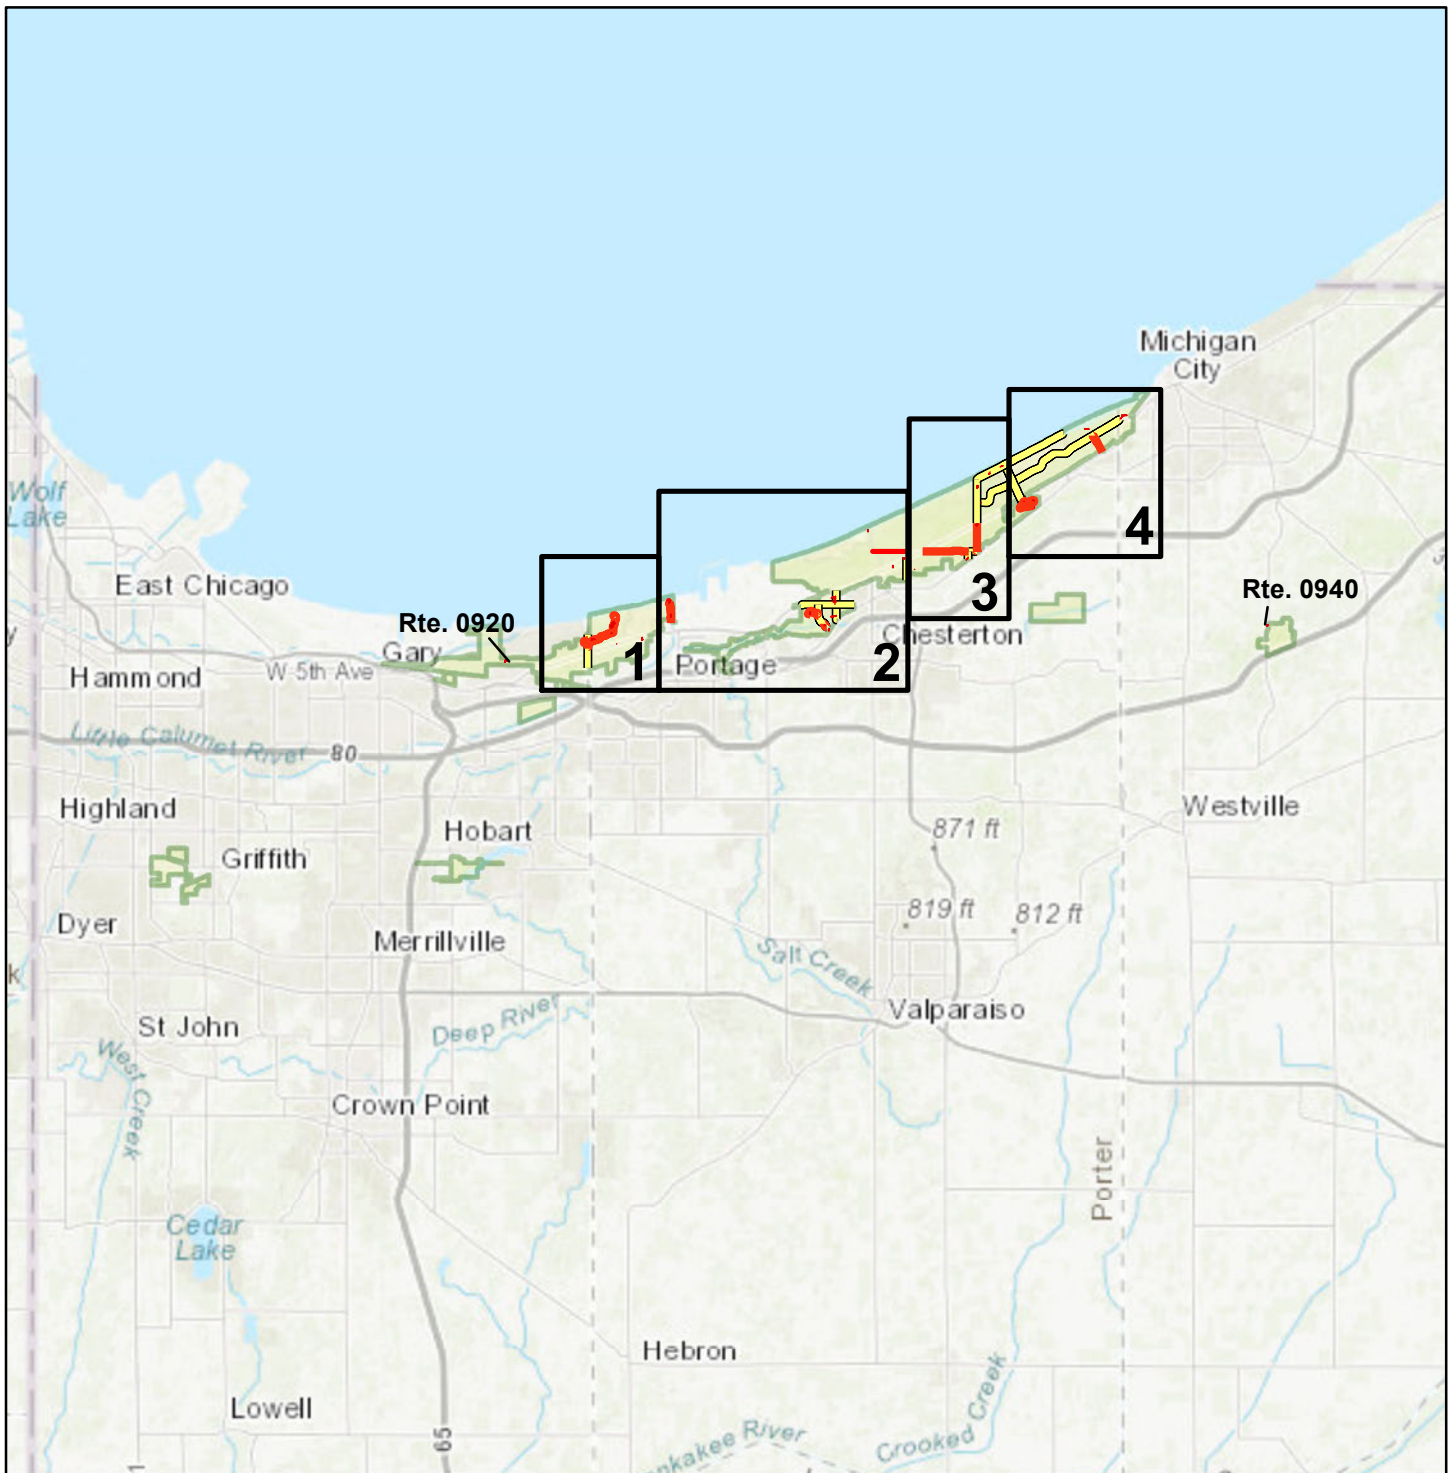

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

 **NPS Collected Routes**


 **Non-NPS Collected Routes**



# Indiana Dunes National Park

## ROUTE LOCATION MAP


### Area Map 1

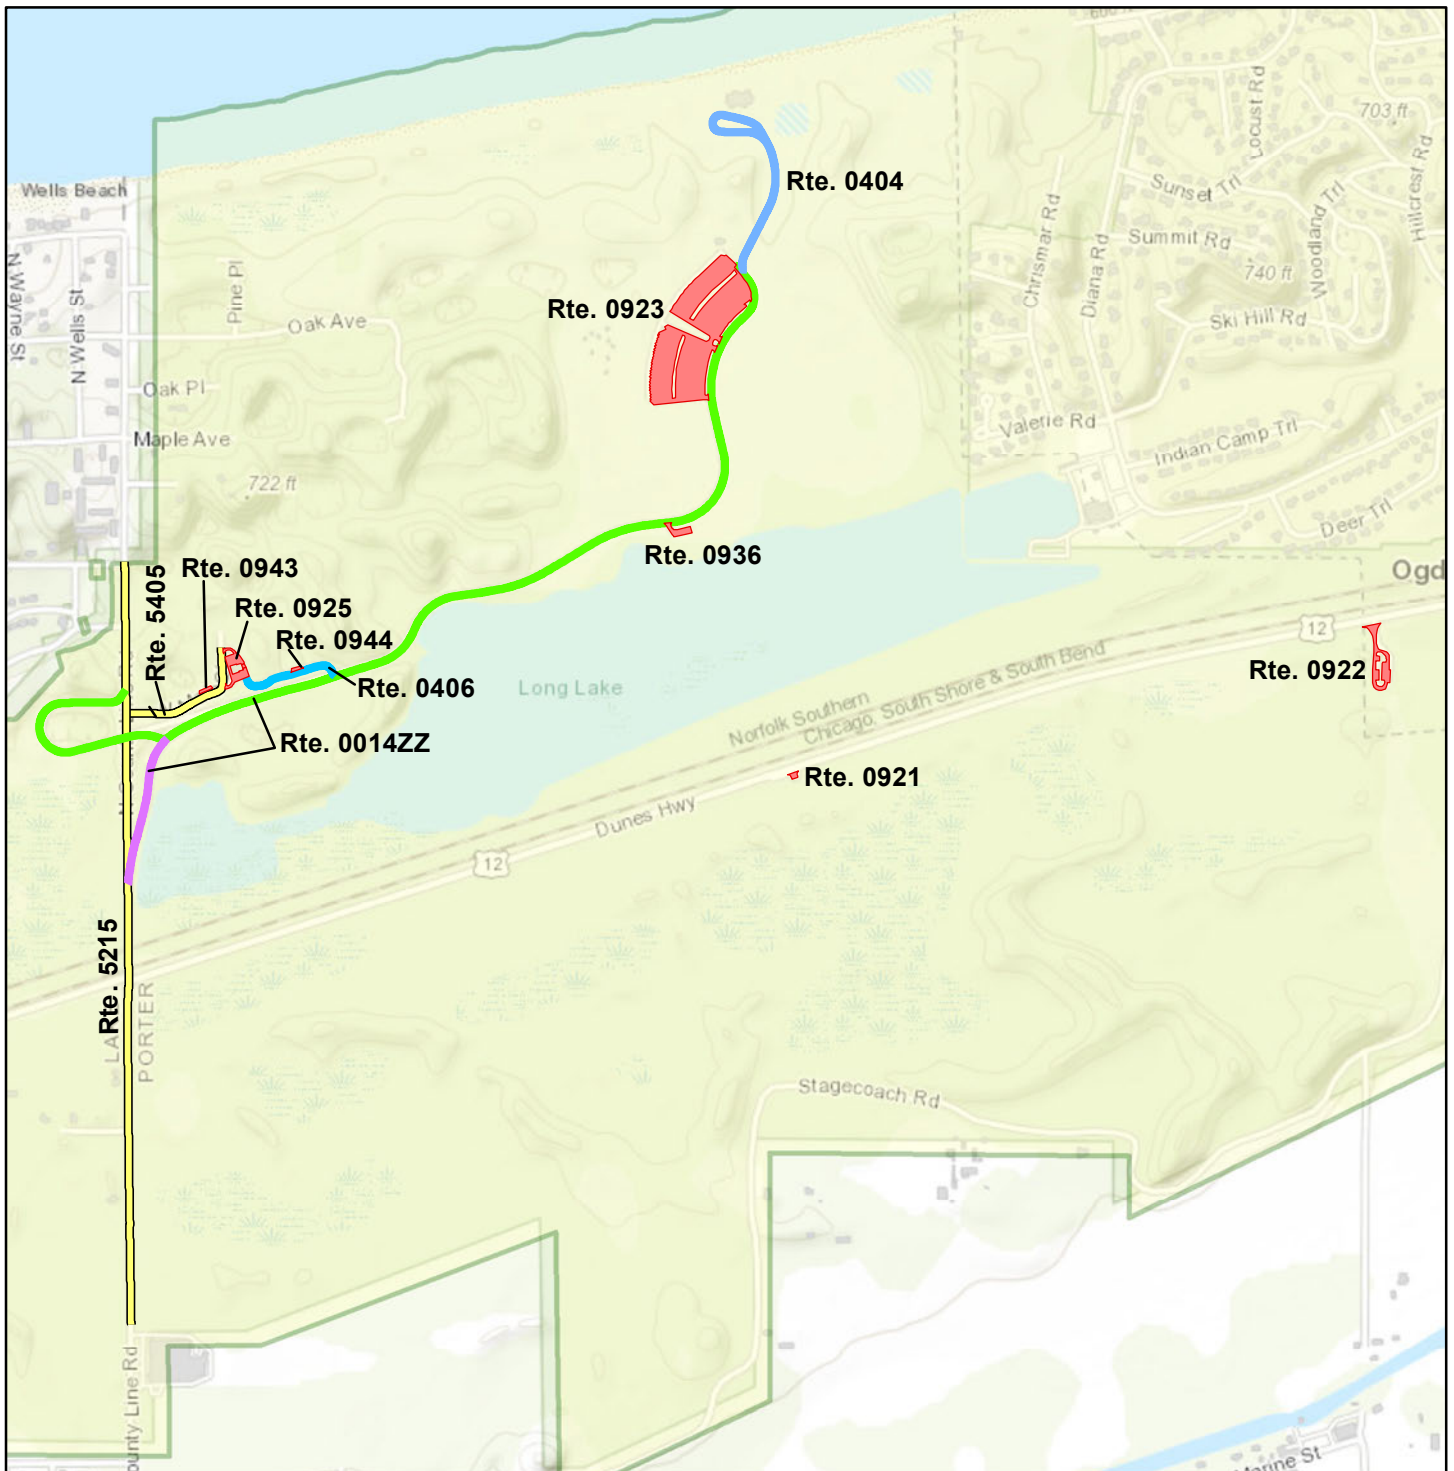

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

**Note: Unique colors are used to differentiate roads**

 **Non-NPS Collected Routes**






# Indiana Dunes National Park

## ROUTE LOCATION MAP


### Area Map 2

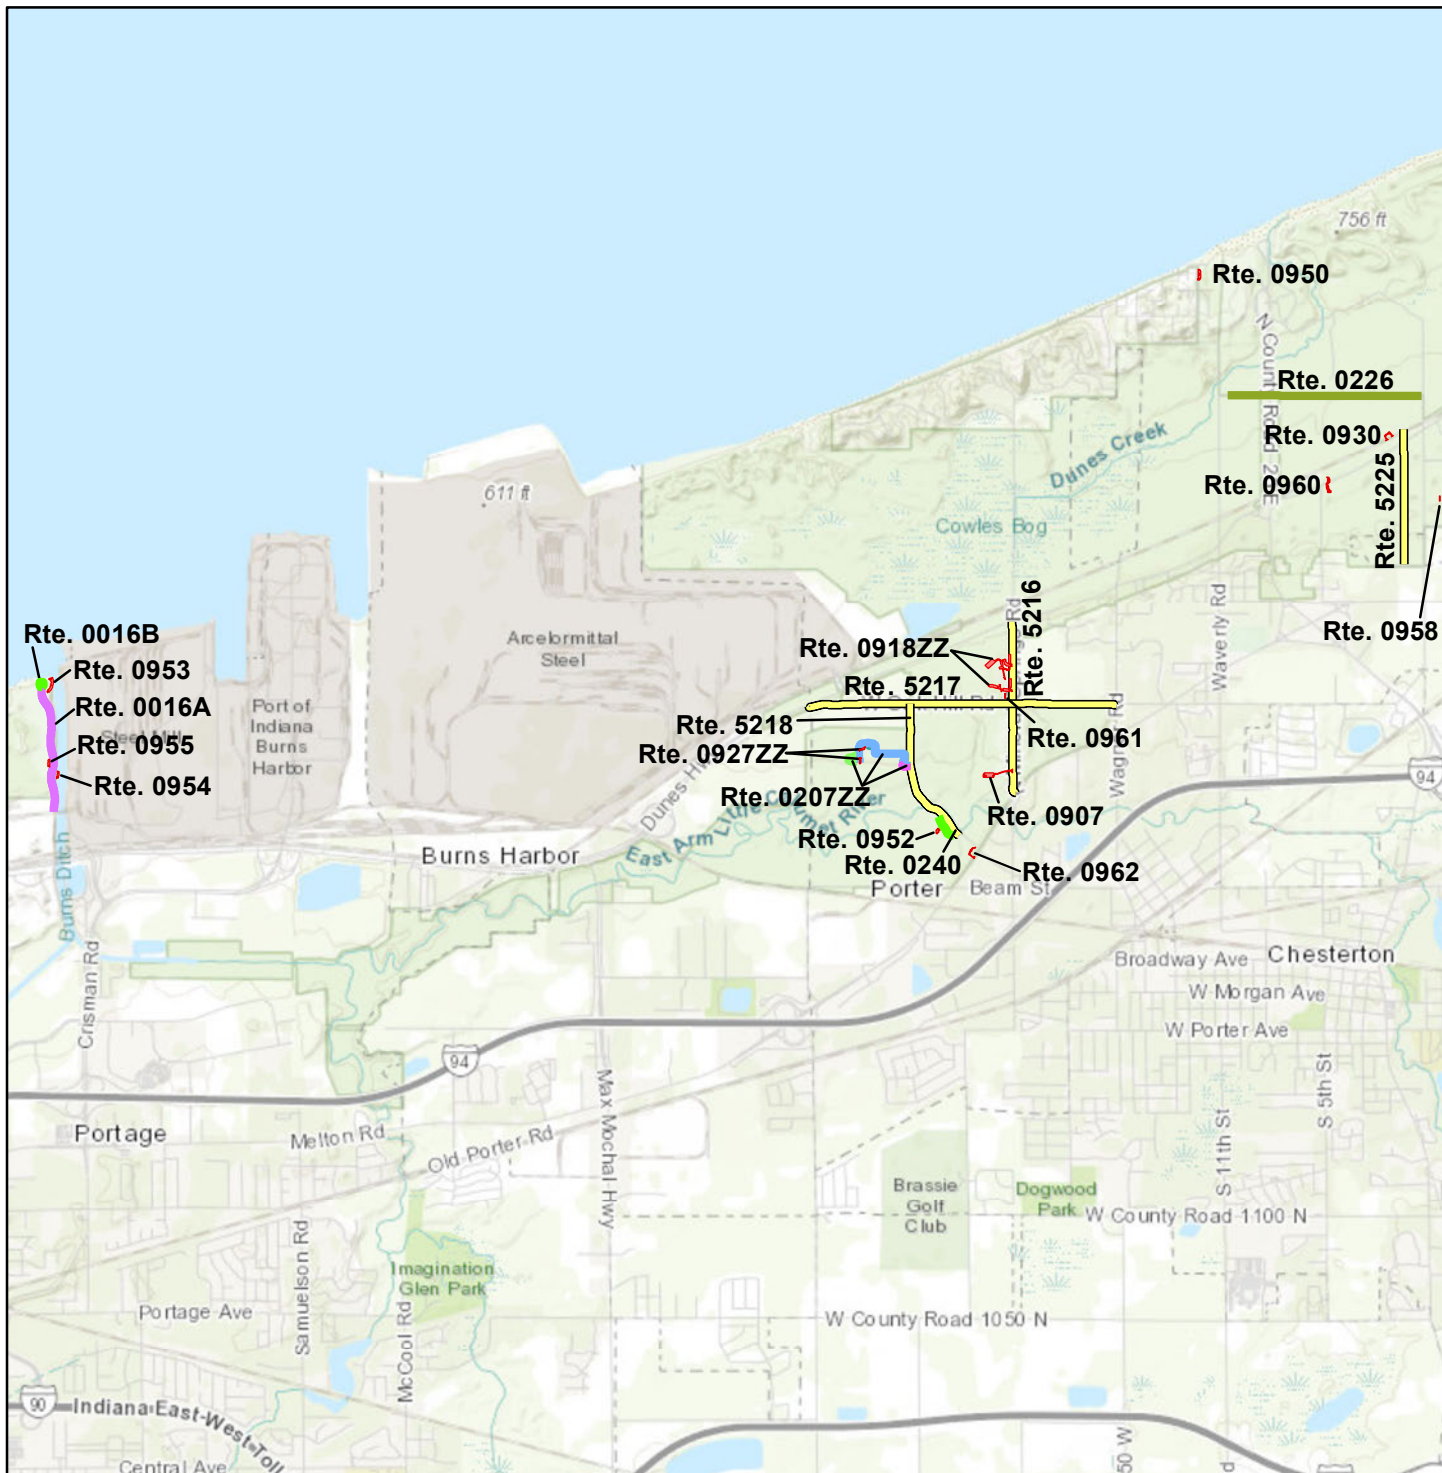

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

**Note: Unique colors are used to differentiate roads**

 Non-NPS Collected Routes



# Indiana Dunes National Park

## ROUTE LOCATION MAP


### Area Map 3



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

**Note: Unique colors are used to differentiate roads**

 Non-NPS Collected Routes



# Indiana Dunes National Park

## ROUTE LOCATION MAP


### Area Map 4



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

**Note: Unique colors are used to differentiate roads**

————— Non-NPS Collected Routes




# Indiana Dunes National Park

## ROUTE CONDITION MAP

### PCR - MILE BY MILE

### Key Map

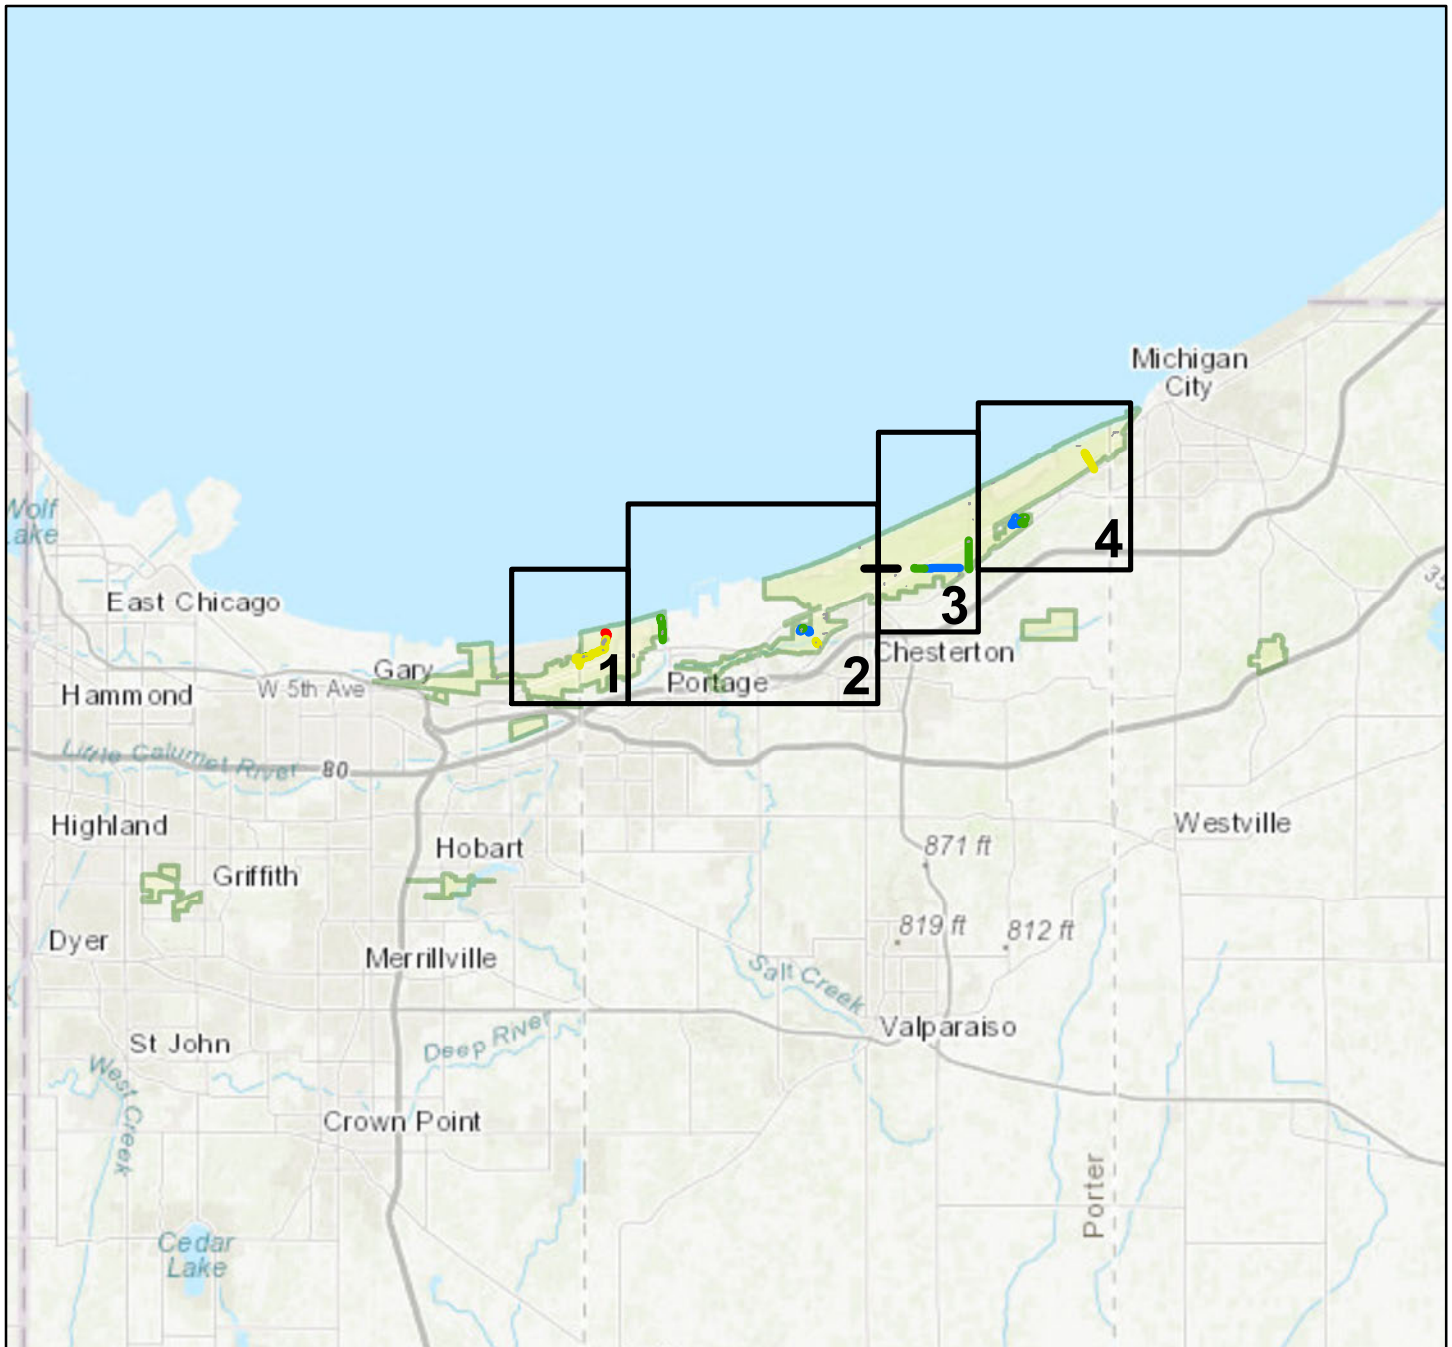


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

#### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas  
Only Data Collection Vehicle and Manually Rated Roads are displayed




# Indiana Dunes National Park

## ROUTE CONDITION MAP

### PCR - MILE BY MILE

#### Area Map 1

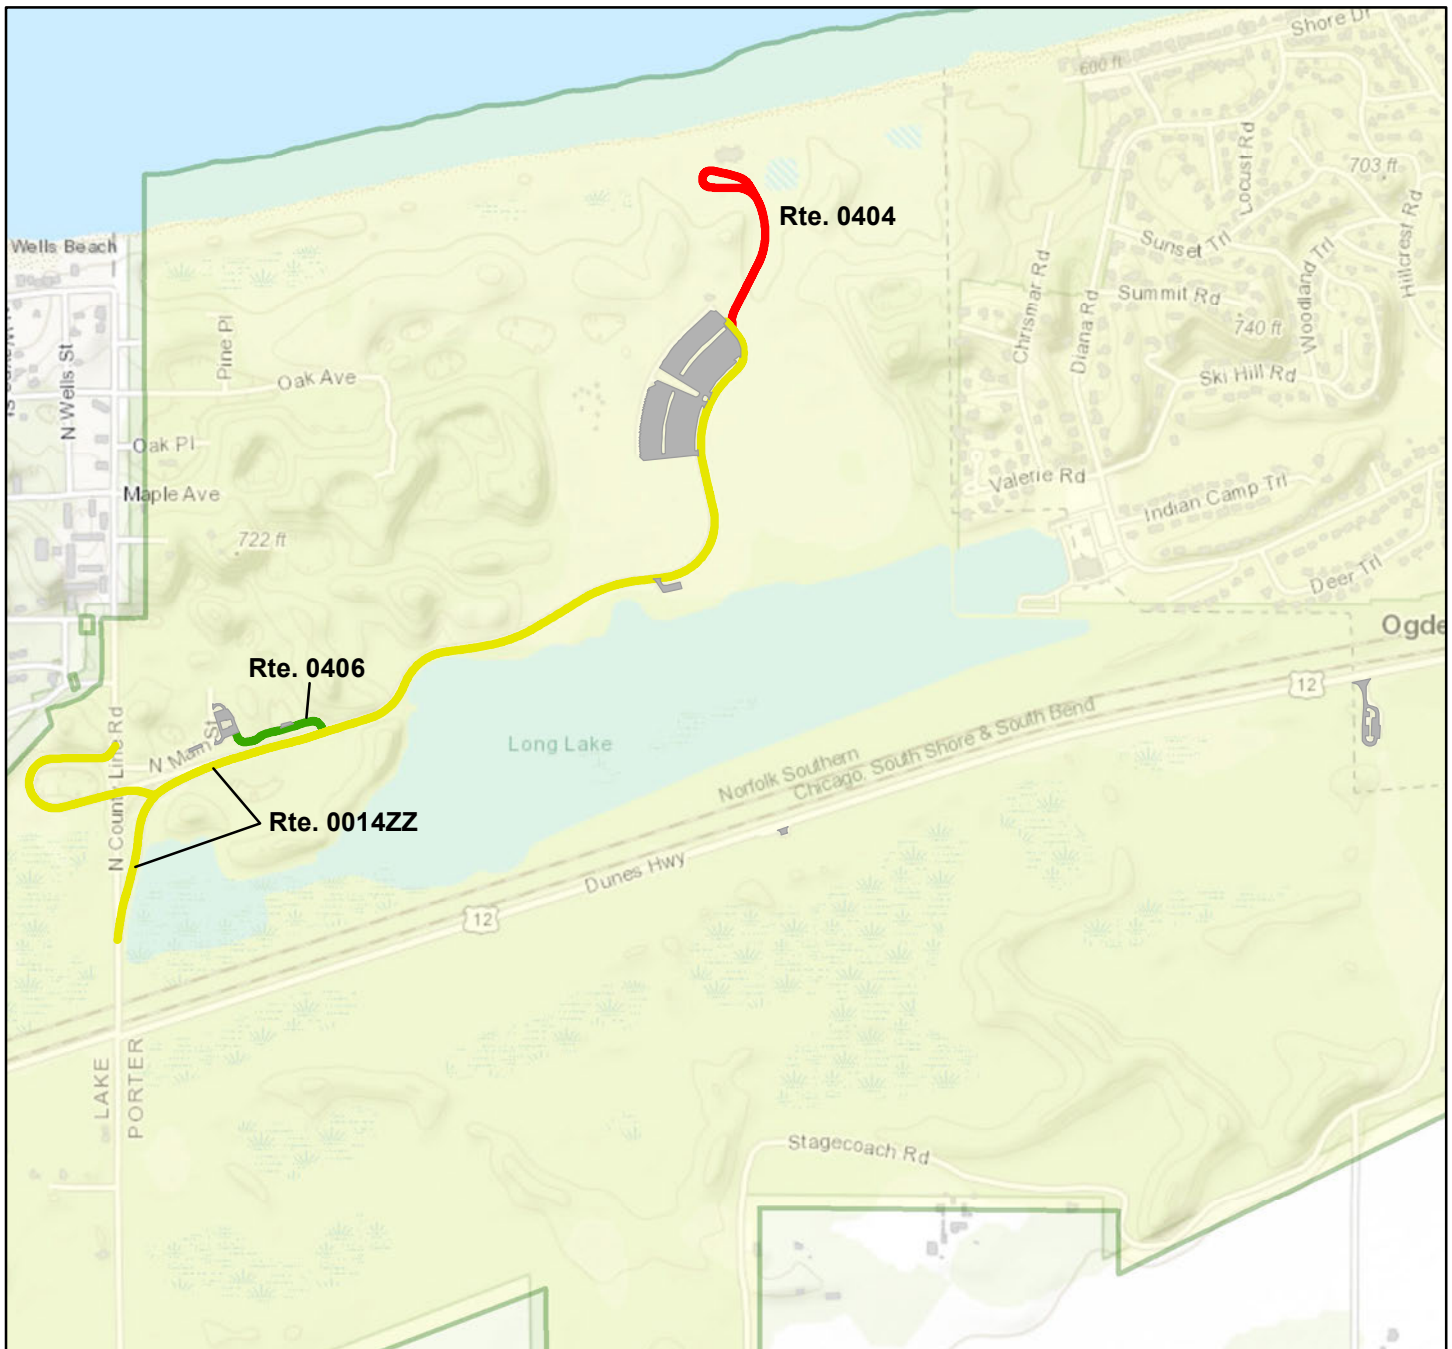


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas  
Only Data Collection Vehicle and Manually Rated Roads are displayed




# Indiana Dunes National Park

## ROUTE CONDITION MAP

### PCR - MILE BY MILE

#### Area Map 2

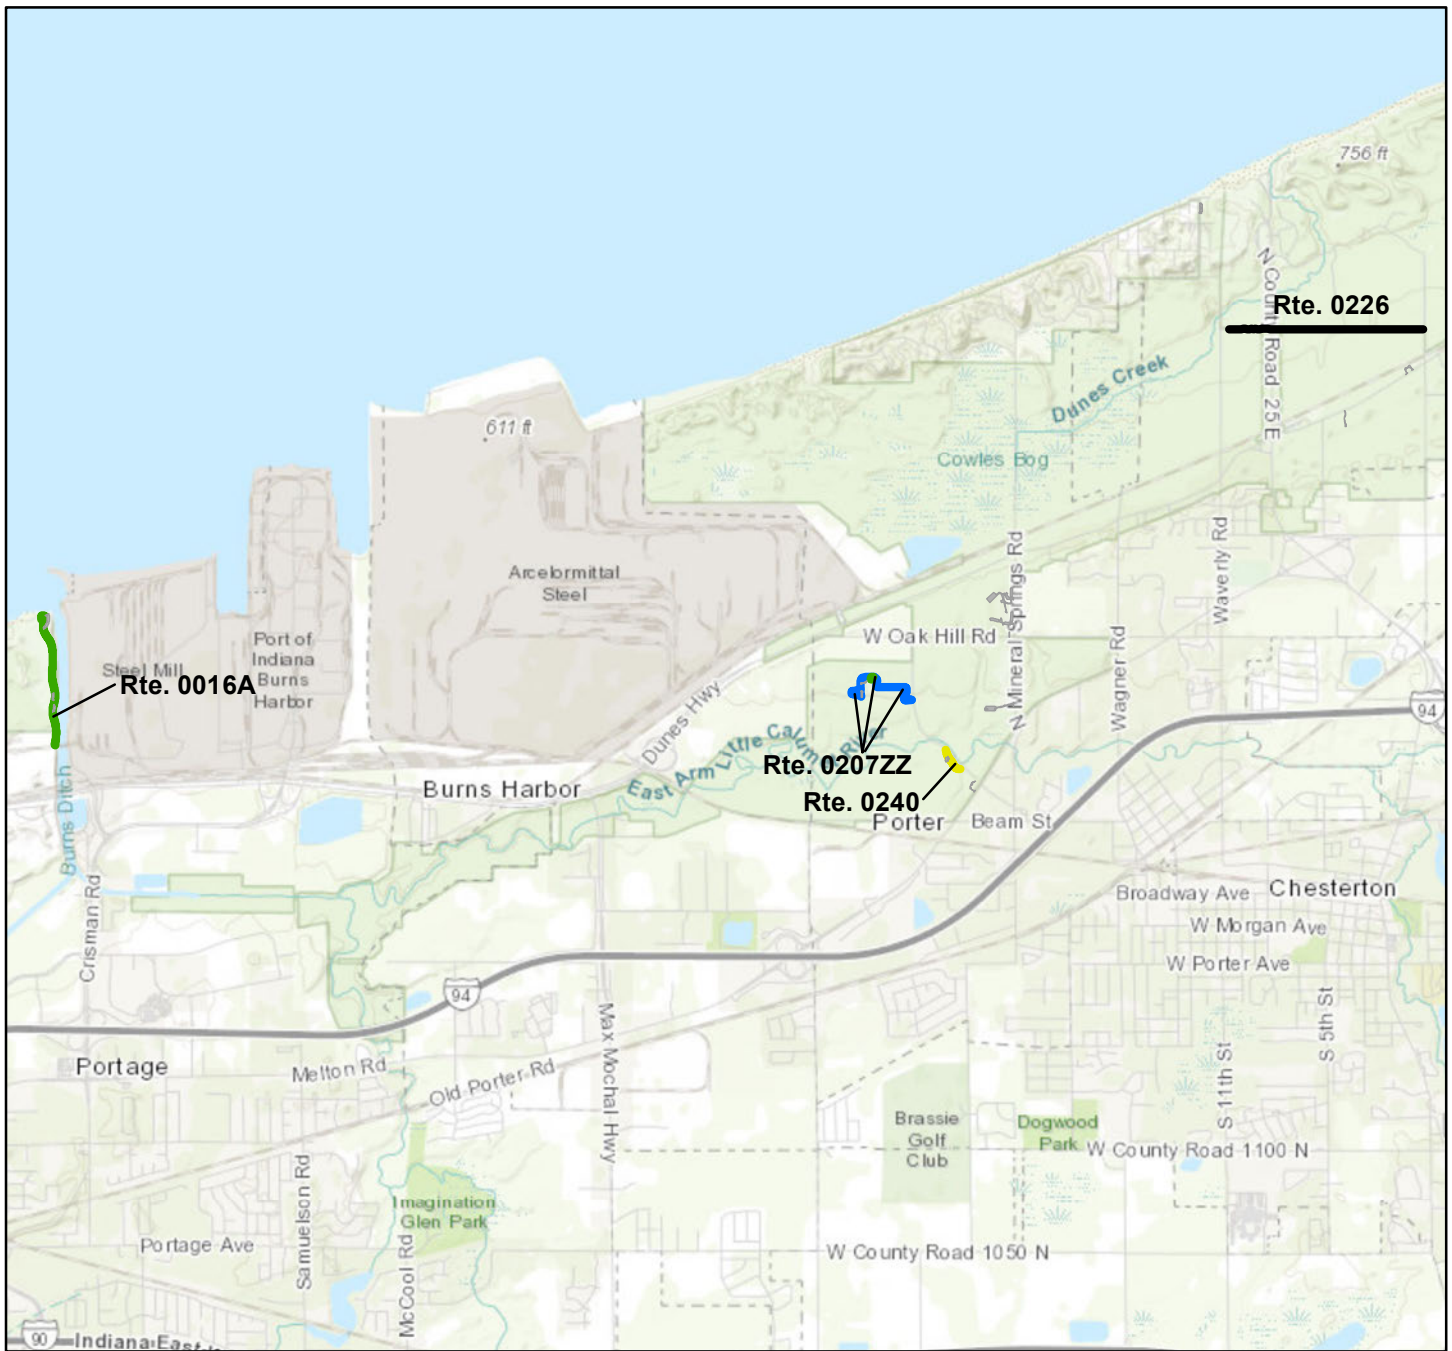


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas  
 Only Data Collection Vehicle and Manually Rated Roads are displayed




# Indiana Dunes National Park

## ROUTE CONDITION MAP

### PCR - MILE BY MILE

#### Area Map 3

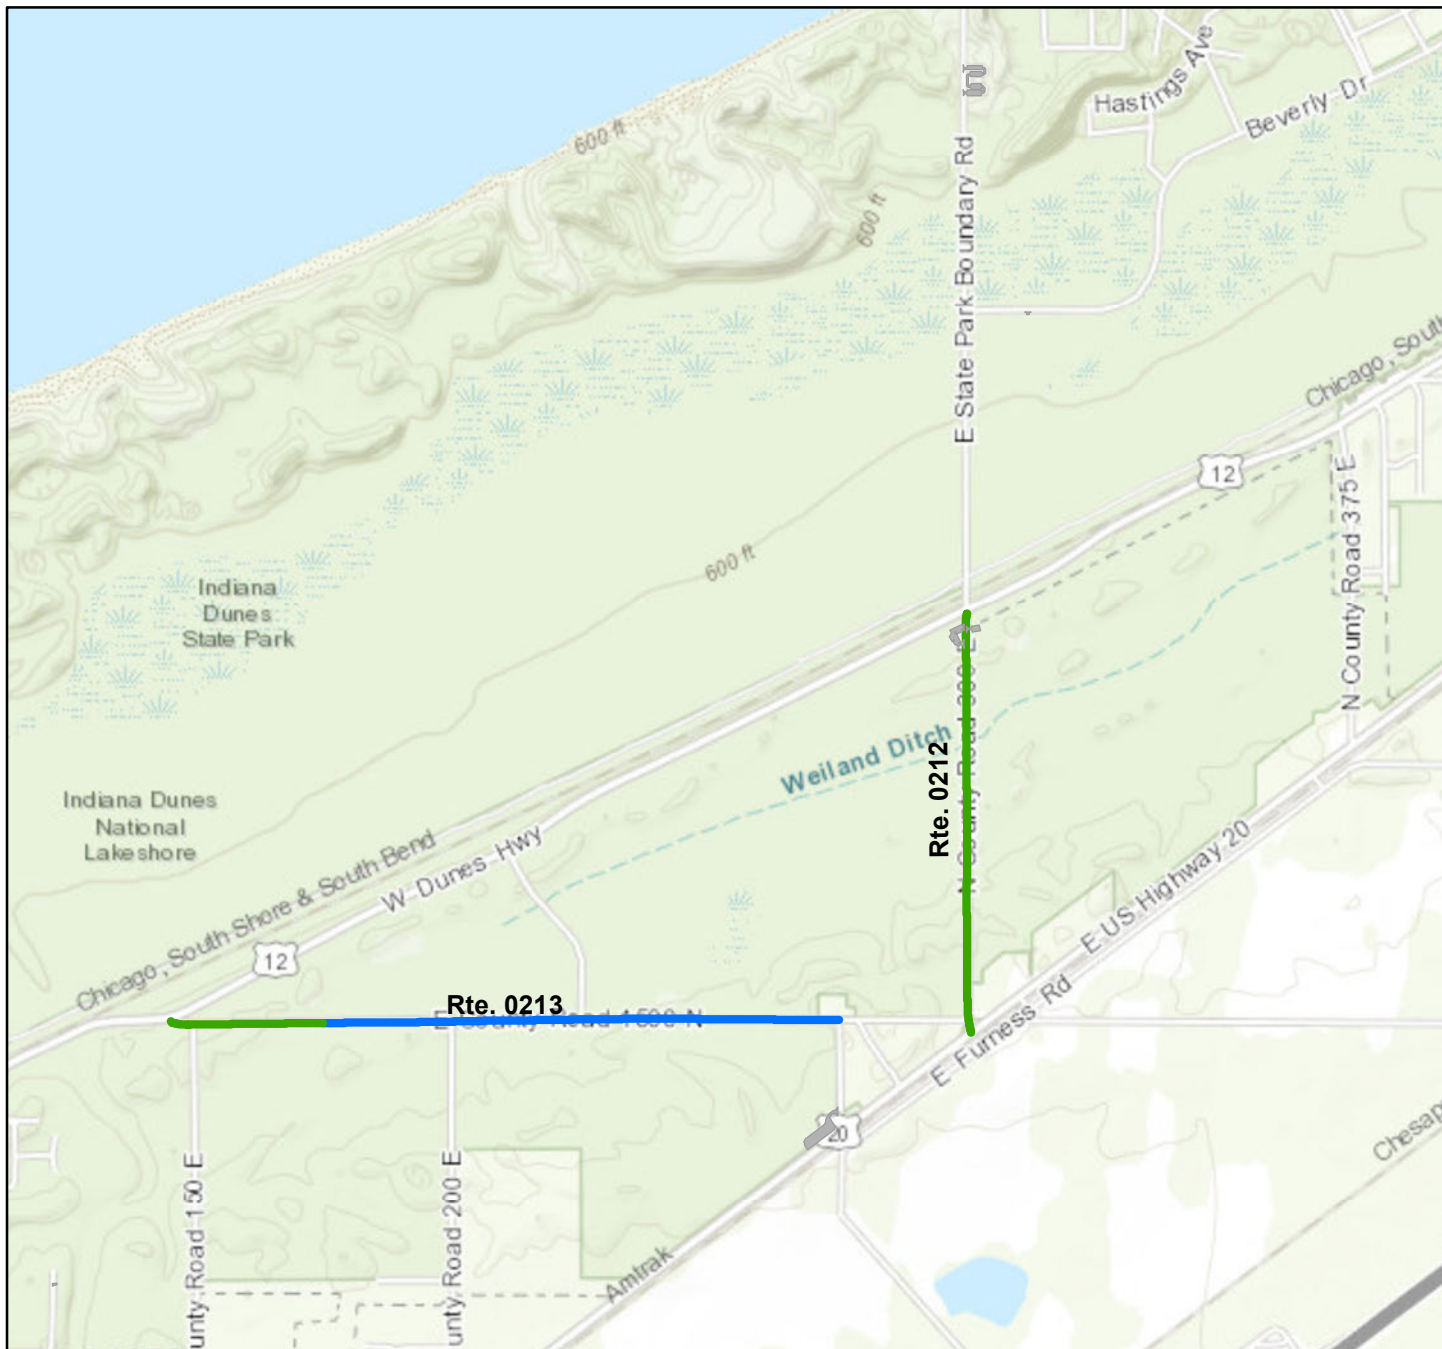


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

#### Route Condition Legend – Pavement Condition Rating (PCR)

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas  
Only Data Collection Vehicle and Manually Rated Roads are displayed




# Indiana Dunes National Park

## ROUTE CONDITION MAP

### PCR - MILE BY MILE

#### Area Map 4

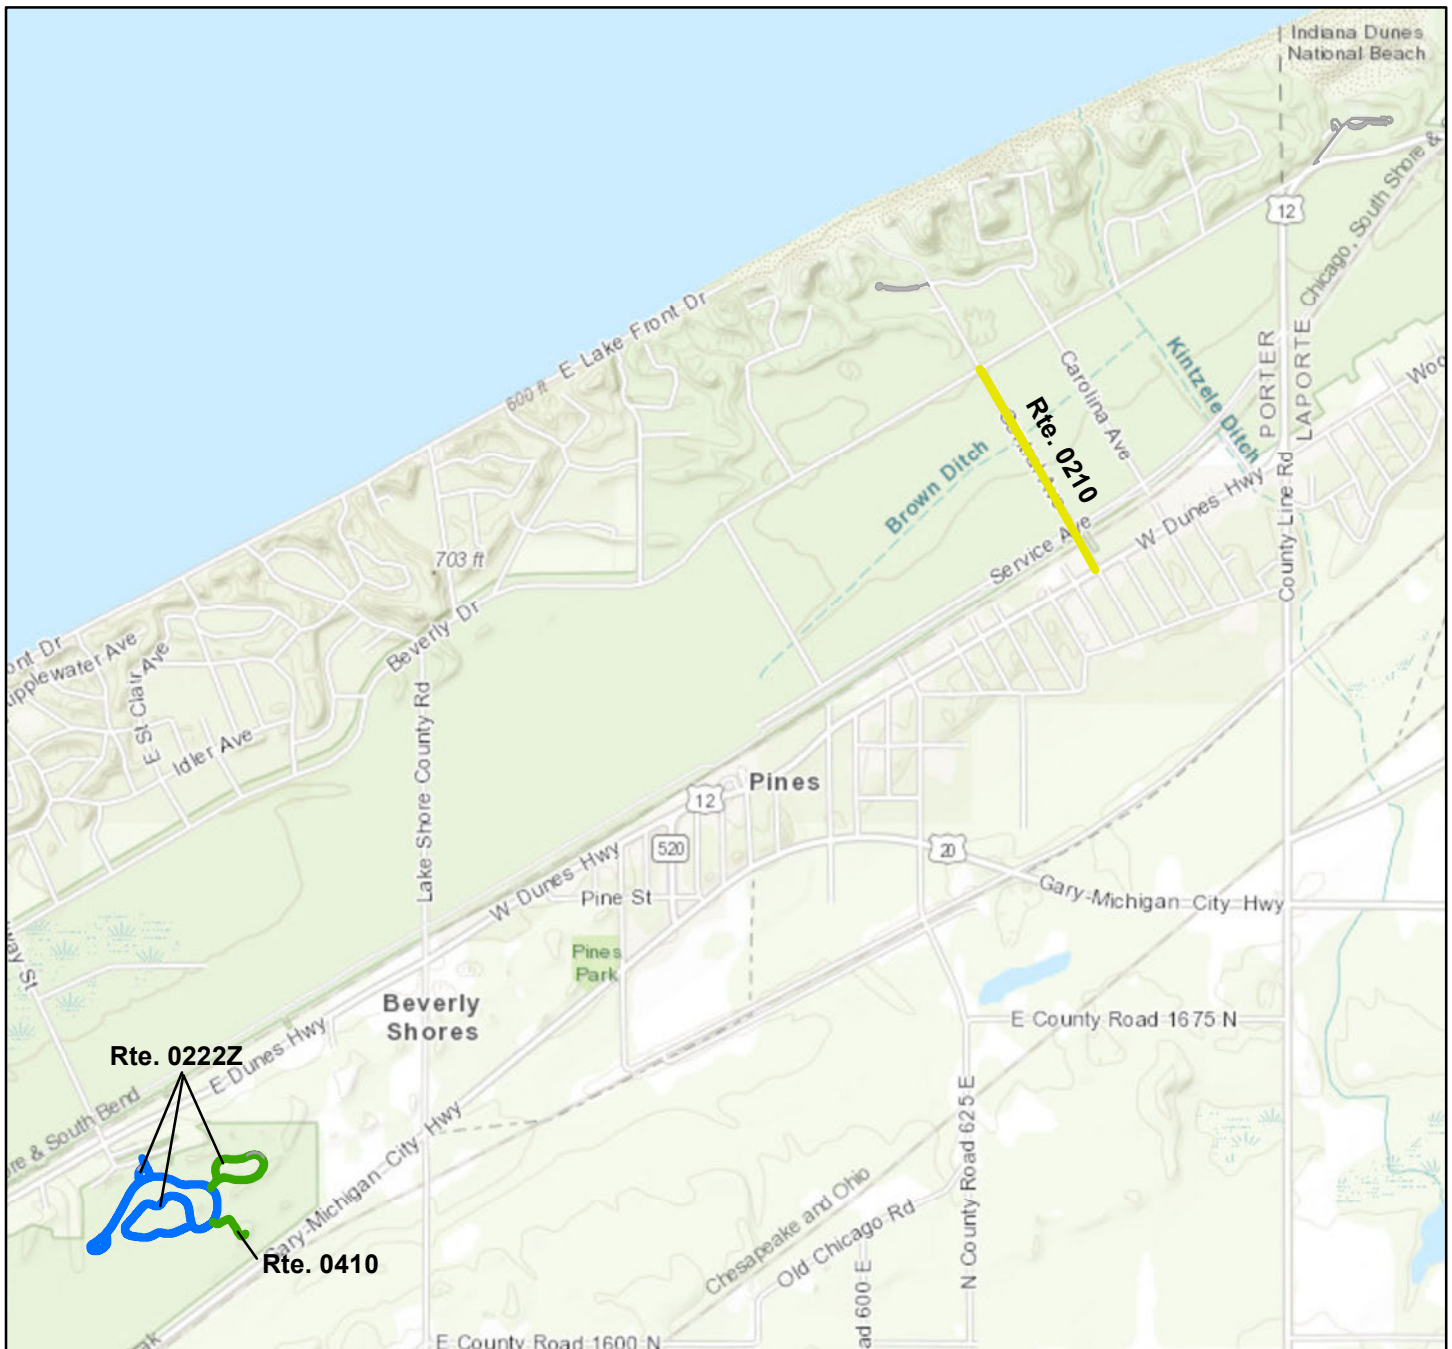


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

#### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

Colors on map represent condition scores at 1-mile intervals. See Appendix for definitions and formulas  
Only Data Collection Vehicle and Manually Rated Roads are displayed





# Section 5 Paved Road Condition Rating Sheets



Indiana Dunes National Park



Federal Lands Highway  
Road Inventory Program

# Indiana Dunes National Park

## ROUTE 0014ZZ: WEST BEACH ACCESS ROADS

### Summary Route



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

**Note:** The weighted average summary PCR value is calculated from only the sections of road where the PCR was collected. The overall PCR for the summary route may not reflect individual subcomponent ratings.

<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>		
See Appendix for definitions and formulas						
<b>Inspection Date:</b>	6/21/2019					
<b>Paved Length (Miles):</b>	1.55					
<b>Surface Type:</b>	ASPHALT	<b>Route Summary</b>				
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	77					
<b>Lane &amp; Width Information</b>						
Number of Lanes	2					
Paved Width (ft)	24.2					
Lane Width (ft)	10.7					

# Indiana Dunes National Park

## ROUTE 0014Z: WEST BEACH ACCESS ROAD

Subcomponent of Route INDU-0014ZZ  
Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0	1			
<b>Paved Length (Miles):</b> 1.37	<b>Section Length (MI)</b>	1	0.37			
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	78	80	74			
Surface Condition Rating (SCR)	63	66	56			
Roughness Condition Index (RCI)	100	100	100			
<b>Distress Index Values</b>						
Structural Crack Index	100	100	99			
Alligator Crack Index	100	100	100			
Longitudinal Crack Index	100	100	99			
Transverse Cracking Index	63	66	56			
Patching Index	100	100	100			
Rutting Index	100	100	100			
International Roughness Index (IRI)	99	98	102			
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2	2			
Paved Width (ft)	24.8	25.7	22.2			
Lane Width (ft)	10.4	10.4	10.6			

# Indiana Dunes National Park

## ROUTE 0015Z: WEST BEACH ENTRY ROAD

Subcomponent of Route INDU-0014ZZ

Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.19	<b>Section Length (MI)</b>	0.19				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	66	66				
Surface Condition Rating (SCR)	66	66				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	98	98				
Alligator Crack Index	100	100				
Longitudinal Crack Index	98	98				
Transverse Cracking Index	66	66				
Patching Index	100	100				
Rutting Index	100	100				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2				
Paved Width (ft)	19.5	19.5				
Lane Width (ft)	12.5	12.5				

# Indiana Dunes National Park

## ROUTE 0016A: PORTAGE LAKEFRONT ENTRANCE ROAD

### Data Collection Vehicle (DCV) Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.63	<b>Section Length (MI)</b>	0.63				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	91	91				
Surface Condition Rating (SCR)	90	90				
Roughness Condition Index (RCI)	92	92				
<b>Distress Index Values</b>						
Structural Crack Index	99	99				
Alligator Crack Index	100	100				
Longitudinal Crack Index	99	99				
Transverse Cracking Index	90	90				
Patching Index	100	100				
Rutting Index	99	99				
International Roughness Index (IRI)	135	135				
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2				
Paved Width (ft)	25.2	25.2				
Lane Width (ft)	10.7	10.7				

# Indiana Dunes National Park

## ROUTE 0016B: PORTAGE LAKEFRONT TURNAROUND

Manual Rating

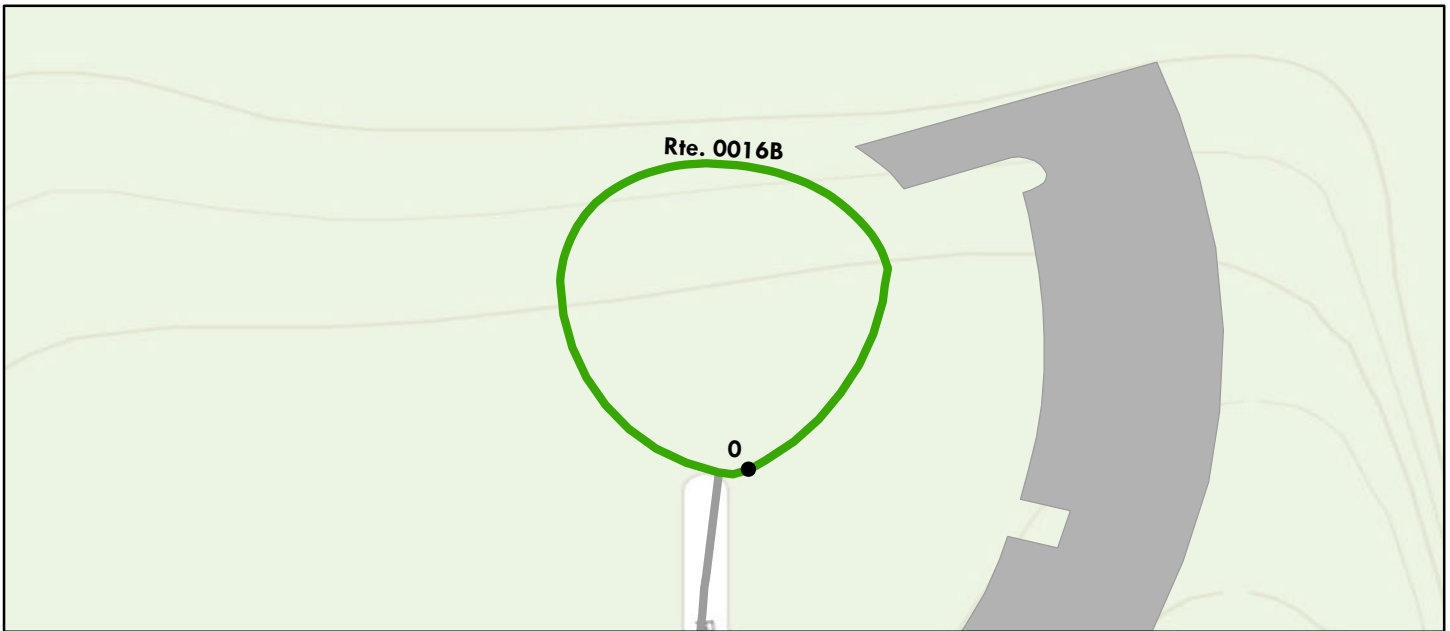

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>		
See Appendix for definitions and formulas						
<b>Inspection Date:</b> 11/11/2018	<b>Beginning Section MP</b>	0.00				
<b>Paved Length (Miles):</b> 0.06	<b>Section Length (MI)</b>	0.06				
<b>Surface Type:</b> CONCRETE	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	90	90				
Surface Condition Rating (SCR)	90	90				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	N/A	N/A				
Alligator Crack Index	N/A	N/A				
Longitudinal Crack Index	N/A	N/A				
Transverse Cracking Index	N/A	N/A				
Patching Index	N/A	N/A				
Rutting Index	N/A	N/A				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2				
Paved Width (ft)	23	23				
Lane Width (ft)	11	11				

# Indiana Dunes National Park

## ROUTE 0016B: PORTAGE LAKEFRONT TURNAROUND

### Condition Photos

Condition photos are shown only for manually rated roads. Use the PathView program to see images of DCV rated roads.



INDU\_0016B\_1820.JPG



INDU\_0016B\_1821.JPG



INDU\_0016B\_1822.JPG



INDU\_0016B\_1823.JPG




INDU\_0016B\_1824.JPG

# Indiana Dunes National Park

## ROUTE 0207ZZ: GOOD FELLOW CAMP ROADS DLC

### Summary Route

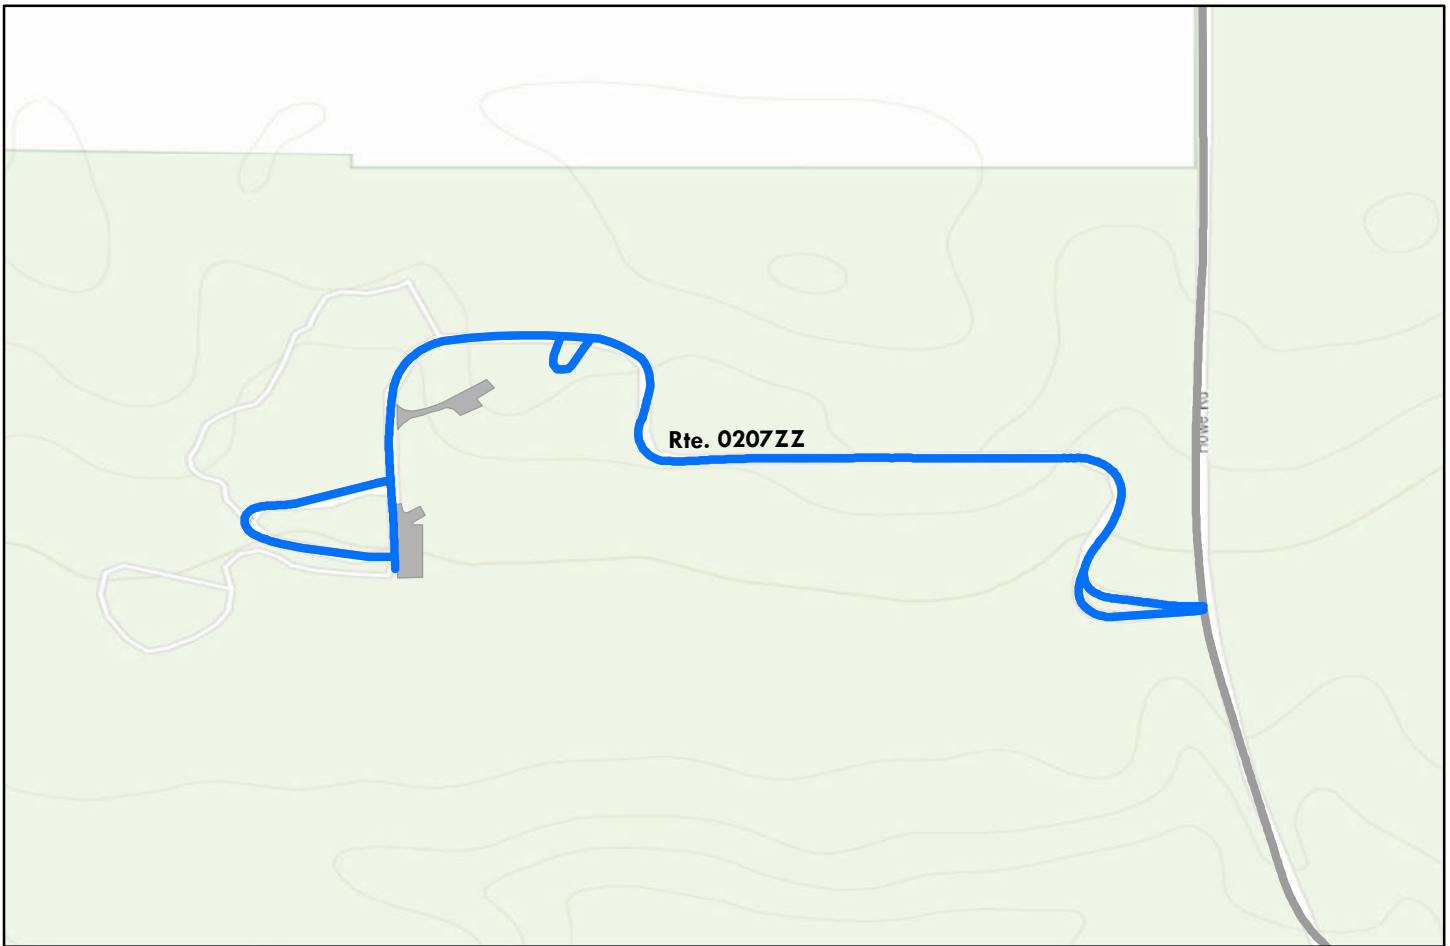

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

**Note:** The weighted average summary PCR value is calculated from only the sections of road where the PCR was collected. The overall PCR for the summary route may not reflect individual subcomponent ratings.


<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>		
See Appendix for definitions and formulas						
<b>Inspection Date:</b> 6/21/2019						
<b>Paved Length (Miles):</b> 0.62						
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	97					
<b>Lane &amp; Width Information</b>						
Number of Lanes	2					
Paved Width (ft)	18.2					
Lane Width (ft)	11.1					



# Indiana Dunes National Park

## ROUTE 0207AZ: GOOD FELLOW CAMP ROAD DLC

Subcomponent of Route INDU-0207ZZ  
Data Collection Vehicle (DCV) Rating

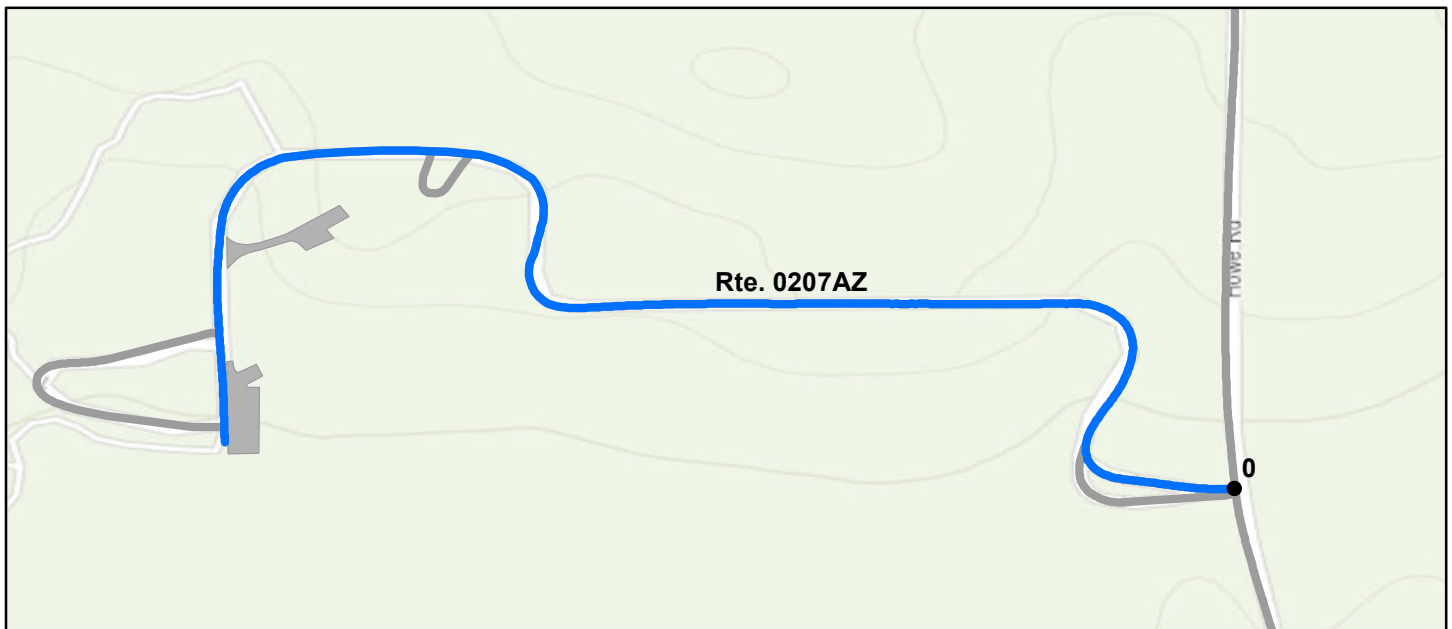


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.44	<b>Section Length (MI)</b>	0.44				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	98	98				
Surface Condition Rating (SCR)	98	98				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	99	99				
Alligator Crack Index	100	100				
Longitudinal Crack Index	99	99				
Transverse Cracking Index	98	98				
Patching Index	100	100				
Rutting Index	100	100				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2				
Paved Width (ft)	20	20				
Lane Width (ft)	11.2	11.2				

# Indiana Dunes National Park

## ROUTE 0207BZ: GOOD FELLOW CAMP EXIT ROAD DLC

Subcomponent of Route INDU-0207ZZ  
Data Collection Vehicle (DCV) Rating

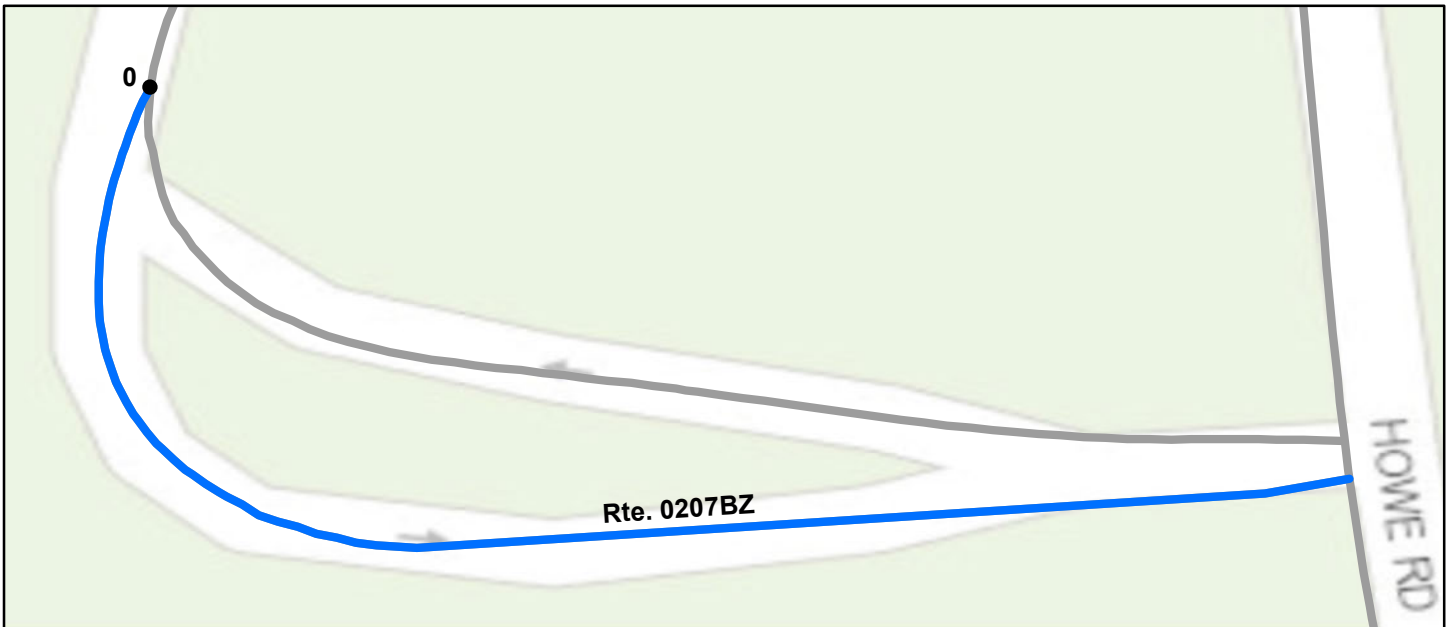

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community


<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.05	<b>Section Length (MI)</b>	0.05				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	97	97				
Surface Condition Rating (SCR)	97	97				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	99	99				
Alligator Crack Index	100	100				
Longitudinal Crack Index	99	99				
Transverse Cracking Index	100	100				
Patching Index	100	100				
Rutting Index	97	97				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	1	1				
Paved Width (ft)	14.3	14.3				
Lane Width (ft)	10.7	10.7				

# Indiana Dunes National Park

## ROUTE 0207CZ: GOOD FELLOW CAMP ROAD TURNAROUND DLC

Subcomponent of Route INDU-0207ZZ

Manual Rating

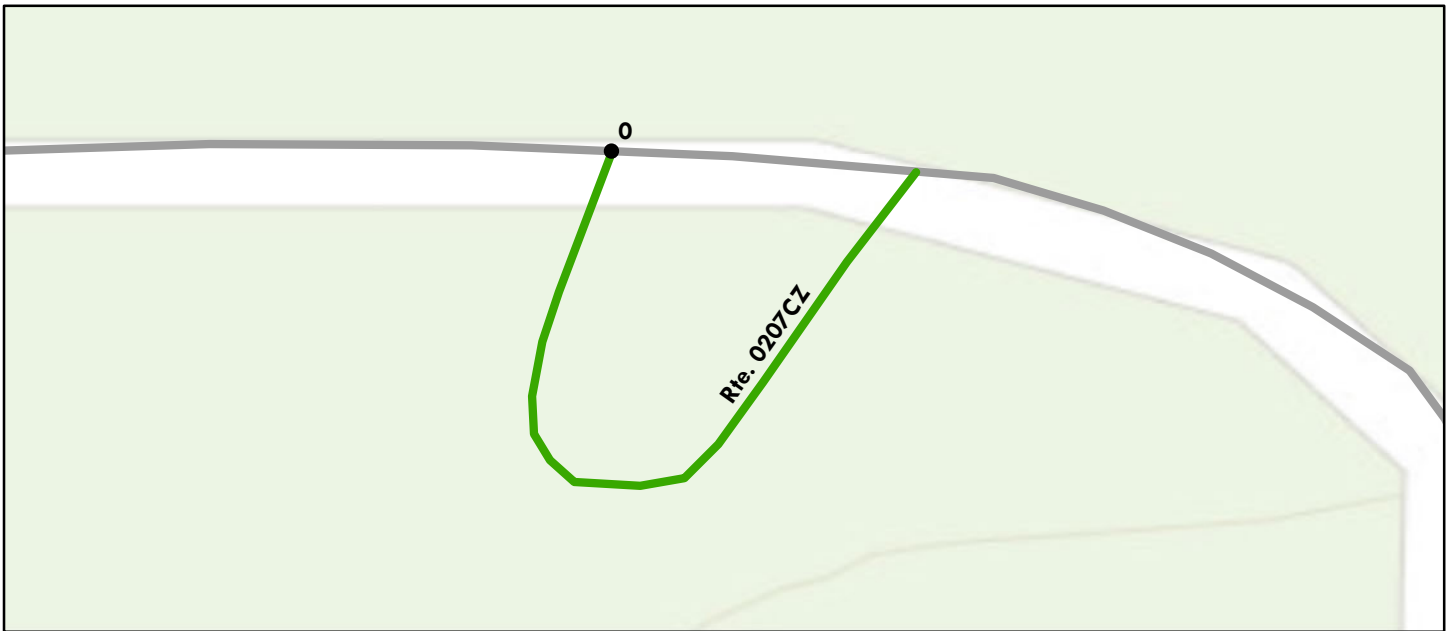

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas

<b>Inspection Date:</b> 11/11/2018	<b>Beginning Section MP</b>	0.00				
<b>Paved Length (Miles):</b> 0.03	<b>Section Length (MI)</b>	0.03				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	90	90				
Surface Condition Rating (SCR)	90	90				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	N/A	N/A				
Alligator Crack Index	97	97				
Longitudinal Crack Index	90	90				
Transverse Cracking Index	90	90				
Patching Index	97	97				
Rutting Index	97	97				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2				
Paved Width (ft)	20	20				
Lane Width (ft)	10	10				

# Indiana Dunes National Park

## ROUTE 0207CZ: GOOD FELLOW CAMP ROAD TURNAROUND DLC

### Condition Photos

Condition photos are shown only for manually rated roads. Use the PathView program to see images of DCV rated roads.



INDU\_0207CZ\_1797.JPG



INDU\_0207CZ\_1798.JPG



INDU\_0207CZ\_1799.JPG




INDU\_0207CZ\_1796.JPG

# Indiana Dunes National Park

## ROUTE 0207DZ: GOOD FELLOW CAMP LOOP DLC

Subcomponent of Route INDU-0207ZZ  
Data Collection Vehicle (DCV) Rating

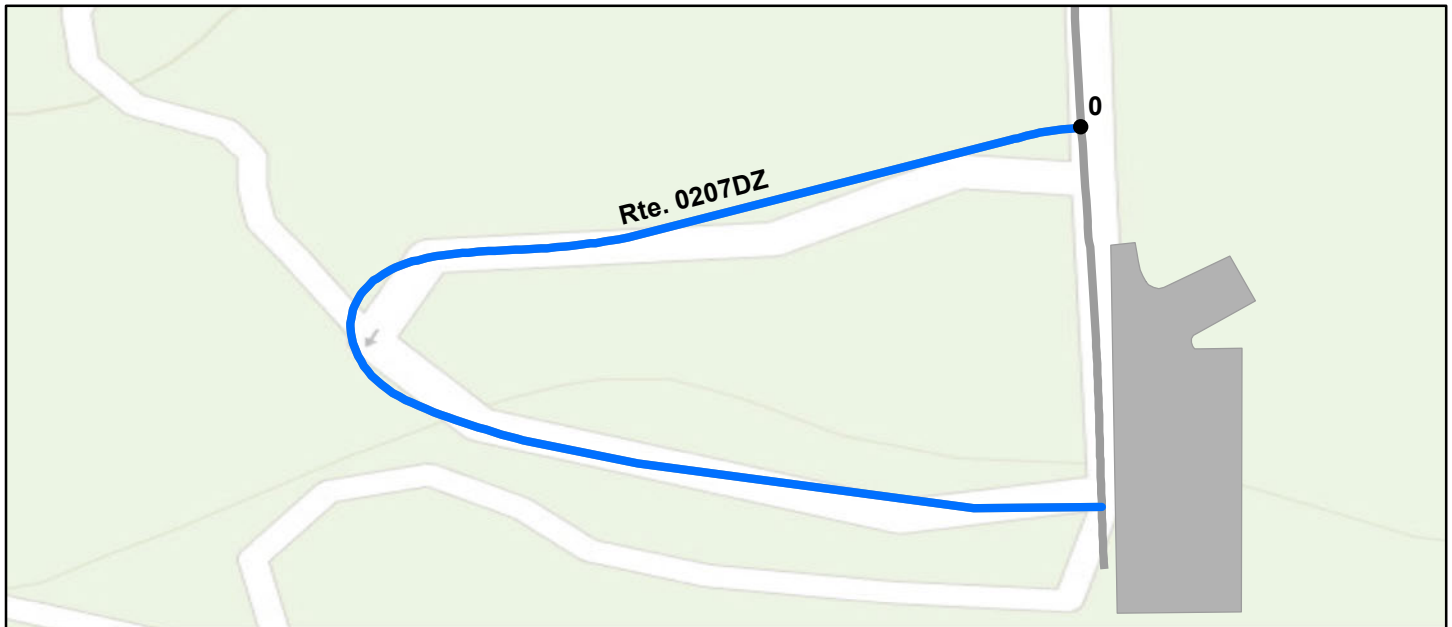


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.1	<b>Section Length (MI)</b>	0.1				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	98	98				
Surface Condition Rating (SCR)	98	98				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	100	100				
Alligator Crack Index	100	100				
Longitudinal Crack Index	100	100				
Transverse Cracking Index	99	99				
Patching Index	100	100				
Rutting Index	98	98				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	1	1				
Paved Width (ft)	11.5	11.5				
Lane Width (ft)	11.5	11.5				

# Indiana Dunes National Park

## ROUTE 0210: CENTRAL AVENUE

### Data Collection Vehicle (DCV) Rating

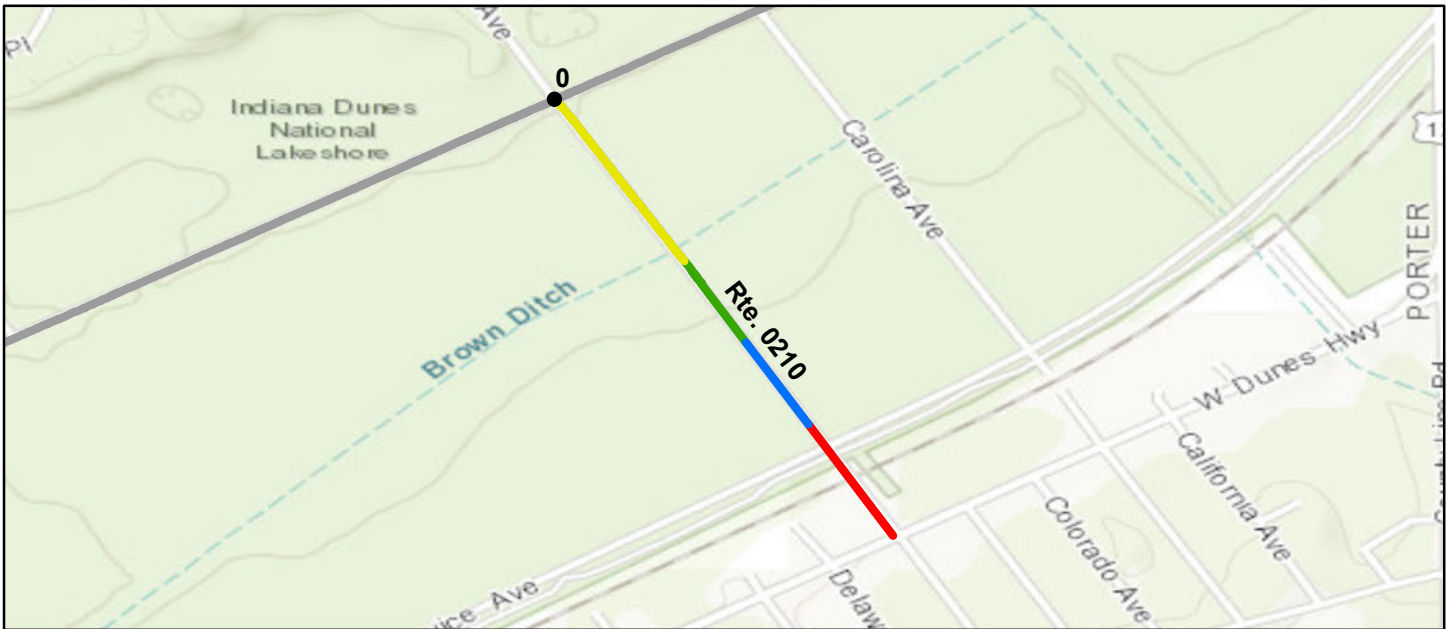

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.54	<b>Section Length (MI)</b>	0.54				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	73	73				
Surface Condition Rating (SCR)	82	82				
Roughness Condition Index (RCI)	59	59				
<b>Distress Index Values</b>						
Structural Crack Index	93	93				
Alligator Crack Index	100	100				
Longitudinal Crack Index	93	93				
Transverse Cracking Index	82	82				
Patching Index	100	100				
Rutting Index	98	98				
International Roughness Index (IRI)	244	244				
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2				
Paved Width (ft)	17.3	17.3				
Lane Width (ft)	9	9				

# Indiana Dunes National Park

## ROUTE 0212: KEMIL ROAD (300 EAST ROAD)

### Data Collection Vehicle (DCV) Rating

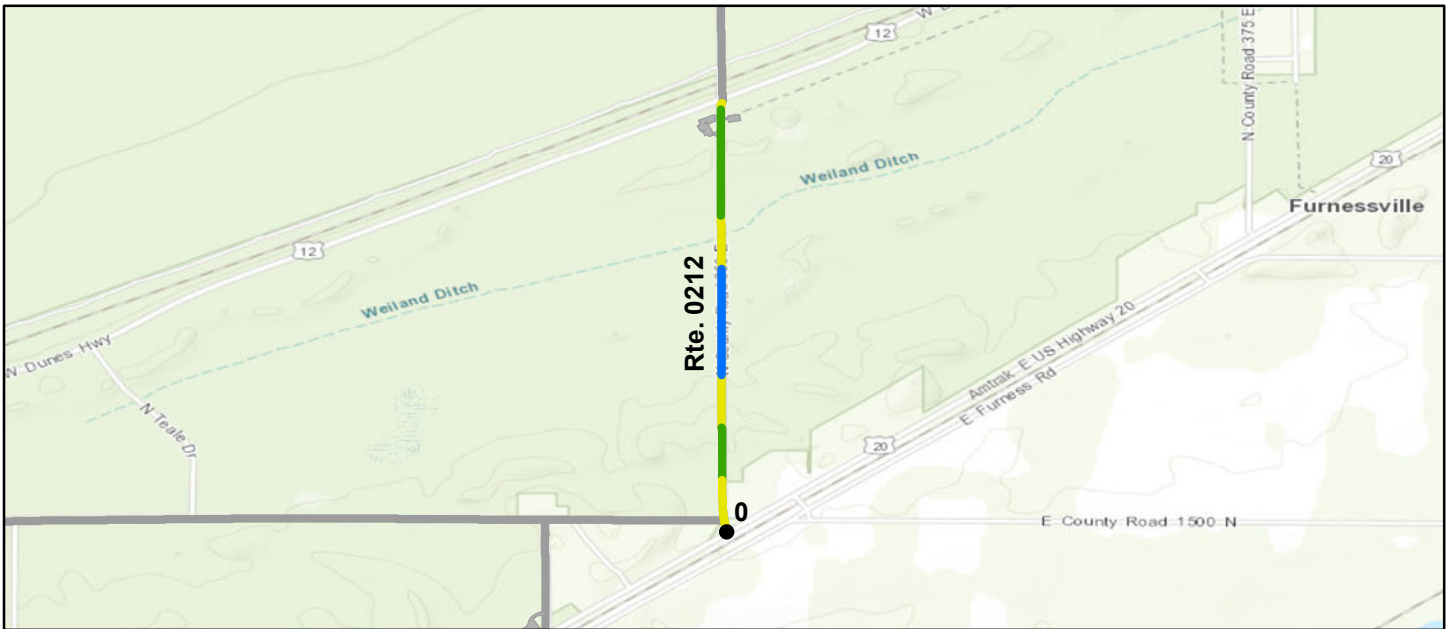


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.81	<b>Section Length (MI)</b>	0.81				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	87	87				
Surface Condition Rating (SCR)	82	82				
Roughness Condition Index (RCI)	95	95				
<b>Distress Index Values</b>						
Structural Crack Index	93	93				
Alligator Crack Index	100	100				
Longitudinal Crack Index	93	93				
Transverse Cracking Index	82	82				
Patching Index	100	100				
Rutting Index	99	99				
International Roughness Index (IRI)	127	127				
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2				
Paved Width (ft)	18.3	18.3				
Lane Width (ft)	9.1	9.1				

# Indiana Dunes National Park

## ROUTE 0213: FURNESSVILLE ROAD (1500 NORTH ROAD)

### Data Collection Vehicle (DCV) Rating

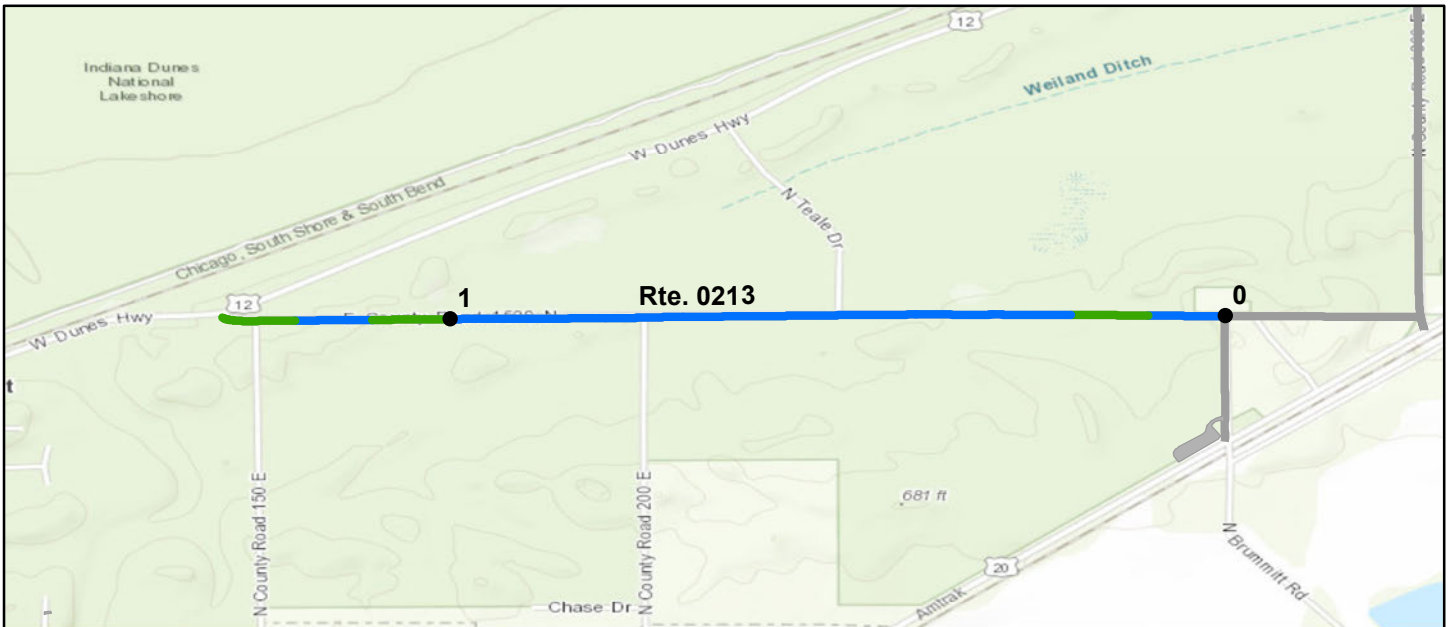

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community


<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0	1			
<b>Paved Length (Miles):</b> 1.3	<b>Section Length (MI)</b>	1	0.29			
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	96	97	94			
Surface Condition Rating (SCR)	99	100	98			
Roughness Condition Index (RCI)	92	93	88			
<b>Distress Index Values</b>						
Structural Crack Index	99	100	98			
Alligator Crack Index	100	100	100			
Longitudinal Crack Index	99	100	98			
Transverse Cracking Index	100	100	100			
Patching Index	100	100	100			
Rutting Index	100	100	100			
International Roughness Index (IRI)	135	132	145			
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2	2			
Paved Width (ft)	17.2	17.3	17			
Lane Width (ft)	8.6	8.7	8.5			



# Indiana Dunes National Park

## ROUTE 0222ZZ: DUNEWOOD CAMPGROUND ACCESS ROADS

### Summary Route

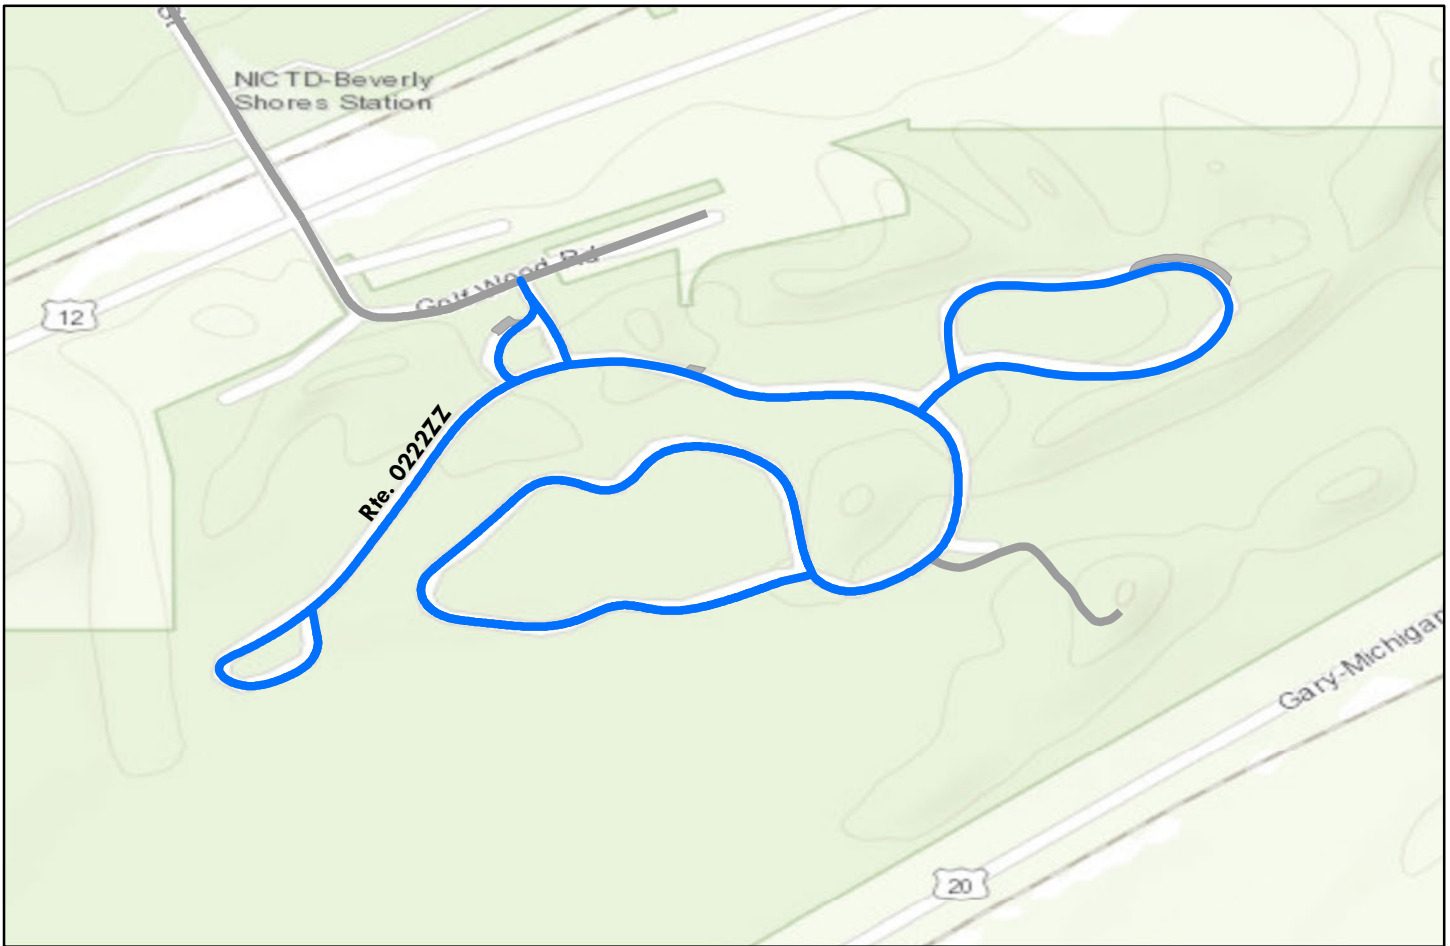

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community


**Note:** The weighted average summary PCR value is calculated from only the sections of road where the PCR was collected. The overall PCR for the summary route may not reflect individual subcomponent ratings.

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
See Appendix for definitions and formulas						
<b>Inspection Date:</b>	6/21/2019					
<b>Paved Length (Miles):</b>	1.4					
<b>Surface Type:</b>	ASPHALT	<b>Route Summary</b>				
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	97					
<b>Lane &amp; Width Information</b>						
Number of Lanes	2					
Paved Width (ft)	18.9					
Lane Width (ft)	13.3					

# Indiana Dunes National Park

## ROUTE 0222AZ: DUNEWOOD CAMPGROUND ACCESS ROAD LOOPAZ

Subcomponent of Route INDU-0222ZZ  
 Data Collection Vehicle (DCV) Rating

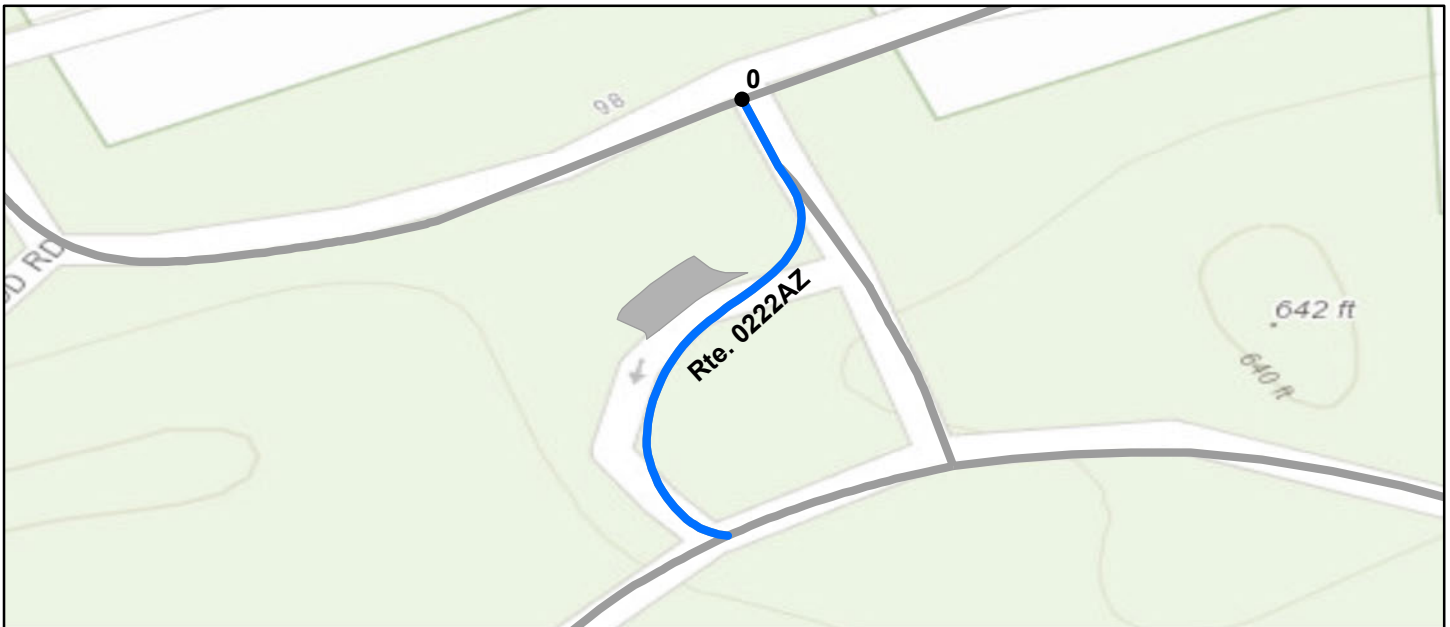

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.06	<b>Section Length (MI)</b>	0.06				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	95	95				
Surface Condition Rating (SCR)	95	95				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	98	98				
Alligator Crack Index	100	100				
Longitudinal Crack Index	98	98				
Transverse Cracking Index	95	95				
Patching Index	100	100				
Rutting Index	98	98				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	1	1				
Paved Width (ft)	14.8	14.8				
Lane Width (ft)	13.8	13.8				

# Indiana Dunes National Park

## ROUTE 0222BZ: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP BZ

Subcomponent of Route INDU-0222ZZ  
 Data Collection Vehicle (DCV) Rating

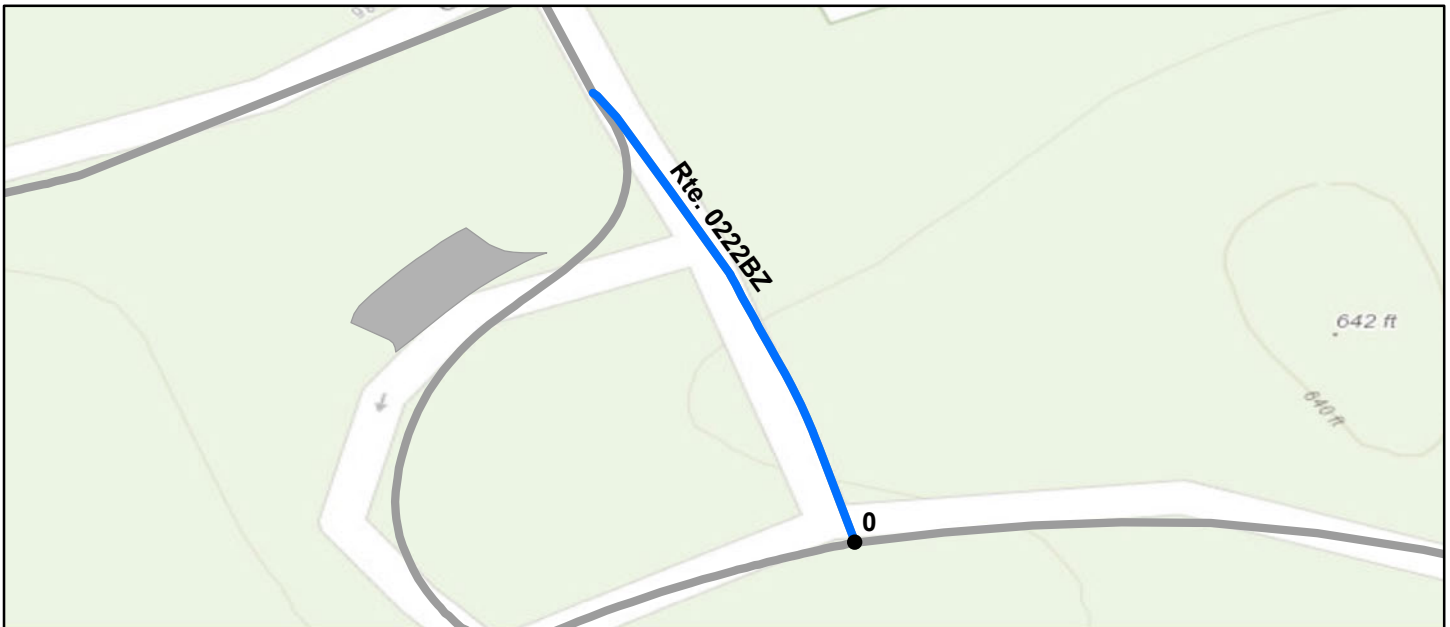


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.04	<b>Section Length (MI)</b>	0.04				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	98	98				
Surface Condition Rating (SCR)	98	98				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	100	100				
Alligator Crack Index	100	100				
Longitudinal Crack Index	100	100				
Transverse Cracking Index	99	99				
Patching Index	100	100				
Rutting Index	98	98				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	1	1				
Paved Width (ft)	11.6	11.6				
Lane Width (ft)	11.6	11.6				

# Indiana Dunes National Park

## ROUTE 0222Z: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A

Subcomponent of Route INDU-0222ZZ  
Data Collection Vehicle (DCV) Rating

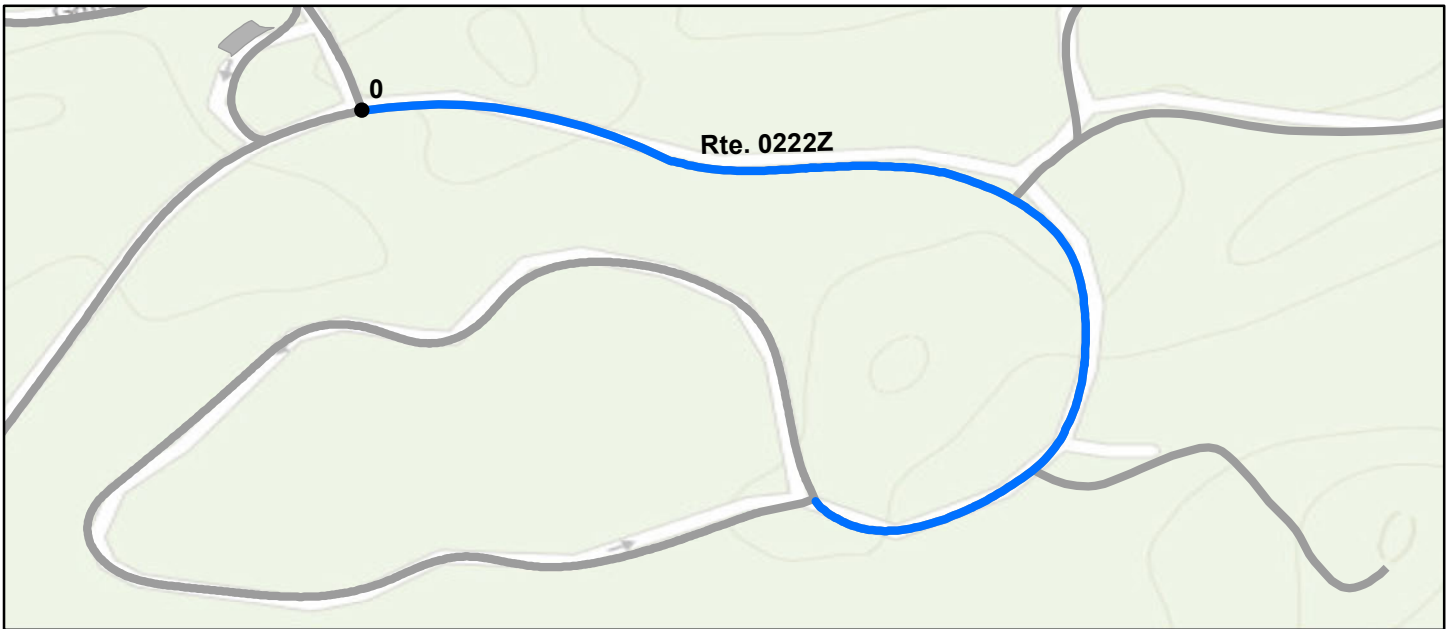


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.29	<b>Section Length (MI)</b>	0.29				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	98	98				
Surface Condition Rating (SCR)	98	98				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	100	100				
Alligator Crack Index	100	100				
Longitudinal Crack Index	100	100				
Transverse Cracking Index	98	98				
Patching Index	100	100				
Rutting Index	100	100				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2				
Paved Width (ft)	25	25				
Lane Width (ft)	12.1	12.1				

# Indiana Dunes National Park

## ROUTE 0223Z: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C

Subcomponent of Route INDU-0222ZZ  
 Data Collection Vehicle (DCV) Rating

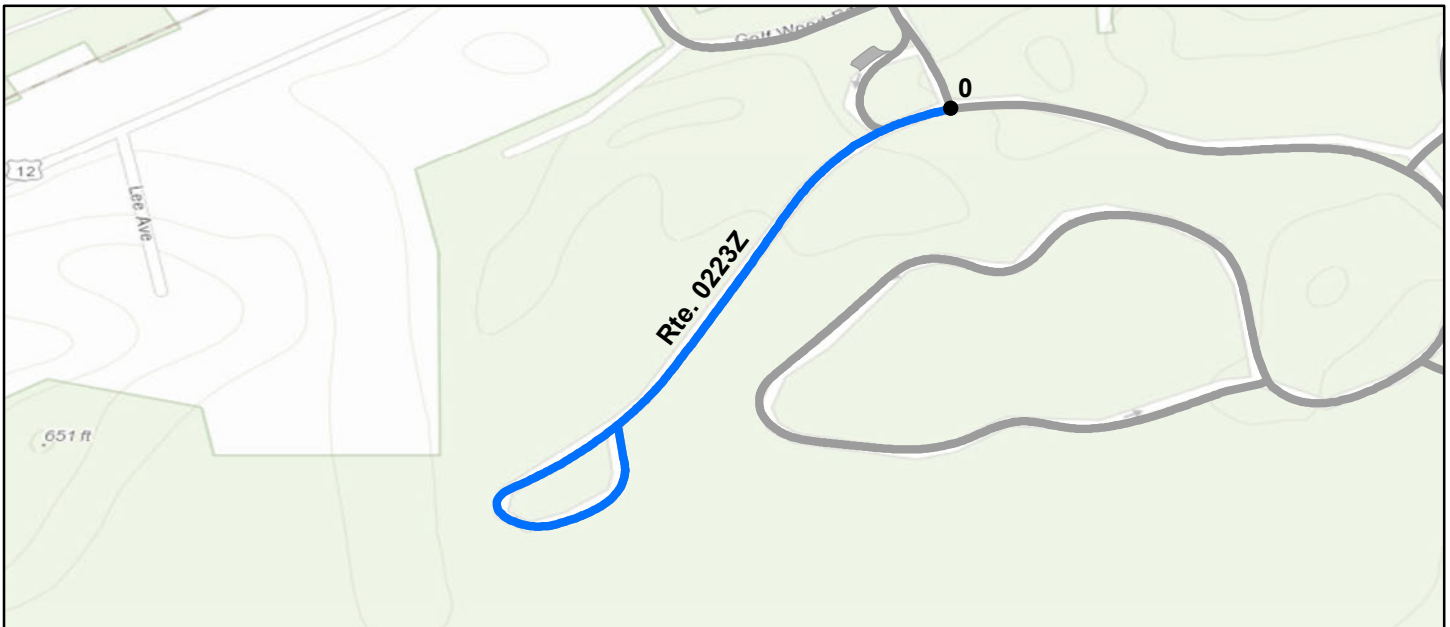

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61 - 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated


Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.29	<b>Section Length (MI)</b>	0.29				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	97	97				
Surface Condition Rating (SCR)	97	97				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	100	100				
Alligator Crack Index	100	100				
Longitudinal Crack Index	100	100				
Transverse Cracking Index	97	97				
Patching Index	100	100				
Rutting Index	100	100				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2				
Paved Width (ft)	23.1	23.1				
Lane Width (ft)	12	12				

# Indiana Dunes National Park

## ROUTE 0237Z: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP D (DOUGLAS LOOP)

Subcomponent of Route INDU-0222ZZ  
 Data Collection Vehicle (DCV) Rating

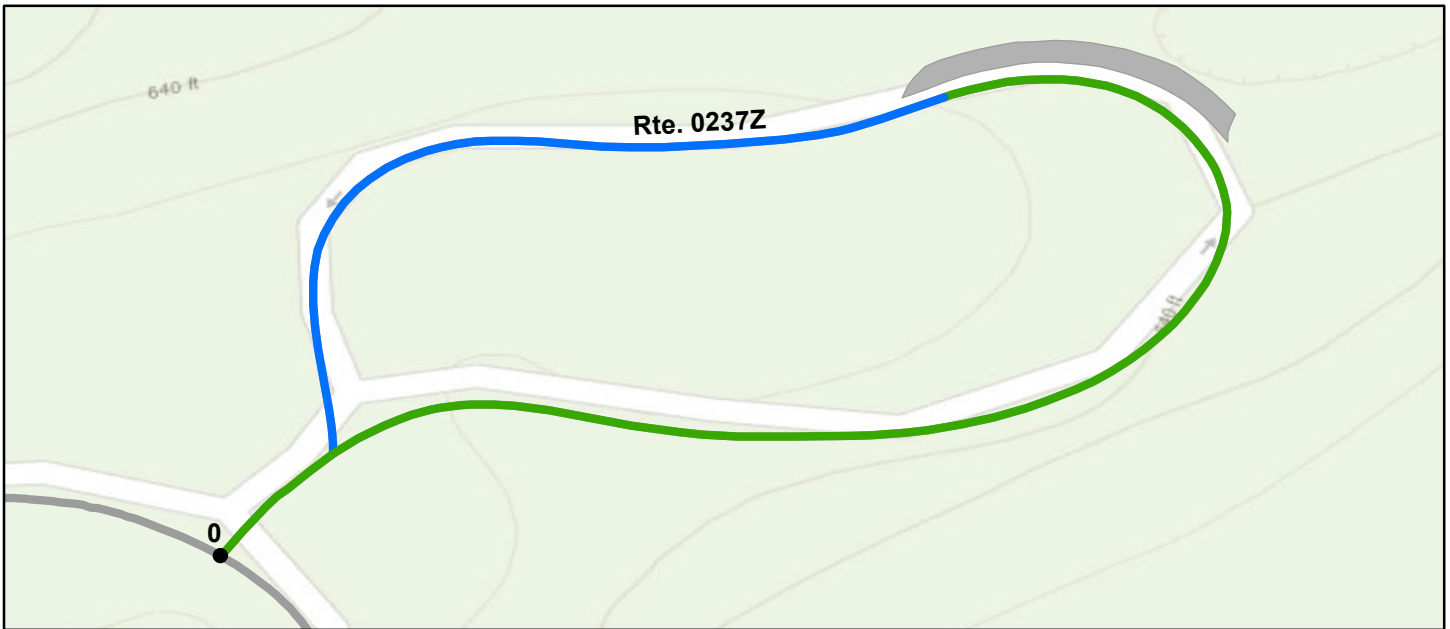


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.32	<b>Section Length (MI)</b>	0.32				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	93	93				
Surface Condition Rating (SCR)	93	93				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	99	99				
Alligator Crack Index	100	100				
Longitudinal Crack Index	99	99				
Transverse Cracking Index	93	93				
Patching Index	100	100				
Rutting Index	100	100				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	1	1				
Paved Width (ft)	17.2	17.2				
Lane Width (ft)	14.7	14.7				

# Indiana Dunes National Park

## ROUTE 0238Z: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP B (MATHER LOOP)

Subcomponent of Route INDU-0222ZZ  
Data Collection Vehicle (DCV) Rating

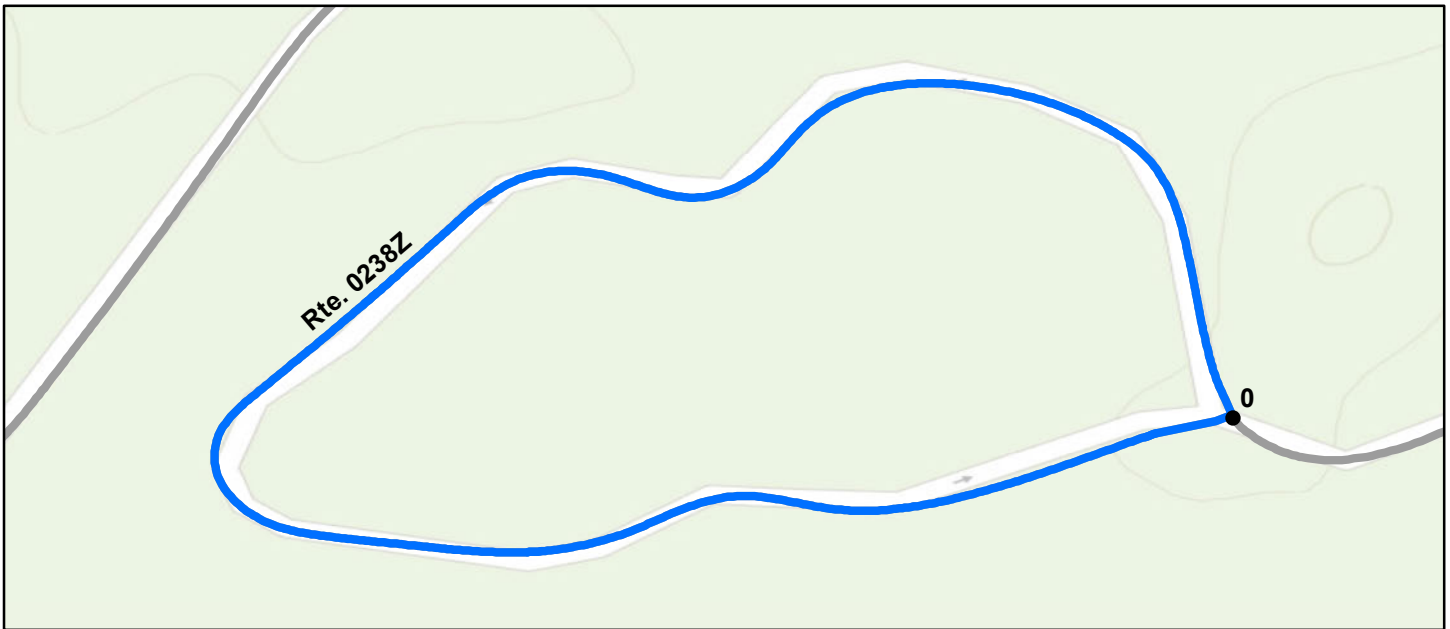


Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.41	<b>Section Length (MI)</b>	0.41				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	99	99				
Surface Condition Rating (SCR)	99	99				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	100	100				
Alligator Crack Index	100	100				
Longitudinal Crack Index	100	100				
Transverse Cracking Index	99	99				
Patching Index	99	99				
Rutting Index	99	99				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	1	1				
Paved Width (ft)	14.1	14.1				
Lane Width (ft)	14.1	14.1				

# Indiana Dunes National Park

## ROUTE 0226: SOUTH STATE PARK ROAD (1500 NORTH ROAD)

Manual Rating

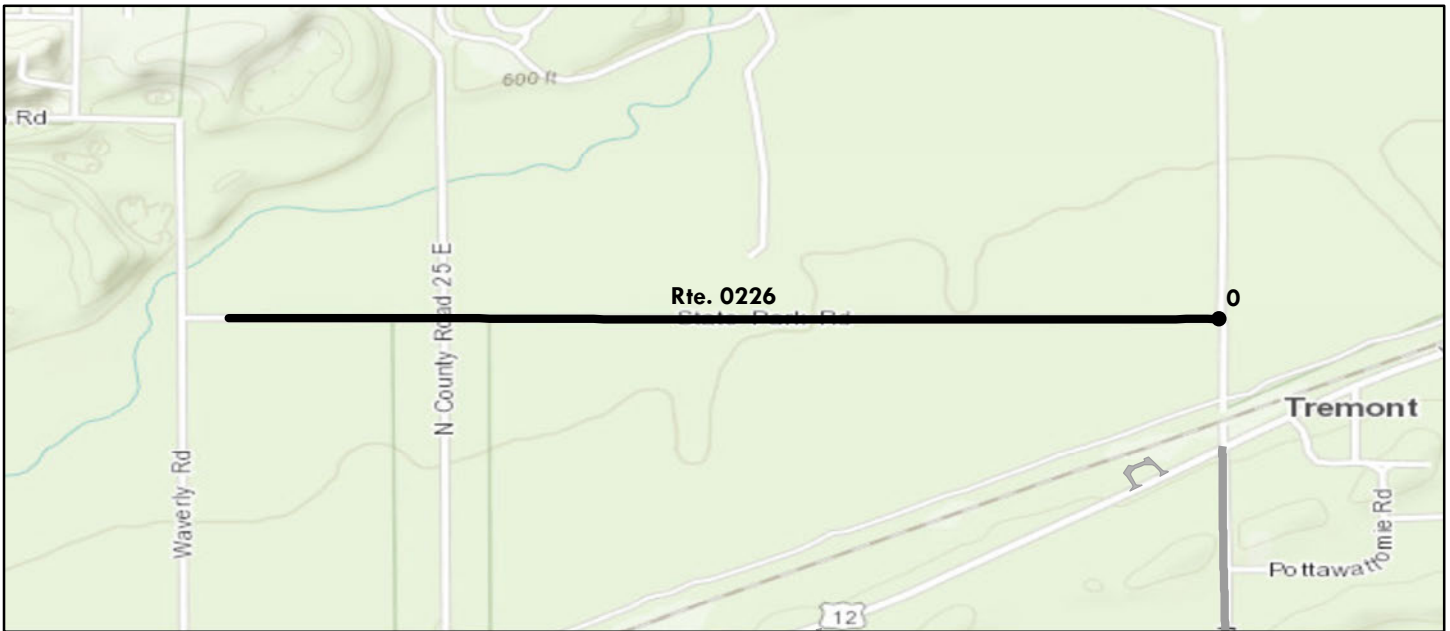

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
See Appendix for definitions and formulas						
<b>Inspection Date:</b> 11/11/2018	<b>Beginning Section MP</b>	0.00				
<b>Paved Length (Miles):</b> 0.95	<b>Section Length (MI)</b>	0.95				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	N/A	N/A				
Surface Condition Rating (SCR)	N/A	N/A				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	N/A	N/A				
Alligator Crack Index	N/A	N/A				
Longitudinal Crack Index	N/A	N/A				
Transverse Cracking Index	N/A	N/A				
Patching Index	N/A	N/A				
Rutting Index	N/A	N/A				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	1	1				
Paved Width (ft)	10	10				
Lane Width (ft)	10	10				

Note: Route appears to be abandoned. It is completely covered with leaves and overgrown.



# Indiana Dunes National Park

ROUTE 0226: SOUTH STATE PARK ROAD (1500 NORTH ROAD)

## Condition Photos

Condition photos are shown only for manually rated roads. Use the PathView program to see images of DCV rated roads.



INDU\_0226\_1780.JPG




INDU\_0226\_1781.JPG

# Indiana Dunes National Park

## ROUTE 0240: WAHL FARM ACCESS ROAD

### Data Collection Vehicle (DCV) Rating

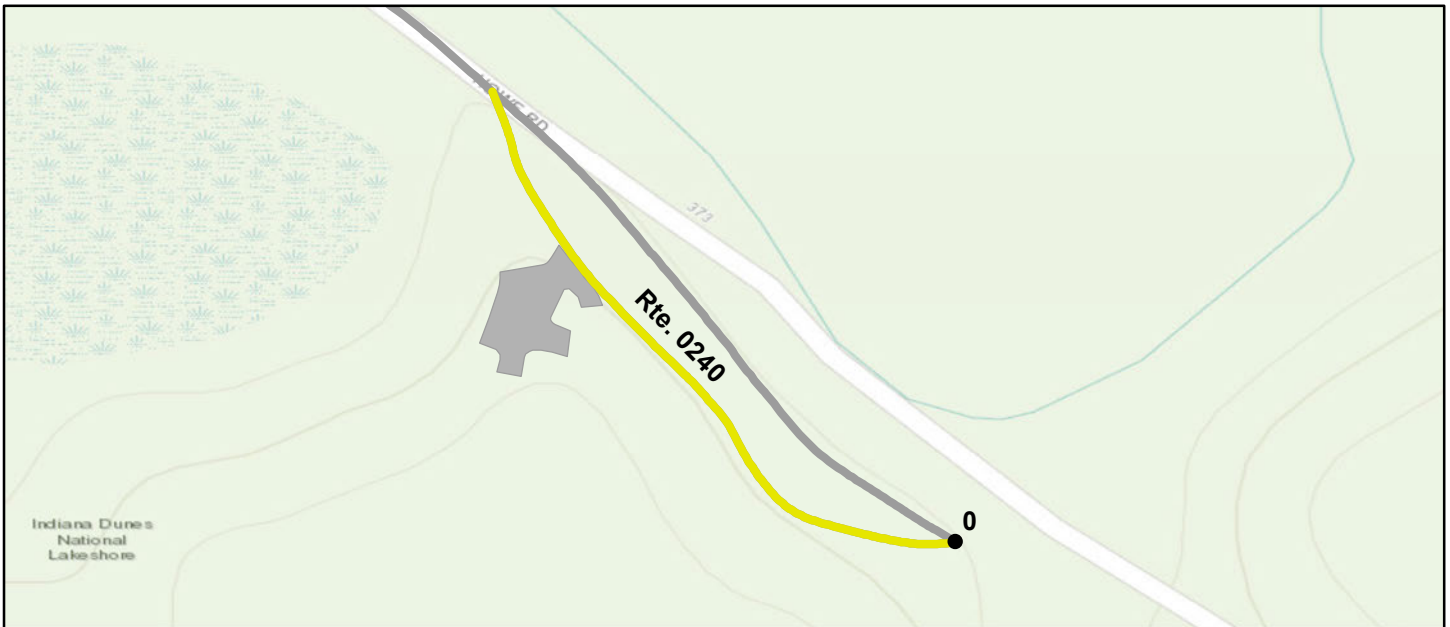

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.

<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.12	<b>Section Length (MI)</b>	0.12				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	76	76				
Surface Condition Rating (SCR)	76	76				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	76	76				
Alligator Crack Index	95	95				
Longitudinal Crack Index	81	81				
Transverse Cracking Index	89	89				
Patching Index	99	99				
Rutting Index	89	89				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	1	1				
Paved Width (ft)	11.1	11.1				
Lane Width (ft)	11.1	11.1				

# Indiana Dunes National Park

## ROUTE 0404: WEST BEACH SERVICE ACCESS ROAD

### Data Collection Vehicle (DCV) Rating




Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.32	<b>Section Length (MI)</b>	0.32				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	47	47				
Surface Condition Rating (SCR)	47	47				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	99	99				
Alligator Crack Index	100	100				
Longitudinal Crack Index	99	99				
Transverse Cracking Index	47	47				
Patching Index	100	100				
Rutting Index	99	99				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	2	2				
Paved Width (ft)	20.2	20.2				
Lane Width (ft)	12.2	12.2				

# Indiana Dunes National Park

## ROUTE 0406: WEST BEACH SERVICE ROAD

### Data Collection Vehicle (DCV) Rating

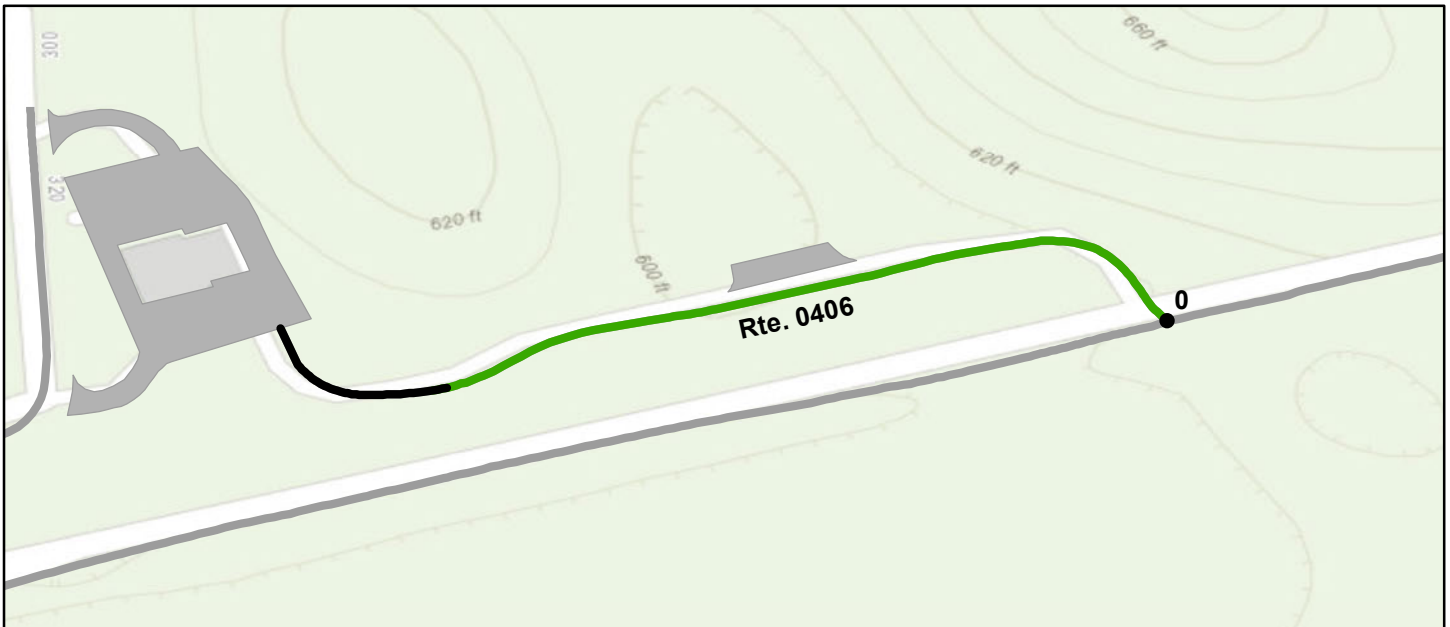

Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>						
<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>		
Colors on map represent condition scores at 0.10-mile intervals. See Appendix for definitions and formulas.						
<b>Inspection Date:</b> 6/21/2019	<b>Beginning Section MP</b>	0				
<b>Paved Length (Miles):</b> 0.12	<b>Section Length (MI)</b>	0.12				
<b>Surface Type:</b> ASPHALT	<b>Route Summary</b>					
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	88	88				
Surface Condition Rating (SCR)	88	88				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	99	99				
Alligator Crack Index	100	100				
Longitudinal Crack Index	99	99				
Transverse Cracking Index	88	88				
Patching Index	100	100				
Rutting Index	99	99				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	1	1				
Paved Width (ft)	11.7	11.7				
Lane Width (ft)	11.7	11.7				

Debris on the route; not rated at very end.

# Indiana Dunes National Park

## ROUTE 0410: DUNEWOOD SERVICE ROAD

Manual Rating



Sources: Esri, HERE, Garmin, Intermap, increment P Corp., GEBCO, USGS, FAO, NPS, NRCAN, GeoBase, IGN, Kadaster NL, Ordnance Survey, Esri Japan, METI, Esri China (Hong Kong), (c) OpenStreetMap contributors, and the GIS User Community

Route Condition Legend – Pavement Condition Rating (PCR)						
Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated		
See Appendix for definitions and formulas						
<b>Inspection Date:</b>	11/10/2018	<b>Beginning Section MP</b>	0.00			
<b>Paved Length (Miles):</b>	0.10	<b>Section Length (MI)</b>	0.10			
<b>Surface Type:</b>	ASPHALT	<b>Route Summary</b>				
<b>Roadway Condition Information</b>						
Pavement Condition Rating (PCR)	90	90				
Surface Condition Rating (SCR)	90	90				
Roughness Condition Index (RCI)	N/A	N/A				
<b>Distress Index Values</b>						
Structural Crack Index	N/A	N/A				
Alligator Crack Index	90	90				
Longitudinal Crack Index	90	90				
Transverse Cracking Index	90	90				
Patching Index	90	90				
Rutting Index	90	90				
International Roughness Index (IRI)	N/A	N/A				
<b>Lane &amp; Width Information</b>						
Number of Lanes	1	1				
Paved Width (ft)	10	10				
Lane Width (ft)	10	10				

# Indiana Dunes National Park

## ROUTE 0410: DUNEWOOD SERVICE ROAD

### Condition Photos

Condition photos are shown only for manually rated roads. Use the PathView program to see images of DCV rated roads.



INDU\_0410\_1712.JPG



INDU\_0410\_1713.JPG



INDU\_0410\_1714.JPG

# Section 6 Paved Parking Area Condition Rating Sheets



Indiana Dunes National Park



Federal Lands Highway  
Road Inventory Program

# Indiana Dunes National Park

## ROUTE 0900ZZ: DUNEWOOD CAMPGROUND PARKING

Summary Route  
Manual Rating

FROM ROUTE 0222ZZ (DUNEWOOD CAMPGROUND ACCESS ROADS)  
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	56393	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Condition Rating / PCR	
7,208	0.124	SUMMARY /	90



**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

The condition shown on this page reflects the overall route condition and may not reflect individual subcomponent ratings.

**Rte. 0900ZZ**  
(3 Subcomponents)

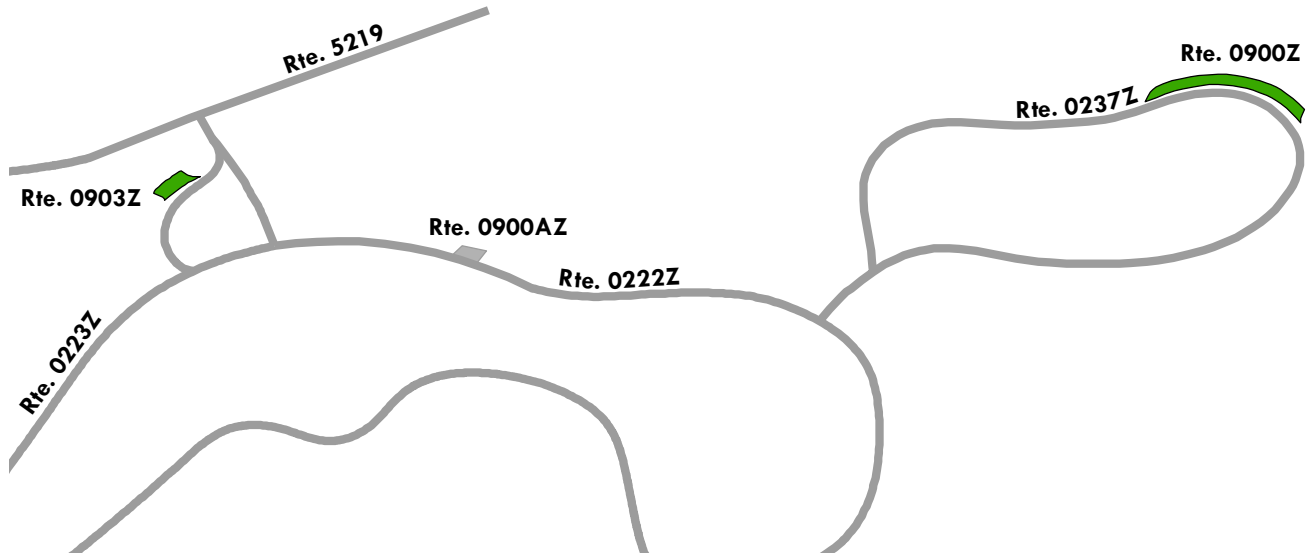



# Indiana Dunes National Park

## ROUTE 0900Z: DUNEWOOD CAMPGROUND ACCESS PARKING

Subcomponent of Route INDU-0900ZZ

Manual Rating

ADJACENT TO ROUTE 0222AZ (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP AZ) AT MP 0.04 ON RIGHT

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	56393	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
1,280	0.022	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)



Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas

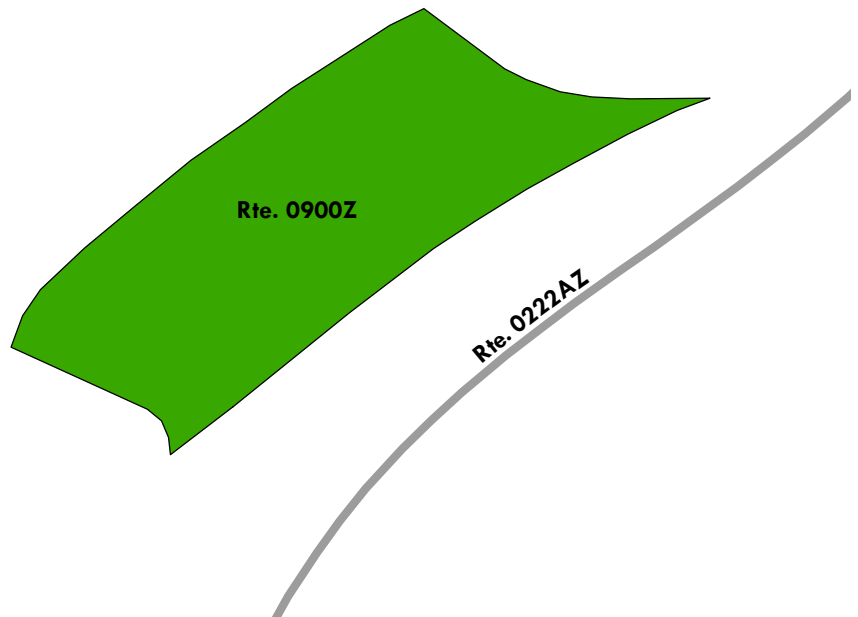

# Indiana Dunes National Park

## ROUTE 0903Z: DUNEWOOD WALK-IN PARKING

Subcomponent of Route INDU-0900ZZ  
Manual Rating


ADJACENT TO ROUTE 0237Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP D (DOUGLAS LOOP)) AT  
 MP 0.19 ON RIGHT

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	56393	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
4,428	0.076	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas



# Indiana Dunes National Park

## ROUTE 0904: CALUMET DUNES INTERPRETER CENTER PARKING

Manual Rating

FROM ROUTE 0212 (KEMIL ROAD (300 EAST ROAD)) AT MP 0.75 ON LEFT AND ROUTE 0905 (CALUMET DUNES INTERPRETER CENTER OVERFLOW PARKING)




TO ROUTE 0212 (KEMIL ROAD (300 EAST ROAD)) AT MP 0.78 ON LEFT

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	24732	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
17,752	0.306	5	DO NOTHING
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

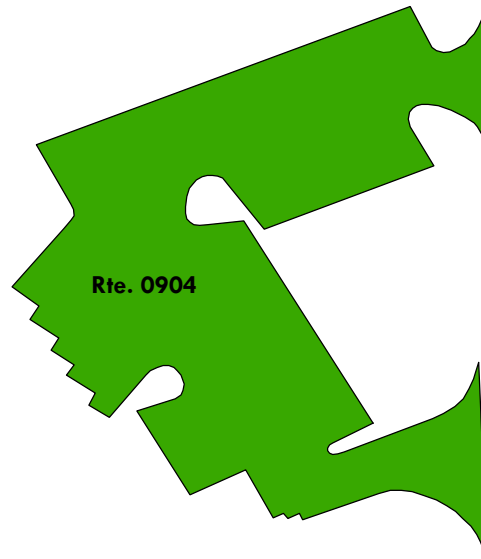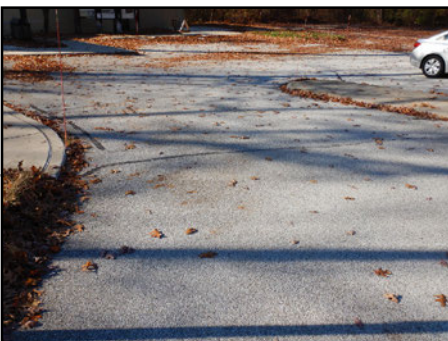

# Indiana Dunes National Park

## ROUTE 0905: CALUMET DUNES INTERPRETER CENTER OVERFLOW PARKING

Manual Rating

FROM ROUTE 0212 (KEMIL ROAD (300 EAST ROAD)) AT MP 0.78 ON RIGHT AND ROUTE 0904 (CALUMET DUNES INTERPRETER CENTER PARKING)

TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	25516	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
6,568	0.113	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
DO NOTHING		EXCELLENT / 97	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)





Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas

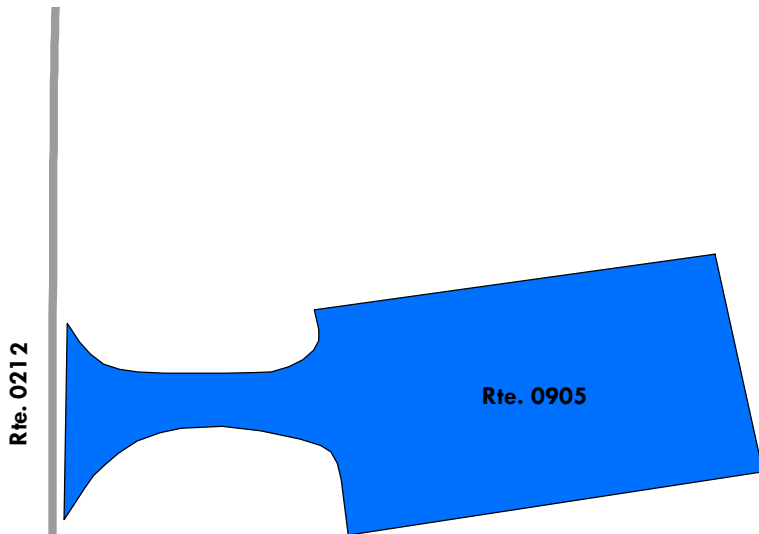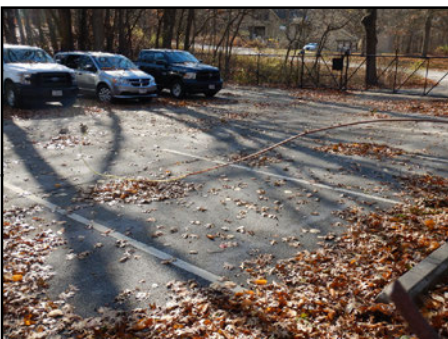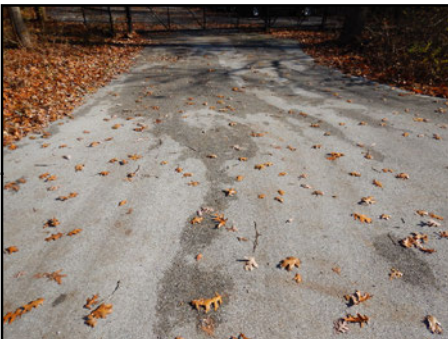

# Indiana Dunes National Park

## ROUTE 0906: KEMIL BEACH PARKING

Manual Rating

FROM ROUTE 5211 (EAST STATE PARK ROAD (300 EAST ROAD)) AT MP 1.00 ON RIGHT



TO ROUTE 5211 (EAST STATE PARK ROAD (300 EAST ROAD)) AT MP 1.05 ON RIGHT

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	24734	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
36,947	0.636	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

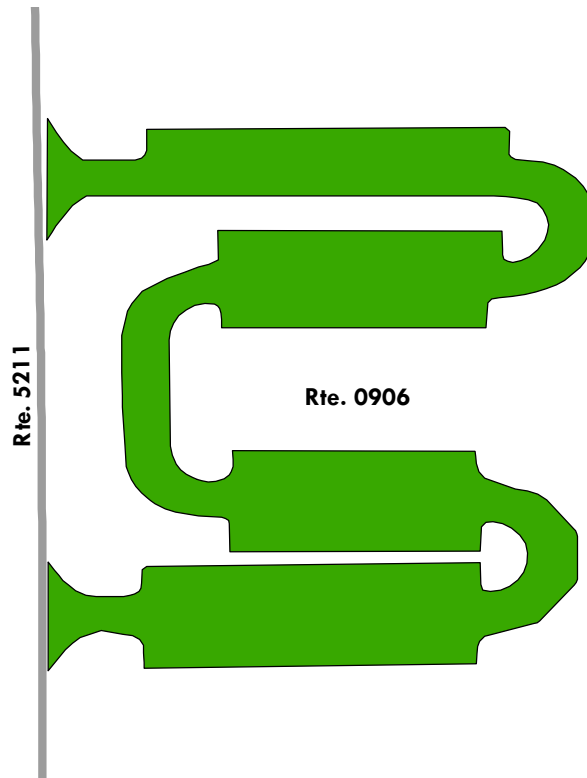

# Indiana Dunes National Park

## ROUTE 0907: BAILLY/CHELLBERG VISITOR PARKING

Manual Rating



FROM ROUTE 5216 (MINERAL SPRINGS ROAD) AT MP 0.11 ON LEFT  
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/9/2018	56219	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
38,724	0.667	6	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

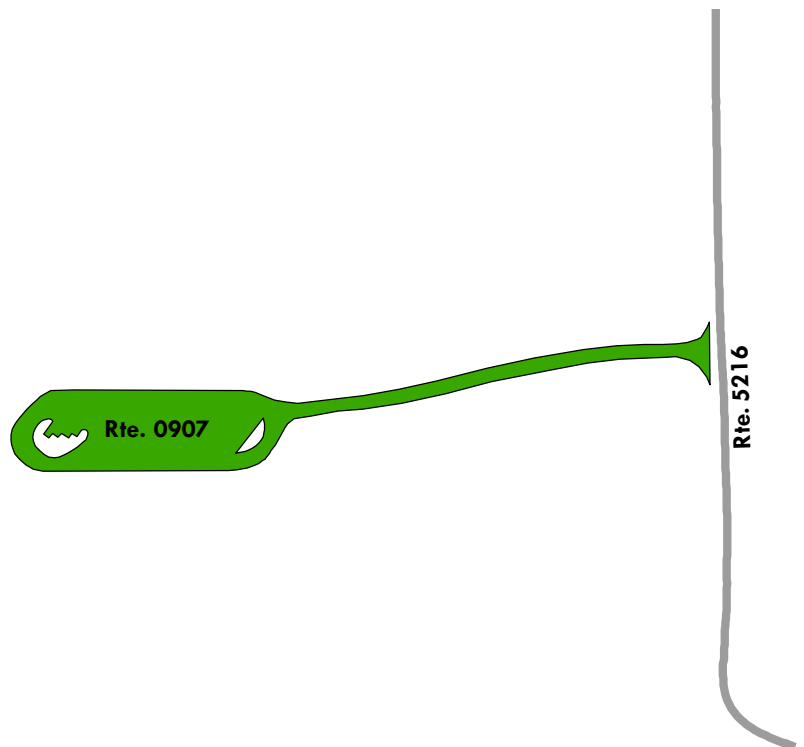

# Indiana Dunes National Park

## ROUTE 0913: LAKE VIEW BEACH PARKING

Manual Rating



ADJACENT TO ROUTE 5224 (LAKE FRONT DRIVE)

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	24725	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
9,143	0.157	3	DO NOTHING
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

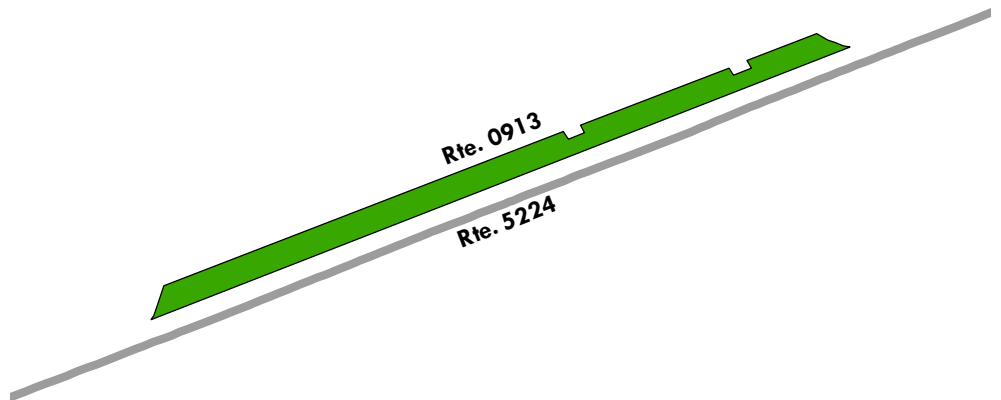

# Indiana Dunes National Park

## ROUTE 0914: LAKE FRONT DRIVE 15 MINUTES PARKING

Manual Rating



ADJACENT TO ROUTE 5224 (LAKE FRONT DRIVE )

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	56223	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
999	0.017	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

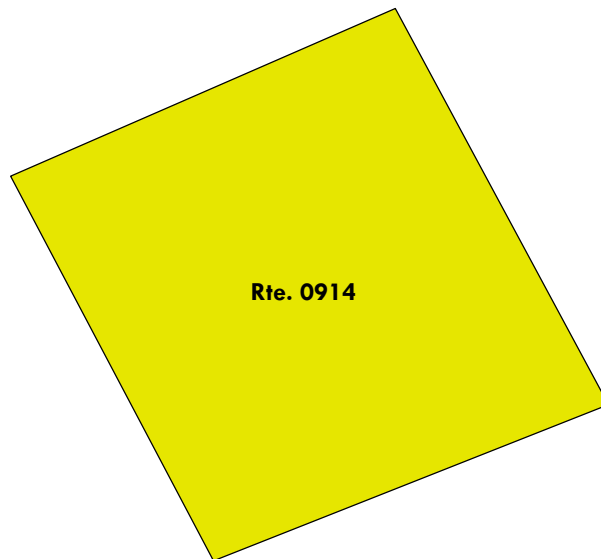



# Indiana Dunes National Park

## ROUTE 0915: CENTRAL BEACH PARKING

Manual Rating

FROM VALLEY AVENUE AND CENTRAL AVENUE NON NPS SECTION

TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	24727	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
31,510	0.543	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)



Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas



# Indiana Dunes National Park

## ROUTE 0916ZZ: MT. BALDY PARKING AREAS

Summary Route  
Manual Rating

FROM U.S. HIGHWAY 12  
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	24729	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Condition Rating / PCR	
66,739	1.149	SUMMARY / 75	


**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

The condition shown on this page reflects the overall route condition and may not reflect individual subcomponent ratings.

**Rte. 0916ZZ**  
(2 Subcomponents)

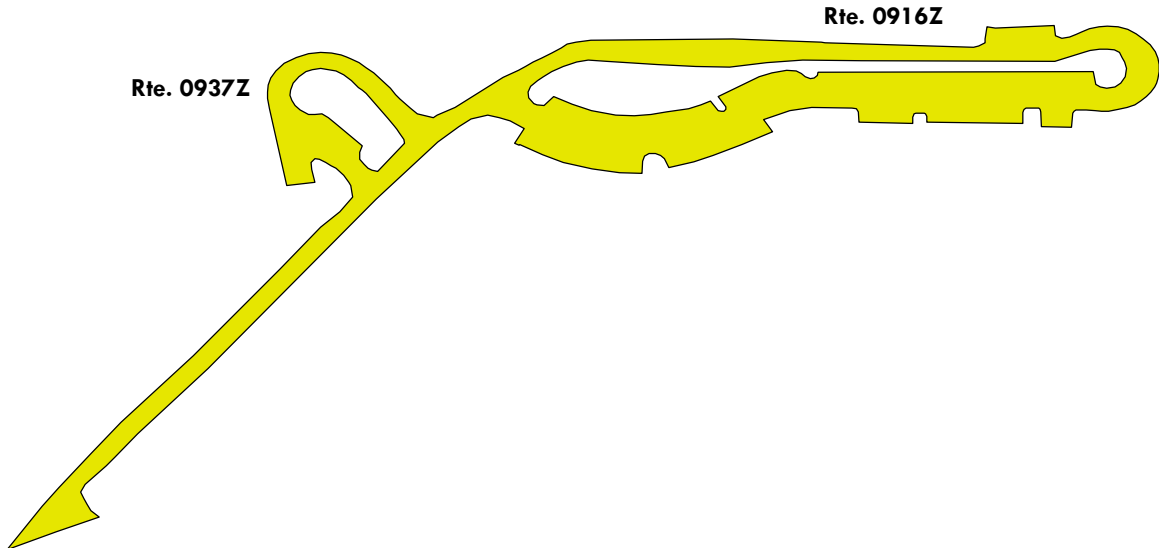

# Indiana Dunes National Park

## ROUTE 0916Z: MT. BALDY PARKING

Subcomponent of Route INDU-0916ZZ

Manual Rating

FROM U.S. HIGHWAY 12

TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	24729	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
57,792	0.995	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)




Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas

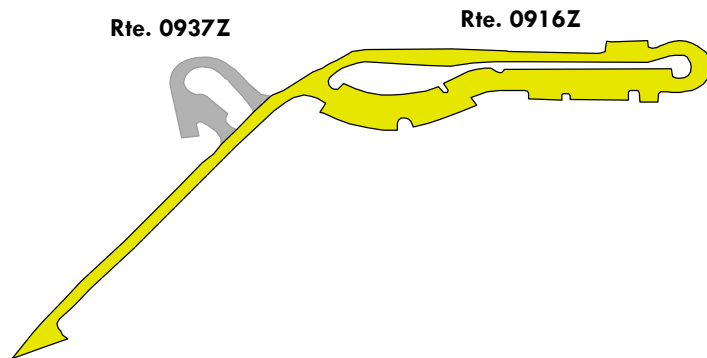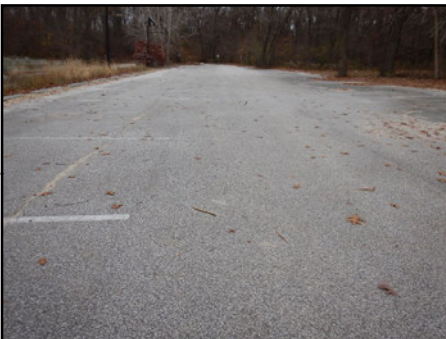

# Indiana Dunes National Park

## ROUTE 0937Z: MT. BALDY BUS PARKING

Subcomponent of Route INDU-0916ZZ

Manual Rating

FROM ROUTE 0916Z (MT. BALDY PARKING)

TO ROUTE 0916Z (MT. BALDY PARKING)

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	24729	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
8,947	0.154	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)



Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas

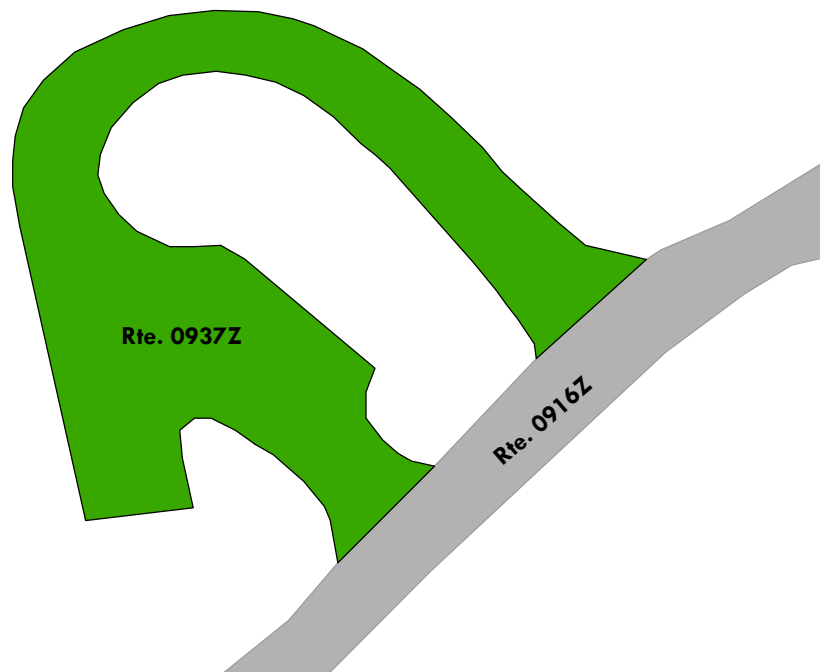

# Indiana Dunes National Park

## ROUTE 0917: GLENWOOD DUNES PARKING

Manual Rating


FROM ROUTE 5220 (SCHOOL HOUSE ROAD (275 E))  
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	24726	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
42,731	0.736	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

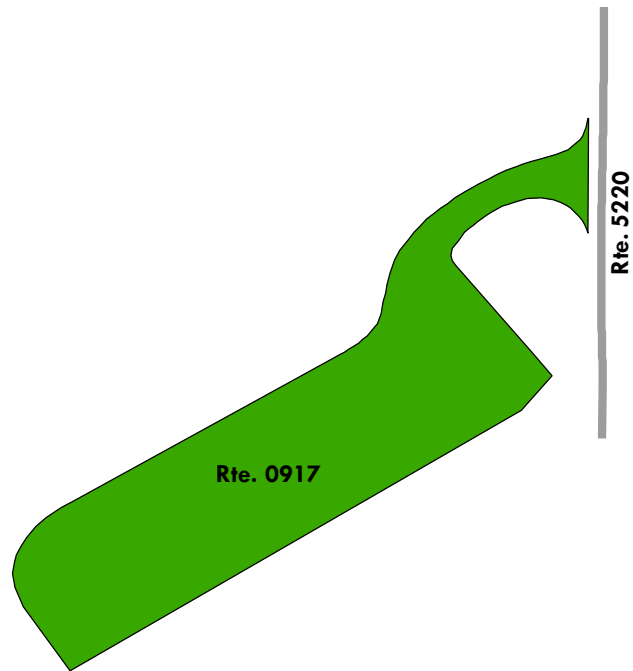

# Indiana Dunes National Park

## ROUTE 0918ZZ: HQ PARKING AREAS

Summary Route

Manual Rating

FROM ROUTE 5216 (MINERAL SPRINGS ROAD)

TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/9/2018	24760	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Condition Rating / PCR	
133,446	2.298	SUMMARY / 90	



**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

The condition shown on this page reflects the overall route condition and may not reflect individual subcomponent ratings.

**Rte. 0918ZZ**  
(2 Subcomponents)

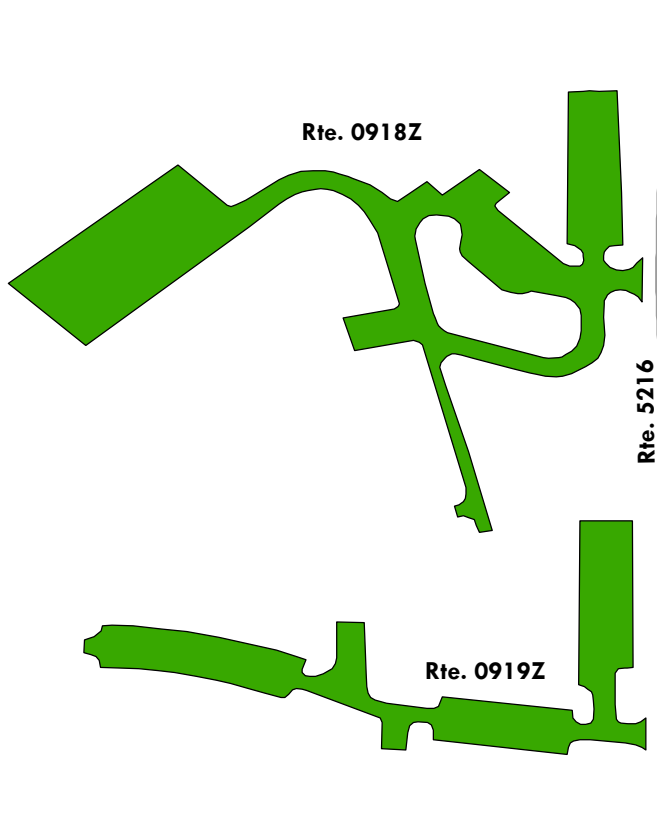

# Indiana Dunes National Park

## ROUTE 0918Z: HQ ADMINISTRATIVE PARKING A

Subcomponent of Route INDU-0918ZZ  
Manual Rating



FROM ROUTE 5216 (MINERAL SPRINGS ROAD)  
 TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/9/2018	24760	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
86,162	1.484	6	DO NOTHING
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

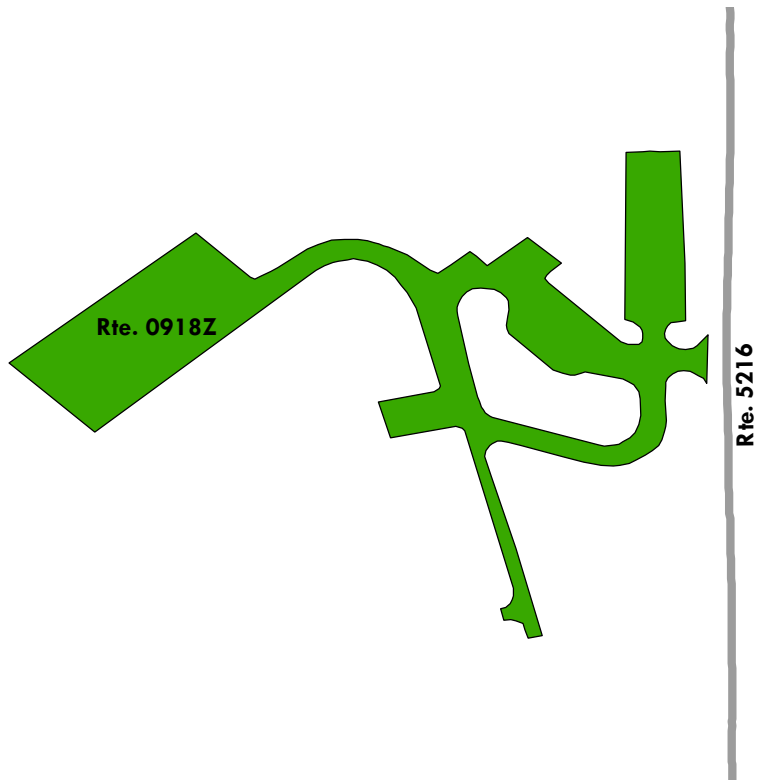

# Indiana Dunes National Park

## ROUTE 0919Z: HQ ADMINISTRATIVE PARKING B

Subcomponent of Route INDU-0918ZZ

Manual Rating

FROM ROUTE 5216 (MINERAL SPRINGS ROAD)




TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/9/2018	24760	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
47,284	0.814	4	DO NOTHING
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

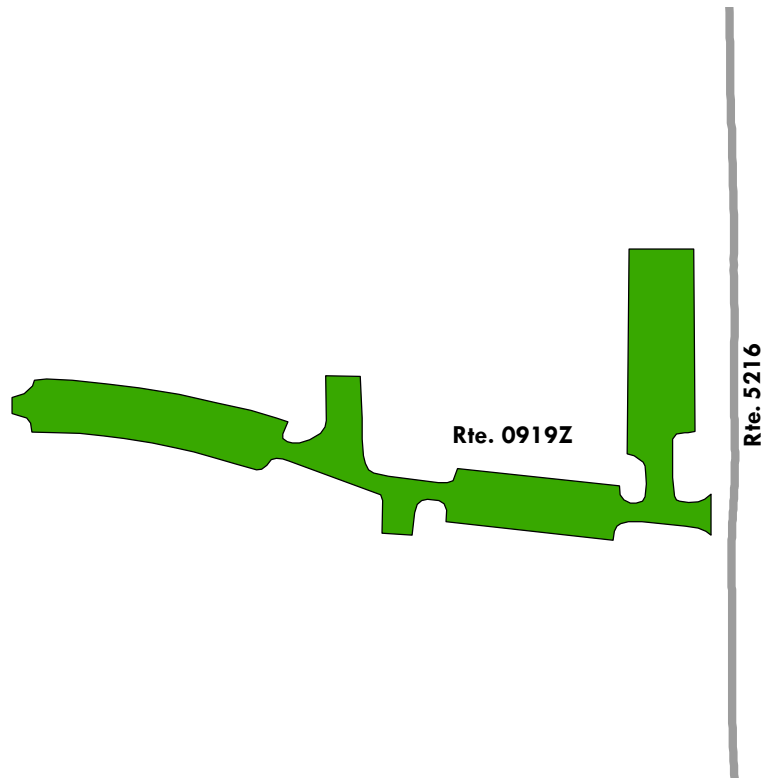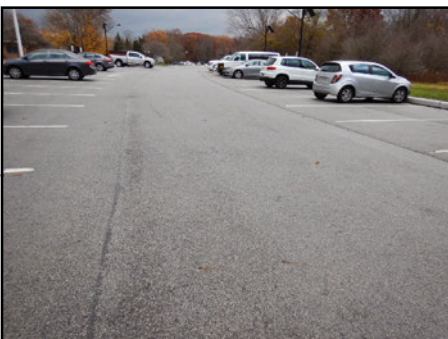



# Indiana Dunes National Park

## ROUTE 0920: DOUGLAS CENTER PARKING

Manual Rating

FROM LAKE STREET



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	25510	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
28,224	0.486	6	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
CONCRETE		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)
Fair (61- 84)
Good (85 - 94)
Excellent (95 - 100)
Not Rated

See Appendix for definitions and formulas

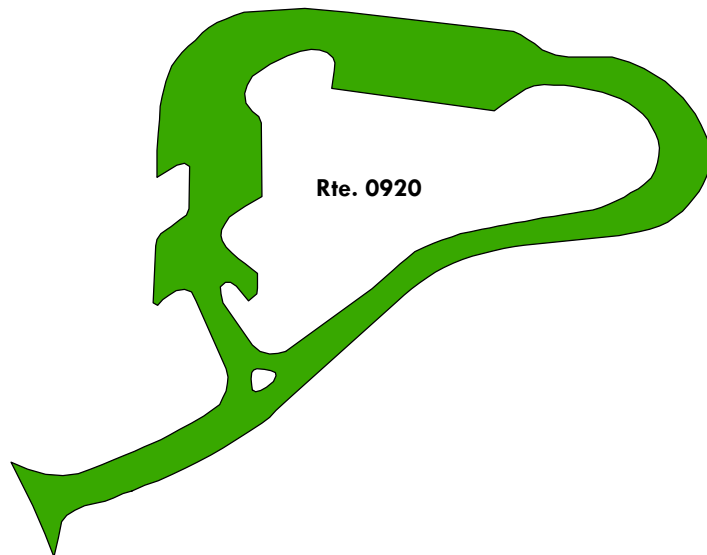

# Indiana Dunes National Park

## ROUTE 0921: TOLLESTON DUNES OVERLOOK PARKING

Manual Rating


ADJACENT TO U.S. HIGHWAY 12

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	52955	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
1,667	0.029	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

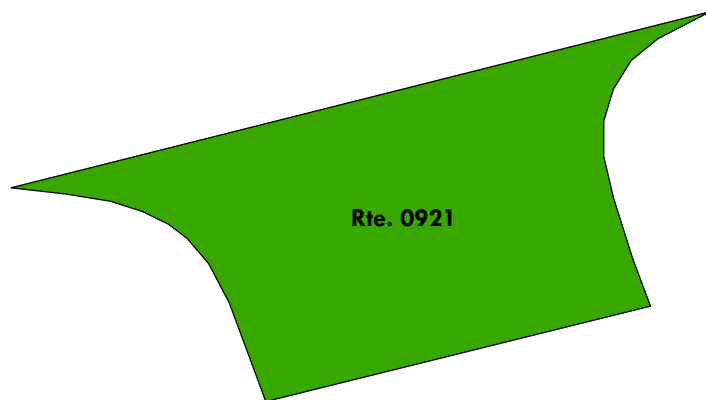

# Indiana Dunes National Park

## ROUTE 0922: TOLLESTON DUNES TRAILHEAD PARKING

Manual Rating

FROM U.S. HIGHWAY 12



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	24748	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
23,424	0.403	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

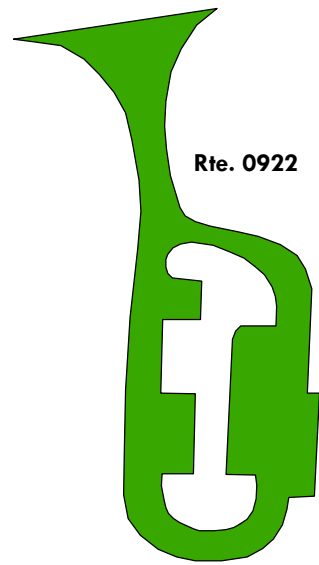

# Indiana Dunes National Park

## ROUTE 0923: WEST BEACH VISITOR PARKING

Manual Rating

FROM ROUTE 0014ZZ (WEST BEACH ACCESS ROADS)



TO ROUTE 0014ZZ (WEST BEACH ACCESS ROADS) AND ROUTE 0404 (WEST BEACH SERVICE ACCESS ROAD)

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	24754	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
303,237	5.221	3	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
CONCRETE		CONCRETE	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

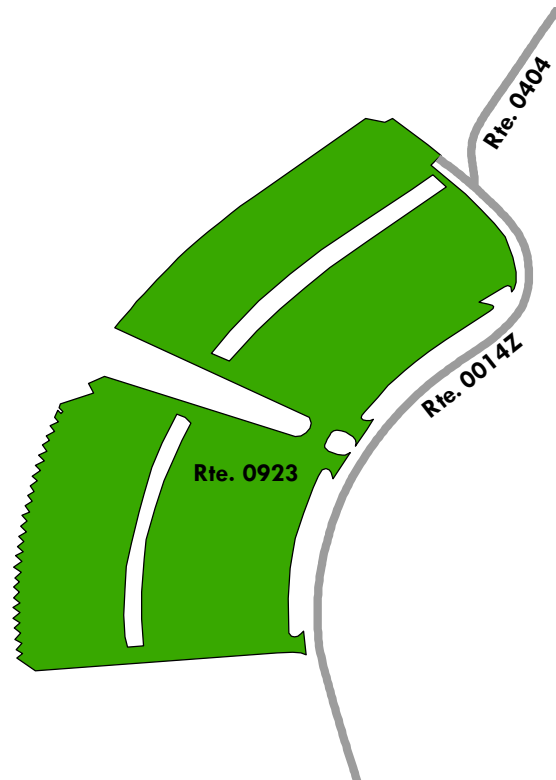

# Indiana Dunes National Park

## ROUTE 0925: WEST BEACH MAINTENANCE BUILDING PARKING

Manual Rating

FROM ROUTE 5405 (WEST BEACH MAINTENANCE ROAD)

TO ROUTE 0406 (WEST BEACH SERVICE ROAD)

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	56225	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
17,128	0.295	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)

Fair (61- 84)

Good (85 - 94)


Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas



Note: Parking area consists of multiple surface types: 1 part Asphalt at 16,601 square feet; 1 part Concrete at 527 square feet.

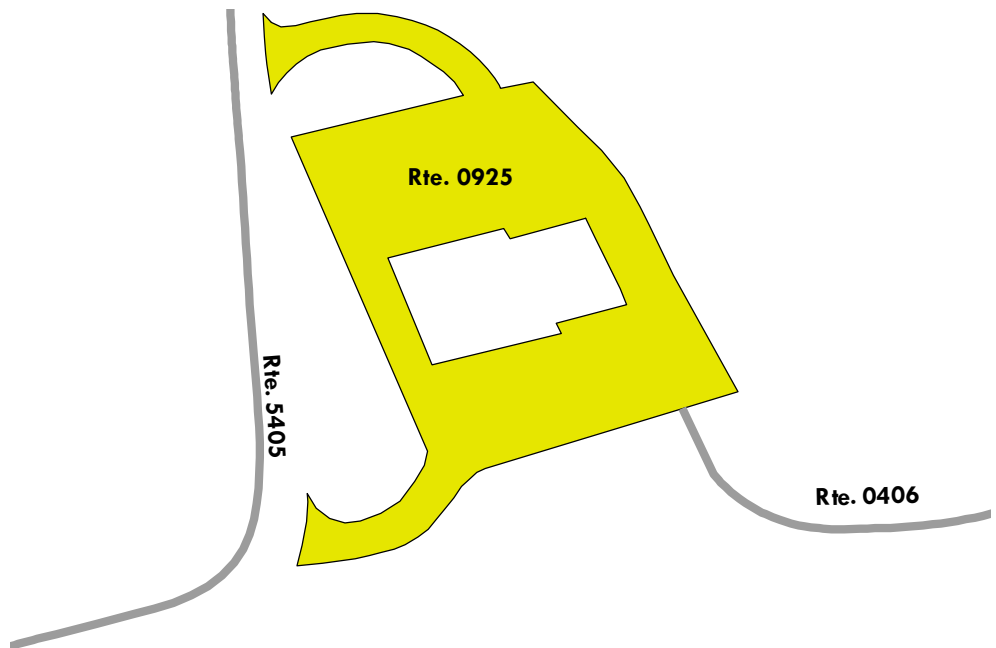

# Indiana Dunes National Park

## ROUTE 0927ZZ: DLC (GOOD FELLOW CAMP) PARKING AREAS

Summary Route  
Manual Rating

FROM ROUTE 0207ZZ (GOOD FELLOW CAMP ROADS DLC) ON LEFT  
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	56228	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Condition Rating / PCR	
10,183	0.175	SUMMARY / 90	


**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

The condition shown on this page reflects the overall route condition and may not reflect individual subcomponent ratings.

**Rte. 0927ZZ**  
(2 Subcomponents)

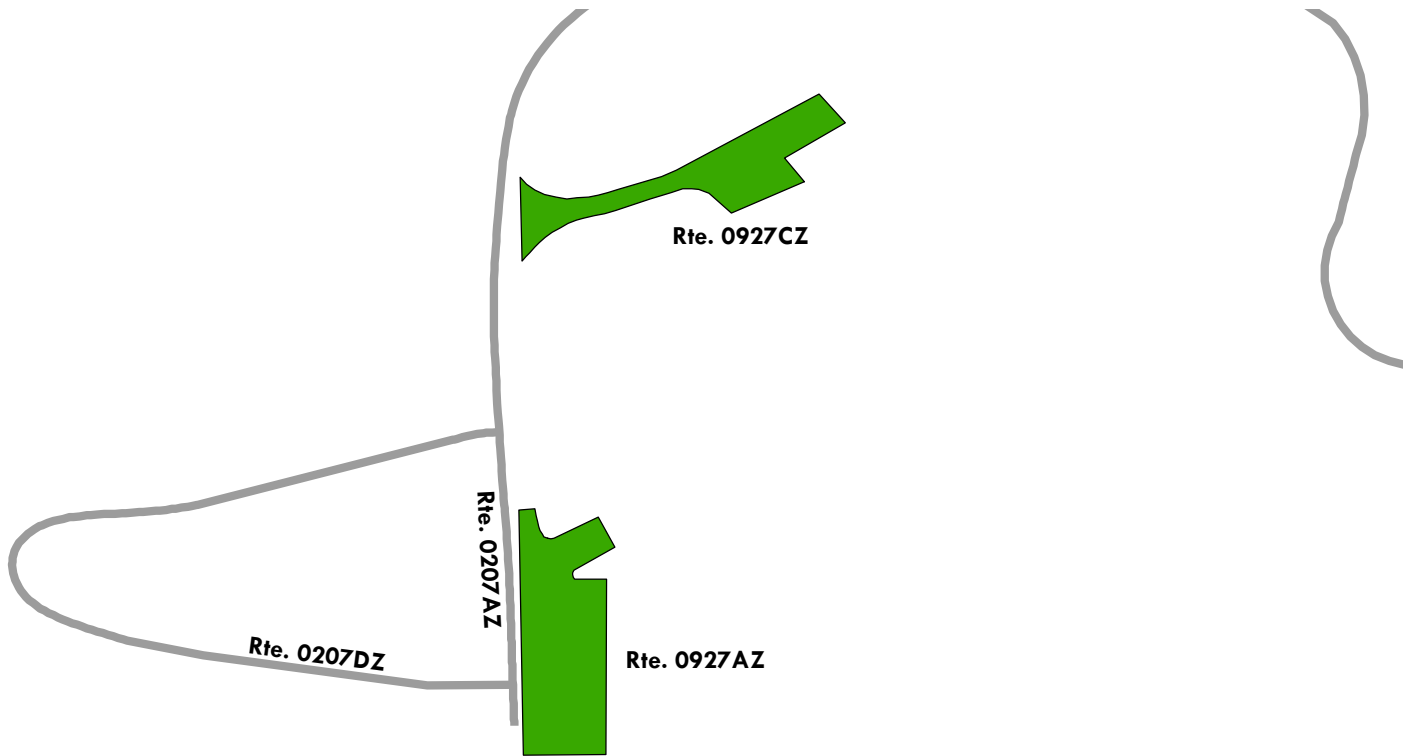

# Indiana Dunes National Park

## ROUTE 0927AZ: DLC (GOOD FELLOW CAMP) PARKING A

Subcomponent of Route INDU-0927ZZ

Manual Rating

ADJACENT TO ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC) ON LEFT AND ROUTE 0207DZ (GOOD FELLOW CAMP LOOP DLC)

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	56228	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
6,034	0.104	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)



Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas

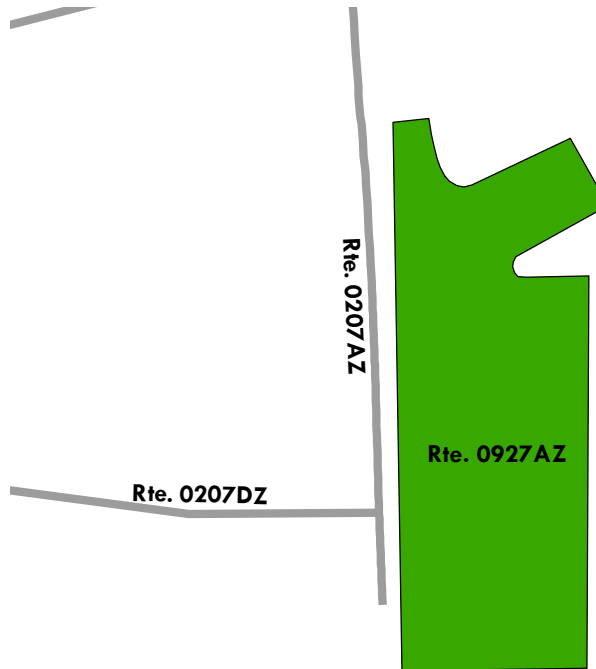

# Indiana Dunes National Park

## ROUTE 0927CZ: DLC (GOOD FELLOW CAMP) PARKING C

Subcomponent of Route INDU-0927ZZ

Manual Rating

FROM ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)


TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	56228	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
4,149	0.071	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)
Fair (61- 84)
Good (85 - 94)
Excellent (95 - 100)
Not Rated

See Appendix for definitions and formulas

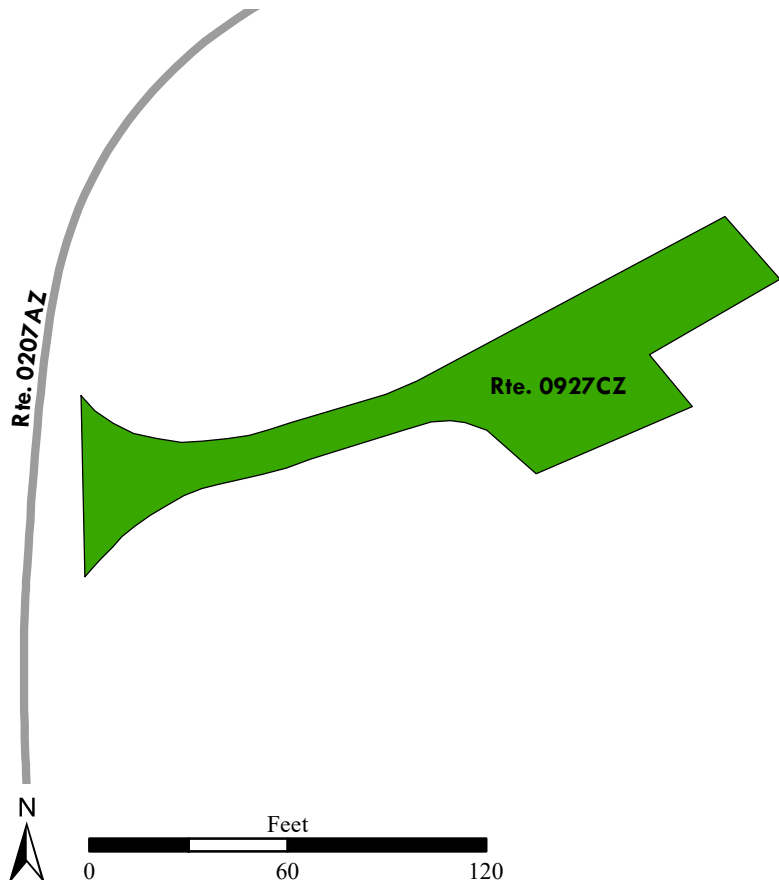



# Indiana Dunes National Park

## ROUTE 0930: TREMONT COMFORT AREA PARKING

Manual Rating

FROM U.S. HIGHWAY 12

TO U.S. HIGHWAY 12

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	24730	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
8,721	0.15	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
DO NOTHING		EXCELLENT / 97	



**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas



Note: Parking area resurfaced from gravel to asphalt.

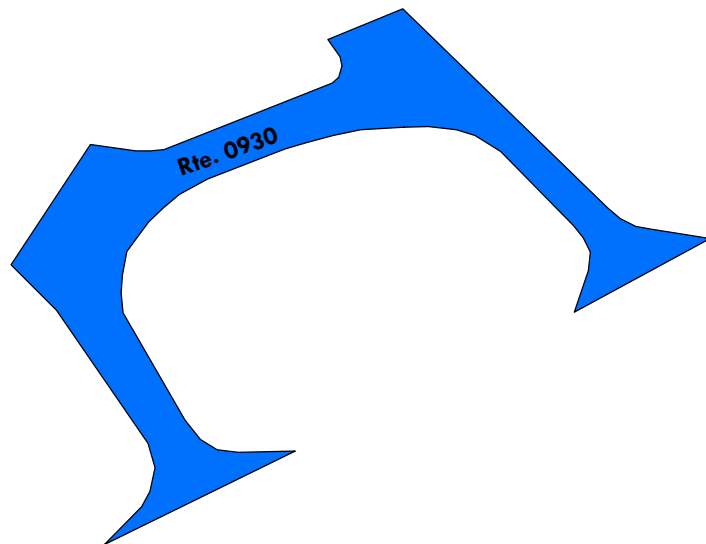

# Indiana Dunes National Park

## ROUTE 0936: LONG LAKE TRAIL PARKING

Manual Rating

FROM ROUTE 0014ZZ (WEST BEACH ACCESS ROADS)

TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	46984	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
6,937	0.119	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)




Fair (61- 84)

Good (85 - 94)

Excellent (95 - 100)

Not Rated

See Appendix for definitions and formulas

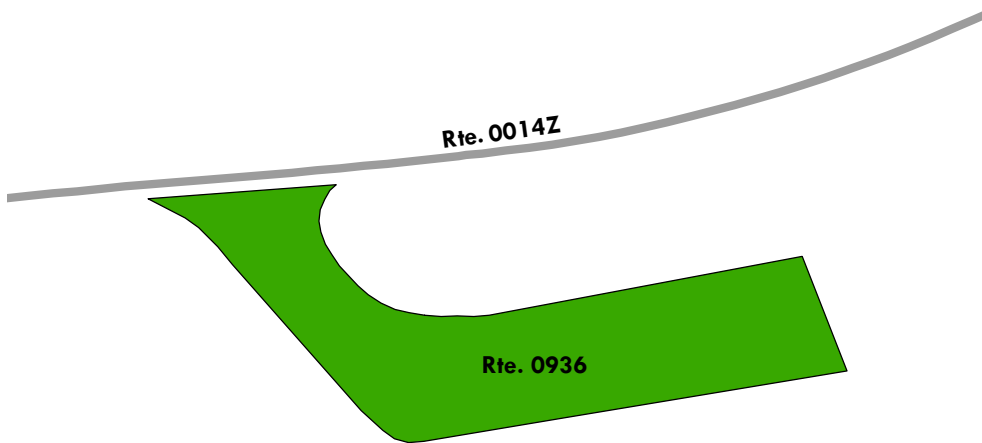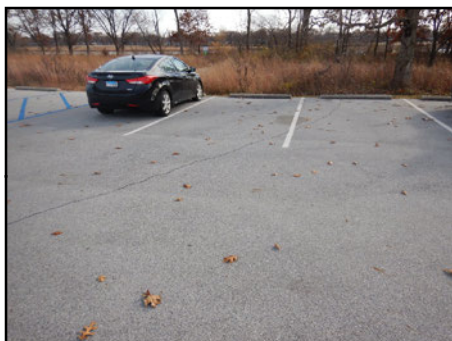

# Indiana Dunes National Park

## ROUTE 0938: DUNBAR PARKING AREA

Manual Rating

FROM DUNBAR AVENUE



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	25906	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
12,933	0.223	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

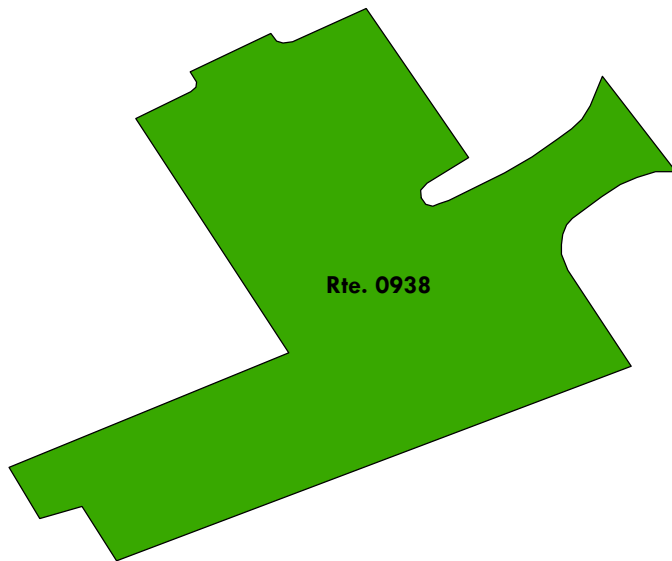

# Indiana Dunes National Park

## ROUTE 0940: PINHOOK BOG PARKING

Manual Rating

FROM WOZNIAK ROAD



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	111768	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
16,378	0.282	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

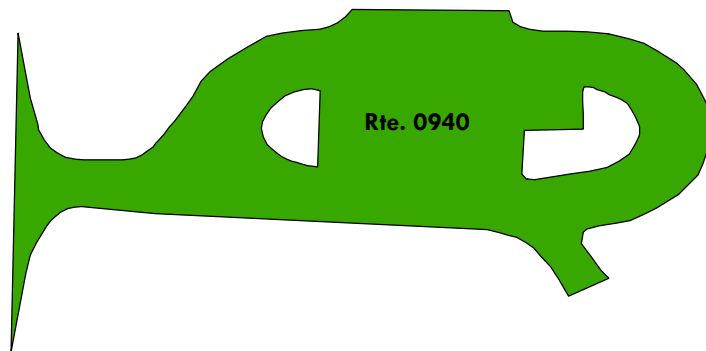

# Indiana Dunes National Park

## ROUTE 0943: MARQUETTE TRAIL PARKING

Manual Rating

ADJACENT TO ROUTE 5405 (WEST BEACH MAINTENANCE ROAD)

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	104538	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
1,799	0.031	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
NOT APPLICABLE		NOT RATED	


**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas



Note: Parking area was covered with debri/leaves; not rated.

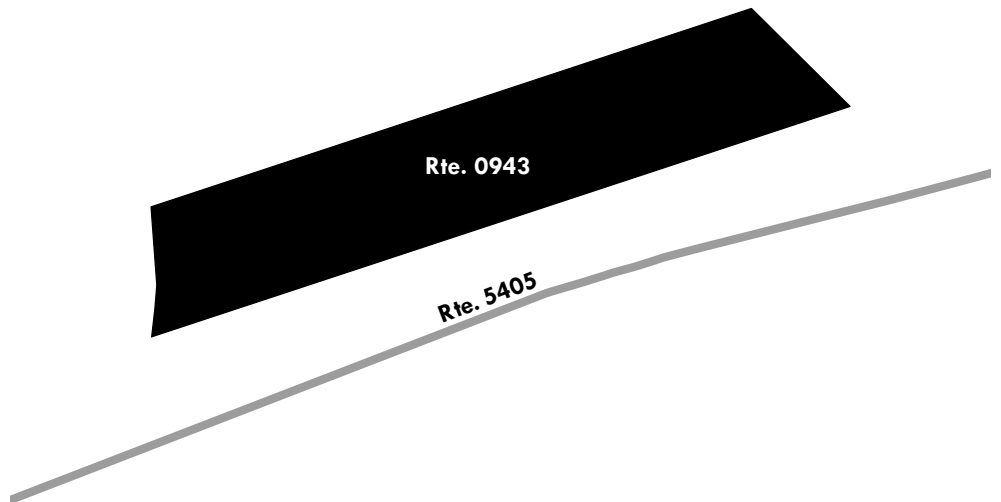

# Indiana Dunes National Park

## ROUTE 0944: WEST BEACH SERVICE PARKING

Manual Rating




ADJACENT TO ROUTE 0406 (WEST BEACH SERVICE ROAD) ON RIGHT

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	104580	NONPUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
1,539	0.026	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
DO NOTHING		EXCELLENT / 97	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

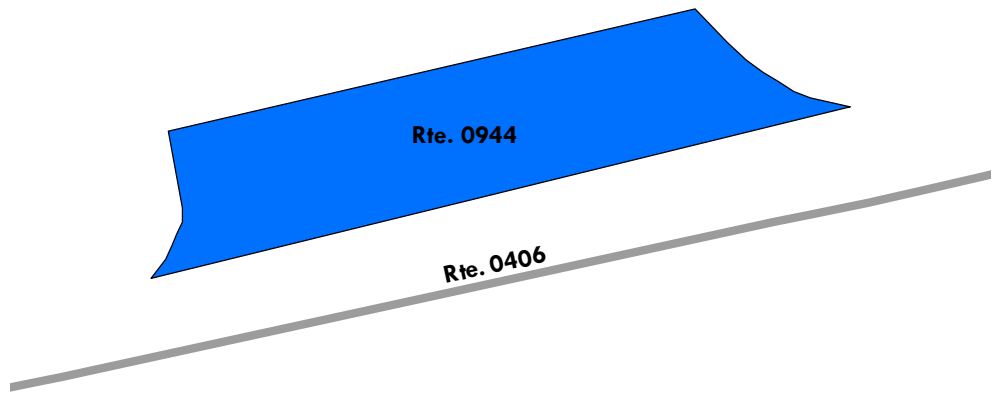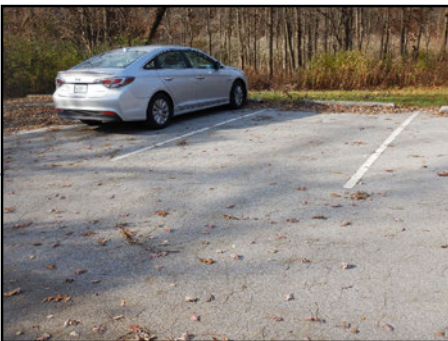

# Indiana Dunes National Park

## ROUTE 0950: PORTER BEACH NORTH PARKING

Manual Rating

FROM WABASH AVENUE




TO WABASH AVENUE

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	100346	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
14,021	0.241	5	LIGHT REPAIR
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

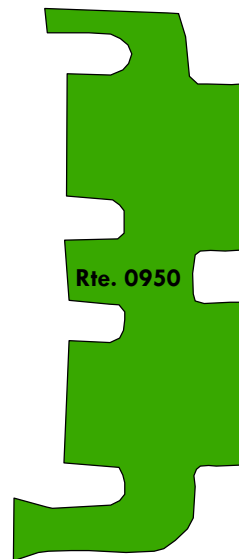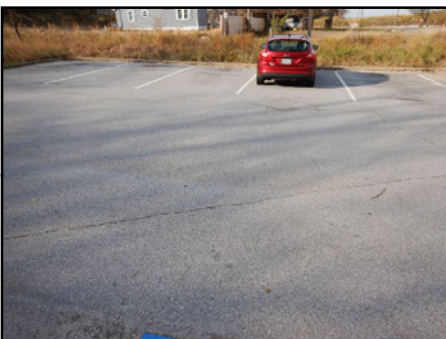

# Indiana Dunes National Park

## ROUTE 0952: CALUMET RIVER TRAIL PARKING

Manual Rating



FROM ROUTE 0240 (WAHL FARM ACCESS ROAD)  
TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	82346	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
6,729	0.116	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

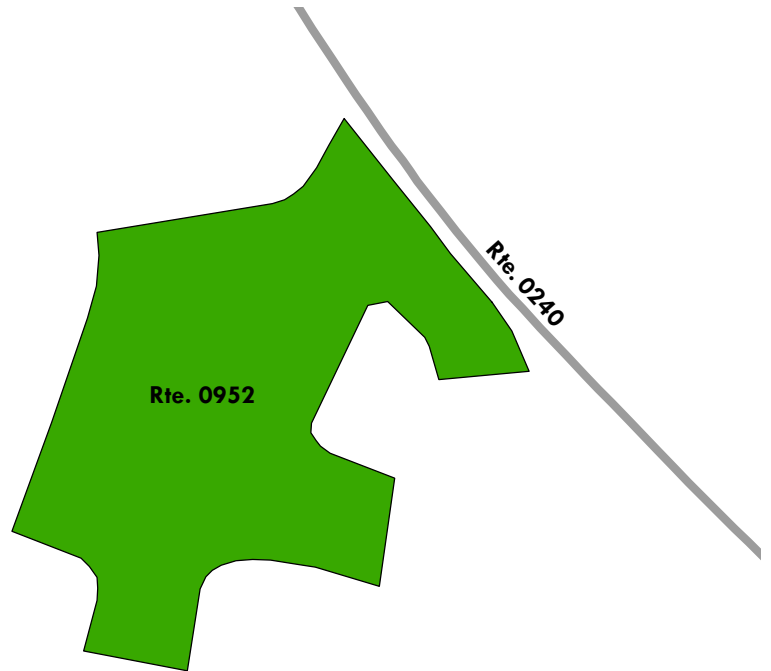



# Indiana Dunes National Park

## ROUTE 0953: PORTAGE LAKEFRONT NORTH PARKING AREA

Manual Rating

FROM ROUTE 0016A (PORTAGE LAKEFRONT ENTRANCE ROAD)




TO ROUTE 0016B (PORTAGE LAKEFRONT TURNAROUND)

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	114273	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
23,035	0.397	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

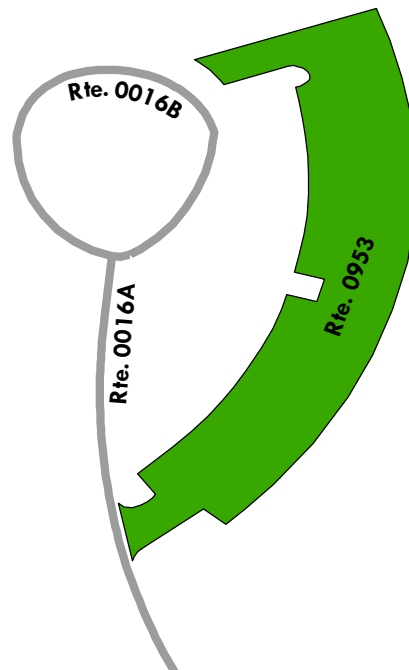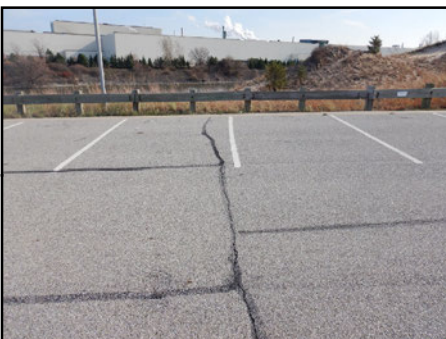

# Indiana Dunes National Park

## ROUTE 0954: PORTAGE LAKEFRONT EAST PARKING AREA

Manual Rating

FROM ROUTE 0016A (PORTAGE LAKEFRONT ENTRANCE ROAD)



TO ROUTE 0016A (PORTAGE LAKEFRONT ENTRANCE ROAD)

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	114274	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
7,115	0.123	4	DO NOTHING
Curb Type		Curb & Gutter Type	
CONCRETE		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

Poor (0 - 60)	Fair (61- 84)	Good (85 - 94)	Excellent (95 - 100)	Not Rated
---------------	---------------	----------------	----------------------	-----------

See Appendix for definitions and formulas

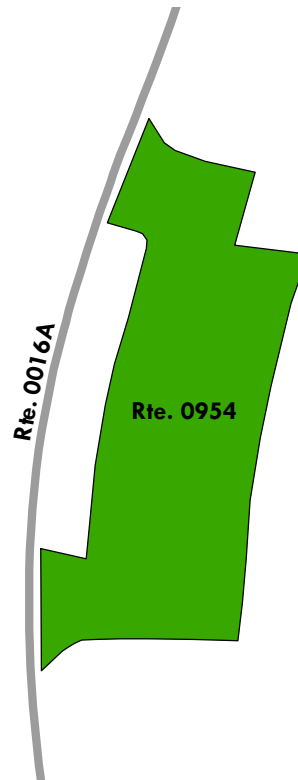

# Indiana Dunes National Park

## ROUTE 0955: PORTAGE LAKEFRONT WEST PARKING AREA

Manual Rating

FROM ROUTE 0016A (PORTAGE LAKEFRONT ENTRANCE ROAD)



TO ROUTE 0016A (PORTAGE LAKEFRONT ENTRANCE ROAD)

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	114283	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
7,553	0.13	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

### Route Condition Legend – Pavement Condition Rating (PCR)

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

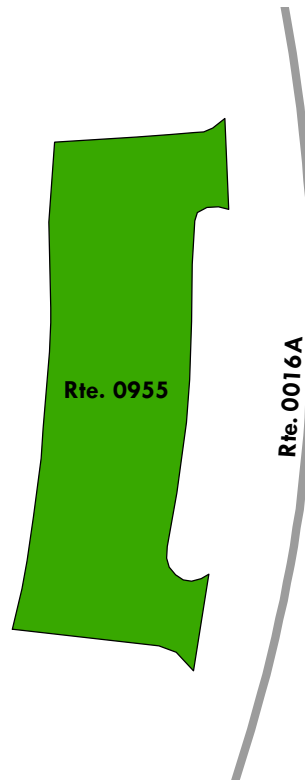

# Indiana Dunes National Park

## ROUTE 0956: BEVERLY DRIVE SPRING PARKING AREA

Manual Rating

ADJACENT TO ROUTE 5209 (BEVERLY DRIVE)

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	87732	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
861	0.015	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
HEAVY 3R TREATMENTS		POOR / 53	



**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas



Rte. 5209

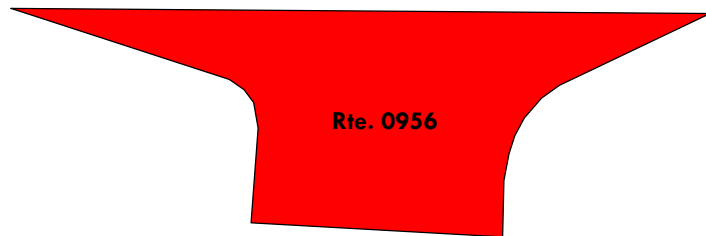

# Indiana Dunes National Park

**ROUTE 0958: HAWLEYWOOD BUILDING #504 DRIVEWAY / PARKING**

Manual Rating



FROM HAWLEYWOOD ROAD

TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/10/2018	46990	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
1,035	0.018	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
NOT APPLICABLE		NOT RATED	
<b>Route Condition Legend – Pavement Condition Rating (PCR)</b>			
<span style="background-color: red; color: white; padding: 2px;">Poor (0 - 60)</span>	<span style="background-color: yellow; padding: 2px;">Fair (61- 84)</span>	<span style="background-color: green; color: white; padding: 2px;">Good (85 - 94)</span>	<span style="background-color: blue; color: white; padding: 2px;">Excellent (95 - 100)</span>
			<span style="background-color: black; color: white; padding: 2px;">Not Rated</span>
See Appendix for definitions and formulas			



Note: Parking area is abandoned; not rated.

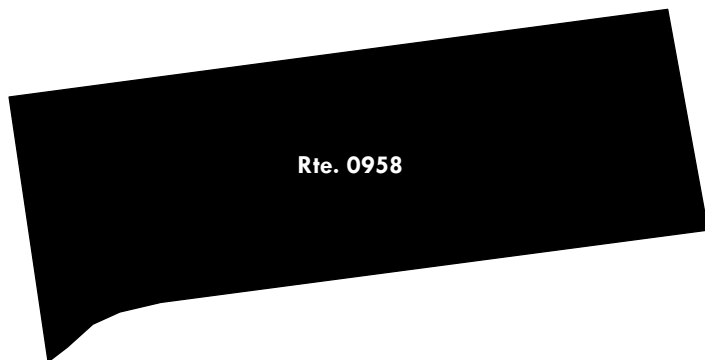

# Indiana Dunes National Park

## ROUTE 0960: U.S. HIGHWAY 12 DORM DRIVE/PARKING

Manual Rating

FROM U.S. HIGHWAY 12



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	58102	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
6,177	0.106	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
PREVENTIVE MAINTENANCE		GOOD / 90	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

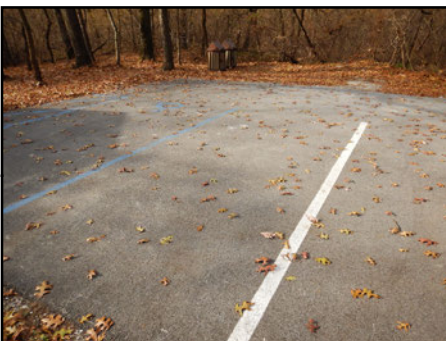

# Indiana Dunes National Park

ROUTE 0961: #106 RM ANNEX DRIVEWAY

Manual Rating

FROM ROUTE 5217 (OAK HILL ROAD)



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/9/2018	98098	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
1,422	0.024	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
RECONSTRUCTION		POOR / 30	

**Route Condition Legend – Pavement Condition Rating (PCR)**

Poor (0 - 60)
Fair (61- 84)
Good (85 - 94)
Excellent (95 - 100)
Not Rated

See Appendix for definitions and formulas

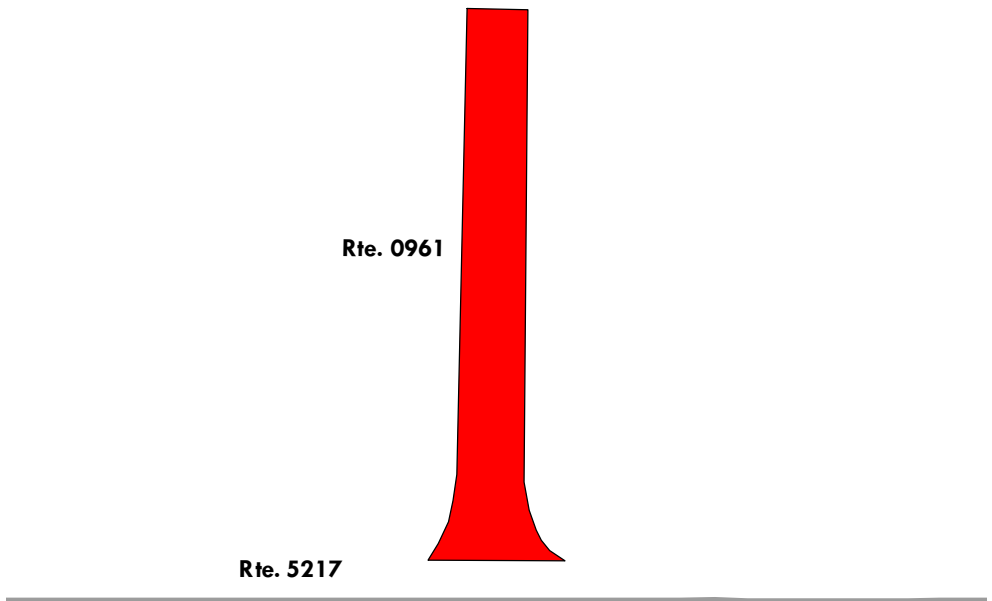

# Indiana Dunes National Park

## ROUTE 0962: US 20 DORM ENTRANCE PARKING

Manual Rating

FROM U.S. HIGHWAY 20



TO PARKING

Inspection Date	FMSS Number	User Access	Surface Type
11/11/2018	58534	PUBLIC	ASPHALT
Area (Sq. Ft.)	Lane Miles (11' Widths)	Curb Reveal (Inches)	Curb Recommendation
6,912	0.119	NOT APPLICABLE	NOT APPLICABLE
Curb Type		Curb & Gutter Type	
NO CURB		NO CURB AND GUTTER	
Pavement Recommendation		Condition Rating / PCR	
LIGHT 3R TREATMENTS		FAIR / 73	

**Route Condition Legend – Pavement Condition Rating (PCR)**

<b>Poor (0 - 60)</b>	<b>Fair (61- 84)</b>	<b>Good (85 - 94)</b>	<b>Excellent (95 - 100)</b>	<b>Not Rated</b>
----------------------	----------------------	-----------------------	-----------------------------	------------------

See Appendix for definitions and formulas

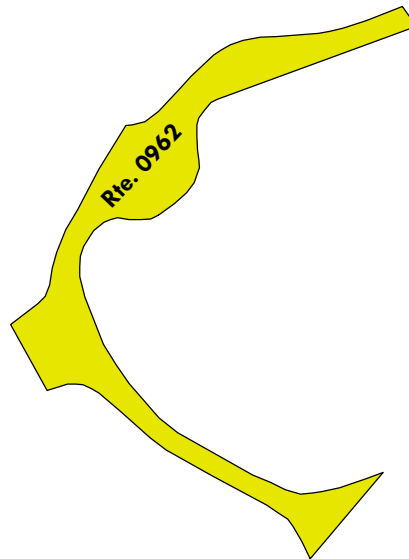



# Section 7 Road Milepost Information



## Indiana Dunes National Park



Federal Lands Highway  
Road Inventory Program

## Road Milepost Information

This report section contains road milepost information for all paved roads in the park that were collected with the Data Collection Vehicle (DCV). The milepost data is obtained from the DCV by using a distance measuring instrument (DMI) that is calibrated to record mileage to the nearest thousandth of a mile. Park roads that were manually rated did not have milepost data collected, and thus are not included in this report section.

For Cycle 6, the information presented in this section differs from previous RIP cycles in that it does not contain the roadside features inventories for the paved park roads. Some examples of the features previously collected are signs, culverts/drop inlets, guardrails, curbing, pullouts, etc. If the park was collected in a previous RIP cycle, then the latest features data can be obtained by referencing the following:

### **Where to find the latest Features Inventories for NPS Parks:**

- For Small Parks (parks with less than 10 miles of paved roads):
  - Refer to Cycle 5 data (collected 2010 - 2014)
    - Features were reported in Section 9 of the *Cycle 5* RIP report
    - Video of features can be viewed using the *PathViewVO* program and *Cycle 5* data
- For Large Parks (parks with more than 10 miles of paved roads):
  - Refer to Cycle 4 data (collected 2006 - 2009)
    - Features were reported in Section 9 of the *Cycle 4* RIP report
    - Video of features can be viewed using the *VisiData* program and *Cycle 4* data
  - Note: Features inventories were updated in Large Parks in *Cycle 5* only on a route by route basis if the route was new or modified in *Cycle 5*. If this is the case for a particular route, then features for the route can be obtained using the *PathViewVO* program and *Cycle 5* data (same as above for Small parks).

### **Milepost Events Verified in Cycle 6**

In Cycle 6, the following events were collected and reported in Section 7 of this report:

- Intersections with roads and parking areas
- All bridges and culverts with BIP Numbers (bridge inspection program numbers)
- Mile Marker Signs
- One-Way travel directions
- Overpasses
- Tunnels
- Low Water Crossings (LWCR)
- Surface type changes
- Construction areas where no pavement condition data was obtained

## **GPS Mileage Matching**

A consistent survey milepost and constant route length as recorded by the Data Collection Vehicle (DCV) is a challenge to maintain from one collection cycle to the next. The challenge is due to many factors such as driver characteristics, DMI calibration, tire pressure etc. After Cycle 4 (~2010), a decision was made to hold constant the length of roads so long as there was no physical change from reconstruction projects or realignments that would result in a change to the length of a road. Consequently, the “GPS Mileage Match” was implemented to specify which cycle the route length is being matched. Route mileages and GPS are matched to a previous collection whenever there is no physical change to a route alignment. The route mileage and GPS is not matched to previous cycles whenever it is determined that a road length and GPS needs to be updated. When this happens the GPS and length is updated to the cycle that displays the change, and that collection cycle is used as the matching cycle in subsequent collections of the road. Thus, the Cycle 6 GIS could be either the survey length collected in Cycle 4, Cycle 5, or Cycle 6 and therefore, may not match the survey milepost displayed in the latest Cycle 6 DCV video which is viewable in *PathView VO*.

The features inventories and road logs collected on NPS routes contain mileposts that are determined from the corresponding cycle that the GPS is matched to. Therefore, the mileposts contained in the Cycle 4 or 5 features inventories or the Cycle 6 road logs may not exactly match the survey milepost collected in the latest Cycle 6 video of the road.

## **Locating Mile Marker Signs**

For routes that have mile marker signs along them, the milepost reported by RIP will most likely not line up exactly with the sign located in the field. This could be happening for many reasons, most likely due to either the error falling within the acceptable calibration range of the vehicle, or the level of accuracy that the mile marker signs were placed in the field.

Because mile marker signs are important features in many project plans and location descriptions, RIP is reporting locations of mile marker signs in three ways in Cycle 6:

1. Mileposts from Cycle 6 GIS: the official RIP milepost taken from the features inventories and the matching GPS/mileage cycle as described above. This is the milepost that should be used on project plans and when finding locations in the field
2. Mileposts from Cycle 6 Video: milepost shown to help locate the mile marker sign in the latest *PathView VO* video.
3. Latitude / Longitude: a constant way of locating a mile marker sign so long as the park has not moved the sign

The mileposts from Cycle 6 Video and GIS should be nearly the same, but on longer roads it has been observed that the Video milepost deviates more from the official GIS milepost that comes from the matching cycle.

# INDU: Route Milepost Log

## ROUTE 0014Z: WEST BEACH ACCESS ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	ROUTE 5215 (COUNTY LINE ROAD)
0.00	0.00	INTERSECTION	L	ROUTE 5215 (COUNTY LINE ROAD)
0.01	0.01	INTERSECTION	L	PAVED SPUR
0.15	0.15	CULVERT	N/A	N/A
0.25	0.25	OVERPASS	N/A	6300-003 (COUNTY LINE ROAD BRIDGE)
0.26	0.26	INTERSECTION	L	ROUTE 0014Z (WEST BEACH ACCESS ROAD) OPPOSITE LANE
0.26	0.26	ONE-WAY START	N/A	N/A
0.30	0.30	INTERSECTION	R	ROUTE 0015Z (WEST BEACH ENTRY ROAD)
0.37	0.37	INTERSECTION	L	ROUTE 0014Z (WEST BEACH ACCESS ROAD) OPPOSITE LANE
0.37	0.37	ONE-WAY END	N/A	N/A
0.52	0.52	INTERSECTION	L	ROUTE 0406 (WEST BEACH SERVICE ROAD)
0.99	0.99	INTERSECTION	R	ROUTE 0936 (LONG LAKE TRAIL PARKING)
1.18	1.18	INTERSECTION	L	ROUTE 0923 (WEST BEACH VISITOR PARKING)
1.24	1.24	INTERSECTION	L	ROUTE 0923 (WEST BEACH VISITOR PARKING)
1.25	1.25	INTERSECTION	L	ROUTE 0923 (WEST BEACH VISITOR PARKING)
1.34	1.34	INTERSECTION	L	ROUTE 0923 (WEST BEACH VISITOR PARKING)
1.36	1.36	INTERSECTION	R	ROUTE 0404 (WEST BEACH SERVICE ACCESS ROAD)
1.37	1.37	INTERSECTION	N/A	ROUTE 0923 (WEST BEACH VISITOR PARKING)

## ROUTE 0015Z: WEST BEACH ENTRY ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	ROUTE 5215 (COUNTY LINE ROAD)
0.00	0.00	INTERSECTION	L	ROUTE 5215 (COUNTY LINE ROAD)
0.00	0.00	ONE-WAY START	N/A	N/A
0.19	0.19	ONE-WAY END	N/A	N/A
0.19	0.19	INTERSECTION	L	ROUTE 0014Z (WEST BEACH ACCESS ROAD)
0.19	0.19	INTERSECTION	N/A	ROUTE 0014Z (WEST BEACH ACCESS ROAD)

Data Collected on 6/2019

# INDU: Route Milepost Log

## ROUTE 0016A: PORTAGE LAKEFRONT ENTRANCE ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 6.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	PAVED ROUTE (US STEEL COMPANY FRONTAGE ROAD)
0.00	0.00	INTERSECTION	L	PAVED ROUTE (US STEEL COMPANY FRONTAGE ROAD)
0.17	0.17	INTERSECTION	R	ROUTE 0954 (PORTAGE LAKEFRONT EAST PARKING AREA)
0.20	0.20	INTERSECTION	R	ROUTE 0954 (PORTAGE LAKEFRONT EAST PARKING AREA)
0.23	0.23	INTERSECTION	L	ROUTE 0955 (PORTAGE LAKEFRONT WEST PARKING AREA)
0.26	0.26	INTERSECTION	L	ROUTE 0955 (PORTAGE LAKEFRONT WEST PARKING AREA)
0.59	0.59	INTERSECTION	R	ROUTE 0953 (PORTAGE LAKEFRONT NORTH PARKING AREA)
0.62	0.62	SURFACE TYPE	N/A	CONCRETE
0.63	0.63	INTERSECTION	N/A	ROUTE 0016B (PORTAGE LAKEFRONT TURNAROUND)

## ROUTE 0207AZ: GOOD FELLOW CAMP ROAD DLC

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	ROUTE 5218 (HOWE ROAD)
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	CULVERT	N/A	N/A
0.00	0.00	INTERSECTION	L	ROUTE 5218 (HOWE ROAD)
0.05	0.05	ONE-WAY END	N/A	N/A
0.05	0.05	INTERSECTION	L	ROUTE 0207BZ (GOOD FELLOW CAMP EXIT ROAD DLC)
0.21	0.21	CULVERT	N/A	N/A
0.30	0.30	INTERSECTION	L	ROUTE 0207CZ (GOOD FELLOW CAMP ROAD TURNAROUND DLC)
0.34	0.34	INTERSECTION	R	ROUTE 0951 (IDELC OVERFLOW PARKING)
0.38	0.38	INTERSECTION	L	ROUTE 0927CZ (DLC (GOOD FELLOW CAMP) PARKING C)
0.40	0.40	INTERSECTION	R	ROUTE 0207DZ (GOOD FELLOW CAMP LOOP DLC)
0.41	0.41	INTERSECTION	L	UNPAVED ROUTE (SERVICE ROAD)
0.42	0.42	INTERSECTION	L	ROUTE 0927AZ (DLC (GOOD FELLOW CAMP) PARKING A)
0.43	0.43	INTERSECTION	R	ROUTE 0207DZ (GOOD FELLOW CAMP LOOP DLC)
0.44	0.44	INTERSECTION	N/A	ROUTE 0411 (GOOD FELLOW GRAVEL SERVICE ROAD)

Data Collected on 6/2019

# INDU: Route Milepost Log

---

## ROUTE 0207BZ: GOOD FELLOW CAMP EXIT ROAD DLC

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	INTERSECTION	N/A	ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)
0.00	0.00	INTERSECTION	L	ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)
0.04	0.04	INTERSECTION	L	ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)
0.05	0.05	ONE-WAY END	N/A	N/A
0.05	0.05	INTERSECTION	L	ROUTE 5218 (HOWE ROAD)
0.05	0.05	INTERSECTION	R	ROUTE 5218 (HOWE ROAD)

## ROUTE 0207DZ: GOOD FELLOW CAMP LOOP DLC

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	INTERSECTION	L	ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)
0.00	0.00	INTERSECTION	R	ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)
0.10	0.10	INTERSECTION	N/A	ROUTE 0927AZ (DLC (GOOD FELLOW CAMP) PARKING A)
0.10	0.10	INTERSECTION	R	ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)
0.10	0.10	ONE-WAY END	N/A	N/A
0.10	0.10	INTERSECTION	L	ROUTE 0207AZ (GOOD FELLOW CAMP ROAD DLC)

## ROUTE 0210: CENTRAL AVENUE

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 6.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	PAVED ROUTE (CENTRAL AVE / NON NPS)
0.00	0.00	INTERSECTION	L	ROUTE 5209 (BEVERLY DRIVE)
0.00	0.00	INTERSECTION	R	ROUTE 5209 (BEVERLY DRIVE)
0.54	0.54	INTERSECTION	L	PAVED ROUTE (U.S. HIGHWAY 12 / NON NPS)
0.54	0.54	INTERSECTION	R	PAVED ROUTE (U.S. HIGHWAY 12 / NON NPS)

Data Collected on 6/2019

# INDU: Route Milepost Log

## ROUTE 0212: KEMIL ROAD (300 EAST ROAD)

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	PAVED ROUTE (U.S. HIGHWAY 20)
0.00	0.00	INTERSECTION	L	PAVED ROUTE (U.S. HIGHWAY 20)
0.02	0.02	CULVERT	N/A	N/A
0.03	0.03	INTERSECTION	L	ROUTE 5213 (FURNESSVILLE ROAD / NON NPS)
0.37	0.37	INTERSECTION	L	ROUTE 0400 (GUN RANGE ROAD)
0.75	0.75	INTERSECTION	L	ROUTE 0904 (CALUMET DUNES INTERPRETER CENTER PARKING)
0.78	0.78	INTERSECTION	R	ROUTE 0905 (CALUMET DUNES INTERPRETER CENTER OVERFLOW PARKING)
0.78	0.78	INTERSECTION	L	ROUTE 0904 (CALUMET DUNES INTERPRETER CENTER PARKING)
0.81	0.81	INTERSECTION	R	PAVED ROUTE (U.S. HIGHWAY 12)
0.81	0.81	INTERSECTION	N/A	ROUTE 5211 (EAST STATE PARK ROAD (300 EAST ROAD))
0.81	0.81	INTERSECTION	L	PAVED ROUTE (U.S. HIGHWAY 12)

## ROUTE 0213: FURNESSVILLE ROAD (1500 NORTH ROAD)

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	ROUTE 5220 (SCHOOL HOUSE ROAD (275 E))
0.00	0.00	INTERSECTION	N/A	ROUTE 5213 (FURNESSVILLE ROAD / NON NPS)
0.17	0.17	CULVERT	N/A	N/A
0.29	0.29	INTERSECTION	R	ROUTE 0939 (ROADS AND TRAILS PARKING)
0.38	0.38	INTERSECTION	L	UNPAVED ROUTE
0.75	0.75	INTERSECTION	L	PAVED ROUTE (N COUNTY ROAD 200 E STREET / NON NPS)
1.25	1.25	INTERSECTION	L	PAVED ROUTE (HADENFELT ROAD / NON NPS)
1.30	1.30	INTERSECTION	L	PAVED ROUTE (U.S. HIGHWAY 12)
1.30	1.30	INTERSECTION	R	PAVED ROUTE (U.S. HIGHWAY 12)

# INDU: Route Milepost Log

---

## ROUTE 0222AZ: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP AZ

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	ROUTE 5219 (DUNEWOOD AMPHITHEATER ACCESS ROAD / BROADWAY)
0.00	0.00	INTERSECTION	L	ROUTE 5219 (DUNEWOOD AMPHITHEATER ACCESS ROAD / BROADWAY)
0.00	0.00	ONE-WAY START	N/A	N/A
0.02	0.02	INTERSECTION	L	ROUTE 0222BZ (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP BZ)
0.03	0.03	INTERSECTION	L	PAVED SPUR
0.04	0.04	INTERSECTION	R	ROUTE 0900Z (DUNEWOOD CAMPGROUND ACCESS PARKING)
0.06	0.06	ONE-WAY END	N/A	N/A
0.06	0.06	INTERSECTION	R	ROUTE 0223Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C)
0.06	0.06	INTERSECTION	L	ROUTE 0223Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C)

## ROUTE 0222BZ: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP BZ

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	INTERSECTION	R	ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A)
0.00	0.00	INTERSECTION	L	ROUTE 0223Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C)
0.02	0.02	INTERSECTION	L	PAVED SPUR
0.04	0.04	ONE-WAY END	N/A	N/A
0.04	0.04	INTERSECTION	N/A	ROUTE 0222AZ (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP AZ)



# INDU: Route Milepost Log

---

## ROUTE 0222Z: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	ROUTE 0223Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C)
0.00	0.00	INTERSECTION	L	ROUTE 0222BZ (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP BZ)
0.05	0.05	INTERSECTION	L	ROUTE 0900AZ (DUNEWOOD CAMPGROUND PARKING 1)
0.15	0.15	INTERSECTION	L	ROUTE 0237Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP D (DOUGLAS LOOP))
0.22	0.22	CULVERT	N/A	N/A
0.23	0.23	INTERSECTION	L	ROUTE 0410 (DUNEWOOD SERVICE ROAD)
0.29	0.29	INTERSECTION	L	ROUTE 0238Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP B (MATHER LOOP))
0.29	0.29	INTERSECTION	N/A	ROUTE 0238Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP B (MATHER LOOP))

## ROUTE 0223Z: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A)
0.00	0.00	INTERSECTION	R	ROUTE 0222BZ (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP BZ)
0.02	0.02	INTERSECTION	R	ROUTE 0222AZ (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP AZ)
0.17	0.17	INTERSECTION	L	ROUTE 0223Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C)
0.22	0.22	ONE-WAY START	N/A	N/A
0.29	0.29	INTERSECTION	R	ROUTE 0223Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C)
0.29	0.29	INTERSECTION	L	ROUTE 0223Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP C)
0.29	0.29	ONE-WAY END	N/A	N/A

## INDU: Route Milepost Log

---

### ROUTE 0237Z: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP D (DOUGLAS LOOP)

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A)
0.00	0.00	INTERSECTION	R	ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A)
0.03	0.03	INTERSECTION	L	ROUTE 0237Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP D (DOUGLAS LOOP))
0.03	0.03	ONE-WAY START	N/A	N/A
0.19	0.19	INTERSECTION	R	ROUTE 0903Z (DUNEWOOD WALK-IN PARKING)
0.32	0.32	INTERSECTION	R	ROUTE 0237Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP D (DOUGLAS LOOP))
0.32	0.32	ONE-WAY END	N/A	N/A
0.32	0.32	INTERSECTION	L	ROUTE 0237Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP D (DOUGLAS LOOP))

### ROUTE 0238Z: DUNEWOOD CAMPGROUND ACCESS ROAD LOOP B (MATHER LOOP)

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	ROUTE 0238Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP B (MATHER LOOP))
0.00	0.00	ONE-WAY START	N/A	N/A
0.00	0.00	INTERSECTION	N/A	ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A)
0.41	0.41	INTERSECTION	R	ROUTE 0222Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP A)
0.41	0.41	ONE-WAY END	N/A	N/A
0.41	0.41	INTERSECTION	L	ROUTE 0238Z (DUNEWOOD CAMPGROUND ACCESS ROAD LOOP B (MATHER LOOP))

# INDU: Route Milepost Log

---

## ROUTE 0240: WAHL FARM ACCESS ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	N/A	ROUTE 5218 (HOWE ROAD)
0.00	0.00	INTERSECTION	R	ROUTE 5218 (HOWE ROAD)
0.00	0.00	ONE-WAY START	N/A	N/A
0.09	0.09	ONE-WAY END	N/A	N/A
0.09	0.09	INTERSECTION	L	ROUTE 0952 (CALUMET RIVER TRAIL PARKING)
0.12	0.12	INTERSECTION	R	ROUTE 5218 (HOWE ROAD)
0.12	0.12	INTERSECTION	L	ROUTE 5218 (HOWE ROAD)

## ROUTE 0404: WEST BEACH SERVICE ACCESS ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	R	ROUTE 0014Z (WEST BEACH ACCESS ROAD)
0.00	0.00	INTERSECTION	L	ROUTE 0014Z (WEST BEACH ACCESS ROAD)
0.00	0.00	INTERSECTION	N/A	ROUTE 0923 (WEST BEACH VISITOR PARKING)
0.18	0.18	INTERSECTION	L	ROUTE 0404 (WEST BEACH SERVICE ACCESS ROAD)
0.18	0.18	ONE-WAY START	N/A	N/A
0.32	0.32	ONE-WAY END	N/A	N/A
0.32	0.32	INTERSECTION	N/A	ROUTE 0404 (WEST BEACH SERVICE ACCESS ROAD)
0.32	0.32	INTERSECTION	L	ROUTE 0404 (WEST BEACH SERVICE ACCESS ROAD)

## ROUTE 0406: WEST BEACH SERVICE ROAD

Road logs are verified in Cycle 6 and mileposts for this route are matched to GPS collected in Cycle 5.

FROM MILEPOST	TO MILEPOST	FEATURE	SIDE	COMMENT
0.00	0.00	INTERSECTION	L	ROUTE 0014Z (WEST BEACH ACCESS ROAD)
0.00	0.00	INTERSECTION	R	ROUTE 0014Z (WEST BEACH ACCESS ROAD)
0.05	0.05	INTERSECTION	R	ROUTE 0944 (WEST BEACH SERVICE PARKING)
0.06	0.06	CULVERT	N/A	N/A
0.12	0.12	INTERSECTION	N/A	ROUTE 0925 (WEST BEACH MAINTENANCE BUILDING PARKING)

Data Collected on 6/2019

# Section 8 Appendix



Indiana Dunes National Park



Federal Lands Highway  
Road Inventory Program

## **Improvements to the RIP Index Equations and Determination of PCR**

In 2005, the Federal Highway Administration (FHWA) began implementing the use of a Pavement Management System (PMS) to assist the National Park Service (NPS) in prioritizing Pavement Maintenance and Rehabilitation activities. The PMS used by FHWA is the Highway Pavement Management Application (HPMA) which has the ability to store inventory and condition data from the Road Inventory Program (RIP) and forecast future performance using prediction models. Outputs include performance and condition reports at the National, Region, Park, or Route level. A regional prioritized list and optimization have been produced for most regions and the Federal Highway Deferred Maintenance is calculated via the HPMA as well.

In an effort to improve the accuracy of treatment recommendations and pavement condition descriptions the distresses and indexes that comprise the Pavement Condition Rating (PCR), an extensive study was completed throughout 2010 that has resulted in changes to the RIP condition reporting method and specifically, the calculation of PCR. It was determined that a better representation of PCR could be achieved by modifying the relative impact certain distresses would have on the overall rating.

Through the use of HPMA data, it was noted that false failure indicators existed with the existing PCR model, and that it would be necessary to reduce their impact. The distresses affected in this way were Rutting and Roughness. Conversely, experience showed that roadways with extensive cracking present were often shown to have a high PCR. Therefore, the crack index models were adjusted to be more sensitive to changes in crack severity or quantity. It was also determined that these issues were not due to a problem with data acquisition (i.e. the RIP “van”), but with the way the collected data was processed. The final change was to provide guidance on when to use the Roughness Condition Index (RCI) in the PCR calculation. Roughness data is of little value to determining overall condition on routes that, due to their length or geometrics, have lower vehicle operating speeds. Therefore, in Cycle 5, only routes that have lengths of one half mile or greater and posted speed limits of 25 mph or greater will have RCI reported and included in the PCR calculations.

Additionally, methodologies were updated in 2013 for Manually Rated Routes (paved routes that the collection vehicle is unable to drive) as well as Parking Areas to provide more accurate condition data to the HPMA. These updated methodologies allow for the efficient assessment of pavement conditions using a visual inspection method to denote specific distresses. These distresses are indicative of current conditions, the causes for current and future deterioration, and identify the level of targeted repair and rehabilitation practices required.

The changes that were implemented were endorsed by management at both the FHWA and NPS. In order to show the effectiveness of these changes, several sites were ground truth tested in early 2014 to ensure that an improvement was achieved between the relationship of PCR and the actual Maintenance and Rehabilitation needs that were represented. The changes will allow greater use of RIP and HPMA data for not simply condition data reporting, but also as a reliable tool for project identification and selection.

## Description of the Rating System

---

The Federal Highway Administration, National Park Service Road Inventory Program (NPS-RIP), collects roadway condition data on paved surfaces (asphalt, concrete, brick, and cobblestone) on roads, parkways, and parking areas in national parks nationwide. The road surface condition data is collected using an automated Data Collection Vehicle (DCV) and manually using Manually Rated Route (MRR) procedures. Roads having brick or cobblestone surfacing are not normally surveyed with the DCV, but are manually rated for condition rating.

The FHWA RIP is implemented based on the premise that an accurate pavement surface condition assessment can be accomplished using automated crack detection technology as applied to digital images. Various methods of pavement condition assessment have been developed over the years with varying degrees of accuracy and acceptance. The use of digital photography to record pavement images and subsequent crack detection and classification has undergone continuous improvements over the past decade. Digital cameras with increasingly superior resolution and high definition have become more affordable, and the proprietary programming code and algorithms have been improved in crack detection software.

With the use of quality digital photography and automated crack detection software, FHWA RIP is tasked with executing a pavement condition assessment on a network of roughly 5,700 miles of National Park Service roads and parkways. Because a subset of roads will be collected multiple times this cycle, the total collection length will be around 13,000 miles. Foremost in setting up the basis of pavement distress identification is employing the distress identification protocols used by FHWA. There is no single distress identification system that is universal among entities conducting a program of distress identification. For the purpose of the NPS RIP, FHWA employs distress identification protocols that are specific to this program.

FHWA has referenced the “*Distress Identification Manual for the Long-Term Pavement Performance Program*”, Publication No. FHWA-RD 03-031, June 2003, as the point-of-reference for distress types on NPS pavement. In truth, the FHWA RIP distress types are similar to those described in the LTPP manual with some modifications. This document, “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 6, 2014-2020*” was developed using the “*Distress Identification Manual for the Long-Term Pavement Performance Program*” as a guideline. Definitions of severity levels based on crack width contained in this document adhere to the LTPP Distress ID Manual. Modifications have been made to the definition of Alligator and Longitudinal Cracking and determination of Alligator Cracking severity. This manual also addresses Rutting and Roughness and its application to RIP.

Cycle 6 has launched in the spring of 2014 and will again comprise all parks, large and small, that are served by paved roads and/or parking areas. For Cycle 6, roughly 333 large and small parks will have all paved routes and parking areas collected at least once in the cycle, some will have multiple collections depending on the size of the park and the functional class of the route.

This “*Distress Identification Manual for the NPS Road Inventory Program, Cycle 6, 2014-2020*” will be used as a reference resource in crack detection and classification, determination of distress severity and extent, and in the calculation of distress index values for the FHWA RIP Cycle 6.

## Explanation of the Condition Descriptions


---

In addition to the RIP Index changes that were implemented in Cycle 5, we will also aim to provide greater assistance in translating good/fair/poor categories into pavement needs categories. The PCR can be used to indicate the place in the Pavement Life Cycle and the types of treatments that should be considered now and into the future.

- Excellent/New: PCR of 95-100. Pavements in this range will require only spot repairs
- Good: PCR of 85-94. Pavements in this range will likely be candidates for preventive maintenance. Examples include Chip and Slurry Seals, Micro Surfacing and Thin Overlays.
- Fair: PCR of 61-84. Pavements in this range will likely be candidates of Light Rehabilitation (L3R). Examples include single-lift overlays up to 2.5 inches in total thickness, milling and overlays.
- Poor: PCR of 60 or below. Pavements in this range will likely be candidates of Heavy Rehabilitation or Reconstruction (H3R or 4R). Examples include Pulverization, Multiple Lift Overlays, and Reconstruction.

At this time, specific maintenance and rehabilitation activities should be evaluated and recommended at the project level. Site-specific conditions that influence treatment type should be determined based on performing a subsurface investigation and/or pavement condition survey, and not be based solely on RIP data. Additionally, RIP produces a snapshot of conditions the year in which the data was collected. For further information or to obtain additional PMS data from our (HPMA) please contact the Eastern Federal Lands pavement team.

### Condition Categories and Treatments

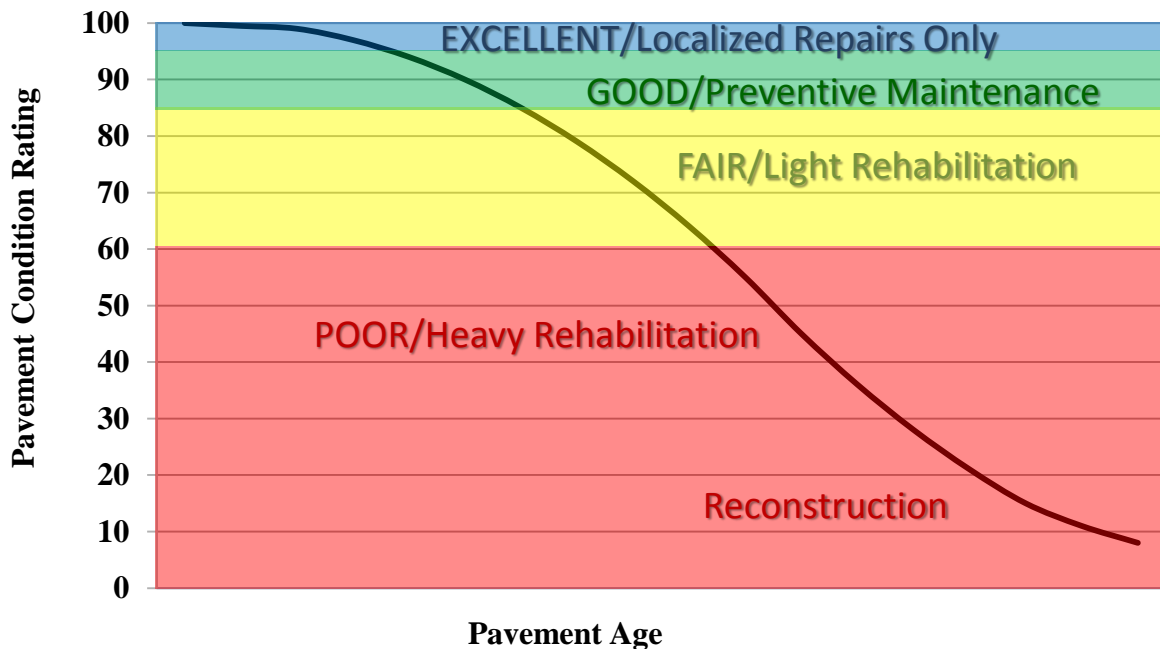

## Description of Pavement Treatment Types

---

1. **Preventive Maintenance** is a planned strategy of cost-effective treatments to an existing roadway system and its appurtenances that preserves the system, retards future deterioration, and maintains or improves the functional condition of the system (without significantly increasing the structural capacity). Preventive maintenance is typically applied to pavements in good condition having significant remaining service life. As a major component of pavement preservation, preventive maintenance is a strategy of extending the service life by applying cost-effective treatments to the surface or near-surface of structurally sound pavements. Examples of preventive treatments include asphalt crack sealing, chip sealing, slurry or micro-surfacing, thin and ultra-thin hot-mix asphalt overlay, concrete joint sealing, diamond grinding, dowel-bar retrofit, and isolated, partial and/or full-depth concrete repairs to restore functionality of individual slabs.
2. Pavement Rehabilitation consists of structural enhancements that extend the service life of an existing pavement and/or improve its load carrying capacity. Rehabilitation techniques include restoration treatments and structural overlays. Rehabilitation projects extend the life of existing pavement structures either by restoring existing structural capacity through the elimination of age-related, environmental cracking of embrittled pavement surface or by increasing pavement thickness to strengthen existing pavement sections to accommodate existing or projected traffic loading conditions. Two sub-categories result from these distinctions, which are directly related to the restoration or increase of structural capacity.
  - **Light Rehabilitation (L3R)** - Examples include single-lift overlays up to 2.5 inches in total thickness and milling and overlays for flexible pavements
  - **Heavy Rehabilitation (H3R)** – Requires rehabilitation with grade improvement. H3R stands for resurfacing, restoration, and rehabilitation projects. H3R projects typically involve multi-depth (overlays greater than 2.5 inches) pavement improvement work (short of full-depth replacement) and targeted safety improvements. H3R projects generally involve retention of the existing three-dimensional alignment.
3. **Reconstruction (4R)** is defined as the replacement of the entire existing pavement structure by the placement of the equivalent or increased pavement structure. Reconstruction usually requires the complete removal and replacement of the existing pavement structure. Reconstruction may utilize either new or recycled materials incorporated into the materials used for the reconstruction of the complete pavement section. Reconstruction is required when a pavement has either failed or has become functionally obsolete.



## **Appendix A**

### **Methodology for Determining Condition Ratings with the Data Collection Vehicle (DCV)**

## **Surface Distresses Identified by the Data Collection Vehicle**

---

### **Surface Condition Rating – SCR**

Surface distresses are measured in the primary lane only. In the classification and measurement of all paved surface condition data, results will be reported in the database in record intervals of 0.02 miles (105.6 feet) (smallest granularity) along the route.

Surface distresses and rutting are determined from digital images that provide both the longitudinal and transverse profile. The images also provide an elevation profile of the road, creating a 3-dimensional image of the paved surface.

- Transverse Cracks
- Longitudinal Cracks
- Alligator Cracks
- Patching/Potholes
- Rutting

Each of the five surface distresses is assigned a computed surface distress index

- Transverse Crack Index
- Longitudinal Crack Index
- Alligator Crack Index
- Patching/Pothole Index
- Rutting Index

Surface distress data are classified as listed above, measured for severity, and quantified for extent. Classification, severity, and extent of these five surface distresses comprise the three main elements for calculation of Surface Condition Rating (SCR).

In addition to the five surface distresses, a Structural Crack Index is computed, which is a combination of the Longitudinal Crack Index and the Alligator Crack Index. The Structural Crack Index is then used in lieu of the LC and AC indices to compute SCR.

### **Roughness Condition Index - RCI**

Additional condition data measured by DCV (lasers and accelerometers)

- Roughness (IRI)

Roughness is measured by FHWA's DCV and reported as International Roughness Index (IRI) in inches/mile. Using IRI, the Roughness Condition Index (RCI) is computed.

### **Pavement Condition Rating - PCR**

Using the SCR (computed from the five surface distresses) and the RCI, an overall Pavement Condition Rating (PCR) is computed. The formula for PCR is:

$$\text{Asphalt PCR} = (0.60 * \text{SCR}) + (0.40 * \text{RCI})$$

$$\text{Concrete PCR} = \text{RCI}$$

A detailed description of each distress index formula, roughness index formula, SCR and PCR is provided in this document.

Each classified surface distress will fall into one or more severity - LOW, MEDIUM, or HIGH based on criteria listed. For each severity, an extent is established based on the measured quantity of the distress within that severity. Within each severity individual distresses are assigned a Maximum Allowable Extent (MAE). For example, LOW severity transverse cracking may be allowed up to 21.1 cracks within a 0.02 mile interval before it reaches MAE and fails.

The index formulas are based on a scale of 0 to 100. A PCR index value of 100 would indicate a “new” road with no measurable distresses or rough ride. A PCR value of 60 is determined to be terminable serviceability and the road is considered failed. The range of index values with condition descriptors is:

**POOR** = (less than or equal to 60), **FAIR**= (61 – 84), **GOOD**= (85 - 94), **EXCELLENT**= (95 - 100)

Index values are generally computed based on cumulative deducts of the measured severities. As shown in the index formulas below, as any single severity reaches or exceeds MAE, the index computes to a value of 60 or less, and the road fails for that 0.02 interval.

**Note:** *As a result of a unique combination of measured surface distresses and IRI, index values occasionally compute to less than 0 or greater than 100. In this instance, an index value less than 0 defaults to 0. Index values greater than 100 defaults to 100. For all indices, a higher value indicates a better road condition, and a lower value indicates a poorer road condition.*

On the following page, Table 1 summarizes the different types of distresses measured.

<b>ASPHALT-SURFACED PAVEMENT DISTRESS TYPES WITH RUTTING AND ROUGHNESS</b>				
<b>Distress Type</b>	<b>Units Of Measure</b>	<b>Converted To</b>	<b>Defined Severity Levels?</b>	<b>Measured By</b>
Alligator Cracking	Square Feet	Percent of Lane Per 0.02 Mile	Yes	3 Dimensional pavement imaging system
Transverse Cracking	Linear feet	Number of Cracks Per 0.02 Mile	Yes	3 Dimensional pavement imaging system
Longitudinal Cracking	Linear feet	Percent of Lane Length Per 0.02 Mile	Yes	3 Dimensional pavement imaging system
Patching / Potholes	Square Feet	Percent of Lane Per 0.02 Mile	No	3 Dimensional pavement imaging system
Rutting	Inches	Rut Depth Per 0.02 Mile	Yes	3 Dimensional pavement imaging system
Roughness	IRI	*RCI Per 0.02 Mile	No	DCV – Lasers / Accelerometers

*\*Note: Roughness is measured on concrete roadways, but surface distresses and rutting are not measured. For concrete, PCR = RCI*

**Table 1. Distress summary**

## **Alligator Cracking**

### **Description:**

Alligator cracking is considered a combination of fatigue and block cracking. It is a series of interconnected cracks in various stages of development. Alligator cracking develops into a many-sided pattern that resembles chicken wire or alligator skin. It can occur anywhere in the road lane. Alligator cracking must have a quantifiable area.

### **Severity Levels:**

#### **LOW**

An area with little to no interconnecting cracks with no visible spalling. Cracks are less than or equal to a mean width of 0.25 in. (6mm). Cracks in the pattern are no further apart than 1 foot (0.328 m). May be sealed cracks with sealant in good condition and a crack width that cannot be determined.

#### **MEDIUM**

An area of interconnected cracks that form a complete pattern. Cracks may be slightly spalled. Cracks are greater than 0.25 in. (6 mm) but less than or equal to 0.75 in. (19 mm) or any crack with a mean width less than or equal to 0.75 in. (19 mm) and adjacent low severity cracking. Cracks in the pattern are no further apart than 6 in. (150 mm).

#### **HIGH**

An area of interconnected cracks forming a complete pattern. Cracks are moderately or severely spalled. Cracks are greater than 0.75 in. (19mm) or any crack with a mean width less than or equal to 0.75 in. (19mm) and adjacent medium to high severity random cracking.

A combination of observed crack width and crack pattern is used to determine overall severity of alligator cracking. Based on above description of each severity, the highest level of crack width and crack pattern determines overall severity as shown in Table 2.

<b>ALLIGATOR CRACKING SEVERITY LEVELS</b>				
	<b>CRACK SEVERITY</b>	<b>CRACK PATTERN</b>		
		<b>LOW</b>	<b>MED</b>	<b>HIGH</b>
<b>CRACK WIDTH</b>	LOW	LOW	MED	HIGH
	MED	MED	MED	HIGH
	HIGH	HIGH	HIGH	HIGH

**Table 2. Alligator Crack Severity Levels**

## **Longitudinal Cracking**

### **Description:**

Longitudinal cracking occurs predominantly parallel to the pavement centerline. It can occur anywhere within the lane. Longitudinal cracks occurring in the wheelpath may be noteworthy.

### **Severity Levels:**

#### **LOW**

Cracks with a mean width less than or equal to 0.25 in. (6 mm). This also includes sealed cracks with sealant in good condition and a width that cannot be determined.

#### **MEDIUM**

Cracks with a mean width greater than 0.25 in. (6 mm) but less than 0.75 in. (19 mm). Also, any crack with a mean width less than 0.75 in. (19 mm) and adjacent random low severity cracking.

#### **HIGH**

Cracks with a mean width greater than 0.75 in. (19 mm). Also, any crack with a mean width less than 0.75 in. (19 mm) and adjacent random medium to high severity cracking.

## **Transverse Cracking**

### **Description:**

Transverse cracking occurs predominantly perpendicular to the pavement centerline. It can occur anywhere within the lane.

### **Severity Levels:**

#### **LOW**

Cracks with a mean width of less than or equal to 0.25 in. (6 mm). Sealed cracks with sealant in good condition and a width that cannot be determined.

#### **MEDIUM**

Cracks with a mean width greater 0.25 in. (6 mm) and less than or equal to 0.75 in. (19 mm). Also, any crack with a mean width less than 0.75 in. (19 mm) and adjacent random low severity cracking.

#### **HIGH**

Cracks with a mean width greater than 0.75 in. (19 mm). Also, any crack with a mean width less than 0.75 in. (19 mm) and adjacent random medium to high severity cracking.

## **Patching and Potholes**

### **Description:**

Patching is an area of pavement surface that has been removed and replaced with patching material or an area of pavement surface that has had additional patching material applied. Patching may encompass partial lane or full lane width. On full lane width patching; the total, contiguous length of patch may not exceed 0.100 mi. (0.161 km). (Any full-lane patch exceeding 0.100 mi. in length is considered a pavement change). Patching must have a quantifiable area.

Potholes are bowl-shaped holes of various sizes occurring in the pavement surface.

Manhole covers should not be rated as patches unless there is obvious patching around the manhole.

Speed bumps should not be rated as patches

### **Severity Levels:**

There are no stratified severities for Patching and Potholes. They either are present or they are not.

## **RUTTING**

### **Description:**

Rutting is a longitudinal surface depression in the wheelpath.

### **Severity Levels:**

#### **LOW**

Ruts with a measured depth of 0.20 inches to 0.49 inches  
Ruts less than 0.20 in. are not included in the distress calculations.

#### **MEDIUM**

Ruts with a measured depth of 0.50 inches to 0.99 inches

#### **HIGH**

Ruts with a measured depth greater than 1.00 inch

## **ROUGHNESS**

### **Description:**

Roughness is the measurement of the unevenness of the pavement in the direction of travel. It is measured in units of IRI (International Roughness Index), inches per mile, and is indicative of ride comfort.

### **Severity Levels:**

There are no stratified severity levels for roughness. The roughness (or smoothness) of a road surface can be defined by IRI in the following table.

<b>IRI DESCRIPTIONS</b>	
<b>Type of Road</b>	<b>Typical IRI (in/mile)</b>
New Road, no noticeable roughness	<90
Small level of roughness	90 – 126
Road of average roughness	126 – 190
Road with above average roughness	190 – 253
Road with severe roughness	253 – 380
Nearly impassable	>380

**Table 3. International Roughness Index**

### **Roughness Collection Parameters**

On shorter roads with a lower speed limit the usefulness in collecting and reporting IRI is negligible. Lower, inconsistent speeds can lead to a less accurate IRI value. Therefore RIP has put in place the following protocols for reporting IRI.

International Roughness Index (IRI) is not reported on routes with the following criteria:

- Posted speed limit is less than 25 mph
- Length of route is less than 0.50 miles

When a collected route has a posted speed limit of at least 25 mph and length of at least 0.50 miles, IRI will be collected except on road sections where the speed is less than 20 mph

Other situations may arise where the speed and length factors are met, but reporting IRI could lead to an inaccurate PCR. RIP will determine whether or not it is reasonable to report IRI on these routes on a case by case basis.



## Index Formulas

---

*Note: All index formulas listed below contain MAE applicable to 0.02 mile (105.6 feet) interval.*

### **Alligator Crack Index**

$$AC\_INDEX = 100 - 40 * [(\%LOW / 35) + (\%MED / 15) + (\%HI / 5)]$$

#### **Where:**

The values %LOW, %MED and %HI report the percentage of the observed pavement (0.02 mile, primary lane) that contains alligator cracking within the respective severities. These values range from 0 to 100.

%LOW = Percent of total area (primary lane, 0.02 in length), low severity

%MED = Percent of total area (primary lane, 0.02 in length), medium severity

%HI = Percent of total area (primary lane, 0.02 in length), high severity

Percent of total area is computed as:

$$\frac{\text{square foot area of alligator crack severity}}{(0.02 \text{ mile}) * (\text{lane width})}$$

In AC\_INDEX, the denominators 35, 15, and 5 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 35% of low severity alligator cracking for a 0.02 interval before failure, 15% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

### **Longitudinal Crack Index**

$$LC\_INDEX = 100 - 40 * [(\%LOW / 175) + (\%MED / 75) + (\%HI / 25)]$$

#### **Where:**

The values %LOW, %MED, and %HI report the length of longitudinal cracking within each severity as a percent of the section length (0.02 mile, primary lane). These values are greater than or equal to 0 and can exceed 100.

%LOW = Percent of interval length (primary lane, 0.02 in length), low severity

%MED = Percent of interval length (primary lane, 0.02 in length), medium severity

%HI = Percent of interval length (primary lane, 0.02 in length), high severity

Percent of interval length is computed as:

$$\frac{\text{length of respective longitudinal cracking}}{(0.02 \text{ mile}) * (105.6 \text{ ft.})}$$

In LC\_INDEX, the denominators 175, 75, and 25 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 175% of low severity longitudinal cracking for a 0.02 interval before failure, 75% for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

## **Structural Crack Index**

$$SC\_INDEX = [100 - ((100 - AC\_INDEX) + (100 - LC\_INDEX))]$$

Structural Crack Index is a combination of Alligator Cracking and Longitudinal Cracking, and is used in the SCR formula in lieu of AC and LC separately.

## **Transverse Crack Index**

$$TC\_INDEX = 100 - 40 * [(LOW / 21.1) + (MED / 4.4) + (HI / 2.6)]$$

### **Where:**

The values LOW, MED and HI report a count of the total number of transverse cracks (reported to three decimals) within each severity level, where one transverse crack is equal to the lane width. These values are greater than or equal to 0.

LOW = Number of cracks in interval (primary lane, 0.02 in length), low severity

MED = Number of cracks in interval (primary lane, 0.02 in length), medium severity

HI = Number of cracks in interval (primary lane, 0.02 in length), high severity

Number of cracks is computed as:

$$\frac{\text{Total length of transverse cracks}}{\text{Lane width}}$$

In TC\_INDEX, the denominators 21.1, 4.4, and 2.6 are the Maximum Allowable Extents (MAE) for each severity. In other words, we will allow up to 21.1 low severity transverse cracks for a 0.02 interval before failure, 4.4 cracks for medium severity, and so on. As you can see, if any single severity reaches MAE the resulting index value is 60, or failure.

## **Patching Index**

$$PATCH\_INDEX = (100 - 40) * (\%PATCHING / 80)$$

### **Where:**

The value %PATCHING reports the percentage of the observed pavement (0.02 mile, primary lane) that contains patching/potholes. This value ranges from 0 to 100.

%PATCHING = Percent of total area (primary lane, 0.02 in length)

Percent of total area is computed as:

$$\frac{\text{square foot area of patching/potholes}}{(0.02 \text{ mile}) * (\text{lane width})}$$

There are no severity levels for patching. It either exists or does not.

There are no severity levels for patching. It either exists or does not. In PATCH\_INDEX, the denominator 80 is the Maximum Allowable Extent (MAE) for each severity. In other words, we will allow up to 80% patching for a 0.02 interval before failure. As you can see, if patching/potholes reaches MAE the resulting index value is 60, or failure.

## **Rutting Index**

$$\text{RUT\_INDEX} = 100 - 40 * [(\% \text{LOW} / 535) + (\% \text{MED} / 205) + (\% \text{HI} / 40)]$$

### **Where:**

20 rut depth measurements are taken per 0.02 interval for each of 2 wheel paths (left and right), resulting in a total of 40 measurements taken for both wheel paths. Each wheelpath is analyzed independently for rut severities. The values %LOW, %MED and %HI report the percentage of the 40 measurements within that severity. These values range from 0 to 200.

%LOW = Percent of LOW ruts in left wheelpath based on 20 ruts, plus percent of LOW ruts in right wheelpath based on 20 ruts.

%MED = Percent of MED ruts in left wheelpath based on 20 ruts, plus percent of MED ruts in right wheelpath based on 20 ruts.

%HI = Percent of HI ruts in left wheelpath based on 20 ruts, plus percent of HI ruts in right wheel path based on 20 ruts.

Percent of rut measurements within each severity can also be computed as:

$$\frac{\text{(total number of ruts within each severity in both wheelpaths)}}{20} \times 100$$

In RUT\_INDEX, the denominators 535, 205, and 40 are the Maximum Allowable Extents for each severity; Low, Medium, and High, respectively. Only the MAE for high severity rutting can fail a section, since 200% of *only* low severity ruts would yield a rut index of 85 and 200% of *only* medium severity ruts would yield a rut index of 61.

## **Roughness Condition Index (Asphalt)**

$$\text{RCI} = 32 * [5 * (2.718282^{(-.0041 * \text{AVG IRI}))}]$$

### **Where:**

The value AVG IRI reports the average value of the Left IRI and Right IRI measurements for the interval (0.02 mile, primary lane). This value can range from approximately 40 to 999.0.

Average IRI is computed as:

$$\frac{(\text{Left wheelpath IRI}) + (\text{Right wheelpath IRI})}{2}$$

There is no applicable threshold for failure for this index.

## **Roughness Condition Index (Concrete)**

$$\text{RCI} = (-0.0012)(\text{IRI}^2) + (0.0499)(\text{IRI}) + 99.542$$

For concrete, PCR = RCI

## **Surface Condition Rating Index**

**SCR** = Lowest Index Value Of: [SC\_INDEX, TC\_INDEX, PATCH\_INDEX, RUT\_INDEX]

*Note: The modified SCR equation above combines AC\_INDEX and LC\_INDEX, and considers that a single AC/LC index value of the Structural Crack Index (SC\_INDEX). The lowest of the four computed index values (SC\_INDEX, TC\_INDEX, PATCH\_INDEX, or RUT\_INDEX) becomes the SCR.*

### **Where:**

See above for determinations of SC\_INDEX, TC\_INDEX, PATCH\_INDEX and RUT\_INDEX.

The threshold for failure for this index is SCR = 60. Data Collection Vehicle Subsystems

Data on paved roads is collected by FHWA using a Pathway Services Inc. Data Collection Vehicle (DCV), called a PathRunner. The DCV is driven in the primary-direction lane at posted speed limits and less.

## **Cameras**

Forward-facing and rear-facing video is collected as jpeg digital imagery files at a frequency of every 26.4feet.

Two forward-facing cameras are mounted above the vehicle cab, one pointed straight ahead and the other to the right shoulder providing seamless roughly 120 degree viewing. A third camera is mounted in the rear of the vehicle, recording the left shoulder.

<b>CAMERA SPECIFICATIONS TWO FORWARD / ONE REAR FACING CAMERA</b>	
Camera lens/type	Prosilica GT 2750 (GigE Technology)
Image format	*.jpg
Image resolution	2750 x 2200, 18 frames/second
Image pixel size	depends on distance
Zoom ratio	16mm Fixed
Iris range	Aperture Range F 1.8 – Infinity (P-Iris, Automatic)

## **Pavement Imaging and Rutting**

High resolution rutting data and surface imaging are collected in a single data stream using a three-dimensional (3D) pavement surface transverse profile data acquisition system. The 3D camera captures a laser line as it is projected over the pavement surface and uses the location of this line to measure the height deviations of the pavement surface. These height deviations can be used to calculate rutting in both wheelpaths. These deviations also provide a grayscale image detailing the change in height throughout the surface, i.e. providing depth measurements for cracking.

<b>THREE-DIMENSIONAL PAVEMENT SURFACE AND TRANSVERSE PROFILE DATA ACQUISITION SYSTEM</b>	
<b>Surface Image Specifications</b>	
Image size	1536 pixels/scan @ 3000 Hz
Image width	4 meters (3950 mm nominal)
Laser class	3B
Power	16W (Two lasers @ 8W Ea)
Vehicle speed limitations	62 mph
Environment	Dry pavement, day or night
Sensor size (approximate)	1536 pixels x 512 pixels
Image display length	26.4 feet
<b>Rutting Specifications</b>	
Reported rut depth units	Inches
Vehicle speed limitations	Up to 62 mph
Sampling rate	3000 profiles/second
Transverse resolution	1536 points/profile
Transverse field-of-view	14 feet
Depth accuracy (nominal)	<1mm
Environment	Dry pavement, day or night, above 32 degrees F
Adherence to specifications	ASTM E1703M-95 (reapproved 2005)

### **Distance Measuring Instrument (DMI)**

The DMI (Distance Measuring Instrument) obtains road length measurements that are accurate to 0.15% for speeds up to 60 mph. The DMI is connected to the hub of the rear wheel on the driver's side, and is calibrated to the revolutions of the rear vehicle axle on a regular basis.

## **Roughness (IRI)**

<b>IRI SPECIFICATIONS</b>	
Reported IRI units	Inches/mile
Vehicle speed limitations	12-62 mph
IRI equipment certification	Texas Transportation Institute (TTI)
Wavelengths accommodated	0.5 feet to 300 feet
IRI computed & reported	World Bank Technical Paper Number 46
Environment	Dry pavement, day or night, above 32 degrees
Adherence to specifications	ASTM E950 Class 1 & AASHTO M 328

The collection system includes a South Dakota type laser profiler manufactured based on active Class 1 ASTM E950 standards. The dynamic profile of the pavement surface is collected from which the IRI roughness data is computed. The sensors include one accelerometer on each wheelpath, one height sensor (laser) on each wheelpath, and a distance transducer.

## **GPS & Inertial Systems**

GPS is collected by an onboard system employing Omnistar real time correction and a spinning gyroscope to provide accurate positioning data in instances of satellite obstruction. All GPS coordinates are tied to an image and linear distance measurements.

<b>GPS SPECIFICATIONS</b>	
Static accuracy	Sub-meter
Dynamic accuracy	2-3 meters
Receiver	12 satellite tracking
Coordinate system	Lat Lon WGS 84
Environment	Day or night
Cross-slope	± 1.75%
Grade	± 1.75%
Adherence to specifications	ASTM E1703M-95 (reapproved 2005)

\*NOTE – GPS accuracy is dependent on many different factors. Satellite constellation, tree coverage, GPS receiver quality, and real-time correction availability can all affect the locational and elevation accuracies. The elevation (z coordinate) accuracy is less dependable than locational or horizontal accuracy (x/y coordinates or latitude/longitude). In areas of heavy tree coverage or poor satellite constellations, elevation data can vary by as much as +/- 100 feet.

**Appendix B**

**Methodology for Determining Condition Ratings  
Using Manual Rating Procedures**



## **Description of Manual Rating Methods**

---

In 2013, the Federal Highway Administration updated existing Manual Rating Procedures in an effort to better align pavement conditions for Manually Rated Routes and Parking with the Highway Pavement Management Application (HPMA). HPMA is the Pavement Management System used by the FHWA to store inventory and condition data from the Road Inventory Program (RIP) and forecast future performance using prediction models. HPMA uses pavement condition data (collected by the Road Inventory Program) to develop life cycles for pavements and recommend treatments to maximize useable pavement life while minimizing costs associated with maintenance and repair.

The Federal Highway Administration (FHWA) developed a set of manual rating methods for pavement that are appropriate for Federal Roadways. Two different methods were developed for linear roads and a separate method was developed for parking areas and nonlinear roads. These methods employ a 0 to 100 rating scale and improve consistency and objectivity in the manual evaluation of surface distresses. They are compatible with ratings that are collected by the automated Data Collection Vehicle (DCV).

- The first of the two manual evaluation methods for roads uses rating criteria to assign index values to each distress type based on a visual evaluation of severity and extent.
- The second manual evaluation method for roads is very time demanding and is best employed on only a select set of routes which may have the highest visitor use and require a more intensive assessment. This method will be used for the Manual Rating of Function Class 1, 2, 7, and 8 Roads. This method is based on measurements that are recorded for each instance of a surface distress. These measurements are converted into index values using conversion formulas.
- Parking areas and non-linear roads are rated similar to the first method shown above, however, there are some slight differences due to the non-linear nature.

The details and criteria used for each of these rating methods are outlined below.

## **Visual Inspection Method for Manually Rating Secondary Roads**

---

The visual inspection method for manually rated roads uses condition rating criteria that have been developed by FHWA. This criteria is based on a visual evaluation of the severity and extent of distresses to determine the overall condition of the roadway. This method is used for secondary roads that are Functional Class 3, 4, 5, and 6. This constitutes the majority of manually rated roads collected by the Road Inventory Program.

### **Rating Section Lengths**

For this method, Manually Rated Roads are rated in sections. These sections may be made based on length of changes in surface type or condition as described below. The ratings are then aggregated to give an overall rating for the Route:

- Rating sections should be no longer than 0.25 miles in order to keep the area being rated manageable.
- A new rating section may be started based on changes in condition, width, or surface type if these changes represent a significant portion of the route (are not isolated instances).
- If the road condition, width, and surface type remain constant then new sections do not need to be created unless the road exceeds 0.25 miles.

### **Rating Criteria**

For this method, Manually Rated Roads are evaluated using a visual inspection of the six distress types listed below. Each distress is assigned one of five index values. An overall Surface Condition Rating (SCR) and Pavement Condition Rating (PCR) are calculated based on these index values.

- Alligator Cracking
  - Rating based on percentage of road surface affected
- Longitudinal Cracking
  - Rating based on severity level (crack width) and percentage of road section length of longitudinal cracks
- Transverse Cracking
  - Rating based on crack width, crack spacing, and percentage of surface affected
- Patching
  - Rating based on percentage of road surface affected
- Rutting
  - Rating based on percentage of road section length affected by visible rutting (>1 inch depth) that requires remediation
- Roughness
  - Manual assessments of roughness are not made due to the subjectivity of the measurement. Therefore, roughness is not incorporated into the PCR calculation of manually rated roads.

Concrete Routes also receive a PCR rating based on visual evaluation of the following six distress types.

- Slab Faulting at Joints
- Slab Cracking and breakup
- Surface Delamination and Pop-outs
- Joint Distresses
- Patching

## **Distress Measurement Method for Manually Rating Primary Roads**

---

A more intensive and time demanding assessment than our standard method was developed for Primary roads that are functional class 1, 2, 7, or 8. These high visitation roads are usually accessible by the automated Data Collection Vehicle but in rare instances may need to be manually rated. The method developed is based on measuring each instance of a distress. These measurements are totaled over each section length being measured and are then converted into index values between 0 and 100 (100 being a road with no distress) using index formula equations outlined below. The goal of this method is to produce measured index values which are directly comparable to the automated DCV.

### **Rating Section Lengths**

For the distress measurement method roads are broken into sections in order to rate. Distress measurements are totaled for each section separately in order to determine the index value for that particular section. The section length to be rated is determined based on the following rules:

- Rating sections are between 0.25 and 0.50 miles long
- A new rating section is created if there is a significant change in condition or pavement width
- If there are no significant changes in condition or pavement width, rating sections are broken at equal intervals, typically 0.50 miles

### **Manual Distress Measurements**

#### **Alligator Cracking**

- Alligator cracking is measured by area (square feet). Instances of Alligator cracking are measured along the length and multiplied by the average width of the distressed area.
- The index for alligator cracking takes the total area of cracking compared to the interval length and converts it to a percentage. That percentage is then input into an index formula that yields a value between 0 and 100 (0 being the most distressed).
- Severity levels are not defined for manually measured Alligator cracks. The Alligator Crack Index formula is calculated based on an assumption of medium severity.

#### **Longitudinal Cracking**

- Longitudinal cracking (cracking in the direction parallel to the roadway) is measured by length (ft.).
- The index for longitudinal cracking takes the total length of cracking compared to the interval length and converts it to a percentage broken down by severity. That percentage is then input into a formula that yields a value between 0 and 100 (0 being the most distressed).
- Two severity levels are defined for manually measured Longitudinal Cracks. Lower severity cracks are those with a mean width of less than 0.25 inches. Sealed cracks with sealant in good condition are also considered lower severity. Higher severity cracks are those with a mean width of greater than 0.25 inches.

#### **Transverse Cracking**

- Transverse cracking (cracking in the direction perpendicular to the roadway) is measured by length (ft).
- The index for transverse cracking takes the total number of cracks (1 crack would encompass the full lane) broken down by severity. The total numbers of each severity are then put into a formula that yields a value between 0 and 100 (0 being the most distressed).
- Two severity levels are defined for manually measured Transverse Cracks. Lower severity cracks are those with a mean width of less than or equal to 0.25 inches. Sealed cracks with sealant in

good condition are also considered lower severity. Higher severity cracks are those with a mean width of greater than 0.25 inches.

#### **Patching and Potholes**

- Patching and Potholes are measured by area (square feet). Instances of Patching are measured along the length and multiplied by the average width of the patch.
- Instances of full lane width patching cannot be longer than 0.100 miles, otherwise it should be considered a pavement change rather than a distress.
- There are no stratified severities for Patching. It is either present or it is not.

#### **Rutting**

- Visible rutting is measured by length (ft.) in each wheel path. Only visible ruts are rated, which are ruts greater than 1 inch deep.
- All rutting recorded in a manual rating is considered to be high severity (> 1 inch). Lesser severities are generally not distinguishable in a visual inspection.

#### **Roughness**

- Manual assessments of roughness are not made due to the subjectivity of the measurement. Therefore, roughness is not incorporated into the PCR calculation of manually rated roads.

### **Index Formulas for Distress Measurement Method:**

The method used to convert distress measurements into index values is shown below. The Surface Condition Rating and Pavement Condition Rating are calculated based on these index values.

#### **Alligator Crack Index for Manual Rating:**

$$AC\_INDEX = 100 - 40 * (\%ALLIGATOR / 15)$$

#### **Where:**

%ALLIGATOR = Percent of total area of section being rated that contains Alligator cracking.

#### **Longitudinal Crack Index for Manual Rating:**

$$LC\_INDEX = 100 - 40 * [(\%LOW / 175) + (\%MED / 75)]$$

#### **Where:**

%LOW = Percent length of longitudinal cracks where crack width less than or equal to 0.25 inches

%HIGH = Percent length of longitudinal cracks where crack width greater than 0.25 inches

#### **Transverse Crack Index for Manual Rating:**

$$TC\_INDEX = (100 - 40) * [(LOW / 21.1) + (MED / 4.4)]$$

#### **Where:**

LOW = Count of the total number of transverse cracks within the section length where one transverse crack is equal to the lane width and the crack width <= 0.25 inches

HIGH = Count of the total number of transverse cracks within the section length where one transverse crack is equal to the lane width and the crack width > 0.25 inches

Number of cracks is computed as:  
Total length of transverse cracks/Lane width

**Patching Index for Manual Rating:**

$$\text{PATCH\_INDEX} = (100 - 40) * (\% \text{PATCHING} / 80)$$

**Where:**

**%PATCHING** = Percentage of pavement section that contains patching/potholes.

**Rutting Index for Manual Rating:**

$$\text{RUT\_INDEX} = 100 - 40 * (\% \text{RUTTING} / 40)$$

**Where:**

**%RUTTING** = Percentage length of high severity rutting within the section being measured.

## **Method for Manually Rating Paved Parking Areas and Non-Linear Roads**

Parking areas are evaluated based on a visual inspection using condition rating criteria that has been developed by FHWA. This criteria is based on a visual evaluation of the severity and extent of distresses to determine the overall condition of the parking area. This overall condition rating is linked to the level of repair and rehabilitation practices required.

A distress index is determined for each of the distresses listed below for Asphalt and Concrete Parking areas. The overall Pavement Condition Rating (PCR) of the parking lot is driven by the most severe distress present.

### **Rating Criteria:**

#### **Asphalt Parking Distress Types**

- Alligator Cracking
  - Rating based on percentage of road surface affected
- Longitudinal, Transverse and Block cracking
  - Rating based on crack width, crack spacing, and percentage of surface affected
- Rutting and Distortions
  - Rating based on percentage of road surface affected
- Hot Mix Asphalt Patches
  - Rating based on overall percentage of HMA patches
- Potholes and Cold Patches
  - Rating based on percentage of road surface affected
- Surface Raveling and Bleeding
  - Rating based on percentage of road surface affected

#### **Concrete Parking Distress Types**

- Slab Faulting at Joints
  - Rating based on height differential between adjacent slabs or pieces of broken slabs
- Slab Cracking and breakup
  - Rating based on quantity of cracks and if slab is acting to able distribute load as designed
- Surface Delamination and Pop-outs
  - Rating based on percentage of road surface affected to include pop-outs, spalls and surface delamination
- Joint Distresses
  - Rating based on sealant condition and concrete distresses at/or adjacent to joints
- Patching
  - Rating based on percentage of road surface affected

## **Curb Inspection and Treatments**

During inspections of manually rated parking lots and routes, the curb reveal and overall curb condition are evaluated. The curb condition is used to determine a recommendation.

### **Curb Reveal**

The vertical distance on the curb face from the gutter flow line or pavement surface to the top of curb. When resurfacing adjacent to curb, the resulting curb reveal should be no less than 4 inches. Additionally, when resurfacing adjacent to a gutter, the resulting pavement surface should be flush with the gutter pan. In cases where a resurfacing would violate either of these parameters, the surface may need to be milled or removed to adjust to these field conditions.

### **Curb Recommendations**

The following treatment categories are based on the overall percentage of distresses along the entire curb structure for a specific pavement structure. Distresses include spalling, cracking, loss of material and any other damage which prevents the curb from conveying storm runoff or failing to perform in its intended function.

- Overall curb damage ranging 0%-5%:
  - DO NOTHING
- Overall curb damage ranging 5%-20%
  - LIGHT REPAIR
- Overall curb damage ranging 20%-50%
  - MODERATE REPAIR
- Overall curb damage greater than 50%:
  - REPLACE

## **GPS for Manually Rated Roads and Parking**

---

GPS information for Manually Collected Cycle 6 Routes will be recorded using the latest hardware and software by TRIMBLE 6000 Series GeoXT. Cycle 6 GPS collection units will allow access to GPS and GLONASS, improving overall GPS reliability, accuracy and precision to submeter accuracy.

Additionally, the new GPS units have an enhanced ability to collect accurate signals underneath tree cover or adjacent to buildings or natural terrain with extreme vertical gradations that typically reduce GPS accuracy. Trees and buildings create “satellite shadows”, limiting the areas where you can reliably collect high-accuracy GPS data. The updated GPS receiver will deliver improved usable data under tree canopy or in natural or urban canyons. Routes that were previously collected accurately will not be recollected in Cycle 6.

<b>TRIMBLE 6000 SERIES GeoXT GPS SPECIFICATIONS</b>	
Receiver	Trimble Maxwell™ 6 GNSS chipset
Channels	220 channels
Systems	GPS / GLONASS / WAAS
Accuracy	Sub-meter
Operation Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Cellular and Wireless	UMTS / HSDPA / GPRS / EDGE / Wi-Fi / Bluetooth
Internal Still Camera w/ GEOTAG ability	Autofocus 5 MP (JPG) and WMV w/ Audio



**Appendix C**  
**Description of Cycle 6 Deliverables**

## Final Report Delivery

---

The Final Report will contain all data collected by Manual Inspection and the Data Collection Vehicle. All information provided in the Interim Report will be included in the Final report. Manually collected information reported in the Interim Report may be updated in the Final Report if pavement conditions have substantially changed between the Manual Inspection and Data Collection Vehicle Inspection or other unforeseen circumstances.

The final report will be released approximately 8 months after the Data Collection Vehicle completes its collection of that specific park.

Data included in the Final Report package consists of the following:

- **Condition Photos:** All photos taken during Cycle 6.
- **Data Video:** Data and video of each route collected by the DCV will be viewable through PATHVIEW software. PATHVIEW Software and training will be provided to NPS personnel by Eastern Federal Lands.
- **GPS on All Rated Routes:** All GPS data collected from the DCV will be provided. Parking areas, some roads, and other paved areas that are not fully drivable with the DCV are collected manually by field technicians. GPS is collected for these routes using portable Trimble GPS units.
  - GPS will be provided as Shapefiles and KMLs
  - All GPS data related to road collection will be linear referenced to the collected length
- **Geodatabase – Background and Metadata:** In addition to this park report, a geodatabase containing both tabular and spatial data specific to this park has been provided.
  - All data disseminated in the preceding report has been obtained from the tables and fields within said geodatabase. The geodatabase can be referenced for tabular data via Microsoft Access or for both tabular and spatial data via ESRI's ArcGIS Suite of software which consists of; ArcMap, ArcCatalog and ArcExplorer.
  - Consolidating the RIP data into one database creates a seamless relationship of tables and geographic data. It allows RIP to facilitate easier updates and enhancements in the future. A geodatabase can be thought of as simply a database containing spatial data. A complete and thorough description of the tables and fields contained within this geodatabase can be found in the metadata. The metadata is attached directly within the geodatabase and can be accessed via ESRI's ArcCatalog.
- **Report (RIP Report and Route ID):** A PDF report will be provided that includes a list of all routes and key data. Condition reports for each route will be included. All changes, additions and deletions to any route will be included in the report. Features along routes will not be collected in Cycle 6.

## **Partial DCV Collections**

---

Additional Partial DCV Collections may be done on specific parks depending on their size and overall mileage of routes within its boundaries during Cycle 6. Parks with greater than 10 miles of paved roadways will receive at least one additional Partial DCV collection during Cycle 6. Data collected during these Partial DCV Collections will not result in the delivery of an additional report to the park.

Data collected by the DCV during Partial DCV Collection will be used to improve HPMA modeling by providing additional “snapshots in time” of park pavement conditions. This improved HMPA modeling will assist in the programming and budgeting of future projects which will help maximize the life of pavement infrastructures.

Instead of receiving a report of conditions collected during the Partial DCV collection, the park will receive a formal letter from the Road Inventory Program requesting coordination for the additional Partial DCV collection, identifying the dates of the Partial DCV Collection and will reinforce the purpose and importance of the Partial DCV Collection.

**Appendix D**  
**Glossary of Terms and Abbreviations**

## Glossary of Terms and Abbreviations

TERM OR ABBREVIATION	DESCRIPTION OR DEFINITION
AC	Alligator Cracking
CRS	Condition Rating Sheets (Section 5)
Curb Recommendation	Curb remediation based on overall percentage of curb distress
Curb Reveal	Height of curb exposed from gutter flow line to top of curb
DCV	Data Collection Vehicle
Excellent	Excellent rating with an index value of 95 to 100
Fair	Fair rating with an index value from 61 to 84
FUNCT_CLASS	Functional Classification (see Route ID, Section 2)
Good	Good rating with an index value from 85 to 94
IRI	International Roughness Index
HPMA	Highway Pavement Management Application
Lane Width	Width from road centerline to fogline, or from centerline to edge-of-pavement when no fogline exists
LC	Longitudinal Cracking
MRR	Manually Rated Route
MRL	Manually Rated Line
MRP	Manually Rated Polygon
N/A	Not Applicable
NC	Not Collected
PATCH	Patching and Potholes
Paved Width	Width from edge-of-pavement to edge-of-pavement
PCR	Pavement Condition Rating
PKG	Parking Area
Poor	Poor rating with an index value of 0 to 60
RCI	Roughness Condition Index
SC	Structural Cracking
SCR	Surface Condition Rating
TC	Transverse Cracking